

itsubishi lectric uality

SPLIT-TYPE AIR CONDITIONERS

Wrap Yourself in Comfort and Quiet
Eco-conscious Technologies from Japan

Full Product Line Catalogue

2025



Environmental Sustainability Vision 2050

Environmental Declaration

Protect the air, land, and water with our hearts and technologies to sustain a better future for all.



Environmental Sustainability Vision 2 0 5 0

To solve various factors that lead to environment issues, the Mitsubishi Electric Group shall unite the wishes of each and every person, and strive to create new value for a sustainable future.

Three Environmental Action Guidelines

Apply diverse technologies in wide-ranging business areas to solve environmental issues

Challenge to develop business innovations for future generations

Publicize and share new values and lifestyles

Cey Initiatives

- Climate Change Measures
- Resource Circulation
- Live in Harmony with
- Long-term Activities Innovation
- Nurturing Human
- Understanding Needs Co-create and
- Disseminate New Values Live in Harmony with the Region

Heat pump technology inspires Mitsubishi Electric to design air conditioners that harmonize comfort and ecology.

"1kW" Heat Pump Principle (When Heating) <Case of COP 5.0> Refrigerant and Heat Circulation Outdoors Indoors "5kW" "4kW"




Mitsubishi Electric takes on the challenge of creating new value and contribute to a sustainable future in order to solve various environmental problems.

Preventing Global Warming

Mitsubishi Electric is actively introducing R32 refrigerant which has a global warming potential approximately 1/3 that of R410A refrigerant. Not only by shifting from R410A to R32 but by decreasing the diameter of refrigerant piping, we are also striving to reduce the amount of refrigerant usage. Throught these activities, we have achieved significant reduction in CO₂ equivalent amount compared to conventional models and realised minimizing the negative impact to the environment more than ever.

Reducing the amount of refrigerant usage

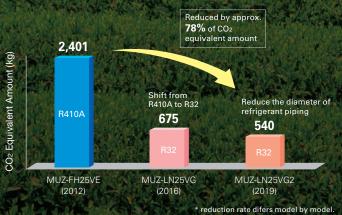

Effective use of materials (Reduce & Recycle)


- Accelerating the downsizing technology to reduce material use while balancing energy saving performance.
- 2. Designing products that are easy to separate and recycle.
- 3. All models are designed for WEEE and RoHS (II) compliance.*

'WEEE and RoHS directive: The Waste Electrical and Electronic Equipment (WEEE) Directive is a recycling directive for this type for equipment, while the Restrictions of Hazardous Substances (RoHS) Directive is an EU directive restricting the use of ten specified substances in electronic and electrical devices. In the EU, it is no longer possible (from July 2019) to sell products containing any of the ten substances.

Balancing comfort and ecology

Mitsubishi Electric develops technologies to balance comfort and ecology, achieving greater efficiency in heat pump operation.

. F. 1 . A.	Comfort	Ecology
1. Inverter	Faster start-up and more stable indoor temperature than non-inverter units.	Fewer On/Off operations than with non-inverter, saving energy.
2. 3D i-see Sensor	Since the positions of people can be detected, airflow can be set to personal taste, such as in airflow path or protected from the wind. The ability to adjust to individual preferences realizes more comfortable air conditioning.	Since the number of people in a room can be detected, energy-saving operation is adjusted or the power is turned off automatically. Efficient air conditioning with less waste is realized.
3. Flash Injection	Achieves high heating capacity even at low temperatures, plus faster start-up compared to conventional inverters.	Expands heat pump heating system to the cold regions to replace combustion heaters.
4. Dual Barrier Coating Dual Barrier Material	Prevents the indoor unit from getting dirty, delivering you clean air.	Keeping the inside of air conditioner clean leads to efficient operation and energy saving.

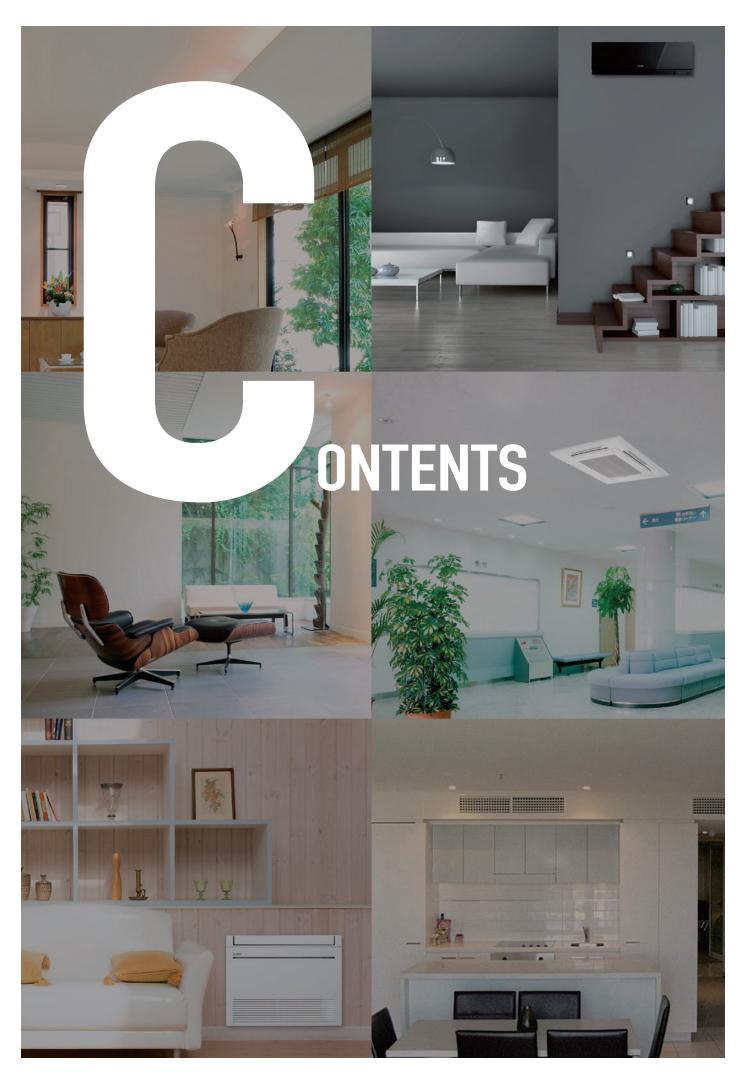

Air Conditioners

New releases	005-006
LINE-UP	007-010
M series	011-054
S SERIES	055-068
P SERIES	069–106
MULTI SPLIT SERIES	107–118
VRF SERIES	119-130
Air Conditioners	
NEW ECODESIGN DIRECTIVE	131–132
COMFORT	133–134
AIR QUALITY	135–138
CONVENIENCE	139–140
INSTALLATION & MAINTENANCE	141-202
SYSTEM CONTROL	143–144
CONTROL TECHNOLOGIES	145–150
SYSTEM CONTROL	151–152
FUNCTION LIST	153–160
OPTIONAL PARTS	161–172
EXTERNAL DIMENSIONS	173–192
PIPING INSTALLATION	 193–203
APPENDIX	204
M/S/P/Multi/Zubadan	
CONDITIONS FOR SPECIFICATIONS	205
REFRIGERANT AMOUNT	206
R32 REFRIGERANT	207–208
LOSSNAY SYSTEM	
FEATURES & SPECIFICATIONS	209-240



New releases





PUZ-ZM100/125/140V/YDA P.75

RVXT3 SERIES



LGH-160/200/250RVXT3-E P.275

LINE-UP

M SERIES

Martel Na		1.5kW	1.8kW	2.0kW	2.2kW	2.5kW	3.5kW	4.2kW	5.0kW	6.0kW	7.1kW	Page
Model Nar	ne	1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	гауе
	MSZ-RW VGHZ Series R32 R410A *2					SINGLE	SINGLE		SINGLE			13
	MSZ-LN Series R32 R410A *2		W-V-R-B Multi connection only			W-V-R-B SINGLE	W-V-R-B SINGLE		W-V-R-B SINGLE	WV-R-B SINGLE		17
	MSZ-LNVGHZ Series R32 R410A *2					SINGLE	SINGLE		SINGLE			22
	MSZ-AY series MSZ-AY25/35/42/50VGK(P) MSZ-AY15/20VGK(P)	SINGLE		SINGLE		SINGLE	SINGLE	SINGLE	SINGLE			25
	MSZ-AP series R32 R410A *2									SINGLE	SINGLE	29
Wall- mounted	MSZ-E Series R32 R410A *2		W-S-B Multi connection only		W-S-B Multi connection only	WSB SINGLE H	W-S-B SINGLE	W-S-B SINGLE	W-S-B SINGLE			33
	MSZ-FT VGHZ Series					SINGLE	SINGLE		SINGLE			35
	MSZ-BT Series			SINGLE		SINGLE	SINGLE		SINGLE			37
	MSZ-HR Series MSZ-HR25/35/42/50VF(K) MSZ-HR60/71VF(K)					SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	39
	MSZ-DW Series					SINGLE	SINGLE		SINGLE			41
	MSYTP Series						SINGLE		SINGLE			43
Compact	MFZ-KT Series					SINGLE	SINGLE		SINGLE	SINGLE		45
floor	MFZ-KW Series					SINGLE	SINGLE		SINGLE	SINGLE		47
1-way cassette	MLZ Series MLZ-KY20VG MLZ-KP25/35/50VG			Multi connection only		SINGLE	SINGLE		SINGLE			49

^{*1:} R410A for MXZ and PUMY connection. *2: R410A for PUMY connection only.

H: Outdoor unit with freeze-prevention heater is available.
W·S·B: Indoor units are available in three colours; White, Black and Silver.
W·V·R·B: Indoor units are available in four colours; Natural White, Pearl White, Ruby Red, and Onyx Black.

Indoor Combinations

(SINGLE) 1 outdoor unit & 1 indoor unit

TWIN 1 outdoor unit & 2 indoor units

TRIPLE 1 outdoor unit & 3 indoor units

QUADRUPLE 1 outdoor unit & 4 indoor units

Model Nan	ne	1.5kW 1-phase	2.5kW 1-phase	3.5kW 1-phase	5.0kW 1-phase	6.0kW	7.1kW 1-phase	10.0kW	12.5kW 1- & 3-phase	14.0kW 1- & 3-phase	Page
2 x 2 cassette	SLZ Series R32 R410A	Multi connection only	SINGLE	SINGLE	SINGLE	SINGLE	TWIN	TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TRIPLE	57
Compact ceiling- concealed	SEZ Series R32 R410A		* SINGLE	* SINGLE	* SINGLE	* SINGLE	SINGLE	TWIN	TWIN TRIPLE QUADRUPLE	TRIPLE QUADRUPLE	62
Concealed floor standing	SFZ Series R32		SINGLE	SINGLE	SINGLE	SINGLE					66

* Indoor units are available in two types; with or without the wireless remote controller.

Power Inverter Models / Standard Inverter Models

Model Name		3.5kW	5.0kW	6.0kW	7.1kW	10.0kW	12.5kW	14.0kW 1- &	20.0kW	25.0kW	Page
		1-phase	1-phase	1-phase	1-phase	3-phase	3-phase	3-phase	3-phase	3-phase	
4-way cassette	PLA Series R32 R410A	SINGLE	SINGLE	SINGLE	SINGLE *	SINGLE	SINGLE	TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TWIN TRIPLE QUADRUPLE	80
Ceiling-	PEAD Series R32 R410A	SINGLE	SINGLE	SINGLE	SINGLE *	SINGLE	SINGLE	SINGLE TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TWIN TRIPLE QUADRUPLE	87
concealed	PEA Series R32 R410A								SINGLE	SINGLE	90
Wall- mounted	PKA Series R32 R410A	* SINGLE	* SINGLE	* SINGLE	SINGLE * TWIN *	SINGLE	TWIN	TWIN	TWIN TRIPLE QUADRUPLE	TRIPLE	92
Ceiling- suspended	PCA-KA Series R32 R410A	SINGLE	SINGLE	SINGLE	SINGLE *	SINGLE	SINGLE	SINGLE TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TWIN TRIPLE QUADRUPLE	95
for Professional Kitchen	PCA-HA Series* R32 R410A				SINGLE*			* TWIN		TRIPLE	98
Floor- standing	PSA Series R32 R410A				SINGLE	SINGLE	SINGLE	SINGLE TWIN	TWIN	TWIN TRIPLE	101

* Power Inverter Model only

LINE-UP

MXZ SERIES INVERTER Models

Model Name	Capacity Class	Page
up to 2 indoor units MXZ-2F33VF4	3.3kW <1-phase>	109
up to 2 indoor units MXZ-2F42VF4	4.2kW <1-phase>	109
up to 2 indoor units MXZ-2F53VF(H)4	5.3kW <1-phase>	109
up to 3 indoor units MXZ-3F54VF4	5.4kW <1-phase>	109
up to 3 indoor units MXZ-3F68VF4	6.8kW <1-phase>	109
up to 4 indoor units MXZ-4F72VF4	7.2kW <1-phase>	109
up to 4 indoor units MXZ-4F80VF4	8.0kW <1-phase>	109
up to 4 indoor units MXZ-4F83VF2	8.3kW <1-phase>	109
up to 5 indoor units MXZ-5F102VF2	10.2kW <1-phase>	109
up to 6 indoor units MXZ-6F120VF2	12.0kW <1-phase>	109
up to 2 indoor units MXZ-2HA40VF2	4.0kW <1-phase>	114
up to 2 indoor units MXZ-2HA50VF2	5.0kW <1-phase>	114
up to 3 indoor units MXZ-3HA50VF2	5.0kW <1-phase>	114

MXZ-VFHZ SERIES INVERTER Models

Model Name		2.5kW	3.5kW	5.0kW	5.3kW	6.0kW	8.3kW	10.0kW	12.5kW	Page
Model Name		1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	1 & 3-phase	3-phase	lage
Multi split	MXZ-FVFHZ2 Series MXZ-EVAHZ Series R32 R410A				2PORT H		4PORT H			111

* R410A is for PUMY connection.


H: Freeze-prevention heater is included as standard equipment.

PUMY SERIES INVERTER Models

Model Name		12.5kW	14.0kW	15.5kW	22.4kW	28.0kW	33.5kW	Page
woder Name		1 & 3-phase	1 & 3-phase	1 & 3-phase	3-phase	3-phase	3-phase	1 age
PUMY-SP R410A		1	✓	✓				121
PUMY-P R410A		1	1	1	1	1	1	123
PUMYSM R32	0	1	1	1				125

Indoor Combinations

(SINGLE) 1 outdoor unit & 1 indoor unit TWIN 1 outdoor unit & 2 indoor units



LOSSNAY SERIES

Com	mercial	Residential					
	ncealed Type	Vertical Type	Wall Mounted Type				
LGH-RVX3 Series	LGH-RVXT3 Series	VL-CZPVU Series	VL-50(E)S2-E VL-50SR2-E				
LGH-RVS Series	GUF Series						










SELECTION

Choose the model that best matches room conditions.

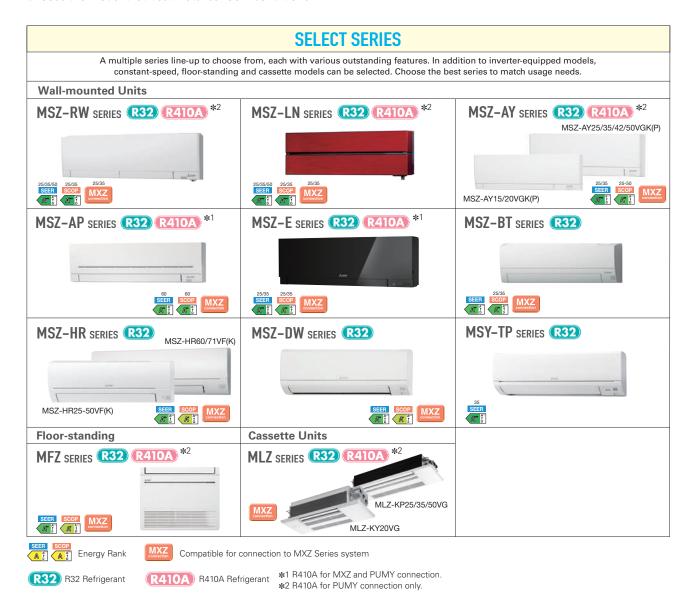

SELECT OUTDOOR UNIT

Some outdoor units in the line-up have heaters for use in cold regions. Units with an "H" in the model name are equipped with heaters.

Heater Installed MUZ-AY25/35/42/50VGH

MUZ-EF25/35VGH



Hyper Heating

MUZ-RW25/35/50VGHZ MUZ-LN25/35/50VGHZ MUZ-FT25/35/50VGHZ MUZ-FT25/35/50VGHZ MUFZ-KW25/35/50/60VGHZ



MUZ-LN50VGHZ2

Selecting a Heater-equipped Model

In regions with the following conditions, there is a possibility that water resulting from condensation on the outdoor unit when operating in the heating mode will freeze and not drain from the base.

- 1) Cold outdoor temperatures (temperature does not rise above $0\,^{\circ}\text{C}$ all day)
- Areas where dew forms easily (in the mountains, valleys(surrounded by mountains), near a forest, near unfrozen lakes, ponds, rivers or hot springs), or areas with snowfall.

To prevent water from freezing in the base, it is recommended that a unit with a built-in heater be purchased. Please ask your dealer representative about the best model for you.

MSZ-RW SERIES R410A SERIES

As a flagship model, RW series realises further outstanding heating performances under extremely cold outdoor temperature even with high energy efficiency. Moreover, excellent air purifying functions and many other smart features deliver a great comfort to you.





Heating Performance


MS7-RW25/35/50VG

Excellent heating performance of RW series delivers the prime warmth into your room. RW series' powerful compressor realises re-

markable maximum heating capacity in low ambient temperature with a high energy efficiency. Also, RW series performs 100% rated capacity even at -25°C, and the operation is guaranteed down to -30°C for all classes (25/35/50).



Improved Heating Capacity

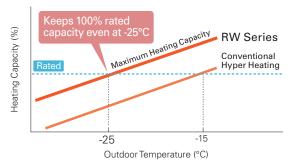


According to the optimal conditions observed in the lab test.

Wider Heating Operation Range



Longer Continuous Heating Operation

RW series with a high frost-detecting technology, made it possible to provide maximum continuous heating operation as long as 150 minutes with less frequent defrosting operations, maintaining a comfortable indoor environment in a long term.

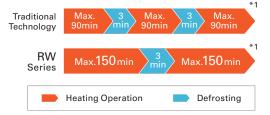


^{*1} The time for heating and defrosting operation depends on the environmental conditions

Tested in Sweden and Norway

We have conducted field tests in several cold sites and received high user satisfactions with sufficient air volume and remarkable heating performance of RW series. As the test result shows, we confirmed that RW series provides stable indoor comfortability even in extremely low ambient temperature.



Test result in Norway

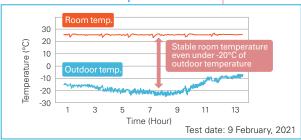

3D i-see Sensor

3D i-see sensor with the sophisticated hemispherical design measures the temperature of the room with an infrared sensor and detects the position of people, which allows you to choose your preferable airflow such as indirect and direct airflow.





*Image is for illustration purposes

Circulator Mode

In heating mode, after reaching the setting temperature, indoor unit automatically starts FAN mode to circulate the air and eliminate temperature unevenness in your room.







Plasma Quad Plus is a plasma-based filtering system which contributes to a better air quality in your room. Plasma Quad Plus applies a voltage of approximately 6,000 volts to the electrode to generate plasma, effectively removing various kinds of airborne particles such as viruses, bacteria, mold, allergen, dust, and PM2.5.



We have confirmed Plasma Quad Plus inhibits 99.8% of adhered COVID-19. *2



*Images are for illustration purposes.


99.8 inhibited*1

Virus (Airborne)

- *1 Tested Organization: vrc. Center, SMC Test Report No: 28-002 Test Method: JEM1467 Test result: Neutralised 99% of Influenza A virus in 72 minutes in a 25m³ test space.
- 2 Tested Organization: Japan Textile Products Quality and Technology Center, Test Report No: 20KB070569, Tested Materials: SARS-CoV-2, Test Method: Original (The test was conducted on the Plasma Quad device alone, not designed to evaluate product performance.) Test Result: Inhibited 99.8% in 360 minutes. The result without the effect of natural attenuation is 96.3%.

Quick Air Purifying Set

If you press "PURIFIER" button when the unit is turned off, Plasma Quad Plus starts to operate with a fan mode and purifies the air in your room.

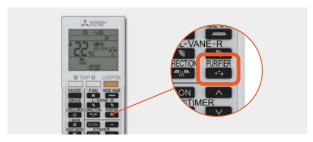

Deodorising Filter


The catalyst in Deodorising Filter denatures the odorous components and destroys them from the source of the odour, quickly delivering fresh air to your room.








Mitsubishi Electric's Dual Barrier Coating prevents dust and greasy dirt from accumulating on the inner surface of the indoor unit; keeping your air conditioner clean. Two barrier coating prevents hydrophilic dirt penetration, and "hydrophilic particles" prevent hydrophobic dirt from getting into the air conditioner.





No Dual Barrier
Coating used
(Image after 10 years)

Dual Barrier
Coating used



No Dual Barrier Coating used



Dual Barrier Coating used



No Dual Barrier Coating used (Image after 10 years)



Dual Barrier Coating used



*Image is for illustration purposes.






Dual Barrier Material performs the same antifouling effect as Dual Barrier Coating, and it is kneaded into horizontal vane and vertical vane material which are hard to apply coating to. Combined with Dual Barrier Coating, the whole air passage of indoor unit is kept clean all year round.

4 Horizontal Vane

No Dual Barrier Dual Barrier Material Material



No Dual Barrier Material Dual Barrier Material

^{*}Comparison of stains after 10 years of use (based on internal research)

^{*1 *2} Verified by SIAA test method (JIS Z 2911) with No. JP0501014A0002O on SIAA antifungal agent positive list. Antifungal effect depends on the working environment. Fungicides comply with the SIAA safety criteria. What is SIAA? https://www.kohkin.net/en_index.html

Drive Mode Selector

Drive Mode Selector allows you to select a preferred control setting according to your residential environment from three modes, Wide Room mode, Quiet mode, and Eco mode.


Wide Room Mode

Provides a better air distribution in your room and raises the comfort level.



Eco Mode

Suppresses a sharp increase in energy consumption by a gradual start-up operation.



Quiet Mode

Lowers operation noise level, creating quieter and peaceful environment.




Built-in Wi-Fi & App Control

Indoor unit is equipped with Wi-Fi interface which allows you to access MELCloud app, providing you with a flexible control of air conditioner on your smartphone, tablets, and PC.



Easy Wi-Fi Set Up

You can easily connect Wi-Fi adaptor in the indoor unit and your local router with just a simple operation of remote controller.




Remote Controller with Backlight

The remote controller screen is equipped with LED backlight. The luminous screen allows you to check the setting easily even in the dark.



Back Plate with a Hole

With a hole as default in the center of the back plate, the piping can be easily taken out from the back. The edge of the hole is reinforced to ensure the strength.

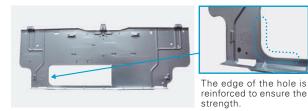

Spacer

A part of the packing material can be used as a spacer to lift indoor unit during the left-side piping work, which makes stable installation work possible.



Bottom Removable Structure

The corner box and the bottom panel are individually removable, and it makes easy to insert tools even in the case of left-side piping.



Easy Plugging/Unplugging of Drain Hose

One-touch structure with screw- free claw fixing. Easy to plug and unplug the drain hose when changing on the left and right.



MSZ-RW SERIES















Indoor Unit / Remote Controller

<White>





Outdoor Unit







MUZ-RW50VGHZ































































Туре					Inverter Heat Pump	
Indoor Ur	nit			MSZ-RW25VG	MSZ-RW35VG	MSZ-RW50VG
Outdoor l	Jnit			MUZ-RW25VGHZ	MUZ-RW35VGHZ	MUZ-RW50VGHZ
Refrigera	nt				R32 (*1)	
Power	Source				Outdoor Power supply	
Supply	Outdoor (V/Phase/H	lz)			230/Single/50	
Cooling	Design Load		kW	2.5	3.5	5.0
	Annual Electricity Co	onsumption (*2)	kWh/a	78	130	230
	SEER (*4)			11.2	9.4	7.6
		Energy Efficiency Class		A+++	A+++	A++
	Capacity	Rated	kW	2.5	3.5	5.0
		Min - Max	kW	0.9 - 3.5	1.0 - 4.0	1.4 - 5.8
	Total Input	Rated	kW	0.435	0.770	1.380
Heating	Design Load	•	kW	3.2	4.0	6.0
(Average	Declared Capacity	at reference design temperature	kW	3.2 (-10°C)	4.0 (-10°C)	6.0 (-10°C)
Season)(*5)		at bivalent temperature	kW	3.2 (-10°C)	4.0 (-10°C)	6.0 (-10°C)
		at operation limit temperature	kW	2.6 (-30°C)	2.6 (-30°C)	4.0 (-30°C)
	Back Up Heating Cap		kW	0.0	0.0	0.0
	Annual Electricity Co		kWh/a	856	1097	1800
	SCOP (*4)	•		5.2	5.1	4.6
	Energy Efficiency Class			A+++	A+++	A++
	Capacity	Rated	kW	3.2	4.0	6.0
	Min - Max		kW	0.8 - 6.3	1.1 - 7.0	1.8 - 8.7
	Total Input	Rated	kW	0.580	0.810	1.450
Operatin	g Current (max)	•	А	9.8	11.2	15.2
Indoor	Input	Rated	kW	0.021	0.022	0.041
Unit	Operating Current (n	nax)	А	0.21	0.22	0.37
	Dimensions	H*W*D	mm	305 - 998 - 247	305 - 998 - 247	305 - 998 - 247
	Weight		kg	14.5	14.5	14.5
	Air Volume	Cooling	m³/min	5.1 - 6.5 - 9.0 - 11.5 - 13.7	5.1 - 6.9 - 9.0 - 11.5 - 14.1	7.8 - 9.5 - 11.1 - 13.1 - 16.2
	(SLo-Lo-Mid-Hi-SHi (*	Heating	m³/min	5.1 - 7.8 - 9.5 - 11.7 - 14.1	5.1 - 7.8 - 9.5 - 11.7 - 14.5	7.8 - 10.7 - 12.5 - 14.7 - 18.2
	Sound Level (SPL)	Cooling	dB(A)	19 - 23 - 29 - 36 - 42	19 - 24 - 29 - 36 - 43	26 - 30 - 34 - 39 - 45
	(SLo-Lo-Mid-Hi-SHi (*	Heating	dB(A)	19 - 25 - 30 - 36 - 41	19 - 25 - 30 - 36 - 42	25 - 32 - 37 - 41 - 46
	Sound Level (PWL)	1	dB(A)	58	59	59
Outdoor	Dimensions	H*W*D	mm	714 - 800 - 285	714 - 800 - 285	880 - 840 - 330
Unit	Weight	'	kg	39.5	40	54
	Air Volume	Cooling	m³/min	35.1	37.8	49.3
		Heating	m³/min	37.8	37.8	55.6
	Sound Level (SPL)	Cooling	dB(A)	46	49	51
		Heating	dB(A)	49	50	54
	Sound Level (PWL)	Cooling	dB(A)	60	61	64
	Operating Current (r	nax)	А	9.6	11.0	14.8
	Breaker Size		А	10	12	16
Ext.	Diameter	Liquid / Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52
Piping	Max. Length	Out-In	m	20	20	30
	Max. Height	Out-In	m	12	12	15
Guarantee	ed Operating Range	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46
[Outdoor]	- 1	Heating	°C	-30 ~ +24	-30 ~ +24	−30 ~ +24

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of COz, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHI: Super High
(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(*5) Please see page 57-58 for heating (warmer season) specifications.



MSZ-LN




MS7-I N18/25/35/50/60VG2

Developed to complement modern interior room décor, the LN Series is available in four colours specially chosen to blend in naturally wherever installed. Not only the sophisticated design, but also the optimum energy efficiency and operational comfort add even more value to this series.



Luminous and Luxurious Design


Natural White, Pearl White, Ruby Red, and Onyx Black. LN Series indoor units are available in four colours to match various lifestyles. The appearance of the indoor unit differs depending on the lighting in the room, attracting the attention of everyone that enters the room.

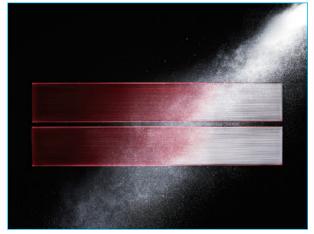


Master craftsmanship painting technology has resulted in a refined design, giving the finish deep colour and a premium guality feel.



Pearl White blends in with any interior.

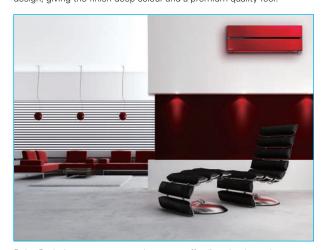

Ruby Red gives an accent to the room, affording timeless elegance to sophisticated interiors.

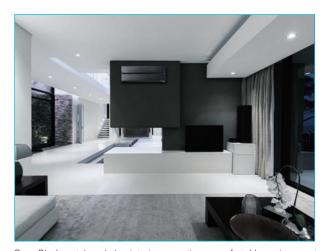

Onyx Black matches darker interiors, creating a comfortable environment.

LED Backlight Remote Controller

Not only the indoor units, but also the wireless remote controllers come in four colours as well. Each remote controller matches the indoor unit. Even the textures are the same.

The setting can be easily checked in the dark thanks to LED backlight.












x N

High Energy Efficiency


Inverter (25/35/50) 25/35 | SEER (SCOP

Optimum cooling/heating performance is another feature for the LN series. Models from capacities 25 to 50 have achieved the "Rank A⁺⁺⁺" for SEER, and models for capacities 25 and 35 have achieved the "Rank A⁺⁺⁺" for SCOP as well.

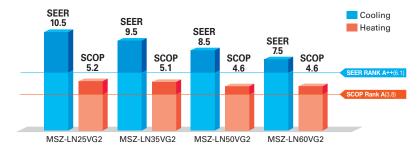

3D i-see Sensor

The LN Series is equipped with 3D i-see Sensor, an infrared-ray sensor that measures the temperature at distant positions. While moving to the left and right, eight vertically arranged sensor elements analyze the room temperature in three dimensions. This detailed analysis makes it possible to judge where people are in the room, thus allowing creation of features such as "Indirect airflow," to avoid airflow hitting people directly, and "direct airflow" to deliver airflow to where people are.

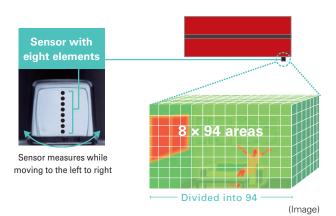

No occupancy energy-saving mode

The sensors detect whether there are people in the room. When no-one is in the room, the unit automatically switches to energy-saving mode.



The "3D i-see Sensor" detects people's absence and the power consumption is automatically reduced approximately 10% after 10 minutes and 20% after 60 minutes.

Indirect Airflow

The indirect airflow setting can be used when the flow of air feels too strong or direct. For example, it can be used during cooling to avert airflow and prevent body temperature from becoming excessively cooled.




Direct Airflow

This setting can be used to directly target airflow at people such as for immediate comfort when coming indoors on a hot (cold) day



Even Airflow *LN Series only Normal swing mode



The airflow is distributed equally throughout the room, even to spaces where there is no human movement.

Even airflow mode



The 3D i-see sensor memorizes human movement and furniture positions, and efficiently distributes airflow.

No occupany Auto-OFF mode *LN Series only

The sensors detect whether or not there are people in the room. When there is no one in the room, the unit turns off automatically.





Circulator Operation

In case the indoor temperature reaches the setting temperature, the outdoor unit stops and the indoor unit starts FAN operation to circulate the indoor air.

The outdoor unit starts operation automatically when the indoor temperature drops below the setting temperature.



If the heating operation is continued, the warm air is formed around ceiling.



(MSZ-LN18/25/35/50/60VG-SC Scandinavian model)

This operation can help to circulate and rense

Plasma Quad Plus

Plasma Quad Plus is a plasma-based filter system that effectively removes six kinds of air pollutants. Plasma Quad Plus captures mold and allergens more effectively than Plasma Quad. It can also capture PM2.5 and particles smaller than 2.5µm, creating healthy living spaces for all.

Bacteria



Test results have confirmed that Plasma Quad Plus neutralizes 99% of bacteria in 162 minutes in a $25 \mathrm{m}^3$ test space.

<Test No.> KRCES-Bio. Test Report No. 2016-0118

Viruses



Test results have confirmed that Plasma Quad Plus neutralizes 99% of virus particles in 72 minutes in a $25\mathrm{m}^3$ test space.

<Test No.> vrc.center, SMC No. 28-002

Molds



Test results have confirmed that Plasma Quad Plus neutralizes 99% of mold in 135 minutes in a 25m³ test space.

<Test No.> Japan Food Research Laboratories Test Report No. 16069353001-0201

Allergens



In a test, air containing cat fur and pollen was passed through the air cleaning device at the low airflow setting. Before and after measurements confirm that Plasma Quad Plus neutralizes 98% of cat fur and pollen.

<Test No.> ITEA Report No. T1606028

PM2.5



Test results have confirmed that Plasma Quad Plus removes 99% of PM2.5 in 145 minutes in a 28m³ test space.

<In-company investigation>

Dust



Test results have confirmed that Plasma Quad Plus removes 99.7% of dust and mites.

<Test No.> ITEA Report No. T1606028


Model	Name	Method	Bacteria	Viruses	Molds	Allergens	Dust	PM2.5*
FH Series	Plasma Quad	One-Stage Plasma	А	А	В	В	С	
LN Series	Plasma Quad Plus	Two-Stage Plasma	А	А	А	А	А	А


- A: Highly effective
- B: Effective
- C: Partially effective

*PM2.5:

Particles smaller than 2.5µm


Image of Plasma Quad Plus

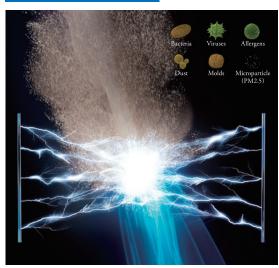

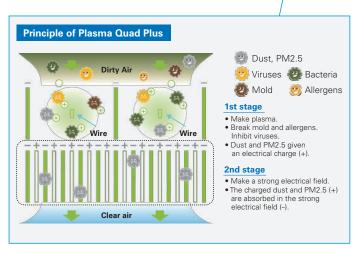

Dual Barrier Coating

A two-barrier coating prevents dust and greasy dirt from getting into the air conditioner.

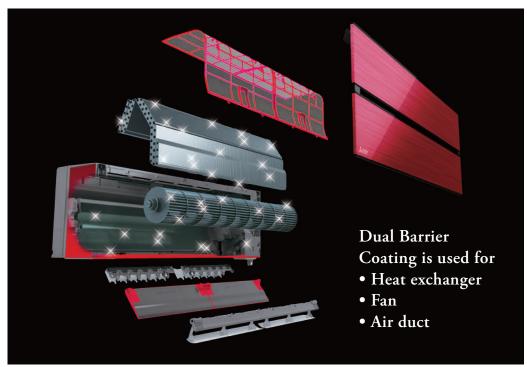



*Image is for illustration purposes.

State-of-the-art Coating Technology

Dirt is generally classified into two groups: hydrophilic dirt such as fiber dust and sand dust, and hydrophobic dirt such as oil and cigarette smoke. Mitsubishi Electric's dual barrier coating works as a two-barrier coating that prevent hydrophilic dirt penetration and "hydrophilic particles" that prevent hydrophobic dirt from getting into the air conditioner. This dual coating on the inner surface keeps the air conditioner clean year-round.



Comparison of dirt on heat exchanger, fan and air duct (in-house comparison)



The inside of the indoor unit gets dirty after many years of usage. Heat exchanger New 10 years later (image) New 10 years later (image)

^{*1} Verified by SIAA test method (JIS Z 2911) with No. JP0501014A0002O on SIAA antifungal agent positive list. Antifungal effect depends on the working environment. Fungicides comply with the SIAA safety criteria.

What is SIAA? https://www.kohkin.net/en_index/en_siaa.html

Double Flap

The vanes create various airflows to make each person in the room comfortable. Not only the horizontal vanes, but also the vertical vanes move independently, eliminating hot spots or cold spots throughout the room.






Night Mode

When Night Mode is activated using the wireless remote controller, air conditioner operation will switch to the following settings.


- The brightness of the operation indicator lamp will become dimmer.
- The beeping sound will be disabled.
- The outdoor operating noise will drop to 3dB lower than the rated operating noise specification.

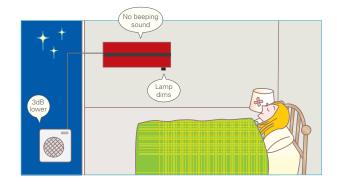

10°C Heating


During heating operation, the temperature can be set in 1°C increments down to 10°C.

This function can also be used with the Weekly Timer setting.

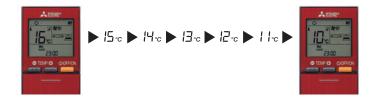

Quiet Operation

The indoor unit noise level is as low as 19dB for LN25/35 models, offering a peaceful inside environment.

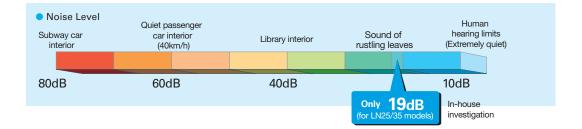

Built-in Wi-Fi Interface

The indoor unit is equipped with a Wi-Fi Interface inside an exclusive pocket in the unit.

This eliminates the need to install a Wi-Fi interface, and also contributes to the beautiful appearance since the interface is hidden.



^{*}The cooling/heating capacity may drop.

LIVING R32 R410A Single / MXZ, PUMY PUMY SERIES

Unlike conventional air conditioning systems, the LN Series don't lose heating capacity when it's cold outside. Original technologies ensure excellent heating performance under extremely low outdoor temperatures and an impressive guaranteed operating range.







MSZ-LN25/35/50VG2(W)(V)(R)(B)

Unparalleled Heating Performance


LN Series outdoor units are equipped with a high-output compressor that provides enhanced heating performance under low outdoor temperatures. The heating operation range is extended down to $-25^{\circ}\mathrm{C}$

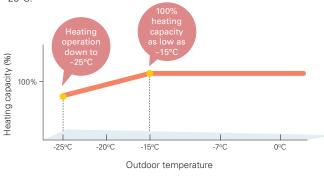

Operating Range

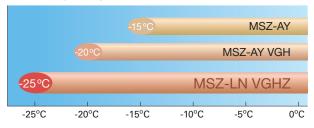

Declared Capacity (at reference design temperature)

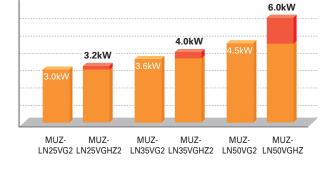

High Energy Efficiency – Energy Rank of A⁺ or Higher for All Models



With indoor units that combine functionality, design and capacity and outdoor units equipped with a high-efficiency compressor, the MUZ-LN VGHZ simultaneously achieves high heating capacity and energy-saving performance.



MUZ-LN25VGHZ2 MUZ-LN35VGHZ2 MUZ-LN50VGHZ

Freeze-prevention Heater Equipped as Standard

The Freeze-prevention heater restricts lowered capacity and operation shutdowns caused by the drain water freezing. This supports stable operation in low-temperature environments.

Can operate at Outdoor temperature temperature of -25°C





Without Freeze-prevention heater

With Freeze-prevention heater


*Image is for illustration purposes. The actual performance depends on outdoor temperature.

Compact, Powerful Compressor

A special manufacturing technology, "Heat Caulking Fixing Method," has been introduced to reduce compressor size while maintaining a high compressor output. This technology enables the installation of a powerful compressor in compact MUZ outdoor units. As a result, excellent heating performance is achieved when operating in cold outdoor environments.





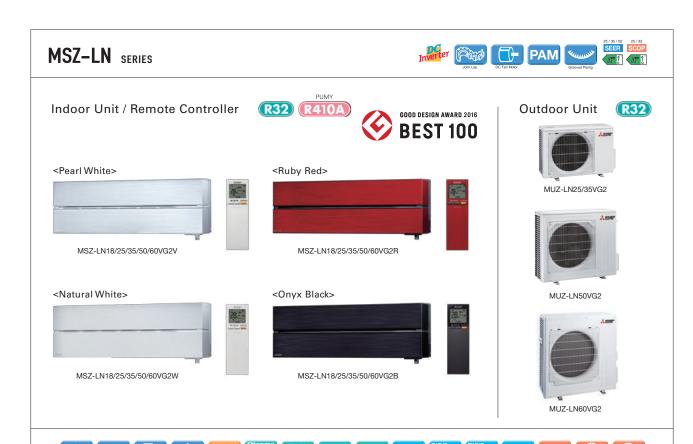

							<u> </u>	
Туре						Inverter Heat Pump		
Indoor Ur	it			MSZ-LN18VG2	MSZ-LN25VG2	MSZ-LN35VG2	MSZ-LN50VG2	MSZ-LN60VG2
Outdoor l	Jnit			for MXZ connection	MUZ-LN25VG2	MUZ-LN35VG2	MUZ-LN50VG2	MUZ-LN60VG2
Refrigerar	nt				Sir	ngle: R32 ⁽¹⁾ / Multi: R410A or R32	2(*1)	
Power	Source					Outdoor Power Supply		
Supply	Outdoor (V/Ph	ase / Hz)				230 / Single / 50		
	Design load		kW	-	2.5	3.5	5.0	6.1
	Annual electricity	consumption (*2)	kWh/a	-	83	129	205	285
	SEER (*4)			-	10.5	9.5	8.5	7.5
Cooling		Energy efficiency class		-	A+++	A+++	A+++	A++
	Capacity	Rated	kW	-	2.5	3.5	5.0	6.1
	Capacity	Min-Max	kW	-	1.0 - 3.5	0.8 - 4.0	1.0 - 6.0	1.4 - 6.9
	Total Input	Rated	kW	-	0.485	0.820	1.380	1.790
	Design load		kW	-	3.0 (-10°C)	3.6 (-10°C)	4.5 (-10°C)	6.0 (-10°C)
	Da alamad	at reference design temperature		-	3.0 (-10°C)	3.6 (-10°C)	4.5 (-10°C)	6.0 (-10°C)
	Declared Capacity	at bivalent temperature	kW	-	3.0 (-10°C)	3.6 (-10°C)	4.5 (-10°C)	6.0 (-10°C)
	Capacity	at operation limit temperature	kW	-	2.5 (-15°C)	3.2 (-15°C)	4.2 (-15°C)	6.0 (-15°C)
Heating	Back up heating	capacity	kW	-	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
(Average	Annual electricity	consumption (*2)	kWh/a	-	807	987	1369	1816
Season)(*5)	SCOP (*4)			-	5.2	5.1	4.6	4.6
		Energy efficiency class		-	A+++	A+++	A++	A++
Ì	Capacity	Rated	kW	-	3.2	4.0	6.0	6.8
		Min-Max	kW	=	0.7 - 5.4	0.9 - 6.3	1.0 - 8.2	1.8 - 9.3
	Total Input	Rated	kW	=	0.600	0.820	1.480	1.810
Operating	g Current (Max)	`	Α	=	7.1	9.9	13.9	15.2
	Input	Rated	kW	0.027	0.027	0.027	0.034	0.040
	Operating Curre	nt(Max)	Α	0.3	0.3	0.3	0.4	0.4
	Dimensions	H*W*D	mm	307-890-233	307-890-233	307-890-233	307-890-233	307-890-233
	Weight		kg	14.5 (W) 15.5 (V, R, B)	14.5 (W) 15.5 (V, R, B)	14.5 (W) 15.5 (V, R, B)	15 (W) 16 (V, R, B)	15 (W) 16 (V, R, B)
Indoor Unit	Air Volume (SLo-	Cooling	m³/min	4.7 - 5.9 - 7.1 - 9.2 - 12.4	4.7 - 5.9 - 7.1 - 9.2 - 12.4	4.7 - 5.9 - 7.1 - 9.2 - 13.0	5.7 - 7.6 - 8.8 - 10.6 - 13.9	7.1 - 8.8 - 10.6 - 12.7 - 15.7
Oille	Lo-Mid-Hi-SHi(*3))	Heating	m³/min	4.5 - 6.6 - 7.5 - 11.0 - 13.9	4.5 - 6.6 - 7.5 - 11.0 - 13.9	4.5 - 6.6 - 7.5 - 11.0 - 13.9	5.4 - 6.4 - 8.5 - 10.7 - 15.7	6.6 - 9.5 - 11.5 - 13.6 - 15.7
	Sound Level (SPL)	Cooling	dB(A)	19 - 23 - 29 - 36 - 42	19 - 23 - 29 - 36 - 42	19 - 24 - 29 - 36 - 43	27 - 31 - 35 - 39 - 46	29 - 37 - 41 - 45 - 49
	(SLo-Lo-Mid-Hi-SHi ^(*3))	Heating	dB(A)	19 - 24 - 29 - 38 - 45	19 - 24 - 29 - 38 - 45	19 - 24 - 29 - 38 - 45	25 - 29 - 34 - 39 - 47	29 - 37 - 41 - 45 - 49
	Sound Level (PWL)	Cooling	dB(A)	58	58	59	60	65
	Dimensions	H*W*D	mm	-	550-800-285	550-800-285	714-800-285	880-840-330
	Weight		kg	-	33	34	40	53
	Air Volume	Cooling	m³/min	-	34.3	34.3	40.0	48.8
Outdoor	Air volume	Heating	m³/min	-	32.7	32.7	40.5	55.0
Unit	Sound Level (SPL)	Cooling	dB(A)	-	46	49	51	55
	Journa Level (JFL)	Heating	dB(A)	-	49	50	54	55
	Sound Level (PWL)	Cooling	dB(A)	-	60	61	64	65
	Operating Curre	nt (Max)	А	-	6.8	9.6	13.5	14.8
	Breaker Size		Α	-	10	10	16	16
F4	Diameter	Liquid/Gas	mm	-	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.7
Ext. Piping	Max.Length	Out-In	m	-	20	20	30	30
· ·pmg	Max.Height	Out-In	m	-	12	12	12	15
	ed Operating	Cooling	°C	-	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
Range (O	utdoor)	Heating	°C	-	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24

⁽¹⁾ Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.


The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SHI: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 57-58 for heating (warmer season) specifications.

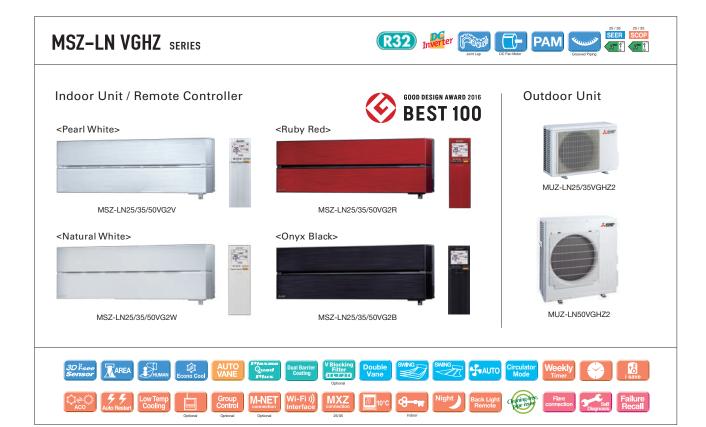

уре					Inverter Heat Pump					
ndoor Un	it			MSZ-LN25VG2(W)(V)(R)(B)	MSZ-LN35VG2(W)(V)(R)(B)	MSZ-LN50VG2(W)(V)(R)(B)				
utdoor l	Jnit			MUZ-LN25VGHZ2	MUZ-LN25VGHZ2 MUZ-LN35VGHZ2					
efrigerar	nt				R32 (*1)					
Power Source				Outdoor Power supply						
ıpply	Outdoor (V/Phase/H	lz)		230/Single/50						
oling	Design Load		kW	2.5	3.5	5.0				
	Annual Electricity Consumption (*2)			83	83 130					
	SEER (* 4)			10.5	9.4	7.6				
		Energy Efficiency Class		A+++	A+++	A++				
	Capacity	Rated	kW	2.5	3.5	5.0				
		Min - Max	kW	0.8 - 3.5	0.8 - 4.0	1.4 - 5.8				
	Total Input	Rated	kW	0.485	0.820	1.380				
ating	Design Load	•	kW	3.2 (-10°C)	4.0 (-10°C)	6.0 (-10°C)				
verage	Declared Capacity	at reference design temperature	e kW	3.2 (-10°C)	4.0 (-10°C)	6.0 (-10°C)				
ason)(*5)		at bivalent temperature	kW	3.2 (-10°C)	4.0 (-10°C)	6.0 (-10°C)				
		at operation limit temperature	kW	2.3 (-25°C)	3.1 (-25°C)	4.7 (-25°C)				
	Back Up Heating Cap		kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)				
	Annual Electricity Co	onsumption (*2)	kWh/a	861	1098	1826				
	SCOP (*4)			5.2	5.1	4.6				
		Energy Efficiency Class		A+++	A+++	A++				
	Capacity	Rated	kW	3.2	4.0	6.0				
	Min - Max		kW	0.8 - 6.3	0.9 - 6.6	1.8 - 8.7				
	Total Input Rated		kW	0.600	0.820	1.480				
eratin	erating Current (max)		9.9	10.5	15.2					
door	Input Rated		kW	0.027	0.027	0.034				
nit	Operating Current (max)		A	0.3	0.3	0.4				
	Dimensions	imensions H*W*D		307 - 890 - 233	307 - 890 - 233	307 - 890 - 233				
	Weight	Weight		15.5	15.5	15.5				
	Air Volume	Cooling	m³/min	4.3 - 5.8 - 7.1 - 8.8 - 11.9	4.3 - 5.8 - 7.1 - 8.8 - 12.8	5.7 - 7.6 - 8.9 - 10.6 - 13.9				
	(SLo-Lo-Mid-Hi-SHi (*)	Heating	m³/min	4.0 - 5.7 - 7.1 - 8.5 - 14.4	4.3 - 5.7 - 7.1 - 8.5 - 13.7	5.4 - 6.4 - 8.5 - 10.7 - 15.7				
	Sound Level (SPL)	Cooling	dB(A)	19 - 23 - 29 - 36 - 42	19 - 24 - 29 - 36 - 43	27 - 31 - 35 - 39 - 46				
	(SLo-Lo-Mid-Hi-SHi (*	Heating	dB(A)	19 - 24 - 29 - 36 - 45	19 - 24 - 29 - 36 - 45	25 - 29 - 34 - 39 - 47				
	Sound Level (PWL)		dB(A)	58	58	60				
tdoor	Dimensions	H*W*D	mm	550 - 800 - 285	550 - 800 - 285	880 - 840 - 330				
nit	Weight		kg	35	36	53				
	Air Volume	Cooling	m³/min	31.4	33.8	48.8				
		Heating	m³/min	27.4	27.4	55.0				
	Sound Level (SPL)	Cooling	dB(A)	46	49	51				
		Heating	dB(A)	49	50	54 64				
	Sound Level (PWL)			60	61					
	Operating Current (max)		A	9.6 10.2		14.8				
	Breaker Size		Α	10	12	16				
t.	Diameter	11.17.21		6.35/9.52	6.35/9.52	6.35/9.52				
ping	Max. Length	lax. Length Out-In		20	20	30				
	Max. Height	Out-In		12	12	15				
	ed Operating Range	Cooling	℃	-10 ~ +46 -10 ~ +46		-10 ~ +46				
Outdoorl] Heating		°C	-25 ~ +24	-25 ~ +24	-25 ~ +24				

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of COz, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHI: Super High

(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(*5) Please see page 57-58 for heating (warmer season/colder season) specifications.

MSZ-AY SERIES

The AY series has an excellent cleanliness feature and ranges to two models: the VGK model comes standard with the V Blocking Filter, which has antiviral, antibacterial, anti-mold, and anti-allergen effects, and the VGKP model comes standard with Plasma Quad Plus, which can collect PM2.5 dust in addition to these effects. The AY series has also been upgraded in terms of quietness, energy efficiency, and ease of installation. Enjoy a comfortable air environment with the AY series.



MSZ-AY25/35/42/50VGK(P)



High Energy Saving



The AY series have achieved either the "Rank A^{+++} " or "Rank A^{++} " for SEER and SCOP as energy-savings rating.

The high-efficiency air conditioner is eco-friendly and economical.







Matt and Sophisticated Design

The elegant and sophisticated design has been created to fit in any room, with careful attention to detail in the surface finish and panel angles.



Rounded corners

The rounded corners give a soft impression that blends in with any room.

Simple and Compact size

While the plasma is built-in, the angle of the curve is carefully designed to maintain the compact unit.

Widely Ranged Capacities

Compact and stylish models are available.

The wide range of capacities is designed to match a variety of room types. In particular, the 1.5kW and 2.0kW models are ideal for children's rooms, bedrooms, and highly insulated homes.



MSZ-AY25/35/42/50VGK(P)




MSZ-AY15/20VGK(P)

Plasma Quad Plus (only VGKP model)



You can enjoy the clean and safe air by Plasma Quad Plus.

Plasma Quad Plus is a plasma-based filtering system which contributes to a better air quality in your room. Plasma Quad Plus applies a voltage of approximately 6,000 volts to the electrode to generate plasma, effectively removing various kinds of airborne particles such as viruses, bacteria, mold, allergen, dust, and PM2.5.

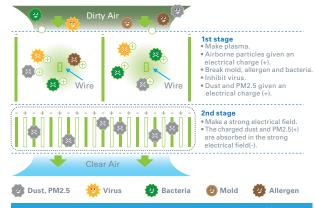

We have confirmed Plasma Quad Plus inhibits 99% of adhered COVID-19.

- *Tested Organization: National Hospital Organization Sendai Medical Center, Test Report No: R4-001 Test result: Neutralised 99% of influenza A virus in 210.5 minutes in a 25m³ test space
- *Tested Organization: Japan Textile Products Quality and Technology Center, Test Report No: 20KB070569, Tested Materials: SARS-CoV-2, Test Method: Original (The test was conducted on the Plasma Quad device alone, not designed to evaluate product performance.) Test Result: Inhibited 99.8% in 360 minutes. The result without the effect of natural attenuation is 96.3%.

The above test results are for AY25-50. Test results for AY15/20 are on p10

V Blocking Filter (only VGK model)

"V Blocking Filter" with antiviral effect inhibits 99% of adhered virus, and other harmful substances, such as bacteria, mold and allergen. Two-layered filter with nonwoven fabric and electrostatic filter can effectively capture and remove small particles from the air in your room.

Virus Test method: JIS L 1922, Tested Organization: Guangdong Detection Center of Microbiology, Test Report No: 2020FM30156R02D, Test result: 99% neutralized in 24 hours in a Testing Container.

Bacteria Test method: JIS L 1902, Tested Organization: Boken Quality Evaluation

Institute, Test Report No: 29020006998-1, Test result: 99% neutralized in 18 hours in a Petri dish.

Mold Test method: JIS Z 2911, Tested Organization: Boken Quality Evaluation Institute, Test Report No: 29020006906-1, Test result: No moldgrowth was confirmed. Allergen Test method: ELISA, Tested Organization: Daiwa Chemical Industries Co., Ltd, Test Report No: 2021B267, Test result: 96% neutralized in 24 hours.



Dual Barrier Coating

Mitsubishi Electric's Dual Barrier Coating prevents dust and greasy dirt from accumulating on the inner surface of the indoor unit, keeping your air conditioner clean. Hydrophilic material resists oil stains and hydrophobic material resists dust stains.





No Dual Barrier Coating used (Image after 10 years)



Dual Barrier Coating used



Dual Barrier Coating used (Image after 10years)



 Heat Exchanger -886-8888 -888-88K ----



Self Clean

When Self Clean Mode is activated, fan operation starts after cooling/dry mode. This operation helps to dry inside indoor unit to prevent molds and odors. You can feel the clean air without frequent cleaning by yourself.

1 High humidity inside the unit, which can lead to mold growth and odors.



Airflow operation suppresses mycelial growth.



*When SELF CLEAN operation is set, it performs for 25 minutes when unit is stopped after COOL/DRY operation.

SELF CLEAN operation performs when: COOL/DRY is operated more than 3 minutes.

The fan is stopped for the first 3 minutes. Then, the horizontal vane is set to higher than angle 1 and the fan is operated for 25 minutes.

To enable this function, press "Self Clean Mode" button on remote controller. (Default setting is OFF)

Maintains clean unit interior.



*Image is for illustration purposes



Noiseless 18dB 18dB Super Quiet


Quiet, relaxing space is within reach. Operational noise is 18dB (for AY25/35 single connection), which is so quiet that you might even forget the air conditioner is on.

Night Mode

When Night Mode is activated using the wireless remote controller, air conditioner operation will switch to the following settings.

- The brightness of the operation indicator lamp will become dimmer.
- The beeping sound will be disabled.
- The outdoor operating noise will be 3dB lower than the rated operating noise specification.



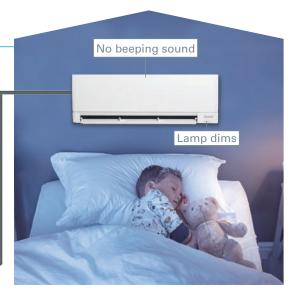

•

Wider Heating Operation Range

Mitsubishi Electric technology ensures that the unit will operate even when the outdoor temperature is down to -20°C for AY20/25/35/42/50 single connection only.

Guaranteed heating operation range is extended to -20°C AY series -20°C -15°C OutdoorTemperature(°C)

Outdoor Units for Cold Region

Single split-type outdoor units are available in both standard and heater-equipped units. An electric heater is installed in each unit to prevent freezing in cold outdoor environments.

MUZ-AY25/35/42VG MUZ-AY50VG M




MUZ-AY25/35/42VGH

MUZ-AY50VGH

^{*}The cooling/heating capacity may drop.

Back Plate with a Hole

With a hole as default in the center of the back plate, the piping can be easily taken out from the back. The edge of the hole is reinforced to ensure the strength.

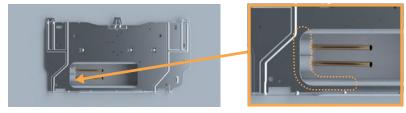

The edge of the hole is reinforced to ensure the strength.

Spacer

A part of the packing material can be used as a spacer to lift indoor unit during the left-side piping work, which makes stable installation work possible.



Built-in Wi-Fi & App Control

Indoor unit is equipped with Wi-Fi interface which allows you to access MELCloud app, providing you with a flexible control of air conditioner on your smartphone, tablets, and PC.


[key control and monitoring features]

- On/Off
- Check and set driving conditions
- Notification of weather conditions from current location
- Weekly timer set
- Energy consumption check
- Air purification on/off



Easy Wi-Fi Set Up

You can easily connect Wi-Fi adaptor in the indoor unit and your local router with just a simple operation of remote controller.

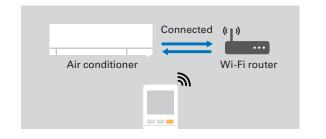

Remote Controller Features

The remote controller screen is equipped with LED back-light. The luminous screen allows you to check the setting easily even in the dark. You can easily connect Wi-Fi adaptor in the indoor unit and your local router with just a simple operation of remote controller.



MSZ-AP


Introducing a compact and stylish indoor unit with various capacity, designed to match number of rooms. High performance indoor and outdoor units enabled to achieve "Rank A^{++} " for SEER.



High Energy Saving



MSZ-AP60/71VG, have achieved either the "Rank A++" or "Rank A+" for SEER and SCOP as energy-savings rating. Our air conditioners are contributing to reduce energy consumption in a wide range.

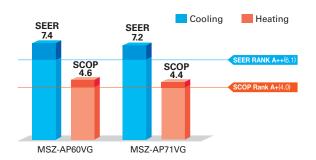



Large Capacity Model

Suitable model for large rooms.





Wide and Long Airflow


The wide and long airflow function is especially beneficial for large spaces, helping to ensure that air is well circulated and reaches every corner of the room.

Wide Airflow

This unique airflow system distributes air horizontally over a wide-ranging 150° in heating mode and 100° in cooling mode. Simply press the Wide Swing icon on the remote controller to select the desired airflow from seven different patterns.

Long Airflow

Use this function to ensure that the airflow circulates to areas far across the room. Press the Long Airflow icon on the remote controller to extend reach up to as far as 12 metres from the unit.



Evolved Comfortable Convenience Function

Horizontal Airflow

The new airflow control which spreads across the ceiling eliminates the uncomfortable drafty feeling.

Auto Vane Control

Auto vanes can be moved left and right, and up and down using the remote controller.

The Function

"WeeklyTimer"

Easily set desired temperatures and operation start/stop times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

■ Example Operation Pattern (Winter/Heating mode)


Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.				
ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C				
		Automatically change								
OFF	OFF	OFF	OFF	OFF		ON 18°C				
	Automatically turned off during work hours Midday is warmer, so the temperature is s									
ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C				
	Automatically turi	ns on, synchronized wi		Automatically raises ten	nperature setting to de-air temperature is low					
ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C				
	Automa	atically lowers tempera	ture at bedtime for ene	ergy-saving operation a	t night					
	ON 20°C	ON 20°C ON 20°C OFF OFF Automatic ON 20°C ON 20°C Automatically turn ON 18°C ON 18°C	ON 20°C ON 20°C ON 20°C Automatically change OFF OFF Automatically turned off during v ON 20°C ON 20°C ON 20°C Automatically turns on, synchronized wi ON 18°C ON 18°C ON 18°C	ON 20°C ON 20°C ON 20°C Automatically changes to high-power opera OFF OFF OFF Automatically turned off during work hours ON 20°C ON 20°C ON 20°C Automatically turns on, synchronized with arrival at home ON 18°C ON 18°C ON 18°C ON 18°C	ON 20°C ON 20°C ON 20°C ON 20°C Automatically changes to high-power operation at wake-up time OFF OFF OFF OFF OFF Automatically turned off during work hours ON 20°C ON 20°C ON 20°C ON 20°C Automatically turns on, synchronized with arrival at home ON 18°C ON 18°C ON 18°C ON 18°C ON 18°C	ON 20°C ON 20°C ON 20°C ON 20°C ON 20°C ON 20°C Automatically changes to high-power operation at wake-up time OFF OFF OFF OFF OFF OFF Automatically turned off during work hours ON 20°C ON 20°C ON 20°C ON 20°C ON 20°C Automatically turns on, synchronized with arrival at home ON 20°C ON 20°C ON 20°C Automatically turns on, synchronized with arrival at home				

Settings

Pattern Settings: Input up to four settings for each day

Settings: •Start/Stop operation •Temperature setting *The operation mode cannot be set.

■ Easy set-up using dedicated buttons

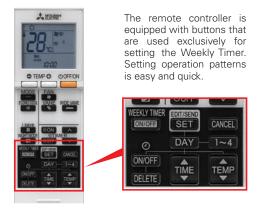



- Start by pushing the "SET" button and follow the instructions to set the desired patterns. Once all of the desired patterns are input, point the top end of the remote controller at the indoor unit and push the "SET" button one more time. (Push the "SET" button only after inputting all of the desired patterns into the remote controller memory. Pushing the "CANCEL" button will end the set-up process without sending the operation patterns to the indoor unit.

 It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent.

 When "Weekly Timer" is set, temperature can not be set 10°C. (only for 15/20 models)

MSZ-AY SERIES














R32 R410A



MSZ-AY15/20VGK(P)



MSZ-AY25/35/42/50VGK(P)

Outdoor Unit











MUZ-AY20VG



MUZ-AY25/35/42VG(H) MUZ-AY50VG(H)




























































































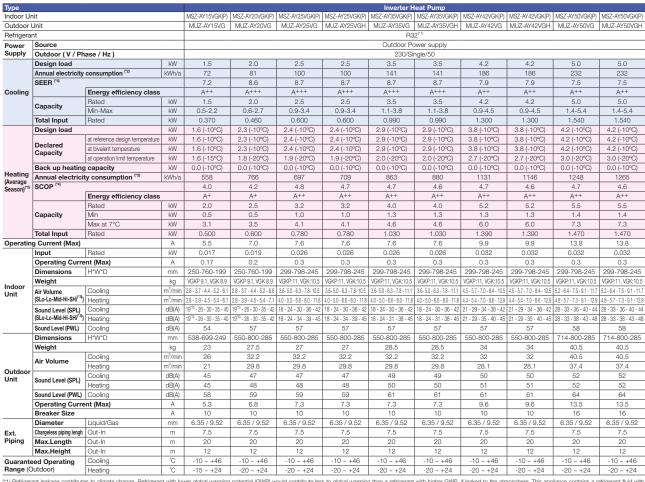


^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R82 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHF: Sunce High

⁽²⁾ Energy consumption based on standard test results. Actual energy consumption will depend on row the applications of consumption based on standard test results. Actual energy consumption will depend on row the applications of consumption asset on standard test results. Actual energy consumption will depend on row the applications of consumption are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season". (5) Please see page 57-56 for heating (warmer season) specifications. (6) For single use: only 19dB/A), For multi use (MX2): 21dB/A).

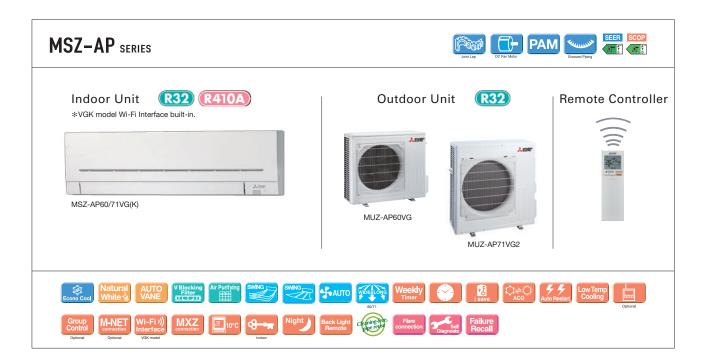

Туре				Inverter Heat Pump						
Indoor Ur	nit			MSZ-AP60VG(K)	MSZ-AP71VG(K)					
Outdoor	Outdoor Unit			MUZ-AP60VG	MUZ-AP71VG					
Refrigera	nt			Single: R32 ⁽¹⁾ / Multi: R32 ⁽¹⁾						
Power	Source			Outdoor Power supply						
Supply	Outdoor (V / Ph	ase / Hz)			ngle / 50					
	Design load	,	kW	6.1	7.1					
	Annual electricity	consumption (*2)	kWh/a	288	345					
	SEER (*4)	- Contracting to Cont	14411114	7.4	7.2					
Cooling	OLLII	Energy efficiency class		A++	A++					
Cooming		Rated	kW	6.1	7.1					
	Capacity	Min-Max	kW	1,4-7.3	2.0-8.7					
			kW	1.4-7.3	2.010					
	Total Input	Rated		***						
	Design load	T	kW	4.6 (-10°C)	6.7 (-10°C)					
	Declared	at reference design temperature		4.6 (-10°C)	6.7 (-10°C)					
	Capacity	at bivalent temperature	kW	4.6 (-10°C)	6.7 (-10°C)					
		at operation limit temperature	kW	3.7 (-15°C)	5.4 (-15°C)					
Heating	Back up heating		kW	0.0 (-10°C)	0.0 (-10°C)					
(Average	Annual electricity	consumption (*2)	kWh/a	1398	2126					
Season)(*5)	SCOP (*4)			4.6	4.4					
		Energy efficiency class		A++	A+					
		Rated	kW	6.8	8.1					
	Capacity	Min-Max	kW	2.0-8.6	2.2-10.3					
	Total Input	Rated	kW	1.670	2.120					
Operatin	g Current (Max)		А	14.1	16.4					
			kW	0.049	0.045					
	Operating Current (Max)		A	0.5	0.4					
	Dimensions H*W*D		mm	325-1100-257	325-1100-257					
	Weight		kg	16.0	17.0					
Indoor	Air Volume Cooling		m³/min	9.4 - 11.0 - 13.2 - 16.0 - 18.9	9.6 - 11.5 - 13.2 - 15.3 - 18.6					
Unit	(SLo-Lo-Mid-Hi-SHi ^(*3))	Heating	m³/min	10.8-13.4-15.4-15.4-20.3						
	,				10.2-11.5-13.2-15.3-19.2					
	(SLo-Lo-Mid-Hi-SHi ^(*3))	ound Level (SPL) Cooling dB(A)		29 - 37 - 41 - 45 - 48	30 - 37 - 41 - 45 - 49					
	,	Heating	dB(A)	30 - 37 - 41 - 45 - 48	30 - 37 - 41 - 45 - 51					
	Sound Level (PWL)	Cooling	dB(A)	65	65					
	Dimensions H*W*D mm			714-800-285	880-840-330					
	Weight		kg	40	53					
	Air Volume	Cooling	m³/min	52.1	63.7					
Outdoor	7 a. Tolamo	Heating	m³/min	52.1	57.7					
Unit	Sound Level (SPL)	Cooling	dB(A)	56	56					
0	Sound Level (SFL)	Heating	dB(A)	57	55					
	Sound Level (PWL)	el (PWL) Cooling dB(A) 69		69	69					
			А	13.6	16.0					
	Breaker Size		Α	16	20					
	Diameter Liquid/Gas		mm	6.35 / 12.7	6.35 / 12.7					
Ext.	Max.Length	Out-In	m	30	30					
Piping	Max.Height	Out-In	m	15	15					
Guarante	eed Operating	Cooling	*C	-10 ~ +46	-10 ~ +46					
Range (C		Heating	°C	-15 ~ +24	-15 ~ +24					
90 (0		r roading	\vdash	-10 ~ T24	-10 ~ T24					

⁽¹⁾ Retrigerant leakage contributes to climate change. Retrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or 682 is 675 in the IPCC 4th Assessment the product yourself or dard always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SHs. Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 57-58 for heating (warmer season) specifications.









MS7-E

Developed to complement modern interior room

décor, Kirigamine ZEN air conditioners are available in three colours specially chosen to blend in naturally wherever installed.

Stylish Line-up Matches Any Room Décor

The streamlined wall-mounted indoor units have eloquent silver-bevelled edges, expressing sophistication and quality. Combining impressively low power consumption and quiet yet powerful performance, these units provide a bestmatch scenario for diverse interior designs while simultaneously ensuring maximum room and energy savings.







Energy-efficient Operation

All models in the series have achieved high energy-savings rating, and are contributing to reduced energy consumption in homes, offices and a range of other settings. Offered in a variety of output capacities and installation patterns, the vast applicability promises an ideal match for any user.

Outdoor	Rank A for single connection	Compatibility									
	MUZ-EF25/35VG(H)	MXZ									
Indoor	MUZ-EF42/50VG	2F33VF	2F42VF	2F53VF	3F54VF	3F68VF	4F72VF				
MSZ-EF18VG	_	~	~	~	~	~	~				
MSZ-EF22VG	-	~	~	~	~	~	~				
MSZ-EF25VG	A +++/ A++(A++*)	~	~	~	~	~					
MSZ-EF35VG	A +++/ A++(A+*)		~	~	~	~	~				
MSZ-EF42VG	A++/A++			~	~	~	~				
MSZ-EF50VG	A++/A+			~	~	~	~				

Quiet Comfort All Day Long

Mitsubishi Electric's advanced "Silent Mode" fan speed setting provides super-quiet operation as low as 19dB for EF18/22/25 models for cooling. This unique feature makes the Kirigamine ZEN series ideal for use in any situation

Superior Exterior and Operating Design Concept


The indoor unit of the Kirigamine ZEN keeps its amazingly thin form even during operation. The only physical change notable is the movement of the variable vent. As a result, a slim attractive look is maintained.



V Blocking Filter

V Blocking Filter with antiviral effect inhibits 99% of adhered virus, and other harmful substances, such as bacteria, mold and allergen.


Two-layered filter with non-woven fabric and electrostatic filter can effectively capture and remove small particles from the air in your room.



Noise Level Human hearing limits Quiet passenger Subway car car interio Sound of Library interior (40km/h) rustling leaves (Extremely quiet) 10dB 80dB 60dB 40dB 19_{dB} An in-company investigation

Low Standby Power

Electrical devices consume standby power even when they are not in actual use. While we obviously strive to reduce power consumption during actual use, reducing this wasted power that cannot be seen is also very important.



Outdoor Units for Cold Region

(25/35)

Single split-type outdoor units are available in both standard and heater-equipped units. An electric heater is installed in each unit to prevent freezing in cold outdoor environments.



MSZ-E SERIES
























reddot award 2015 winner





MUZ-EF25/35VG(H).42VG



MUZ-EF50VG









MSZ-EF18/22/25/35/42/50VG(K)B*

- $\ensuremath{\bigstar}$ Soft-dry Cloth is enclosed with Black models.
- * VGK model Wi-Fi interface built-in















R32 R410A






























Туре							Inverter H	leat Pump			
Indoor Ur	nit			MSZ-EF18VG(K)	MSZ-EF22VG(K)	MSZ-EF25VG(K)	MSZ-EF25VG(K)	MSZ-EF35VG(K)	MSZ-EF35VG(K)	MSZ-EF42VG(K)	MSZ-EF50VG(K)
Outdoor I	Jnit			for MXZ c	onnection	MUZ-EF25VG	MUZ-EF25VGH	MUZ-EF35VG	MUZ-EF35VGH	MUZ-EF42VG	MUZ-EF50VG
Refrigera	nt						R3	2(*1)			
Power	Source						Outdoor Po	ower supply			
Supply	Outdoor (V / Ph	ase / Hz)					230/Sii	- ' ' '			
	,		kW	-	-	2.5	2.5	3.5	3.5	4.2	5.0
	Annual electricity consumption (*2)		kWh/a	-	-	96	96	139	139	186	233
Cooling	SEER (*4)	<u> </u>		-	-	9.1	9.1	8.8	8.8	7.9	7.5
		Energy efficiency class		-	-	A+++	A+++	A+++	A+++	A++	A++
		Rated	kW	-	-	2.5	2.5	3.5	3.5	4.2	5.0
	Capacity	Min-Max	kW	-	-	0.9-3.4	0.9-3.4	1.1-4.0	1.1-4.0	0.9-4.6	1.4-5.4
	Total Input	Rated	kW	-	-	0.540	0.540	0.910	0.910	1.200	1.540
	Design load	Į.	kW	-	-	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.2 (-10°C)
		at reference design temperature	kW	-	-	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.2 (-10°C)
	Declared	at bivalent temperature	kW	-	-	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.2 (-10°C)
	Capacity	at operation limit temperature	kW	-	-	2.0 (-15°C)	1.6 (-20°C)	2.4 (-15°C)	1.7 (-20°C)	3.4 (-15°C)	3.5 (-15°C)
Heating	Back up heating	capacity	kW	-	-	0.0 (-10°C)					
(Average	Annual electricity	consumption (*2)	kWh/a	-	-	713	727	882	900	1151	1304
Season)(*5)	SCOP (14)			-	-	4.7	4.6	4.6	4.5	4.6	4.5
		Energy efficiency class		-	-	A++	A++	A++	A+	A++	A+
	Capacity	Rated	kW	-	-	3.2	3.2	4.0	4.0	5.4	5.8
		Min-Max	kW	-	-	1.0-4.2	1.0-4.2	1.3-5.1	1.3-5.1	1.3-6.3	1.4-7.5
	Total Input	Rated	kW	-	-	0.700	0.700	0.950	0.950	1.455	1.560
Operatin	g Current (Max)	•	Α	-	-	7.1	7.1	7.1	7.1	10.0	14
	Input	Rated	kW	0.026	0.026	0.026	0.026	0.030	0.030	0.033	0.043
	Operating Curre	nt (Max)	Α	0.3	0.3	0.3	0.3	0.3	0.3	0.4	0.4
	Dimensions	H*W*D	mm	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195
	Weight		kg	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
Indoor Unit	Air Volume	Cooling	m³/min	4.0 - 4.6 - 6.3 - 8.3 - 10.5	4.0 - 4.6 - 6.3 - 8.3 - 10.5	4.0 - 4.6 - 6.3 - 8.3 - 10.5	4.0 - 4.6 - 6.3 - 8.3 - 10.5	4.0 - 4.6 - 6.3 - 8.3 - 10.5	4.0 - 4.6 - 6.3 - 8.3 - 10.5	5.8 - 6.6 - 7.7 - 8.9 - 11.2	5.8 - 6.8 - 7.9 - 9.2 - 11.3
O.III.	(SLo-Lo-Mid-Hi-SHi ^(*3))	Heating	m³/min	4.0 - 4.6 - 6.2 - 8.9 - 11.9	4.0 - 4.6 - 6.2 - 8.9 - 11.9	4.0 - 4.6 - 6.2 - 8.9 - 11.9	4.0 - 4.6 - 6.2 - 8.9 - 11.9	4.0 - 4.6 - 6.2 - 8.9 - 12.7	4.0 - 4.6 - 6.2 - 8.9 - 12.7	5.5 - 6.3 - 7.8 - 9.9 - 13.2	6.4 - 7.2 - 9.0 - 11.1 - 14.6
	Sound Level (SPL)	Cooling	dB(A)	19 - 23 - 29 - 36 - 42	19 - 23 - 29 - 36 - 42	19 - 23 - 29 - 36 - 42	19 - 23 - 29 - 36 - 42	21 - 24 - 30 - 36 - 42	21 - 24 - 30 - 36 - 42	28 - 31 - 35 - 39 - 43	30 - 33 - 36 - 40 - 43
	(SLo-Lo-Mid-Hi-SHi ^(*3))	Heating	dB(A)	21 - 24 - 29 - 37 - 45	21 - 24 - 29 - 37 - 45	21 - 24 - 29 - 37 - 45	21 - 24 - 29 - 37 - 45	21 - 24 - 30 - 38 - 46	21 - 24 - 30 - 38 - 46	28 - 30 - 35 - 41 - 48	30 - 33 - 37 - 43 - 49
	Sound Level (PWL)	Cooling	dB(A)	60	60	60	60	60	60	60	60
	Dimensions	H*W*D	mm	-	-	550-800-285	550-800-285	550-800-285	550-800-285	550-800-285	714-800-285
	Weight		kg	-	-	31	31	34	34	35	40
	Air Volume	Cooling	m³/min	-	-	27.8	27.8	34.3	34.3	32.0	40.2
Outdoor	All Volume	Heating	m³/min	-	-	29.8	29.8	32.7	32.7	32.7	40.2
Uutaoor Unit	Sound Level (SPL)	Cooling	dB(A)	-	-	47	47	49	49	50	52
	, ,	Heating	dB(A)	-	-	48	48	50	50	51	52
	Sound Level (PWL)		dB(A)	-	-	58	58	62	62	62	65
	Operating Current (Max) A			-	-	6.8	6.8	6.8	6.8	9.6	13.6
			Α	-	-	10	10	10	10	12	16
Ext.	Diameter	Liquid/Gas	mm	=	-	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52
Piping	Max.Length	Out-In	m	-	-	20	20	20	20	20	30
	Max.Height	Out-In	m	-	-	12	12	12	12	12	15
	ed Operating	Cooling	*C	=	-	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
Range (C	utdoor)	Heating	°C	-	-	-15 ~ +24	-20 ~ +24	-15 ~ +24	-20 ~ +24	-15 ~ +24	-15 ~ +24

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid with would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or 6482 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHE: Super High

(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(*5) Please see page 57-58 for heating (warmer season) specifications.

FTVGHZ SERIES

Unlike conventional air conditioning systems, the FT Series don't lose heating capacity when it's cold outside. Original technologies ensure excellent heating performance under extremely low outdoor temperatures and an impressive guaranteed operating range. Furthermore, the smaller and stylish indoor unit does not give you the limitation of installation location.



MSZ-FT25/35/50VG(K)

Powerful Core for powerful heating

Compact Design

The FT series features its compact design with 280mm height and 229mm depth, which is suitable for the installation above the door.




V Blocking Filter (Optional)



V Blocking Filter with antiviral effect inhibits 99% of adhered virus, and other harmful substances, such as bacteria, mold and allergen.

Two-layered filter with non-woven fabric and electrostatic filter can effectively capture and remove small particles from the air in your room.




Remote Controller with Backlight

The remote controller screen is equipped with an LED backlight. The luminous screen allows you to check the setting easily even in the dark.



Circulator Mode

After reaching the target temperature, heating mode will automatically switch to Circulator mode, which makes the unit go into "fan-only" state and mixes warm air in the room.

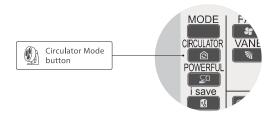


Built-in Wi-Fi

(MSZ-FT25/35/50VGK)

Mitsubishi Electric Wi-Fi Control gives you the freedom to tailor your heating and cooling needs through computers, tablets, or smartphones from anywhere.


Hyper Heating

Mitsubishi Electric's powerful compressor and highly cold-resistant parts enable the heat pump to provide 100% or more heating capacity even at -15° C, and also the heating operation is guaranteed down to -25° C.

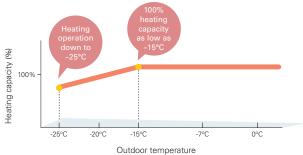

High Energy Efficiency – Energy Rank of A+ or Higher for All Models

With indoor units that combine functionality, design and capacity and outdoor units equipped with a high-efficiency compressor, the MUZ-FT VGHZ simultaneously achieves high heating capacity and energy-saving performance.

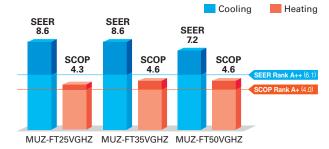

(MSZ-FT25/35/50VG(K)-SC Scandinavian Model)



*Image is for illustration purposes.

MSZ-FT VGHZ SERIES











Remote Controller







MSZ-FT25/35/50VG(K)

Outdoor Unit







MUZ-FT35/50VGHZ












































































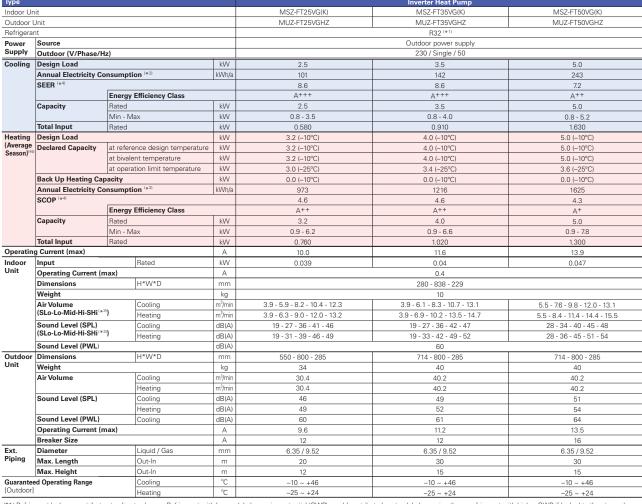

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

^(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) Shi: Super High

(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".


(*5) Please see page 57-58 for heating (warmer season) specifications.



High Energy Efficiency for Entire Range of Series




All models in the series, from the low-capacity 20 to the high-capacity 50, have achieved the "Rank A**" for SEER and size 25 and 35 have achieved the "Rank A**" for SCOP as energy-savings rating. For home use, such as in bedrooms and living rooms, to light commercial use, such as in offices, our air conditioners are contributing to reduced energy consumption in a wide range.

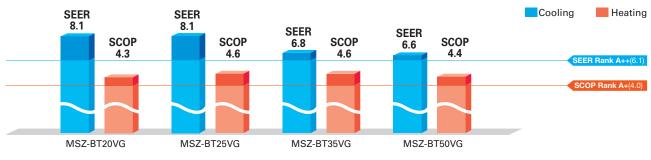

Quiet Operation

The indoor unit noise level is as low as 19dB for AP Series, offering a peaceful inside environment.

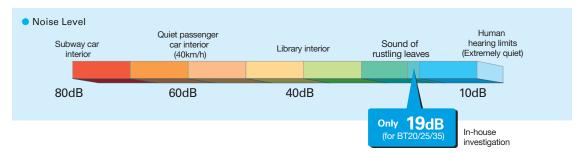

New Remote Controller

New stylish and compact remote controller features easy-read big display and simple button position with fundamental functions.



Back Plate with a Hole

With a hole as default in the center of the back plate, the piping can be easily taken out from the back. The edge of the hole is reinforced to ensure the strength.



Built-in Wi-Fi Interface (MSZ-BT20/25/35/50VGK)




The indoor unit is equipped with a Wi-Fi Interface inside an exclusive pocket in the unit.

This eliminates the need to install a Wi-Fi interface, and also contributes to the beautiful appearance since the interface is hidden.

V Blocking Filter



V Blocking Filter with antiviral effect inhibits 99% of adhered virus, and other harmful substances, such as bacteria, mold and allergen. Two-layered filter with non-woven fabric and electrostatic filter can effectively capture and remove small particles from the air in your room.



MSZ-BT SERIES





















MSZ-BT20/25/35/50VG(K)







MUZ-BT25/35VG



MUZ-BT50VG

Remote Controller























































Туре				Inverter H	eat Pump	
Indoor Ur	nit		MSZ-BT20VG(K)	MSZ-BT25VG(K)	MSZ-BT35VG(K)	MSZ-BT50VG(K)
Outdoor I	Unit		MUZ-BT20VG	MUZ-BT25VG	MUZ-BT35VG	MUZ-BT50VG
Refrigera	nt			R3	2(*1)	
Power	Source			Outdoor Po	ower supply	
Supply	Outdoor (V / Phase / Hz)			230V/Sin	gle/50Hz	
	Design load	kW	2.0	2.5	3.5	5.0

Supply	Outdoor (V / Ph	/!!-\				ngle/50Hz	
Supply	· ·	ase / nz)				<u>~</u>	
	Design load	- (99)	kW	2.0	2.5	3.5	5.0
	Annual electricity	consumption (2)	kWh/a	86	108	180	265
	SEER (*4)			8.1	8.1	6.8	6.6
Cooling		Energy efficiency class		A++	A ⁺⁺	A++	A++
	Capacity	Rated	kW	2.0	2.5	3.5	5.0
		Min-Max	kW	0.5-2.9	0.5-3.0	0.9-3.5	1.3-5.0
	Total Input	Rated	kW	0.450	0.700	1.240	2.050
	Design load		kW	1.5 (-10°C)	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
	Declared	at reference design temperature	kW	1.5 (-10°C)	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
	Capacity	at bivalent temperature	kW	1.5 (-10°C)	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
	Capacity	at operation limit temperature	kW	1.3 (-15°C)	1.7 (-15°C)	2.1 (-15°C)	3.4 (-15°C)
Heating	Back up heating capacity		kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
(Average	Annual electricity	consumption (*2)	kWh/a	487	577	727	1209
Season)(*5)	SCOP (*4)			4.3	4.6	4.6	4.4
		Energy efficiency class		A ⁺	A ⁺⁺	A++	A ⁺
		Rated	kW	2.5	3.15	3.6	5.4
	Capacity	Min-Max	kW	0.7-3.2	0.7-3.5	0.9-4.1	1.4-6.5
	Total Input	Rated	kW	0.550	0.750	0.930	1.550
Operatin	g Current (Max)		А	5.6	7.0	7.0	10.0
•	Input	Rated	kW	0.024	0.024	0.031	0.037
	Operating Curre	nt(Max)	А	0.25	0.25	0.31	0.35
	Dimensions	H*W*D	mm	280-838-235	280-838-235	280-838-235	280-838-235
	Weight		kg	9	9	9	9
Indoor	Air Volume	Cooling	m³/min	4.2 - 5.2 - 6.8 - 8.7 - 10.9	4.2 - 5.2 - 6.8 - 8.7 - 10.9	4.2 - 5.2 - 6.8 - 8.7 - 13.2	6.3 - 7.6 - 9.0 - 11.0 - 13.2
Unit	(Lo-Mid-Hi-SHi ^(*3))	Heating	m³/min	4.2 - 5.0 - 6.8 - 9.0 - 11.9	4.2 - 5.0 - 6.8 - 9.0 - 11.9	4.2 - 5.0 - 6.8 - 9.0 - 11.9	6.0 - 7.8 - 9.9 - 11.9 - 14.1
	Sound Level (SPL)	Cooling	dB(A)	19 - 22 - 30 - 37 - 43	19 - 22 - 30 - 37 - 43	19 - 22 - 31 - 38 - 46	29 - 33 - 36 - 40 - 46
	(Lo-Mid-Hi-SHi ^(*3))	Heating	dB(A)	20 - 23 - 30 - 37 - 43	20 - 23 - 30 - 37 - 43	20 - 23 - 30 - 37 - 44	29 - 33 - 38 - 43 - 48
	Sound Level (PWL)	Cooling	dB(A)	57	57	60	60
	Dimensions	H*W*D	mm	538-699-249	538-699-249	538-699-249	550-800-285
	Weight		kg	23	24	24	35
		Cooling	m³/min	30.3	32.2	32.2	30.4
	Air Volume	Heating	m³/min	30.3	32.2	34.6	32.7
Outdoor		Cooling	dB(A)	50	50	52	50
Unit	Sound Level (SPL)	Heating	dB(A)	50	50	52	51
	Sound Level (PWL)		dB(A)	63	63	64	64
	Operating Curre		A	5.3	6.7	6.7	9.6
	Breaker Size	in (max)	A	10	10	10	12
	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7
Ext.	Max.Length	Out-In	m	20	20	20	20
Piping	Max.Height	Out-In	m	12	12	12	12
Cueron	eed Operating	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
Range (C		Heating	°C	-10 ~ +46 -15 ~ +24	-15 ~ +24	-10 ~ +46 -15 ~ +24	-10 ~ +46 -15 ~ +24
· · ange (c						-10 ~ +24	-10 ~ +24

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or 682s is 675 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SH: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 57-58 for healting (warmer season) specifications.

R32

MSZ-HR

Compact, high-performance indoor and outdoor units with R32 that is low global warming potential compared with the current refrigerant R410A contribute to room comfort and to prevent global warming.




"Rank A++/A+" Energy Savings Achieved for Entire Range of Series







All models in the series, from capacity 25 to 71, have achieved the "Rank A++" for SEER and "Rank A+" for SCOP as energy-savings rating, thanks to Mitsubishi Electric's inverter technologies which are adopted to provide automatic adjustment of operation load according to need.

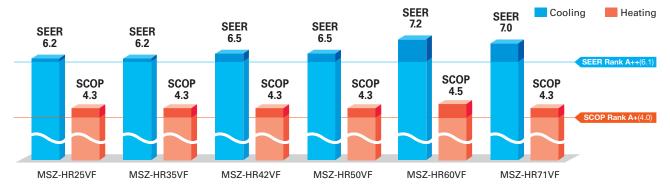

Simple and Friendly Design

The round front surface provides a simple and friendly impression. And the width of indoor unit is compact, making installation in smaller, tighter spaces possible.



Wi-Fi and System Control

Wi-Fi Interface (Built-in) *Only VFK model


Built-in interface enabling users to control air conditioners and check operating status via devices such as personal computers, tablets and smartphones.


System Control Interface (Optional)

- •Remote on/off operation is possible by input to the connector.
- •Depending on the interface used, connecting a wired remotecontrol such as the PAR-41MAA is possible.
- •Centralised control is possible when connected to M-NET.
- *Wi-Fi Interface and System Control Interface cannot be used simultaneously.

Back Plate with a Hole

With a hole as default in the center of the back plate, the piping can be easily taken out from the back. The edge of the hole is reinforced to ensure the strength.

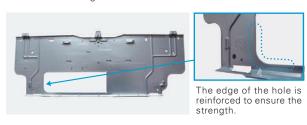


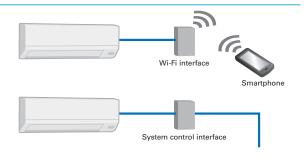


Air Purifying Filter



This filter generates stable antibacterial and deodorising effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the Air Purifying Filter better dust collection performance than conventional filters. The superior air-cleaning effectiveness raises room comfort vet another level.



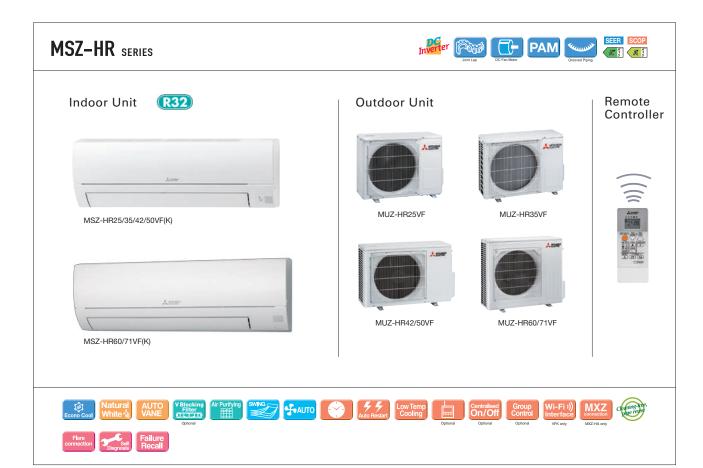

Туре						Inverter H	leat Pump				
Indoor Ur	nit			MSZ-HR25VF(K)	MSZ-HR35VF(K)	MSZ-HR42VF(K)	MSZ-HR50VF(K)	MSZ-HR60VF(K)	MSZ-HR71VF(K)		
Outdoor	Unit			MUZ-HR25VF	MUZ-HR35VF	MUZ-HR42VF	MUZ-HR50VF	MUZ-HR60VF	MUZ-HR71VF		
Refrigera	nt					R3	2(*1)				
Power	Source					Outdoor Po	ower supply				
Supply	Outdoor (V / Ph	ase / Hz)		230V/Single/50Hz							
	Design load		kW	2.5	3.4	4.2	5.0	6.1	7.1		
	Annual electricity	consumption (*2)	kWh/a	141	191	226	269	296	355		
	SEER (*4)			6.2	6.2	6,5	6.5	7.2	7.0		
Cooling		Energy efficiency class	5	A++	A++	A++	A++	A++	A++		
		Rated	kW	2.5	3.4	4.2	5.0	6.1	7.1		
	Capacity	Min-Max	kW	0.5-2.9	0.9-3.4	1.1-4.6	1.3-5.0	1.7-7.1	1.8-7.3		
	Total Input	Rated	kW	0.800	1.210	1.340	2.050	1.810	2.330		
	Design load		kW	1.9 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.6 (-10°C)	5.4 (-10°C)		
		at reference design temperature	kW	1.9 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.6 (-10°C)	5.4 (-10°C)		
	Declared	at bivalent temperature	kW	1.9 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.6 (-10°C)	5.4 (-10°C)		
	Capacity at operation limit temperature		kW	1.9 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.6 (-10°C)	5.4 (-10°C)		
leating	Back up heating capacity kW		kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)		
Average			kWh/a	614	781	928	1224	1430	1755		
eason)(*5)	SCOP ('4)			4.3	4.3	4.3	4.3	4.5	4.3		
		Energy efficiency class	s	A+	A+	A+	A+	A+	A+		
		Rated	kW	3.15	3.6	4.7	5.4	6.8	8.1		
	Capacity	Min-Max	kW	0.7-3.5	0.9-3.7	0.9-5.4	1.4-6.5	1.5-8.5	1.5-9.0		
	Total Input	Rated	kW	0.850	0.975	1.300	1.550	1.810	2.440		
peratin	g Current (Max)		Α	5.0	6.7	8.5	10.0	14.1	14.1		
	Input	Rated	kW	0.020	0.028	0.032	0.039	0.055	0.055		
	Operating Curre	Operating Current(Max)		0.2	0.27	0.3	0.36	0.5	0.5		
	Dimensions H*W*D		mm	280-838-228	280-838-228	280-838-228	280-838-228	305-923-262	305-923-262		
	Weight		kg	8.5	8.5	9	9	12.5	12.5		
ndoor Jnit	Air Volume	Cooling	m³/min	3.6 - 5.4 - 7.2 - 9.7	3.6 - 5.6 - 7.8 - 11.7	6.0 - 8.7 - 10.8 - 13.1	6.4 - 9.2 - 11.2 - 13.1	10.4 - 12.6 - 15.4 - 19.6	10.4 - 12.6 - 15.4 - 19		
Init	(Lo-Mid-Hi-SHi(*3))	Heating	m³/min	3.3 - 5.4 - 7.4 - 10.1	3.3 - 5.4 - 7.4 - 10.5	5.6 - 7.9 - 10.8 - 13.4	6.1 - 8.3 - 11.2 - 14.5	10.7 - 13.1 - 16.7 - 19.6	10.7 - 13.1 - 16.7 - 19		
	Sound Level (SPL)	Cooling	dB(A)	21 - 30 - 37 - 43	22 - 31 - 38 - 46	24 - 34 - 39 - 45	28 - 36 - 40 - 45	33 - 38 - 44 - 50	33 - 38 - 44 - 50		
	(Lo-Mid-Hi-SHi ^(*3))	Heating	dB(A)	21 - 30 - 37 - 43	21 - 30 - 37 - 44	24 - 32 - 40 - 46	27 - 34 - 41 - 47	33 - 38 - 44 - 50	33 - 38 - 44 - 50		
	Sound Level (PWL)	Cooling	dB(A)	57	60	60	60	65	65		
	Dimensions	H*W*D	mm	538-699-249	538-699-249	550-800-285	550-800-285	714-800-285	714-800-285		
	Weight		kg	23	22	32.5	34	40	40		
	Air Valores	Cooling	m³/min	30.3	32.2	30.4	30.4	42.8	42.8		
	Air Volume	Heating	m³/min	30.3	32.2	32.7	32.7	48.3	48.3		
Outdoor Jnit	Cound Lovel (CDL)	Cooling	dB(A)	50	51	50	50	53	53		
,,,,,,	Sound Level (SPL)	Heating	dB(A)	50	51	51	51	57	57		
	Sound Level (PWL)	Cooling	dB(A)	63	64	64	64	65	66		
	Operating Curre	nt (Max)	Α	4.8	6.4	8.2	9.6	13.6	13.6		
	Breaker Size		Α	10	10	10	12	16	16		
	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7		
Ext. Piping	Max.Length	Out-In	m	20	20	20	20	30	30		
iping	Max.Height	Out-In	m	12	12	12	12	15	15		
Guarante	ed Operating	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46		
Range (Outdoor)		Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24		

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid with would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or 6482 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHE: Super High

(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(*5) Please see page 57-58 for heating (warmer season) specifications.

R32

MSZ-DW SERIES

Introducing an indoor unit that is compact yet packed with a variety of features.

High energy saving performance and Air Purifying Filter bring you a comfortable indoor environment.



In<mark>vert</mark>





Energy Saving

Mitsubishi Electric's inverter technologies are adopted to provide automatic adjustment of operation load according to need. This reduces excessive consumption of electricity, and thereby realises Energy Rank "A++" for SEER (cooling) and "A+" for SCOP (heating).



Simple and Compact Design

The stylish design makes it a natural match for any room. The width of indoor units is compact, making installation in smaller, tighter spaces possible.



Air Purifying Filter



Air Purifying Filter generates stable antibacterial, antifungal, and deodorant effects. The three-dimensional surface expands the filter's capture area and contributes to the better dust collection performance than conventional filters.



Simple Control

The simple remote controller and functions provide the easy control solution and comforts of life.



Wi-Fi and System Control


Wi-Fi Interface (Optional)

Optional interface and a Cloud-based solution "MELCloud" enable users to control air conditioners and check operating status via devices such as laptops, tablets and smartphones.

System Control Interface (Optional)

- Remote on/off operation is possible by input to the connector.
- Depending on the interface used, connecting a wired remote control such as the PAR-41MAA is possible.
- Centralised control is possible when connected to M-NET.



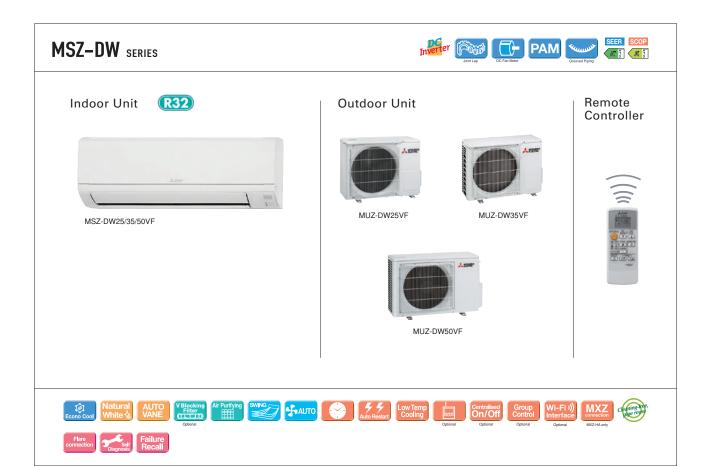

уре					Inverter Heat Pump	
ndoor U	nit			MSZ-DW25VF	MSZ-DW35VF	MSZ-DW50VF
utdoor	Unit			MUZ-DW25VF	MUZ-DW35VF	MUZ-DW50VF
efrigera	nt			·	R32 ^(*1)	
ower	Source				Outdoor Power supply	
ipply	Outdoor (V / Ph	ase / Hz)			230V/Single/50Hz	
	Design load		kW	2.5	3.4	5.0
	Annual electricity	consumption (*2)	kWh/a	135	184	261
	SEER (*4)			6.2	6.2	6.5
oling		Energy efficiency class		A++	A++	A++
_		Rated	kW	2.5	3.4	5.0
	Capacity	Min-Max	kW	0.5-2.9	0.9-3.4	1.3-5.0
	Total Input	Rated	kW	0.800	1.210	2.050
	Design load		kW	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
		at reference design temperature	kW	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
	Declared	at bivalent temperature	kW	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
	Capacity	at operation limit temperature		1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
ating	Back up heating		kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
rage	Annual electricity	consumption (*2)	kWh/a	618	781	1174
son)(*5)	SCOP (*4)			4.3	4.3	4.3
		Energy efficiency class	,	A ⁺	A+	A+
		Rated	kW	3.15	3.6	5.4
Į	Capacity	Min-Max	kW	0.7-3.5	0.9-3.7	1.4-6.5
	Total Input	Rated	kW	0.850	0.975	1.550
eratin	g Current (Max)		А	5.0	6.7	10.0
	Input	Rated	kW	0.023	0.028	0.029
	Operating Curre	Operating Current(Max)		0.24	0.28	0.29
	Dimensions	H*W*D	mm	290-799-232	290-799-232	290-799-232
	Weight		kg	9	9	10
oor it	Air Volume	Cooling	m³/min	3.6 - 5.6 - 7.5 - 9.9	3.6 - 5.8 - 8.1 - 11.3	5.9 - 7.7 - 9.7 - 12.3
ıı	(Lo-Mid-Hi-SHi ^(*3))	Heating	m³/min	3.4 - 5.6 - 7.7 - 10.3	3.4 - 5.6 - 7.7 - 10.7	6.0 - 7.7 - 9.7 - 12.6
	Sound Level (SPL)	Cooling	dB(A)	21 - 30 - 37 - 43	22 - 31 - 38 - 46	28 - 36 - 40 - 45
	(Lo-Mid-Hi-SHi ^(*3))	Heating	dB(A)	21 - 30 - 37 - 43	21 - 30 - 37 - 44	27 - 34 - 41 - 47
	Sound Level (PWL)	Cooling	dB(A)	57	60	60
	Dimensions	H*W*D	mm	538-699-249	538-699-249	550-800-285
	Weight		kg	23	24	35
	Air Volume	Cooling	m³/min	30.3	32.2	33.5
	Air volume	Heating	m³/min	30.3	32.2	32.7
tdoor it	Sound Level (SPL)	Cooling	dB(A)	50	51	50
	Sound Level (SPL)	Heating	dB(A)	50	51	51
	Sound Level (PWL)	Cooling	dB(A)	63	64	64
	Operating Curre	ent (Max)	А	5.3	7.0	9.2
	Breaker Size		A	10	10	12
	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52
t.	Max.Length	Out-In	m	20	20	20
ping	Max.Height	Out-In	m	12	12	12
uarante	eed Operating	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46
Range (Outdoor)		Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or GRassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHI: Super High

(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".


(*5) Please see page 57-58 for heating (warmer season) specifications.






Cooling only model with high-perfomance provides high SHF in various environments thanks to wide operation range.


High Energy-Saving Performance with High SHF

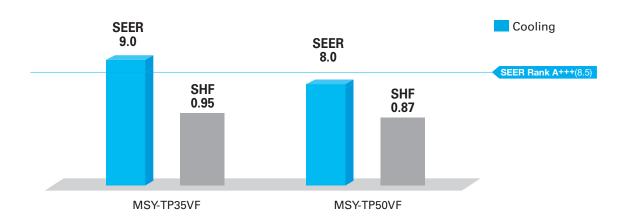

Wide Cooling Operating Range

As a result of an extended operating range in cooling, these models accommodate a wide range of usage environments and applications.

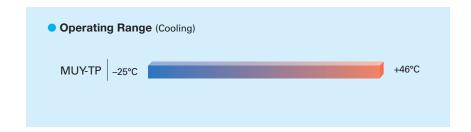

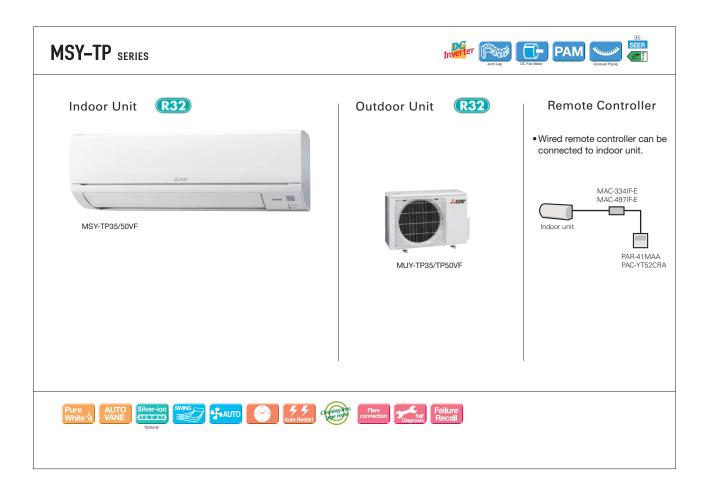

/pe				Inverter	Heat Pump		
door Ur	nit			MSY-TP35VF	MSY-TP50VF		
utdoor l	Jnit			MUY-TP35VF	MUY-TP50VF		
frigera	nt			F	332 ^(*1)		
wer	Source			Indoor P	Power supply		
pply	Outdoor (V / Ph	ase / Hz)			Single / 50Hz		
	Design load	,	kW	3.5	5.0		
	Annual electricity	consumption (*2)	kWh/a	136	218		
	SEER (*4)			9.0	8.0		
oling		Energy efficiency class		A ⁺⁺⁺	A++		
		Rated	kW	3.5	5.0		
	Capacity	Min-Max	kW	1.5 - 4.0	1.5 - 5.7		
	Total Input	Rated	kW	0.760	1.450		
	Design load		kW	-	-		
	200.g loud	at reference design temperature	kW		_		
	Declared	at bivalent temperature	kW	- -	-		
	Capacity	at operation limit temperature	kW		-		
	Back up heating		kW	-	-		
ating	Annual electricity		_	-			
erage son) ^(*5)	SCOP (*4)	consumption	kWh/a		-		
0400117				<u> </u>	-		
		Energy efficiency class		<u>-</u>	-		
	Capacity	Rated	kW	<u>•</u>	-		
		Min-Max	kW	<u> </u>	*		
	Total Input	Rated	kW	-	-		
eratin	g Current (Max)		А	9.6	9.6		
	Input	Rated	kW	0.033	0.034		
	Operating Current (Max)		A mm	0.4	0.4		
	Dimensions			305-923-250	305-923-250		
	Weight	eight		12.5	12.5		
oor	Air Volume	Cooling	m³/min	10.1 - 11.6 - 13.7 - 16.4	10.1 - 11.6 - 13.7 - 16.4		
it	(Lo-Mid-Hi-SHi ^(*3))	Heating	m³/min	-	-		
	Sound Level (SPL)	Cooling	dB(A)	31 - 36 - 40 - 45	31 - 36 - 40 - 45		
	(Lo-Mid-Hi-SHi ^(*3))	Heating	dB(A)	=	-		
	Sound Level (PWL)	Cooling	dB(A)	60	60		
	Breaker Size		Α	10	10		
	Dimensions	H*W*D	mm	550-800-285	550-800-285		
	Weight		kg	34	34		
		Cooling	m³/min	29.3	29.3		
tdoor	Air Volume	Heating	m³/min	-	-		
it		Cooling	dB(A)	45	47		
	Sound Level (SPL)	Heating	dB(A)	-	-		
	Sound Level (PWL)	Cooling	dB(A)	58	61		
	Operating Curre		A A	9.2	9.2		
	Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52		
	Max.Length	Out-In	m	20	20		
ing	Max.Height	Out-In	m	12	12		
	ed Operating Cooling °C utdoor) Heating °C		U	-25 ~ +46	-25 ~ +46		

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP or RS2 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SH: Super High

(*4) SEER and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011.






High Capacity, Energy Savings and a Design in Harmony with Living Spaces Raise the Value of Your Room to the Next Level.



Simple, Flat Design

Uneven surfaces have been smoothed to provide a simple design with linear beauty, harmonised with all types of interiors.

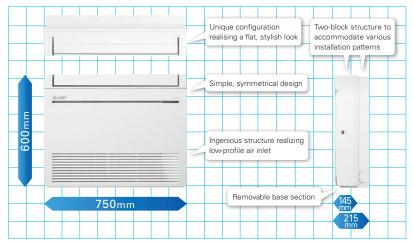




New Line-up


New models have been introduced to expand the line-up. The diverse selection enables the best solution for both customers and locations.

Capacity	2.5kW	3.5kW	5.0kW	6.0kW
MFZ-KJ	✓	✓	✓	
		+		
MFZ-KT	✓	✓	✓	✓

Multi-flow Vane

Three uniquely shaped vanes control the airflow and allow the freedom to customize comfort according to preferences.

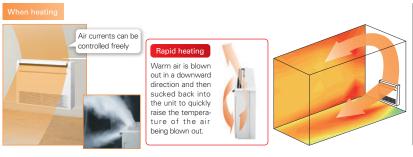



*The downward airflow is also possible as well as heating.


Weekly Timer (Introduced in Response to Market Demand)

Temperature settings and On/Off control can be managed over a period of one week using the Weekly Timer. Up to eight setting patterns per calendar day are possible.

V Blocking Filter

V Blocking Filter with antiviral effect inhibits 99% of adhered


virus, and other harmful substances, such as bacteria, mold and allergen. Two-layered filter with non-woven fabric and electrostatic filter can effectively capture and remove small particles from the air in your room.

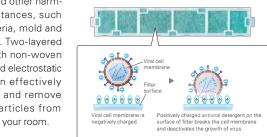


Quiet Operation

The indoor unit noise level is as low as 19dB for MFZ Series, offering a peaceful inside environment.

* Single connection only

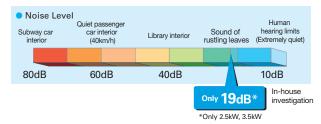

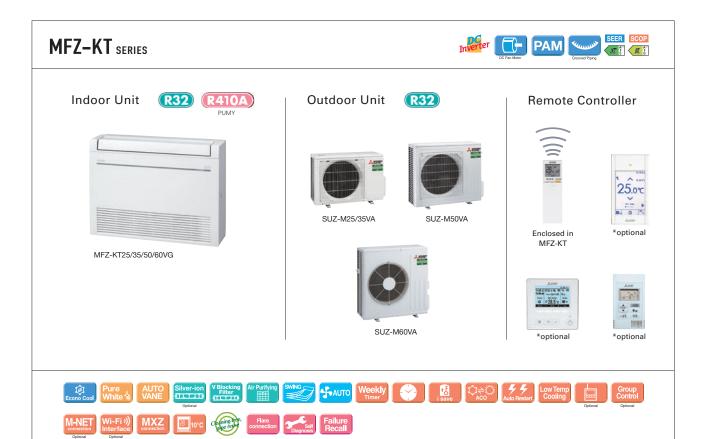

Туре					Inverter H	leat Pump			
Indoor Ur	it			MFZ-KT25VG	MFZ-KT35VG	MFZ-KT50VG	MFZ-KT60VG		
Outdoor l	Jnit			SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA		
Refrigera	nt				R32	(*1)			
Power	Source				Outdoor po	wer supply			
Supply	Outdoor(V/Phase/Hz)			230 / Single / 50					
	Design load		kW	2.5	3.5	5.0	6.1		
	Annual electricity consump	otion (*2)	kWh/a	134	185	257	343		
	SEER (*4), (*5)			6.5	6.6	6.8	6.2		
Cooling		Energy efficiency class		A++	A++	A++	A++		
	Capacity	Rated	kW	2.5	3.5	5.0	6.1		
		Min-Max	kW	1.6 - 3.2	0.9 - 3.9	1.2 - 5.6	1.7 - 6.3		
	Total Input	Rated	kW	0.62	1.06	1.55	1.84		
	Design load		kW	2.2	2.6	4.3	4.6		
	Declared Capacity	at reference design temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.5 (-10°C)	4.1 (-10°C)		
		at bivalent temperature	kW	2.0 (-7°C)	2.3 (-7°C)	3.9 (-7°C)	4.1 (-7°C)		
		at operation limit temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.5 (-10°C)	4.1 (-10°C)		
Heating	Back up heating capacity		kW	0.2	0.3	0.8	0.5		
(Average	Annual electricity consump	otion (*2)	kWh/a	732	825	1423	1568		
Season)	SCOP (*4), (*5)			4.2	4.4	4.2	4.1		
		Energy efficiency class		A ⁺	A ⁺	A ⁺	A ⁺		
	Capacity	Rated	kW	3.4	4.3	6.0	7.0		
		Min-Max	kW	1.3 - 4.2	1.1 - 5.0	1.5 - 7.2	1.6 - 8.0		
	Total Input	Rated	kW	0.91	1.26	1.86	2.18		
Operatin	g Current (Max)		Α	7.0	8.7	14.0	15.4		
	Input Rated		kW	0.020 / 0.024	0.020 / 0.024	0.037 / 0.052	0.063 / 0.059		
	Operating Current(Max)		А	0.20	0.20	0.45	0.55		
	Dimensions	H*W*D	mm	600-750-215	600-750-215	600-750-215	600-750-215		
Indoor	Weight		kg	14.5	14.5	14.5	15.0		
Unit	Air Volume	Cooling	m³/min	3.9 - 4.8 - 6.5 - 7.8 - 8.9	3.9 - 4.8 - 6.5 - 7.8 - 8.9	5.6 - 6.7 - 8.6 - 10.4 - 12.3	5.6 - 8.0 - 9.6 - 12.3 - 15.0		
	(SLo-Lo-Mid-Hi-SHi (*3))	Heating	m³/min	3.5 - 4.0 - 5.6 - 7.3 - 9.7	3.5 - 4.0 - 5.6 - 7.3 - 9.7	6.0 - 7.7 - 9.4 - 11.6 - 14.0	6.0 - 7.7 - 9.7 - 12.5 - 14.6		
	Sound Level (SPL)	Cooling	dB(A)	19 - 24 - 31 - 37 - 41	19 - 24 - 31 - 37 - 41	28 - 32 - 37 - 42 - 48	28 - 36 - 40 - 46 - 53		
	(SLo-Lo-Mid-Hi-SHi (*3))	Heating	dB(A)	19 - 23 - 30 - 37 - 44	19 - 23 - 30 - 37 - 44	29 - 35 - 40 - 44 - 49	29 - 35 - 41 - 47 - 51		
	Sound Level (PWL)	Cooling	dB(A)	54	54	60	65		
	Dimensions	H*W*D	mm	550-800-285	550-800-285	714-800-285	880-840-300		
	Weight		kg	30	35	41	54		
	Air Volume	Cooling	m³/min	36.3	34.3	45.8	50.1		
Outdoor		Heating	m³/min	34.6	32.7	43.7	50.1		
Unit	Sound Level (SPL)	Cooling	dB(A)	45	48	48	49		
		Heating	dB(A)	46	48	49	51		
	Sound Level (PWL)	Cooling	dB(A)	59	59	64	65		
	Operating Current(Max)		А	7	9	14	15		
	Breaker Size		Α	10	10	20	20		
Ext.	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88		
Piping	Max.Length	Out-In	m	20	20	30	30		
	Max.Height	Out-In	m	12	12	30	30		
	ed Operating Range	Cooling	°C	-10 ~ +46	-10 ~ +46	-15 ~ +46	-15 ~ +46		
[Outdoor]		Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24		

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to globa warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disayes ask a professional.


The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHz Super High

(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(*5) SEER and SCOP are based on 2009/125/EC; Energy-related Products Directive and Regulation (EU) No.206/2012.

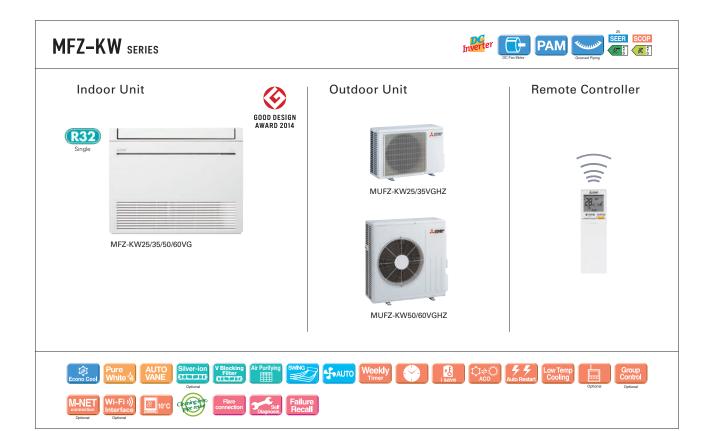

Туре					Inverter F	leat Pump			
Indoor Un	it			MFZ-KW25VG	MFZ-KW35VG	MFZ-KW50VG	MFZ-KW60VG		
Outdoor U	Jnit			MUFZ-KW25VGHZ	MUFZ-KW35VGHZ	MUFZ-KW50VGHZ	MUFZ-KW60VGHZ		
Refrigerar	nt				R3:	2 (*1)			
Power	Source			Outdoor power supply					
Supply	Outdoor (V/Phase/H	z)			230 / Si	ngle / 50			
Cooling	Design Load		kW	2.5	3.5	5.0	6.1		
	Annual Electricity Co	nsumption (*2)	kWh/a	103	151	255	316		
	SEER (*4)			8.5	8.1	6.8	6.7		
		Energy Efficiency Class		A+++	A++	A++	A++		
	Capacity	Rated	kW	2.5	3.5	5.0	6.1		
		Min - Max	kW	0.7 - 3.6	0.7 - 4.3	1.0 - 5.8	1.0 - 6.5		
	Total Input	Rated	kW	0.57	0.90	1.36	1.73		
Heating	Design Load		kW	3.5	3.6	4.5	4.8		
(Average Season)	Declared Capacity	at reference design tempera	ature kW	3.5 (-10°C)	3.6 (-10°C)	4.5 (-10°C)	4.8 (-10°C)		
Season)		at bivalent temperature	kW	3.5 (-10°C)	3.6 (-10°C)	4.5 (-10°C)	4.8 (-10°C)		
		at operation limit temperatu	ıre kW	2.6 (-25°C)	2.6 (-25°C)	4.0 (-25°C)	4.0 (-25°C)		
	Back Up Heating Capacity			0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)		
	Annual Electricity Consumption (*2) k			1188	1211	1500	1624		
	SCOP (*4)			4.1	4.1	4.2	4.1		
		Energy Efficiency Class		A+	A+	A+	A+		
	Capacity	Rated	kW	3.4	4.3	6.0	6.5		
		Min - Max	kW	0.2 - 5.1	0.2 - 6.0	1.2 - 8.4	1.2 - 9.0		
	Total Input	Rated	kW	0.83	1.21	1.60	1.88		
Operating	g Current (max)		A	9.9	10.3	15.3	15.4		
Indoor	Input (Cooling/Heat	ng) Rated	kW	0.019/0.025	0.019/0.025	0.026/0.052	0.063/0.059		
Unit	Operating Current (r		A	0.22	0.22	0.47	0.55		
	Dimensions	H*W*D	mm	600 - 750 - 215					
	Weight		kg	15	15	15	15		
	Air Volume	Cooling	m³/min	3.9 - 4.9 - 5.9 - 7.1 - 8.2	3.9 - 4.9 - 5.9 - 7.1 - 8.2	5.6 - 6.7 - 8.0 - 9.3 - 10.6	5.6 - 8.0 - 9.6 - 12.3 - 15.0		
	(SLo-Lo-Mid-Hi-SHi ^(*)	") Heating	m³/min	3.5 - 5.1 - 6.2 - 7.7 - 9.7	3.5 - 5.1 - 6.2 - 7.7 - 9.7	6.0 - 7.4 - 9.4 - 11.6 - 14.0	6.0 - 7.7 - 9.7 - 12.5 - 14.6		
	Sound Level (SPL)	Cooling	dB(A)	20 - 25 - 30 - 35 - 39	20 - 25 - 30 - 35 - 39	27 - 31 - 35 - 39 - 44	27 - 35 - 39 - 46 - 53		
	(SLo-Lo-Mid-Hi-SHi (*	") Heating	dB(A)	18 - 25 - 30 - 35 - 41	18 - 25 - 30 - 35 - 41	29 - 35 - 40 - 45 - 50	29 - 35 - 41 - 47 - 51		
	Sound Level (PWL)		dB(A)	49	50	56	65		
	Dimensions	H*W*D	mm	550 - 8	00 - 285	880 - 8	40 - 330		
Unit	Weight		kg	35	35	54	54		
	Air Volume	Cooling	m³/min	32.7	32.7	43.8	48.8		
		Heating	m³/min	27.3	27.3	46.3	51.3		
	Sound Level (SPL)	Cooling	dB(A)	47	47	50	52		
		Heating	dB(A)	46	47	54	56		
	Sound Level (PWL)	Cooling	dB(A)	61	61	65	66		
	Operating Current (r	nax)	А	9.6	10.0	14.8	14.8		
	Breaker Size		А	10	12	16	16		
Ext.	Diameter	Liquid / Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7		
Piping	Max. Length	Out-In	m	20	20	30	30		
	Max. Height	Out-In	m	12	12	15	15		
	ed Operating Range	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46		
[Outdoor]		Heating	°C	-25 ~ +24	-25 ~ +24	-25 ~ +24	-25 ~ +24		

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675times higher than 1 kg of CQ2, over a peniod of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHI: Super High

(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".



MLZ SERIES

Introducing a new type of ceiling cassette for the Multi-Split Series with streamed interior dimensions and a sharp, sleek appearance.

Slim Design KY KP





Industry leading slim body realized a simple design with linear beauty.



Ceiling Mounted KY KP






Installing the ceiling-mounted MLZ Series unit in a room creates a more spacious feel that enhances room comfort This overhead format is also an excellent solution when lighting equipment is installed at the centre of the room and fixtures such as book shelves are mounted on wall surfaces.



V Blocking Filter W



V Blocking Filter with antiviral effect inhibits 99% of adhered virus and other harmful substances, such as bacteria, mold and allergen. Two-layered filter with non-woven fabric and electrostatic filter can effectively capture and remove small particles from the air in your room.



Set Airflow According to Ceiling Height KY KP





Dual-level airflow selection is engineered to accommodate specific ceiling heights. This is a key feature for adjusting airflow effectively when it is either too strong or too weak due to being mismatched with the height of the ceiling.

	20	25	35	50
Standard	2.4m	2.4m	2.4m	2.4m
High ceiling	2.7m	2.7m	2.7m	2.7m

Auto Vane Control KY KP





Outlet vanes can be moved left and right, and up and down using the remote controller. This improved airflow control feature solves the problem of drafts.

The new airflow control completely eliminates that uncomfortable drafty-feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

Horizontal Airflow KY KP

[Horizontal Airflow]

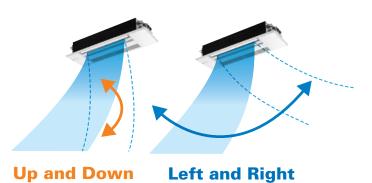



*Only available when Econo Cool is set.

Built-in Weekly Timer Function KY KP

Easily set desired temperatures and operation ON/OFF times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

■ Example Operation Pattern (Winter/Heating mode)

Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.
ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
		Automatically change	es to high-power opera	tion at wake-up time		
OFF	OFF	OFF	OFF	OFF		ON 18°C
	Automatic	ally turned off during v	vork hours			
ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C
	Automatically turn	ns on, synchronized wi	th arrival at home		Automatically raises ten	nperature setting to
ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 10°C	ON 10°C
	Automa	tically lowers tempera	ture at bedtime for en	ergy-saving operation a	t night	
	ON 20°C OFF ON 22°C	ON 20°C OFF OFF Automatic ON 22°C ON 22°C Automatically turn ON 18°C ON 18°C	ON 20°C ON 20°C Automatically change OFF OFF OFF Automatically turned off during v ON 22°C ON 22°C ON 22°C Automatically turns on, synchronized wi ON 18°C ON 18°C ON 18°C	ON 20°C ON 20°C ON 20°C Automatically changes to high-power opera OFF OFF OFF Automatically turned off during work hours ON 22°C ON 22°C ON 22°C ON 22°C Automatically turns on, synchronized with arrival at home ON 18°C ON 18°C ON 18°C ON 18°C	ON 20°C ON 20°C ON 20°C ON 20°C Automatically changes to high-power operation at wake-up time OFF OFF OFF OFF OFF Automatically turned off during work hours ON 22°C ON 22°C ON 22°C ON 22°C ON 22°C Automatically turns on, synchronized with arrival at home ON 18°C ON 18°C ON 18°C ON 18°C ON 18°C	ON 20°C ON 20°C ON 20°C ON 20°C ON 20°C ON 20°C Automatically changes to high-power operation at wake-up time OFF OFF OFF OFF OFF OFF Automatically turned off during work hours ON 22°C ON 22°C ON 22°C ON 22°C ON 22°C Automatically turns on, synchronized with arrival at home ON 20°C ON 20°C ON 20°C ON 20°C Automatically turns on, synchronized with arrival at home


Settings

Pattern Settings: Input up to four settings for each day

Settings: •Start/Stop operation •Temperature setting *The operation mode cannot be set.

■ Easy set-up using dedicated buttons -



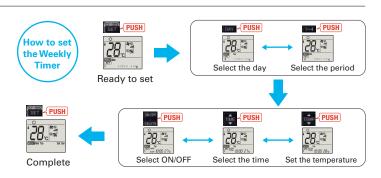


- · Start by pushing the "SET" button and follow the instructions to set the desired patterns. Once all of the desired patterns are input, point the top end of the remote controller at the indoor unit and push the "SET" button one more time. (Push the "SET" button only after inputting all of the desired patterns into the remote controller memory. Pushing the "CANCEL"
- button will end the set-up process without sending the operation patterns to the indoor unit.

 It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent


Easy Installation

Temporary Hanging Hook KY KP

Work efficiency has improved during installation.

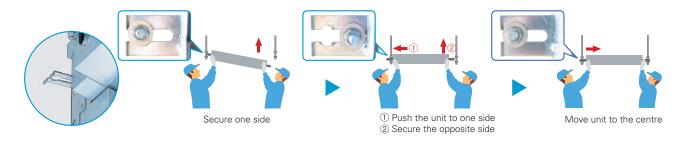



Refrigerant Piping Supporters + Drain Cover KY KP

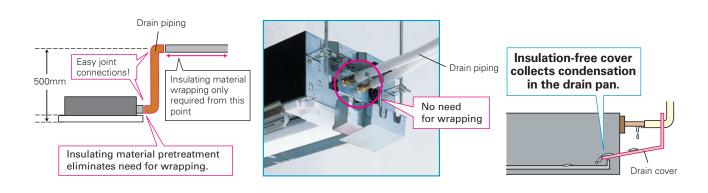

High Serviceability KY KP

No need to put off the panel even when the unit has some troubles to be checked inside. Simply open the panel to see the inside of the unit.

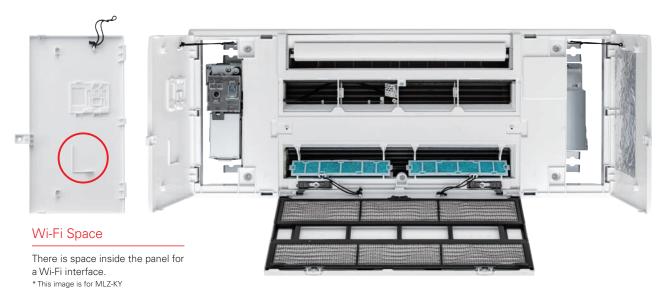

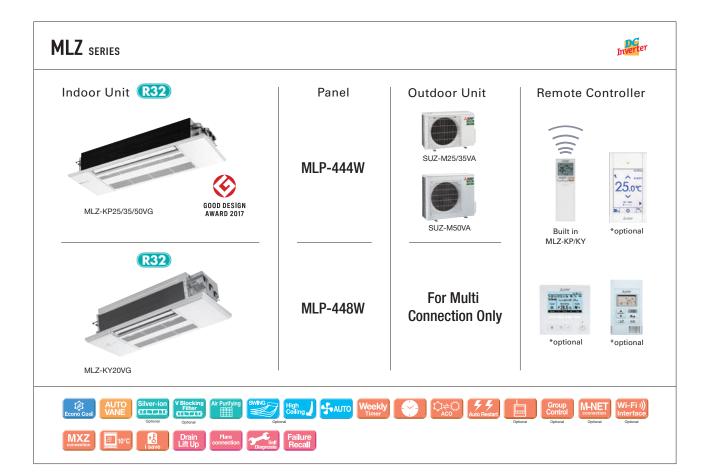

Гуре						er Heat Pump	
ndoor Un				MLZ-KY20VG	MLZ-KP25VG	MLZ-KP35VG	MLZ-KP50VG
Outdoor L	Jnit			For Multi connection only	SUZ-M25VA	SUZ-M35VA	SUZ-M50VA
lefrigerar	nt					R32 ^(*1)	
ower	Source				Outdoo	r Power supply	
Supply	Outdoor (V/Ph	nase / Hz)				/ Single / 50	
	Design load		kW	-	2.5	3.5	5.0
	Annual electricity	consumption (*2)	kWh/a	-	141	175	260
	SEER (*4), (*5)			-	6.2	7.0	6.7
Cooling		Energy efficiency class		-	A++	A++	A++
	Capacity	Rated	kW	-	2.5	3.5	5.0
	Сарасну	Min-Max	kW	-	1.4 - 3.2	0.8 - 3.9	1.7 - 5.6
	Total Input	Rated	kW	-	0.59	0.94	1.38
	Design load		kW	-	2.2	2.6	4.3
	Declared	at reference design temperature	kW	-	2.0 (-10°C)	2.3 (-10°C)	3.8 (-10°C)
	Capacity	at bivalent temperature	kW	-	2.0 (-7°C)	2.3 (-7°C)	3.8 (-7°C)
		at operation limit temperature	kW	-	2.0 (-10°C)	2.3 (-10°C)	3.8 (-10°C)
leating	Back up heating capacity		kW	-	0.2	0.3	0.5
(Average Season)	Annual electricity	consumption (*2)	kWh/a	-	697	791	1397
	SCOP (14), (15)			-	4.4	4.6	4.3
		Energy efficiency class		-	A+	A++	A+
	Capacity	Rated	kW	-	3.2	4.1	6.0
		Min-Max	kW	-	1.4 - 4.2	1.1 - 4.9	1.7 - 7.2
	Total Input	Rated	kW	-	0.80	1.10	1.86
perating	Current (Max)		A	-	7.2	8.9	13.9
	Input	Rated	kW	0.012	0.04	0.04	0.04
	Operating Curre		A	0.12	0.40	0.40	0.40
	Dimensions	H*W*D	mm	194-842-301	185-1102-360	185-1102-360	185-1102-360
ndoor	Weight		kg	14	15.5	15.5	15.5
naoor Jnit	Air Volume	Cooling	m³/min	4.3-4.7-5.2-5.6	6.0-7.2-8.0-8.8	6.0-7.3-8.4-9.4	6.0-8.3-9.8-11.4
-	(SLo-Lo-Mid-Hi ^(*3))	Heating	m³/min	4.3-4.9-5.5-6.0	6.0-7.0-8.2-9.2	6.0-7.7-8.8-9.9	6.0-8.8-10.3-11.8
	Sound Level (SPL)	Cooling	dB(A)	30-32-34-37	27-31-34-38	27-32-36-40	29-36-41-47
	(SLo-Lo-Mid-Hi ^(*3))	Heating	dB(A)	29-32-35-58	29-27-34-37	26-32-36-40	26-37-42-48
	Sound Level (PWL)	Cooling	dB(A)	40-42-44-50	52	53	59
Panel	Dimensions	H*W*D	mm	34-915-370	24-1200-424	24-1200-424	24-1200-424
	Weight		kg	3.8	3.5	3.5	3.5
	Dimensions	H*W*D	mm	-	550-800-285	550-800-285	714-800-285
	Weight		kg	-	30	35	41
	Air Volume	Cooling	m³/min	-	36.3	34.3	45.8
Outdoor	• • • • • • • • • • • • • • • • •	Heating	m³/min	-	34.6	32.7	43.7
Jnit	Sound Level (SPL)	Cooling	dB(A)	-	45	48	48
-	` '	Heating	dB(A)		46	48	49
	Sound Level (PWL)		dB(A)	-	59	59	64
	Operating Curre	ent (Max)	Α	-	6.8	8.5	13.5
	Breaker Size		A	-	10	10	20
Ext.	Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.7
=xt. Piping	Max.Length	Out-In	m	-	20	20	30
-F8	Max.Height	Out-In	m	-	12	12	30
Guarante	ed Operating	Cooling	℃	-	-10~+46	-10~+46	-15~+46
Range (O	utdoor)	Heating	°C	-	-10~+24	-10~+24	-10~+24

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) Elic guper High

(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

Specification on Warmer/Colder Condition

Туре					Inverter Heat Pump	
Indoor Ur	nit			MSZ-RW25VG	MSZ-RW35VG	MSZ-RW50VG
Outdoor I	Unit			MUZ-RW25VGHZ	MUZ-RW35VGHZ	MUZ-RW50VGHZ
Refrigera	nt				R32 (*1)	
	Design load		kW	2.5	3.5	5.0
Cooling	Annual electricity	consumption (*2)	kWh/a	78	130	230
	SEER			11.2	9.4	7.6
		Energy efficiency class		A+++	A+++	A++
	Design load		kW	1.8	2.2	3.3
		at reference design temperature	kW	1.8	2.2	3.3
	Declared Capacity	at bivalent temperature	kW	1.8	2.2	3.3
Heating (Warmer	Сарасну	at operation limit temperature	kW	2.6	2.6	4.0
Season)	Back up heating capacity			0.0	0.0	0.0
,	Annual electricity	consumption (*2)	kWh/a	372	469	715
	SCOP			6.7	6.5	6.4
		Energy efficiency class		A+++	A+++	A+++
	Design load		kW	4.7	5.9	8.8
		at reference design temperature	kW	3.7	4.0	5.6
	Declared Capacity	at bivalent temperature	kW	3.2	4.0	6.0
Heating (Colder	Capacity	at operation limit temperature	kW	2.6	2.6	4.0
Season)	Back up heating		kW	1.0	1.9	3.2
	Annual electricity	consumption (*2)	kWh/a	2407	3083	5157
	SCOP			4.1	4.0	3.5
		Energy efficiency class		A ⁺	A ⁺	A

_										
Туре							Inverter Heat Pump			
Indoor Ur	nit				V25VG2	MSZ-LI	V35VG2	MSZ-LI	N50VG2	MSZ-LN60VG2
Outdoor	Unit			MUZ-LN25VG2	MUZ-LN25VGHZ2	MUZ-LN35VG2	MUZ-LN35VGHZ2	MUZ-LN50VG2	MUZ-LN50VGHZ	MUZ-LN60VG
Refrigera	nt						R32 (*1)			
	Design load		kW	2.5	2.5	3.5	3.5	5	5.0	6.1
Cooling	Annual electricity	consumption (*2)	kWh/a	83	83	129	130	205	230	285
0009	SEER			10.5	10.5	9.5	9.4	8.5	7.6	7.5
		Energy efficiency class		A+++	A+++	A+++	A+++	A+++	A++	A++
	Design load		kW	1.7 (2°C)	1.8 (2°C)	2.0 (2°C)	2.2 (2°C)	2.5 (2°C)	3.3 (2°C)	3.3 (2°C)
		at reference design temperature	kW	1.7 (2°C)	1.8 (2°C)	2.0 (2°C)	2.2 (2°C)	2.5 (2°C)	3.3 (2°C)	3.3 (2°C)
	Declared Capacity	at bivalent temperature	kW	1.7 (2°C)	1.8 (2°C)	2.0 (2°C)	2.2 (2°C)	2.5 (2°C)	3.3 (2°C)	3.3 (2°C)
Heating (Warmer	Сарасну	at operation limit temperature	kW	2.5 (-15°C)	2.3 (-25°C)	3.2 (-15°C)	3.1 (-25°C)	4.2 (-15°C)	4.7 (-25°C)	6.0 (-15°C)
(warmer Season)	Back up heating capacity kW			0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0(2°C)	0.0 (2°C)
,	Annual electricity	consumption (*2)	kWh/a	369	382	431	467	602	779	779
	SCOP			6.4	6.6	6.5	6.5	5.8	5.9	5.9
		Energy efficiency class		A+++	A+++	A+++	A+++	A+++	A+++	A+++
	Design load		kW	-	4.7 (-22°C)	-	5.9 (-22°C)	-	8.8 (-22°C)	_
		at reference design temperature	kW	-	2.6 (-22°C)	-	3.4 (-22°C)	-	5.1 (-22°C)	_
	Declared Capacity	at bivalent temperature	kW	-	3.2 (-10°C)	-	4.0 (-10°C)	-	6.0 (-10°C)	_
Heating (Colder	Capacity	at operation limit temperature	kW	-	2.3 (-25°C)	-	3.1 (-25°C)	-	4.7 (-25°C)	_
Season)	Back up heating		kW	_	2.1 (-22°C)	_	2.5 (-22°C)	_	3.7 (-22°C)	_
,	Annual electricity	consumption (*2)	kWh/a	-	2425	-	3075	_	5340	_
	SCOP			-	4.0	_	4.0	_	3.4	_
		Energy efficiency class		-	A ⁺	_	A ⁺	_	A	_

Туре					Inverter Heat Pump				
Indoor Ur	nit			MSZ-FT25VG	MSZ-FT35VG	MSZ-FT50VG			
Outdoor	Unit			MUZ-FT25VGHZ	MUZ-FT35VGHZ	MUZ-FT50VGHZ			
Refrigera	nt			R32 (*1)					
	Design load		kW	2.5	3.5	5.0			
Cooling	Annual electricity	consumption (*2)	kWh/a	101	142	243			
0009	SEER			8.6	8.6	7.2			
		Energy efficiency class		A+++	A+++	A++			
	Design load		kW	1.8 (2°C)	2.2 (2°C)	2.7 (2°C)			
	Declared	at reference design temperature	kW	1.8 (2°C)	2.2 (2°C)	2.7 (2°C)			
	Capacity	at bivalent temperature	kW	1.8 (2°C)	2.2 (2°C)	2.7 (2°C)			
Heating (Warmer	Capacity	at operation limit temperature	kW	3.0 (-25°C)	3.4 (-25°C)	3.6 (-25°C)			
Season)	Back up heating	capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)			
,	Annual electricity	consumption (*2)	kWh/a	432	527	684			
	SCOP			5.8	5.8	5.5			
		Energy efficiency class		A+++	A+++	A+++			
	Design load		kW	4.7 (-22°C)	5.9 (-22°C)	7.4 (-22°C)			
	Declared	at reference design temperature	kW	3.1 (-22°C)	3.7 (-22°C)	4.0 (-22°C)			
	Capacity	at bivalent temperature	kW	3.2 (-10°C)	4.0 (-10°C)	5.0 (-10°C)			
Heating (Colder	Capacity	at operation limit temperature	kW	3.0 (-25°C)	3.4 (-25°C)	3.6 (-25°C)			
Season)	Back up heating		kW	1.6 (-22°C)	2.2 (-22°C)	3.4 (-22°C)			
,	Annual electricity	consumption (*2)	kWh/a	2766	3453	4707			
	SCOP			3.5	3.5	3.3			
		Energy efficiency class		A	A	В			

Туре								Inverter H	leat Pump					
Indoor Ur	nit			MSZ-AY15VGK(P)	MSZ-AY20VGK(P)	MSZ-AY25VGK(P)	MSZ-AY25VGK(P)	MSZ-AY35VGK(P)	MSZ-AY35VGK(P)	MSZ-AY42VGK(P)	MSZ-AY42VGK(P)	MSZ-AY50VGK(P)	MSZ-AY50VGK(P)	
Outdoor	Unit			MUZ-AY15VG	MUZ-AY20VG	MUZ-AY25VG	MUZ-AY25VGH	MUZ-AY35VG	MUZ-AY35VGH	MUZ-AY42VG	MUZ-AY42VGH	MUZ-AY50VG	MUZ-AY50VGH	
Refrigera	nt				R32 ⁽¹⁾									
	Design load		kW	_	_	2.5	2.5	3.5	3.5	4.2	4.2	5.0	5.0	
Cooling	Annual electricity	consumption (*2)	kWh/a	_	_	100	100	141	141	186	186	232	232	
Cooming	SEER			_	_	8.7	8.7	8.7	8.7	7.9	7.9	7.5	7.5	
		Energy efficiency class		_	_	A+++	A+++	A+++	A+++	A++	A++	A++	A++	
	Design load	Design load kW		0.9 (2°C)	1.3 (2°C)	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.1 (2°C)	2.3 (2°C)	2.3 (2°C)	
	Dardon d	at reference design temperature	kW	0.9 (2°C)	1.3 (2°C)	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.1 (2°C)	2.3 (2°C)	2.3 (2°C)	
	Declared Capacity	at bivalent temperature	kW	0.9 (2°C)	1.3 (2°C)	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.1 (2°C)	2.3 (2°C)	2.3 (2°C)	
Heating (Warmer	Capacity	at operation limit temperature	kW	1.6 (-15°C)	1.8 (-20°C)	1.9 (-20°C)	1.9 (-20°C)	2.0 (-20°C)	2.0 (-20°C)	2.7 (-20°C)	2.7 (-20°C)	3.0 (-20°C)	3.0 (-20°C)	
Season)	Back up heating	g capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	
	Annual electricity	consumption (*2)	kWh/a	267	350	319	319	376	376	495	495	523	523	
	SCOP			4.7	5.2	5.7	5.7	5.9	5.9	5.9	5.9	6.1	6.1	
		Energy efficiency class		A++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	

Туре				Inverter H	eat Pump	
Indoor Ur	nit			MSZ-AP60VG(K)	MSZ-AP71VG(K)	
Outdoor I	Unit			MUZ-AP60VG	MUZ-AP71VG	
Refrigera	nt			R	32(*1)	
	Design load		kW	6.1	7.1	
Cooling	Annual electricity	consumption (*2)	kWh/a	288	345	
0009	SEER			7.4	7.2	
		Energy efficiency class		A ⁺⁺	A++	
	Design load		2.5 (2°C)	3.7 (2°C)		
		at reference design temperature	kW	2.5 (2°C)	3.7 (2°C)	
	Declared Capacity	at bivalent temperature	kW	2.5 (2°C)	3.7 (2°C)	
Heating (Warmer	Capacity	at operation limit temperature	kW	3.7 (-15°C)	5.4 (-15°C)	
Season)	Back up heating	capacity	kW	0.0 (2°C)	0.0 (2°C)	
	Annual electricity	consumption (*2)	kWh/a	627	891	
	SCOP			5.5	5.8	
		Energy efficiency class		A+++	A+++	

Туре						Inverter H	leat Pump		
Indoor Ur	nit			MSZ-E	F25VG		F35VG	MSZ-EF42VG	MSZ-EF50VG
Outdoor I				MUZ-EF25VG MUZ-EF25VGH		MUZ-EF35VG	MUZ-EF35VGH	MUZ-EF42VG	MUZ-EF50VG
Refrigera	nt					R3	2 ^(*1)		
	Design load		kW	2.5	2.5	3.5	3.5	4.2	5.0
Cooling	Annual electricity	y consumption (*2)	kWh/a	96	96	139	139	186	233
	SEER			9.1	9.1	8.8 8.8		7.9	7.5
		Energy efficiency class		A+++	A+++	A+++	A+++ A+++		A++
	Design load kW			1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.3 (2°C)
		at reference design temperature	kW	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.3 (2°C)
	Declared Capacity	at bivalent temperature	kW	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.3 (2°C)
Heating (Warmer	Capacity	at operation limit temperature	kW	2.0 (-15°C)	2.0 (-15°C)	2.4 (-15°C)	2.4 (-15°C)	3.4 (-15°C)	3.5 (-15°C)
Season)	Back up heatin	g capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)
oodoon,	Annual electricity	y consumption (*2)	kWh/a	311	311	398	398	489	595
	SCOP			5.9	5.9	5.6	5.6	6.0	5.4
		Energy efficiency class		A+++	A+++	A+++	A+++	A+++	A+++

Туре					Inverter H	eat Pump				
Indoor Ur	nit			MSZ-BT20VG	MSZ-BT25VG	MSZ-BT35VG	MSZ-BT50VG			
Outdoor l	Jnit			MUZ-BT20VG	MUZ-BT25VG	MUZ-BT35VG	MUZ-BT50VG			
Refrigera	nt			R32 ^(*1)						
	Design load		kW	2.0	2.5	3.5	5.0			
Cooling	Annual electricity	y consumption (*2)	kWh/a	86	108	180	265			
	SEER			8.1	8.1	6.8	6.6			
		Energy efficiency class		A++	A++	A++	A++			
	Design load			0.9 (2°C)	1.1 (2°C)	1.3 (2°C)	2.1 (2°C)			
		At reference design temperature	kW	0.9 (2°C)	1.1 (2°C)	1.3 (2°C)	2.1 (2°C)			
	Declared Capacity	at bivalent temperature	kW	0.9(2°C)	1.1 (2°C)	1.3 (2°C)	2.1 (2°C)			
Heating (Warmer	Capacity	at operation limit temperature	kW	1.3 (-15°C)	1.7 (-15°C)	2.1 (-15°C)	3.4 (-15°C)			
(warmer Season)	Back up heatin	g capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)			
0003011)	Annual electricity	y consumption (*2)	kWh/a	234	268	304	543			
	SCOP			5.3	5.7	5.9	5.4			
		Energy efficiency class		A+++	A+++	A+++	A+++			

Туре						Inverter F	leat Pump					
Indoor Ur	nit			MSZ-HR25VF	MSZ-HR35VF	MSZ-HR42VF	MSZ-HR50VF	MSZ-HR60VF	MSZ-HR71VF			
Outdoor I	Jnit			MUZ-HR25VF	MUZ-HR35VF	MUZ-HR42VF	MUZ-HR50VF	MUZ-HR60VF	MUZ-HR71VF			
Refrigera	nt			R32 ^(*1)								
	Design load		kW	2.5	3.4	4.2	5.0	6.1	7.1			
Cooming	Annual electricity	consumption (*2)	kWh/a	141	191	226	269	296	355			
	SEER			6.2	6.2	6.5	6.5	7.2	7.0			
		Energy efficiency class		A++	A++	A++	A++	A++	A++			
	Design load kW			1.1 (2°C)	1.3 (2°C)	1.6 (2°C)	2.1 (2°C)	2.5 (2°C)	3.0 (2°C)			
		at reference design temperature	kW	1.1 (2°C)	1.3 (2°C)	1.6 (2°C)	2.1 (2°C)	2.5 (2°C)	3.0 (2°C)			
	Declared Capacity	at bivalent temperature	kW	1.1 (2°C)	1.3 (2°C)	1.6 (2°C)	2.1 (2°C)	2.5 (2°C)	3.0 (2°C)			
Heating (Warmer	Capacity	at operation limit temperature	kW	1.9 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.6 (-10°C)	5.4 (-10°C)			
Season)	Back up heating	capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)			
	Annual electricity	consumption (*2)	kWh/a	289	344	427	558	640	802			
	SCOP			5.3	5.2	5.2	5.2	5.4	5.2			
		Energy efficiency class		A+++	A+++	A+++	A+++	A+++	A+++			

Туре					nverter Heat Pump	,			
Indoor Ur	nit			MSZ-DW25VF	MSZ-DW35VF	MSZ-DW50VF			
Outdoor	Unit			MUZ-DW25VF	MUZ-DW35VF	MUZ-DW50VF			
Refrigera	nt			R32 (*1)					
	Design load		kW	2.5	3.4	5.0			
Cooling	Annual electricity	consumption (*2)	kWh/a	135	184	261			
Cooming	SEER		•	6.2	6.2	6.5			
		Energy efficiency class		A++	A++	A++			
	Design load		kW	1.1 (2°C)	1.3 (2°C)	2.1 (2°C)			
		at reference design temperature	kW	1.1 (2°C)	1.3 (2°C)	2.1 (2°C)			
	Declared Capacity	at bivalent temperature	kW	1.1 (2°C)	1.3 (2°C)	2.1 (2°C)			
Heating (Warmer	Capacity	at operation limit temperature	kW	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)			
(warmer Season)	Back up heating	capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)			
	Annual electricity	consumption (*2)	kWh/a	287	351	508			
	SCOP			5.3	5.1	5.3			
		Energy efficiency class		A+++	A+++	A+++			

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or reported, vourself or and always ask a professional.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.









SELECTION

Series line-up consists of two types of indoor units. Choose the model that best matches room conditions.

SELECT INDOOR UNIT

Select the optimal unit and capacity required to match room construction and air conditioning requirements.





Units without Remote Controller

SLZ-M15FA2

(Multi split series connection only)

SLZ-M25FA2

SLZ-M35FA2

SLZ-M50FA2

SLZ-M60FA2

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Plasma Quad Connect
SLP-2FA				
SLP-2FAL	✓			
SLP-2FAE		✓		
SLP-2FALE	✓	✓		
SLP-2FALM2	✓		✓	
SLP-2FALME2	✓	✓	✓	
SLP-2FAP				✓
SLP-2FALP	✓			√
SLP-2FALMP2	✓		✓	✓





Units without Remote Controller

SEZ-M25DA2

SEZ-M35DA2

SEZ-M50DA2

SEZ-M60DA2

SEZ-M71DA2

Units with Wireless Remote Controller

SEZ-M25DAL2

SEZ-M35DAL2

SEZ-M50DAL2

SEZ-M60DAL2

SEZ-M71DAL2





Units without Remote Controller

SFZ-M25VA

SFZ-M35VA

SFZ-M50VA

SFZ-M60VA

SFZ-M71VA

SELECT OUTDOOR UNIT

There is one outdoor unit for respective indoor units.

R32



SUZ-M25/35VA

R32



SUZ-M50VA

R32



SUZ-M60/71VA

 $[\]star$ To confirm compatibility with the MXZ Series multi-type system, refer to the MXZ Series page.






Compact, lightweight ceiling cassette units with 4-way air outlets provide maximum comfort by evenly distributing airflow throughout the entire room.

2x2 Cassette Line-up

The SLZ series was previously only able to be connected to standard inverters and some power inverters. However, it can now also be connected to low-capacity power inverters. The ability to connect to a high-performance power inverter allows us to offer a wider range of options to our customers.

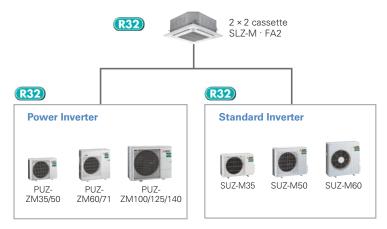

New Lineup


1.5kW has been introduced for multi connection. The diverse selection enables the best solution for both customer and location.

Capacity	15	25	35	50	60
SLZ-KF		✓	✓	✓	✓
SLZ-M	✓	✓	✓	✓	✓

Beautiful Design

The straight-line form introduced has resulted in a beautiful square design. Its high affinity ensures the ability to blend in seamlessly with any interior. The indoor unit is an ideal match for office or store use.


Of course, design matched 2×2 (600mm*600mm) ceiling construction specifications.

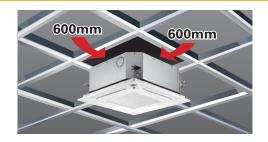

The Height Above Ceiling of 245mm

The height above ceiling of 245mm enables fitting into narrow ceiling space. Installation is simple, even when the ceiling spaces are narrow to make the ceilings higher.


Of course, in addition to our products, replacing competitors' product is simplified too.

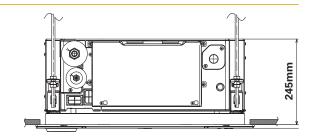

Energy-saving Performance*

The energy-saving performance achieved A++ in SEER and A+ in SCOP.

*In case of connecting with SUZ-KA-VA6





Quietness

Low sound level has been realized by introduction of 3D turbo fan. New SLZ can give users quieter and move comfortable room condition.




Horizontal Airflow

The new airflow control completely eliminates that uncomfortable drafty-feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

[Airflow distribution]*
SLZ-M60FA

Flow angle, cooling at 20°C (ceiling height 2.7m)



*Vane angle: Horizontal

Easy Installation

Temporary hanging hook

The structure of the panel has been revised and is now equipped with a temporary hanging hook. This has improved work efficiency during temporary panel installation.





No need to remove screws

Installation is possible without removing the screws for control box simply loosen them. This eliminates the risk of losing screws.






■ Control box cover



Drain Lift

As the result of using a larger drain pan, the maximum drain lifting height has been up to 850mm, greatly enhancing construction flexibility compared to the existing model.

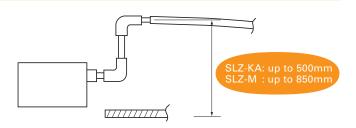

3D Free Sensor for S & P SERIES

Detects Number of People

Room occupancy energy-saving mode

The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air-conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 1°C during both cooling and heating operation is saved. The temperature is controlled according to the number of people.


No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is in the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60min, air-conditioning power equivalent to 2°C during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.

No occupancy Auto-OFF mode*

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10min, ranging from 60 to 180 min.

* When MA Remote Controller is used to control multiple refrigerant systems, "No occupancy Auto-OFF mode" cannot be used.

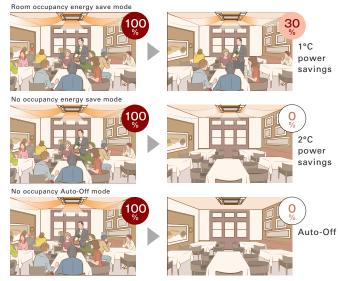

*PAR-41MAA is required for each setting

Detects People's Position

Direct/Indirect settings*

Some people do not like the feel of wind, some want to be warm from head to toe. People's likes and dislikes vary. With the 3D i-see Sensor, it is possible to choose to block or not block to the wind for each vane.



*PAR-41MAA or PAR-SL101A-E is required for each setting.

Seasonal airflow*

<When cooling>

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This clever function contributes to keeping a comfortable coolness.

<When heating>

The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is reused via circulation. When a pre-set temperature is reached the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.



*PAR-41MAA is required for each setting.

Connectable to Plasma Quad Connect

The optional Plasma Quad Connect SLP-2FAP, SLP-2FALP, SLP-2FALMP2 can be installed on the indoor units.*1*2*3

- *1 Plasma Quad Connect cannot be used with PAC-SK54/46KF-E (V blocking filter).
- *2 If Plasma Quad Connect is used with MAC-334/397/587IF-E (Interface), Plasma Quad Connect use the indoor units CN105. Other interface use the another CN105 on Plasma Quad Connect's PCB.
- *3 If Plasma Quad Connect is used with PAC-SK35VK-E (Valve kit) or PAC-SK39AP-E (Valve kit attachment), Plasma Quad Connect use the indoor units barring holes for valve kit. Valve kit needs to be installed on suspension bolts or on horizontal surface using dedicated attachment optional parts.



SLZ-M SERIES

















SLZ-M15/25/35/50/60FA2

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Plasma Quad Connect
SLP-2FA				
SLP-2FAL	✓			
SLP-2FAE		✓		
SLP-2FALE	✓	✓		
SLP-2FALM2	✓		✓	
SLP-2FALME2	✓	✓	√	
SLP-2FAP				✓
SLP-2FALP	✓			√
SLP-2FALMP2	1		1	√

Outdoor Unit







For Multi (Twin/Triple/Quadruple)









PUZ-ZM100/125/140

Remote Controller









Enclosed in SLP-2FALM2/SLP-2FALME2

*optional

*optional

*optional





































								Outdo	oor Unit Ca	pacity							
Indoor Unit C	Combination		For Single							For Twin			For Triple			For Quadruple	
		35	50	60	71	100	125	140	71	100	125	100	125	140	125	140	
Power Inverter (PUZ-ZM)		35×1	50×1	60×1	-	-	-	-	35×2	50×2	60×2	35×3	50×3	50×3	35×4	35×4	
	Distribution Pipe	-	-	-	-	-	-	-	N	ISDD-50TR	2-E	N	/ISDT-111R3	-E	MSDF-1	1111R2-E	

Type					Inverter Heat Pump				
Indoor Un	it .			SLZ-M35FA2	SLZ-M50FA2	SLZ-M60FA2			
Outdoor U				PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2			
Refrigerar				1 OZ ZIVIGOVICAZ	R32	T OZ ZIVIOUVITAZ			
Power	Source			Outdoor power supply					
Supply	Outdoor(V/Phase/Hz)				230/Single/50				
Cooling	Capacity	Rated	kW	3.6	5.0	6.1			
ocoming	Journal	Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5			
	Total Input	Rated	kW	0.800	1.315	1.648			
	EER	Tide Co	1000	4.50	3.80	3.70			
	Design load		kW	3.6	5.0	6.1			
	Annual electricity consump	ntion(*2)	kWh/a	194	280	346			
	SEER(*4)	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	ice erry a	6.5	6.2	6.1			
	022	Energy efficiency class		0.5 A++	0.2 A++	A++			
Heating	Capacity	Rated	kW	4.1	5.0	6.4			
uuiiig	Capacity	Min-Max	kW	1.6 - 5.0	2.5 - 5.5	2.8 - 7.3			
	Total Input	Rated	kW	1.205	1.470	2.064			
	COP	riated	IC V V	3.40	3.40	3.10			
	Design load		kW	2.4	3.8	4.4			
	Declared Capacity	at reference design temperature	kW	2.4 2.4 (-10°C)	3.8 (-10°C)	4.4 4.4 (-10°C)			
	Declared Capacity	at bivalent temperature	kW	2.4 (-10 C) 2.4 (-10°C)	3.8 (-10 C)	4.4 (-10°C)			
			kW	2.4 (-10°C) 2.2 (-11°C)	3.8 (-10°C) 3.7 (-11°C)	2.8 (-20°C)			
	at operation limit temperature Back up heating capacity		kW						
		4* (89)		0.0	0.0	0.0			
	Annual electricity consump SCOP(*4)	otion(-2)	kWh/a	820 4.0	1273	1560			
	SCOP	E		4.0 A+	4.1	3.9			
· ·	Current(Max)	Energy efficiency class		13.2	A+ 13.3	A 19.4			
	Input [cooling / Heating]	In	A						
Indoor		Rated	kW	0.02 / 0.02	0.03 / 0.03 0.32	0.04 / 0.04			
Unit	Operating Current(Max) Dimensions	H*W*D	Α	0.24 245-570-570 <10-625-625>	0.32 245-570-570 <10-625-625>	0.43 245-570-570 <10-625-625>			
	Weight	H^W^D	mm	245-570-570 < 10-625-625> 15 <3>	245-570-570 < 10-625-625> 15 <3>	245-570-570 < 10-625-625> 15 <3>			
	Air Volume (Lo-Mi2-Mi1-Hi)		kg m³/min	6.5-8.0-9.5	7.0-9.0-11.5	7.5-11.5-13.0			
	Sound Level (Lo-Mi2-Mi1-Hi)	(CDI.)	dB(A)	25-30-34	27-34-39	32-40-43			
	Sound Level (PWL)	(SFL)	dB(A)	51	56	60			
Outdoor	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)			
Unit	Weight	11 44 0	kg	46	46	67			
	Air Volume	Cooling	m³/min	45	45	55			
		Heating	m³/min	45	45	55			
	Sound Level (SPL)	Cooling	dB(A)	44	44	47			
		Heating	dB(A)	46	46	49			
	Sound Level (PWL)	Cooling	dB(A)	65	65	67			
	Operating Current(Max)	g	A	13	13	19			
	Breaker Size		A	16	16	25			
Fyt Pinin	Diameter(*5)	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88			
Extriping	Max.Length	Out-In	m	50	50	9.52 / 15.88			
	Max.Height	Out-In	m	30	30	30			
Cuerente	ed Operating Range (Outdoor)	Cooling(*3)	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46			
Guarante	eu Operating Range (Outdoor)		°C						
		Heating	1°C	-11 ~ +21	-11 ~ +21	-20 ~ +21			


^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where It is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/12/5FC.Erengy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

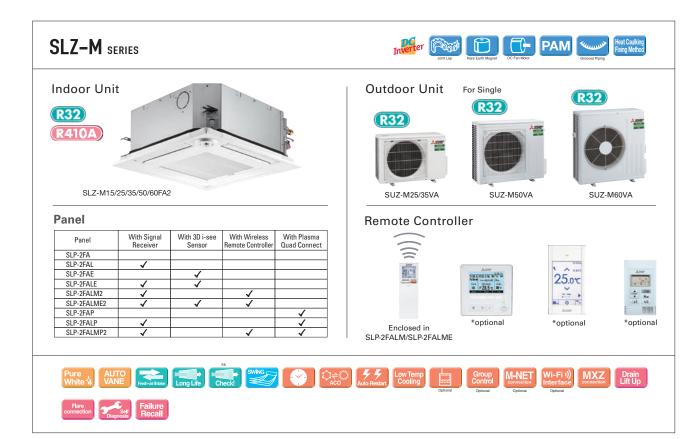

		Outdoor Unit Capacity									
Indoor Unit C	ombination		For Single								
		25	35	50	60	71					
S Seires	25×1	35×1	50×1	60×1	-						
	Distribution Pipe	-	-	-	-	-					

Туре					Inverter H	leat Pump					
Indoor Uni	†			SLZ-M25FA2	SLZ-M35FA2	SLZ-M50FA2	SLZ-M60FA2				
Outdoor U				SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA				
Refrigeran				002 1112077		32	002 11100 111				
Power	Source					ower supply					
Supply	Outdoor(V/Phase/Hz)			230/Single/50							
Cooling	Capacity	Rated	kW	2.5	3.5	4.6	5.7				
Jooning	Cupacity	Min-Max	kW	1.4 - 3.2	0.7 - 3.9	1.0 - 5.2	1.5 - 6.3				
	Total Input	Rated	kW	0.657	1.093	1.352	1.676				
	EER	Inateu	NV V	3.80	3.20	3.40	3.40				
	Design load		kW	2.5	3.5	4.6	5.7				
	Annual electricity consump	ation(*2)	kWh/a	139	183	253	321				
	SEER(*3)	DUOII:	KVVII/d	6.3	6.7	6.3	6.2				
	SEER(9)	F (F: 1									
	10 11	Energy efficiency class	II VA /	A++	A++	A++	A++				
leating	Capacity	Rated	kW	3.2	4.0	5.0	6.4				
		Min-Max	kW	1.3 - 4.2	1.0 - 5.0	1.3 - 5.5	1.6 - 7.3				
	Total Input	Rated	kW	0.886	1.078	1.562	2.133				
	СОР		I	3.61	3.71	3.20	3.00				
	Design load		kW	2.2	2.6	3.6	4.6				
	Declared Capacity	at reference design temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.2 (-10°C)	4.1 (-10°C)				
		at bivalent temperature	kW	2.0 (-7°C)	2.3 (-7°C)	3.2 (-7°C)	4.1 (-7°C)				
		at operation limit temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.2 (-10°C)	4.1 (-10°C)				
	Back up heating capacity		kW	0.2	0.3	0.4	0.5				
	Annual electricity consump	otion ^(*2)	kWh/a	716	845	1192	1560				
	SCOP(*3)			4.3	4.3	4.2	4.1				
		Energy efficiency class		A+	A+	A+	A+				
Operating	Current(Max)		А	7.0	8.7	13.8	15.2				
ndoor	Input [cooling / Heating]	Rated	kW	0.02 / 0.02	0.02 / 0.02	0.03 / 0.03	0.04 / 0.04				
Jnit	Operating Current(Max)		Α	0.20	0.24	0.32	0.43				
	Dimensions	H*W*D	mm	245-570-570 <10-625-625>	245-570-570 <10-625-625>	245-570-570 <10-625-625>	245-570-570 <10-625-625>				
	Weight		kg	15 <3>	15 <3>	15 <3>	15 <3>				
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	6.5-7.5-8.5	6.5-8.0-9.5	7.0-9.0-11.5	7.5-11.5-13.0				
	Sound Level (Lo-Mi2-Mi1-Hi)	(SPL)	dB(A)	25-28-31	25-30-34	27-34-39	32-40-43				
	Sound Level (PWL)		dB(A)	48	51	56	60				
Outdoor	Dimensions	H*W*D	mm	550-800-285	550-800-285	714-800-285	880-840-330				
Jnit	Weight		kg	30	35	41	54				
	Air Volume	Cooling	m³/min	36.3	34.3	45.8	50.1				
		Heating	m³/min	34.6	32.7	43.7	50.1				
	Sound Level (SPL)	Cooling	dB(A)	45	48	48	49				
		Heating	dB(A)	46	48	49	51				
	Sound Level (PWL)	Cooling	dB(A)	59	59	64	65				
	Operating Current(Max)		А	6.8	8.5	13.5	14.8				
	Breaker Size	·	А	10	10	20	20				
vt Pining	Diameter(*4)	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88				
.xc.i ipiiiş	B4 1 41	Out-In	m	20	20	30	30				
.xt.i ipiiiş	Max.Length										
-xt.i ipiiiş	Max.Height	Out-In	m	12	12	30	30				
			m °C	12 -10 ~ +46	12 -10 ~ +46	30 -15 ~ +46	30 -15 ~ +46				

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption who the appliance is used and where it is located.
*3 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.
*4 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.






This concealed ceiling-mounted indoor unit series is compact, and fits easily into rooms with lowered ceilings. Highly reliable energy-saving performance makes it a best match choice for concealed unit installations.

High Energy Efficiency



Highly efficient indoor units with DC inverter contribute to a reduction in electricity consumption throughout a year. The SEZ series has achieved energy-saving performance of "A+" or higher when connected to PUZ series and "A" or higher when connected to SUZ-M series.

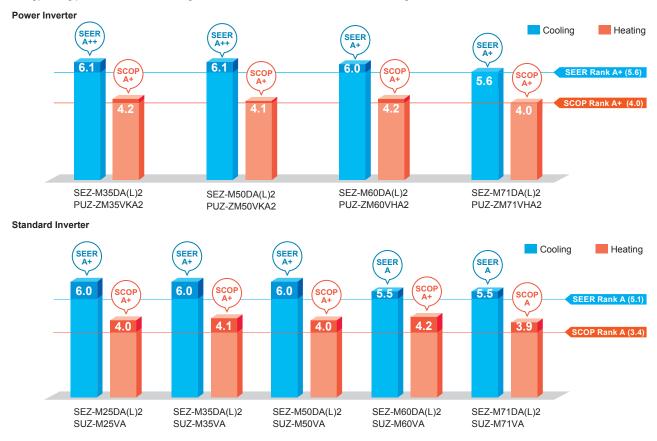

Lineup of Compatible Outdoor Unit has been Expanded by Power Inverter Series

Although models in the SEZ series were previously only compatible with the standard inverter, they can now also be connected to small capacity power inverters. The ability to connect to a power inverter with high-performance specifications makes it possible to offer an even wider range of solutions to our customers.



Compact Design with a Height of 200 mm

The height of the units is 200 mm for all capacity ranges. Its thin body is suitable for installation in low ceilings with a small cavity space.



SEZ-M D	A(L)2	M25	M35	M60	M71	
Height	mm			200		
Width	mm	790	99	90	11	90

Low Noise Operation

Low noise operation contributes to a peaceful indoor environment. The SPL of M25/35 model, which is the quietest model among the new series, is as low as 22 dB (ESP 5 Pa, low fan speed setting).

	Capa	acity	M25	M35	M50	M60	M71
Sound	_	High	29	30	36	37	39
pressure level	Fan speed	Mid	25	26	33	33	34
		Low	22	22	29	29	29

^{*}When fan speed setting is low, the cooling/heating capacity is subject to reduce.


Selectable Static Pressure Levels

External static pressure can be selected from 5, 25, 35, and 50 Pa (set to 25 Pa at the time of factory shipment).

Four levels Available for All Models


Drain Pump (Optional)

The PAC-KE07DM-E drain pump is available as an option. The drain connection can be raised as high as 580 mm, allowing more freedom in piping layout design.



Connectable to Plasma Quad Connect

The optional Plasma Quad Connect MAC-100FT-E can be installed on the indoor unit's air inlet side. For installation, PQ attachment PAC-HA11PAR is required.

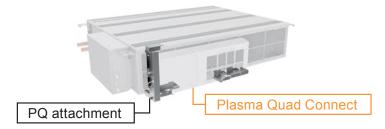

^{*}Operation noise may increase due to the installation environment or the operation status.

^{*}The use of drain pump may increase the operation noise.

SEZ-M SERIES

















Indoor Unit



SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit





For Multi (Twin/Triple/Quadruple)









PUZ-ZM35/50

PUZ-ZM60/71

PUZ-ZM71

PUZ-ZM100/125/140

Remote Controller









Enclosed in SEZ-M DAL2

*optional (for SEZ-M DA2)

*optional (for SEZ-M DA2)

(for SEZ-M DA2)



























Outdoor Unit Capacity																
Indoor Unit Co	ombination				For Single					For Twin			For Triple		For Qu	adruple
	35	50	60	71	100	125	140	71	100	125	100	125	140	125	140	
Power Inverter (PUZ-ZM)		35×1	50×1	60×1	71×1	-	-	-	35×2	50×2	60×2	35×3	50×3	50×3	35×4	35×4
	Distribution Pipe	-	-	-	-	-	-	-	M	SDD-50TR2	2-E	N	/ISDT-111R3	-E	MSDF-1	1111R2-E

Type					Inverter I	leat Pump					
door Uni	it	·		SEZ-M35DA(L)2	SEZ-M50DA(L)2	SEZ-M60DA(L)2	SEZ-M71DA(L)2				
utdoor U	Init			PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2				
efrigeran						32					
wer	Source					ower supply					
ylqqı	Outdoor(V/Phase/Hz)			230/Single/50							
ooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1				
		Min-Max	kW	1.6 - 3.9	2.3 - 5.6	2.7 - 6.3	3.3 - 8.1				
	Total Input	Rated	kW	0.857	1.315	1.525	1.918				
	EER(*4)		'	4.20	3.80	4.00	3.70				
	Design load		kW	3.6	5.0	6.1	7.1				
	Annual electricity consump	otion(*2)	kWh/a	205	287	352	440				
	SEER(*4)(*5)		, , ,	6.1	6.1	6.0	5.6				
		Energy efficiency class		A++	A++	A+	A+				
ating	Capacity	Rated	kW	4.1	6.0	7.0	8.0				
J		Min-Max	kW	1.6 - 5.0	2.5 - 7.2	2.8 - 8.0	3.5 - 10.2				
	Total Input	Rated	kW	1.025	1.578	1.707	2.051				
	COP(*4)			4.00	3.80	4.10	3.90				
	Design load		kW	2.4	3.8	4.4	4.7				
	Declared Capacity	at reference design temperature		2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)				
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)				
			kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.5 (-20°C)				
	Back up heating capacity		kW	0.0	0.0	0.0	0.0				
	Annual electricity consumption(*2)		kWh/a	791	1279	1464	1633				
	SCOP(*4)(*5)			4.2	4.1	4.2	4.0				
		Energy efficiency class		A+	A+	A+	A+				
erating	Current(Max)		Α	13.7	13.8	19.9	20.0				
door	Input [cooling / Heating]	Rated	kW	0.047	0.077	0.084	0.102				
it	Operating Current(Max)		Α	0.65	0.82	0.88	1.00				
	Dimensions	H*W*D	mm	200 - 990 - 700	200 - 990 - 700	200 - 1190 - 700	200 - 1190 - 700				
	Weight		kg	22	22	25.5	25.5				
	Air Volume (Lo-Mid-Hi)		m³/min	7 - 9 - 11	10 - 12.5 - 15	12 - 15 - 18	12 - 16 - 20				
	External Static Pressure(*7)		Pa	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>				
	Sound Level (Lo-Mid-Hi) (SPL)		dB(A)	23 - 27 - 31	30 - 34 - 37	30 - 34 - 38	30 - 35 - 40				
		5Pa(*8)	dB(A)	22 - 26 - 30	29 - 33 - 36	29 - 33 - 37	29 - 34 - 39				
	Sound Level (PWL)		dB(A)	51	57	58	60				
tdoor	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)	943-950-330(+25)				
iit	Weight	To	kg	46	46	67	67				
	Air Volume	Cooling	m³/min	45	45	55	55				
		Heating	m³/min	45	45	55	55				
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47				
		Heating	dB(A)	46	46	49	49				
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67				
	Operating Current(Max)		A	13	13	19	19				
	Breaker Size		A	16	16	25	25				
t.Piping	Diameter ^(*6)	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88				
	Max.Length	Out-In	m	50	50	55	55				
	Max.Height	Out-In	m	30	30	30	30				
uarante	ed Operating Range (Outdoor)	Cooling(*3)	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46				
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21				

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than –5°C.

*4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 25Pa

*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*6 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*7 The factory setting of ESP is shown without < >.

*8 SPL measured at ESP 5Pa.

SEZ-M SERIES









For Single







Indoor Unit



SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit







SUZ-M50VA



SUZ-M60/71VA

Remote Controller







*optional (for SEZ-M DA2)



*optional (for SEZ-M DA2)



(for SEZ-M DA2)



























				oor Unit Cap						
Indoor Unit C	Combination		For Single							
		25	35	50	60	71				
S Seires		25×1	35×1	50×1	60×1	71×1				
	Distribution Pipe	-	-	-	-	-				

Туре						Inverter Heat Pump					
ndoor Unit				SEZ-M25DA(L)2	SEZ-M35DA(L)2	SEZ-M50DA(L)2	SEZ-M60DA(L)2	SEZ-M71DA(L)2			
Outdoor Unit				SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA			
efrigerant(*1)				R32							
ower So	ource			Outdoor power supply							
Supply Ou	utdoor(V/Phase/Hz)					230/Single/50					
	Capacity	Rated	kW	2.5	3.5	5.0	6.1	7.1			
			kW	1.4 - 3.2	0.7 - 3.9	1.1 - 5.6	1.6 - 6.3	2.2 - 8.1			
1 1		Rated	kW	0.714	1.000	1.547	1.848	2.151			
	EER(*4)			3.50	3.50	3.23	3.30	3.30			
Hi	Design load		kW	2.5	3.5	5.0	6.1	7.1			
	Annual electricity consump	tion(*2)	kWh/a	146	202	290	385	451			
"	SEER(*3)(*4)		ice erry G	6.0	6.0	6.0	5.5	5.5			
		Energy efficiency class		A+	A+	A+	A	A			
eating	Capacity	Rated	kW	2.9	4.2	6.0	7.4	8.0			
		Min-Max	kW	1.3 - 4.2	1.1 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2			
		Rated	kW	0.803	1.076	1.617	2.049	2.285			
	COP(*4)			3.61	3.90	3.71	3.61	3.50			
<u> </u>	Design load		kW	2.2	2.6	4.3	4.6	5.8			
		at reference design temperature		2.0 (-10°C)	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)			
		at bivalent temperature	kW	2.0 (-7°C)	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)			
		at operation limit temperature		2.0 (-10°C)	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (7 C)			
1 1	Back up heating capacity	at operation milit temperature	kW	0.2	0.3	0.5	0.5	0.6			
	Annual electricity consumption(*2) kWh/a			769	878	1501	1516	2030			
	SCOP(*3)(*4)		KVVIIJU	4.0	4.1	4.0	4.2	3.9			
		Energy efficiency class		A+	A+	A+	A+	A.			
perating Cu	urrent(Max)	Lifergy efficiency class	Α	7.4	9.2	14.3	15.7	15.8			
		Rated	kW	0.043	0.047	0.077	0.084	0.102			
	perating Current(Max)	riated	Δ	0.62	0.65	0.82	0.88	1.00			
		H*W*D	mm	200 - 790 - 700	200 - 990 - 700	200 - 990 - 700	200 - 1190 - 700	200 - 1190 - 700			
	eight	W D	kg	18	22	22	25.5	25.5			
	r Volume (Lo-Mid-Hi)		m³/min	5.5 - 7 - 9	7 - 9 - 11	10 - 12.5 - 15	12 - 15 - 18	12 - 16 - 20			
	cternal Static Pressure(*6)		Pa	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <			
	ound Level (Lo-Mid-Hi) (SPL)	Rated	dB(A)	23 - 26 - 30	23 - 27 - 31	30 - 34 - 37	30 - 34 - 38	30 - 35 - 40			
		5Pa ^(*7)	dB(A)	22 - 25 - 29	22 - 26 - 30	29 - 33 - 36	29 - 33 - 37	29 - 34 - 39			
So	ound Level (PWL)		dB(A)	50	51	57	58	60			
ıtdoor Di	mensions	H*W*D	mm	550-800-285	550-800-285	714-800-285	880-840-330	880-840-330			
nit W	eight		kg	30	35	41	54	55			
Ai	r Volume	Cooling	m³/min	36.3	34.3	45.8	50.1	50.1			
		Heating	m³/min	34.6	32.7	43.7	50.1	50.1			
So	ound Level (SPL)	Cooling	dB(A)	45	48	48	49	49			
		Heating	dB(A)	46	48	49	51	51			
So	ound Level (PWL)	Cooling	dB(A)	59	59	64	65	66			
Or	perating Current(Max)	-	Α	6.8	8.5	13.5	14.8	14.8			
	eaker Size		A	10	10	20	20	20			
ct.Piping Di		Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88			
		Out-In	m	20	20	30	30	30			
IVI											
	ax.Height	Out-In	m	12	12	30	30	30			
Ma	ax.Height Operating Range (Outdoor)	Out-In Cooling	°C	12 -10 ~ +46	12 -10 ~ +46	-15 ~ +46	30 -15 ~ +46	30 -15 ~ +46			

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 SEER/SCOP are measured at ESP 25Pa.

*4 SEER and SCOP are based on 2009/125/EC.Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*6 The factory setting of ESP is shown without < >.


*7 SPL measured at ESP 5Pa.

The concealed floor standing type indoor unit is newly introduced to the S-series and can be neatly installed in the perimeter zone. High energy efficiency is achieved across all capacity range. External static pressure, airflow rate, and air intake direction can be selected according to the customer's choice.




A Wide Lineup Offering High Energy Efficiency

The SFZ series achieves an A++ rating on the SEER index, and an A+ rating on the SCOP index for all capacity range. No matter which capacity you select, the series offers a high level of energy efficiency.

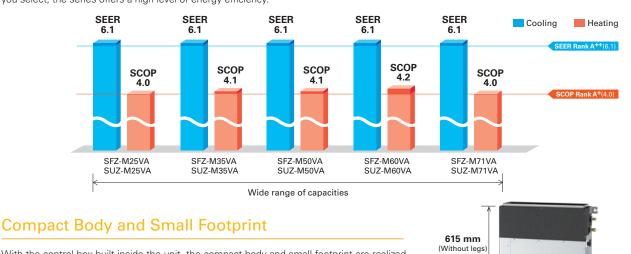


With the control box built inside the unit, the compact body and small footprint are realized. This allows the unit to be installed within a small perimeter zone.





Flexible Installation

Air inlet direction from the bottom or front can be selected by changing panel, fan guard and filter.

Bottom suction *1 Front suction *2 Installation with legs Air outlet Air outlet







*Legs are supplied as accessory with the unit.

- *1 Select a site where the flow of supply air is not blocked. The unit cannot be placed directly on the floor in the case of bottom suction. *2 Unit with front suction generate more noise compared to bottom suction. Not recommended to be installed in rooms such as bedrooms where quietness is valued.

Fan Speed

Airflow rate can be selected from 3 patterns; Low-Medium-High.

External Static Pressure

Four levels of static pressure are available. The ability to select additional static pressure provides flexibility for air outlet configuration.

SFZ-M25/35/50/60/71VA <0>/25/<40>/<60> Pa

The factory setting of external static pressure is shown without brackets (< >). Refer to "Fan characteristics curves" according to the external static pressure, in the DATA BOOK for the usable range of airflow rate.

SFZ-M SERIES







Outdoor Unit



SUZ-M25/35VA



SUZ-M50VA



R32

SUZ-M60/71VA

Remote Controller







PAR-40MAA *Optional

PAR-CT01MAA *Optional

PAC-YT52CRA *Optional

Туре						Inverter Heat Pump							
Indoor U	nit			SFZ-M25VA	SFZ-M35VA	SFZ-M50VA	SFZ-M60VA	SFZ-M71VA					
Outdoor	Unit			SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA					
Refrigera	nt(*1)				R32*1								
Power	Source			Outdoor power supply									
Supply	Outdoor (V/Phase/H	z)				230 / Single / 50							
Cooling	Capacity	Rated	kW	2.5	3.5	5.0	6.1	7.1					
		Min - Max	kW	1.5 - 3.2	0.7 - 3.9	1.1 - 5.6	1.6 - 6.3	1.9 - 8.1					
	Total Input	Rated	kW	0.641	1.000	1.470	1.848	2.151					
	EER	'		3.90	3.50	3.40	3.30	3.30					
	Design Load		kW	2.5	3.5	5.0	6.1	7.1					
	Annual Electricity	Consumption(*2)	kWh/a	143	199	284	346	403					
	SEER(*3)(*4)			6.1	6.1	6.1	6.1	6.1					
		Energy Efficiency Class		A++	A++	A++	A++	A++					
leating	Capacity	Rated	kW	3.2	4.1	6.0	7.0	8.0					
Average		Min - Max	kW	1.2 - 4.2	1.0 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2					
Season)	Total Input	Rated	kW	0.886	1.051	1.617	1.886	2.156					
	COP			3.61	3.90	3.71	3.71	3.71					
	Design Load		kW	2.2	2.6	4.3	4.6	5.8					
	Declared Capacity	at reference design temperature	_	2.0 (-10°C)	2.3 (-10°C)	3.3 (–10°C)	4.1 (–10°C)	5.2 (–10°C)					
	Decialed Capacity	at bivalent temperature	kW	2.0 (-10 C) 2.0 (-7°C)	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)					
		at operation limit temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.3 (–10°C)	4.1 (-10°C)	5.2 (-10°C)					
	Back Up Heating C		kW	0.2	0.3	1.0	0.5	0.6					
			kWh/a	766	887	1467	1532	1997					
	SCOP(*3)(*4) Energy Efficiency Class		KVVII/d	4.0	4.1	4.1	4.2	4.0					
				4.0 A+	4.1 A ⁺	4.1 A ⁺	4.2 A+	4.0 A+					
Operating	Current (max)	Ellergy Elliciency Class	Α	7.2	8.9	14.1	15.4	15.6					
ndoor	Input	Rated	kW	0.041	0.044	0.072	0.078	0.095					
Jnit	Operating Current (n		A	0.041	0.44	0.61	0.64	0.76					
	Dimensions <panel>(*6)(*7)</panel>		mm				615 (690) - 1197 (1100) - 200						
		H*W*D	_										
	Weight <panel></panel>	123	kg	18.5	22.5	22.5	25.5	25.5					
	Air Volume [Lo-Mid-F	<u> </u>	m³/min		7 - 9 - 11	10 - 12.5 - 15	12 - 15 - 18	12 - 16 - 20					
	External Static Press		Pa	<0> / 25 / <40> / <60>	<0> / 25 / <40> / <60>	<0> / 25 / <40> / <60>	<0> / 25 / <40> / <60>	<0> / 25 / <40> / <60					
	Sound Level (SPL)(*9)	[Lo-Mid-Hi]	dB(A)	25 - 29 - 35	25 - 29 - 33	30 - 35 - 39	30 - 35 - 39	30 - 36 - 42					
	Sound Level (PWL)	T	dB(A)	54	53	59	59	61					
Outdoor Unit	Dimensions	H*W*D	mm	550 - 800 - 285	550 - 800 - 285	714 - 800 - 285	880 - 840 - 330	880 - 840 - 330					
Oilit	Weight	1-	kg	30	35	41	54	55					
	Air Volume	Cooling	m³/min	36.3	34.3	45.8	50.1	50.1					
		Heating	m³/min	34.6	32.7	43.7	50.1	50.1					
	Sound Level (SPL)	Cooling	dB(A)	45	48	48	49	49					
		Heating	dB(A)	46	48	49	51	51					
	Sound Level (PWL)	Cooling	dB(A)	59	59	64	65	66					
	Operating Current (n	nax)	Α	6.8	8.5	13.5	14.8	14.8					
	Breaker Size		Α	10	10	20	20	20					
Ext.	Diameter(*5)	Liquid / Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88					
Piping	Max. Length	Out-In	m	20	20	30	30	30					
	Max. Height	Out-In	m	12	12	30	30	30					
	d Operating Range	Cooling	°C	−10 ~ +46	−10 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46					
Outdoor	1	Heating	°C	-10 ~ +24	-10 ~ +24	−10 ~ +24	−10 ~ +24	-10 ~ +24					

¹ Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 SEER/SCOP are measured at ESP 25Pa.

*4 SEFR and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*6 The height that includes the pipe cover (sheet metal). The values in () show the width that does not include the pipe cover.

*8 The factory setting of ESP is shown without < >.

*9 SPL measured at ESP 25Pa.

CONTROL TECHNOLOGIES



User-friendly Deluxe Remote Controller with Excellent Operability and Visibility

2+1 Back-up Rotation*

The use of a three-refrigerant air conditioning system enables you to utilize the back-up, rotation, and cut-in functions. This allows you to implement effective risk management for added peace of mind.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller


Back-up Function

In the unlikely event that one of the units stops operation due to an abnormality, the standby unit immediately starts back-up operation. Being fully prepared for a failure guarantees that and operation is always available and gives you the confidence that your system will be reliable in any situation.




Rotation Function

A single remote controller is used to operate three-refrigerant air conditioning system in a rotation pattern. Reducing the burden on the equipment allows you to maintain a longer time between maintenance and increases product life.

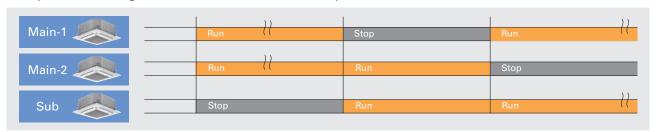

Cut-in Function

If the actual room temperature greatly differs from the set temperature and two-refrigerant air conditioning system is insufficient, the standby unit starts operation to provide support.

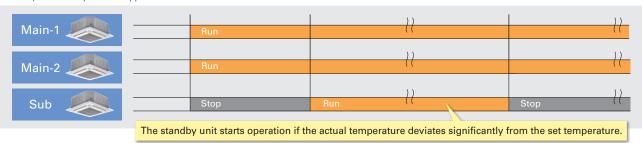










SELECTION

Line-up includes a selection of eight indoor units and four series of outdoor units. Easily construct a system that best matches room air conditioning needs.



* Some indoor units cannot be used with this unit.

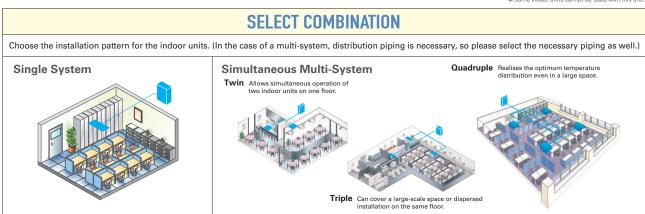

Connectable Combinations for Inverter Units

		Indoor Unit Capacity	
Outdoor Unit Capacity	Twin 50 : 50	Triple 33 : 33 : 33	Quadruple 25 : 25 : 25 : 25
71	35 × 2	_	_
100	50 × 2	_	_
125	60 × 2	_	_
140	71 × 2	50 × 3	_
200	100 × 2	60 × 3	50 × 4
250	125 × 2	71 × 3	60 × 4
Distribution Pipe	MSDD-50TR-E MSDD-50WR-E MSDD-50TR2-E MSDD-50WR2-E	MSDT-111R-E MSDT-111R3-E	MSDF-1111R-E MSDF-1111R2-E

Note: The distribution pipe listed is required for simultaneous multi-systems.

Power Inverter SERIES

Our Eco-conscious Power Inverter Series is designed to achieve industry-leading seasonal energy-efficiency throught use of New R32 refrigerant and advanced







R32

R32

R32

PUZ-ZM35/50VKA2

PUZ-ZM60/71VHA2


PUZ-ZM100/125/140V(Y)DA

PUZ-ZM200/250YKA2

Industry-leading Energy Efficiency

Introduction of R32 refrigerant realises improved cooling efficiency. Rating of more than 7.0 achieved for all capacity range.


Introduction of R32 refrigerant reduces energy consumption and realises energy savings.

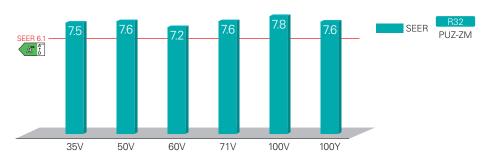

Longer Piping (60/71/100/125/140/200/250)


Longer piping length realised for 60, 71, 100, 125, 140, 200 and 250 classes, widely increasing installation flexibility.

	Piping Length
	R32 PUZ-ZM
35/50	50m
60/71	55m
100/125/140	100m
200/250	100m



Rated Heating Capacity Maintained Down to -3°c*

Rated heating capacity maintained even when the outside temperature is down to -3°C. Stay warm even at times of cold weather.

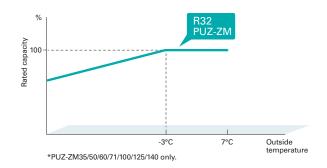


2+1 Back-up Rotation*

The use of a three-refrigerant air conditioning system enables you to utilize the back-up, rotation, and cut-in functions. This allows you to implement effective risk management for added peace of mind.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.


Back-up Function

In the unlikely event that one of the units stops operation due to an abnormality, the standby unit immediately starts back-up operation. Being fully prepared for a failure guarantees that and operation is always available and gives you the confidence that your system will be reliable in any situation.

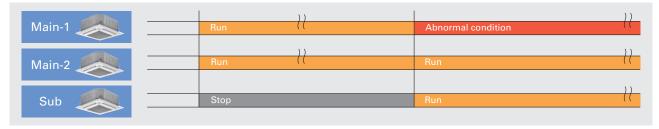


Rotation Function

A single remote controller is used to operate three-refrigerant air conditioning system in a rotation pattern. Reducing the burden on the equipment allows you to maintain a longer time between maintenance and increases product life.

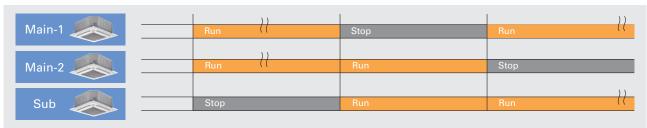

Cut-in Function


If the actual room temperature greatly differs from the set temperature and two-refrigerant air conditioning system is insufficient, the standby unit starts operation to provide support.

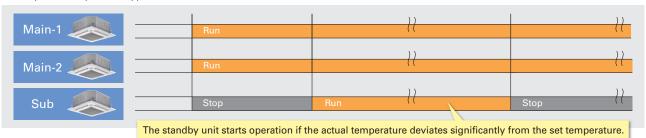

Extended Cooling Set Temperature Range*

In environments such as gyms where people do strenuous exercise, even if the room is cooled to an appropriate temperature, people may feel that it is hot, and they need a cooler air. To satisfy such demands, we have extended the lower limit of the cooling set temperature range from 19-30°C. to 14-30°C.

*Insulation kit (PAC-SK36HK-E) is required when indoor unit is PLA series.
*Availability of this function is depending on outdoor unit, indoor unit and remote controller

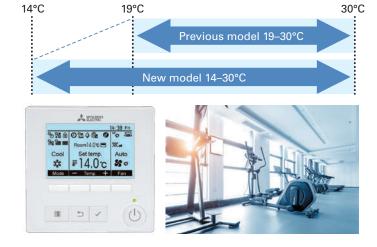

Display of Model Names and Serial Numbers*

The model names and serial numbers of the indoor/outdoor units that are connected to the MA smart remote controller can be automatically acquired and displayed through one simple operation. This eliminates the need to directly check each unit and helps with inquiries in the case of an abnormality.

> 0 OU PUZ-ZM200YKA2 IU1 PLA-ZM50EA2

IU2 PLA-ZM50EA2


IU3 PLA-ZM50EA2

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Model name display (example)

display

(example)

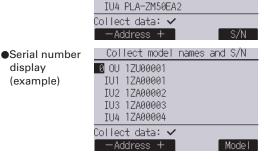


Collect model names and S/N

Preliminary Error History*

In addition to error history, the history of preliminary abnormalities can be displayed. The feature enables the unit status check during inspection and maintenance.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Error history (Sample)



Preliminary error history (Sample)

Preli	minar	error	hist. 1 /8
Error	Unt#	dd/mm/y	У
E0			0 PM12:34
E0	0-1	20/12/2	0 AM 1:23
E0			0 PM10:55
E0	0-1	20/10/2	0 PM12:01
Error hi	story	menu: 🖎	
▼ Fea	⊢ 🛦		De ete

Display of Power Consumption*

It is possible to measure, acquire, and display the amount of energy used by each air conditioning system.

- *Availability of this function is depending on outdoor unit, indoor unit and remote controller.
- < Data Collection Period >

Time data: Every 30 minutes over the past month Monthly/daily data: Monthly over the past 14 months

Energy consumption values are calculated from estimated power consumption values according to the operating conditions. They may vary from the actual power consumption values. Please note that the power consumption of optional parts is not included except in the case of optional parts that have their power supplied directly by the outdoor unit.

Every 30 minutes (example)

Energy Energy	y data
2019- 1-	1234.5kWh 1/6
0:30 123.4kWh	2:30 123.4kWh
1:00 123.4kWh	3:00 123,4kWh
1:30 123.4kWh	3:30 123.4kWh
2:00 123.4kWh	4:00 123, 4kWh
Return: 3	
— Date —	▼ Page 🛦

●Daily (example)

	Ener	gy data	à
2019	- 1	123456	.7kWh 1/4
31	1234.5kWh	i 27	1234.5kWh
30	1234.5kWh	1 26	1234.5kWh
29	1234.5kWh	1 25	1234.5kWh
28	1234.5kWh) 24	1234.5kWh
Retu	rn: ۞		
▼	Page 🛕		

Monthly (example)

E	inergy data	
▶2019- 1	123456. 7kWh	1/3
2018-12	123456. 7kWh	
2018-11	123456, 7kWh	
2018-10	123456. 7kWh	
2018- 9	123456, 7kWh	
View daily	data:✔	
▼ Ourson		

Improved Defrosting Performance*


*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Avoiding Simultaneous Defrosting


When each of multiple units is in operation for heating in the same space, these may start defrosting at the same time, resulting in a drop in the room temperature. Therefore, we have developed a new function that controls up to four-refrigerant air conditioning system to avoid simultaneous defrosting. By ensuring that defrosting is only performed by one unit at a time, it is possible to minimize any decrease in room temperature.

Example System Configuration

Four sets controlled by a single remote controller



■When All Sets Are Controlled Together



Defrosting When People Are Absent


The use of the 3D i-see sensor allows a more comfortable defrosting schedule. After a large amount of frost has built up, the system will switch to defrosting when the 3D i-see sensor detects that no people are present. By minimizing defrosting while people are in the room, there is a much lower chance of a temperature drop while the room is occupied.



* Only compatible with 4-way cassette and 2x2 cassette models with an attached 3D i-see sensor panel. Even though people are present in the room, the defrosting process may start if all defrosting conditions are met.

Defrosting When Operation is Stopped

It takes a long time to start operation if there is an excess build-up of frost. Therefore, each unit is equipped with a control system where defrosting is performed immediately after operation is stopped when there is a large amount of frost. This allows heating to be quickly started the next day.

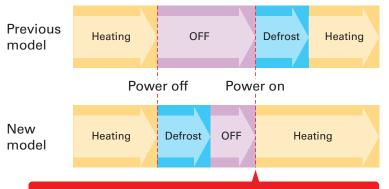

The power turns off after defrosting is complete and the system will start up smoothly the next time it is used.

Easier M-NET Adapter Installation


The optional M-NET adapter, which allows centralized control (M-NET control), is now easier to install. The redesigned mounting position significantly reduces the time and effort for installation.

Conventional Model

PAC-SJ96MA-E

Removed parts

The (1) top panel, (2) front panel, (3) service panel, and (4) electronics box need to be removed, and the connector must be temporarily unplugged.




New Model

PAC-SK15MA-E

Removed parts

There is no need to remove the (1) top panel, (2) service panel, (3) service plate, electronics box, nor temporarily unplug the connector.




Compact Design ZM100/125/140

ZM100/125/140 compact design fits into narrow outdoor unit space of condominiums and offices.



Low Noise ZM100/125/140

The noise level has been significantly reduced comapared to the conventional models by reviewing the unit structure.

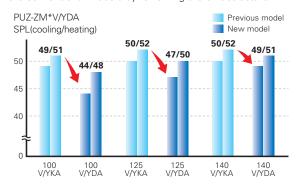

Utilizing IoT for Improved Convenience*

*Availability of IoT functions are depending on MELCloud version

By connecting to a MAC-587IF-E Wi-Fi interface, it is possible to collect data and perform air conditioning control via MELCloud. In addition to basic functions such as turning the power on/off and setting the temperature, it is also possible to acquire data used for maintenance and inspection such as model names, serial numbers, and operation data.

[Basic Operation Functions]

- Operation on/off
- Temperature setting
- Operation mode
- Airflow speed
- •Airflow direction etc...


[Data Collection and Display]

- Model name display
- Serial number display
- Collection of operation data
- Energy consumption display etc...









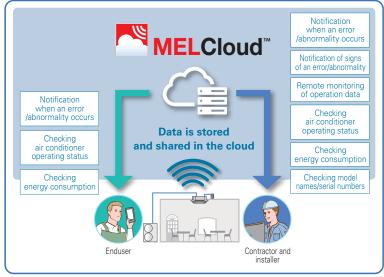

MELCloud System Configuration

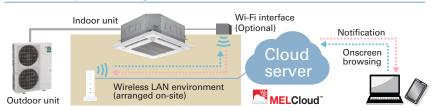

Wi-Fi Adapter (Optional) Installation



On-Site Installation and Configuration

Wireless LAN adapter installation

Connect the wireless LAN adapter to the indoor unit PCB and install it above the ceiling.


Wireless LAN adapter and router connection settings Wireless LAN adapter and server connection settings

Collection of operation data

All the operation data required for maintenance and inspection can be collected in a simple step. This data can then be easily checked via MELcloud. This makes it easy to check the operating status data even in cases when it is difficult to do a visual inspection. This allows you to quickly identify any system malfunctions. This function also helps to improve the quality of installation work and shortening the time required for maintenance and inspection. This operation

Operation data that can be collected (example)

- ●Compressor frequency ●Compressor operating current ●Outdoor discharge temperature
- ●Outdoor heat exchanger temperature ●Outdoor air temperature ●Compressor shell temperature
- ●Sub cool ●Discharge superheat ●Indoor inlet temperature ●Indoor heat exchanger temperature
- ●Total compressor operating time●Compressor operation count ●Indoor filter operating time



Demand control

It is possible to control air-conditioners to appropriately operate according to the energy supply-demand adjustment by electric power companies and each electricity rate plan of end users.


e.g. <Peak cut control> It is possible to utilize an external demand signal to reduce power consumption during peak hours. By satisfying the need for reducing peak power consumption or shifting consumption to a non-peak period, we have increased the range of options for our customers.

Notification of potential abnormality

The comprehensive analysis of operating data allows the early detection of abnormalities in small functional parts by alerting the operator of any signs of abnormal behaviour. The recognition in advance of abnormalities in each unit further improves the ease of servicing and maintenance. Since this allows a countermeasure to be implemented before the abnormality requires the unit to be completely shut down, it is an effective method for maintaining the unit in its optimum condition.

[Abnormalities That Have Their Signs Monitored]


- ●Filter blockage ●Drain blockage ●Refrigerant leakage
- Heat exchanger blockage etc...

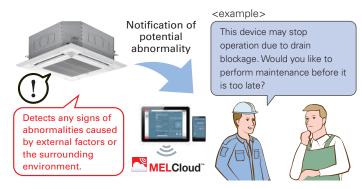

data is strange..

Standard Inverter SERIES

Our Standard Series become light and compact with greater energy-saving performance.





SUZ-M35VA





R32




SUZ-M50VA SUZ-M60/71VA

PUZ-M100/125/140V(Y)KA2 PU

PUZ-M200/250YKA2

Improved Energy Efficiency


Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 6.6 achieved for all capacity range.

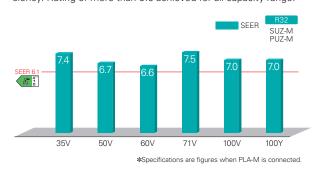

Longer Piping (100/125/140/200/250)

Longer piping length realised for 100, 125, 140, 200 and 250 classes, widely increasing installation flexibility.

	Max. Piping Length
	R32 SUZ-M PUZ-M
25/35	20m
50/60/71	30m
100	55m
125/140	65m
200/250	70m




Light Weight and Compact Size

Compact design fits into narrow outdoor unit space of condominiums and offices. Light weight design facilitates easy installation.




Unobstructive, compact, and easy to hide from view

Conventional outdoor units may spoil the view. Due to its compact size, the new model can be installed in locations that previous model is not suitable.



Easy transportation and installation





Transport efficiency improves thanks to its low height. The unit can even be transported by minivan.


2+1 Back-up Rotation*

The use of a three-refrigerant air conditioning system enables you to utilize the back-up, rotation, and cut-in functions. This allows you to implement effective risk management for added peace of mind.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.


Back-up Function

In the unlikely event that one of the units stops operation due to an abnormality, the standby unit immediately starts back-up operation. Being fully prepared for a failure guarantees that and operation is always available and gives you the confidence that your system will be reliable in any situation.

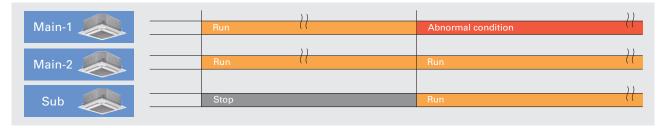


Rotation Function

A single remote controller is used to operate three-refrigerant air conditioning system in a rotation pattern. Reducing the burden on the equipment allows you to maintain a longer time between maintenance and increases product life.

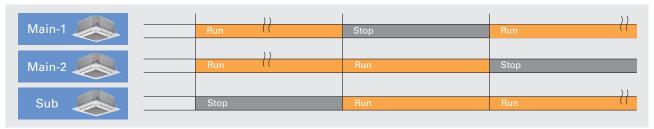

Cut-in Function


If the actual room temperature greatly differs from the set temperature and two-refrigerant air conditioning system is insufficient, the standby unit starts operation to provide support.

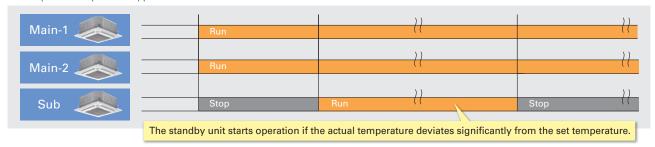

Extended Cooling Set Temperature Range*

In environments such as gyms where people do strenuous exercise, even if the room is cooled to an appropriate temperature, people may feel that it is hot, and they need a cooler air. To satisfy such demands, we have extended the lower limit of the cooling set temperature range from 19–30°C. to 14–30°C.


*Insulation kit (PAC-SK36HK-E) is required when indoor unit is PLA series.
*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

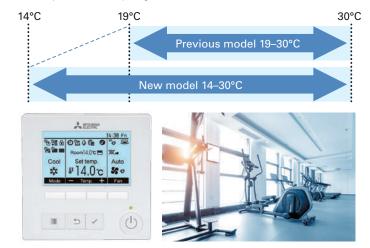

Display of Model Names and Serial Numbers*

The model names and serial numbers of the indoor/outdoor units that are connected to the MA smart remote controller can be automatically acquired and displayed through one simple operation. This eliminates the need to directly check each unit and helps with inquiries in the case of an abnormality.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

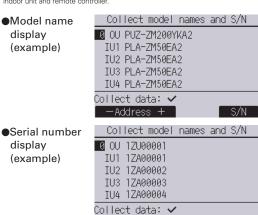

-Address +


Model

Preliminary Error History*

In addition to error history, the history of preliminary abnormalities can be displayed. The feature enables the unit status check during inspection and maintenance.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Error history (Sample)



Preliminary error history (Sample)

Preli	minar	error h	ist. 1/8
Error	Unt#	dd/mm/yy	
E0	0-1	21/10/20	PM12:34
E0		20/12/20	
E0		20/11/20	
E0	0-1	20/10/20	PM12:01
Error hi	story	menu: 🖎	
▼ Fea	⊢ ▲		Се ЕТЕ

Display of Power Consumption*

It is possible to measure, acquire, and display the amount of energy used by each air conditioning system.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

< Data Collection Period >


Time data: Every 30 minutes over the past month Monthly/daily data: Monthly over the past 14 months

Energy consumption values are calculated from estimated power consumption values according to the operating conditions. They may vary from the actual power consumption values. Please note that the power consumption of optional parts is not included except in the case of optional parts that have their power supplied directly by the outdoor unit.

Every 30 minutes (example)

Energy	/ data
2019- 1-1	1234.5kWh 1/6
0:30 123.4kWh	2:30 123.4kWh
1:00 123.4kWh	3:00 123,4kWh
1:30 123.4kWh	3:30 123.4kWh
2:00 123.4kWh	4:00 123.4kWh
Return: 3	
– Date –	🔻 Page 🔺





Monthly (example)

Er	nergy data	
▶2019- 1	123456. 7kWh	1/3
2018-12	123456.7kWh	
2018-11	123456.7kWh	
2018-10	123456. 7kWh	
2018- 9	123456, 7kWh	
View daily	data:✔	
▼ Ourson	lack	


Improved Defrosting Performance*

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.


Avoiding Simultaneous Defrosting

When each of multiple units is in operation for heating in the same space, these may start defrosting at the same time, resulting in a drop in the room temperature. Therefore, we have developed a new function that controls up to four-refrigerant air conditioning system to avoid simultaneous defrosting. By ensuring that defrosting is only performed by one unit at a time, it is possible to minimize any decrease in room temperature.

Example System Configuration Four sets controlled by a single remote controller

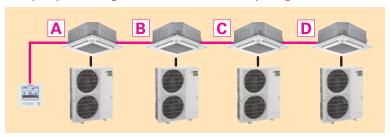

■When All Sets Are Controlled Together

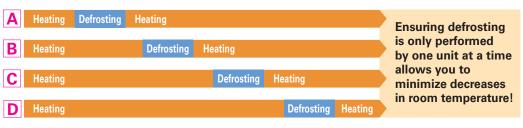

Utilizing IoT for Improved Convenience*

*Availability of IoT functions are depending on MELCloud version.

By connecting to a MAC-587IF-E Wi-Fi interface, it is possible to collect data and perform air conditioning control via MELCloud. In addition to basic functions such as turning the power on/off and setting the temperature, it is also possible to acquire data used for maintenance and inspection such as model names, serial numbers, and operation data.


[Basic Operation Functions]

- ●Operation on/off ●Temperature setting
- ●Operation mode ●Airflow speed
- ●Airflow direction etc...


[Data Collection and Display]

- ●Model name display ●Serial number display
- Collection of operation data
- Energy consumption display etc...




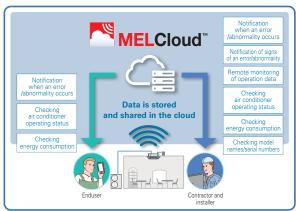

MELCloud System Configuration

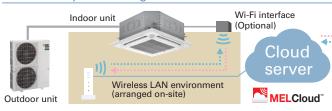

Wi-Fi Adapter (Optional) Installation



On-Site Installation and Configuration

Wireless LAN adapter installation Connect the wireless LAN adapter to the indoor unit PCB and install it above the ceiling

Wireless LAN adapter and router connection settings

Notification

Onscreen browsing

> Wireless LAN adapter and server connection settings

> > This operation data is strange.

Collection of operation data

All the operation data required for maintenance and inspection can be collected in a simple step. This data can then be easily checked via MELcloud. This makes it easy to check the operating status data even in cases when it is difficult to do a visual inspection. This allows you to quickly identify any system malfunctions. This function also helps to improve the quality of installation work and shortening the time required for maintenance and inspection.

Operation data that can be collected (example)

- ●Compressor frequency ●Compressor operating current ●Outdoor discharge temperature
- ●Outdoor heat exchanger temperature ●Outdoor air temperature ●Compressor shell temperature
- ●Sub cool ●Discharge superheat ●Indoor inlet temperature ●Indoor heat exchanger temperature
- ●Total compressor operating time●Compressor operation count ●Indoor filter operating time
- *1The total compressor operating time is displayed in units of 10 hours. The compressor operation count is displayed in units of 100.
 *2 Indicates the elapsed time since a filter sign reset was performed.

Demand control

It is possible to control air-conditioners to appropriately operate according to the energy supply-demand adjustment by electric power companies and each electricity rate plan of end users.

e.g. <Peak cut control> It is possible to utilize an external demand signal to reduce power consumption during peak hours. By satisfying the need for reducing peak power consumption or shifting consumption to a non-peak period, we have increased the range of options for our customers.

Notification of potential abnormality

The comprehensive analysis of operating data allows the early detection of abnormalities in small functional parts by alerting the operator of any signs of abnormal behaviour. The recognition in advance of abnormalities in each unit further improves the ease of servicing and maintenance. Since this allows a countermeasure to be implemented before the abnormality requires the unit to be completely shut down, it is an effective method for maintaining the unit in its optimum condition.

[AbnormalitiesThat HaveTheir Signs Monitored]

- ●Filter blockage ●Drain blockage ●Refrigerant leakage
- Heat exchanger blockage etc...






Deluxe 4-way Cassette Line-up


For users seeking even further energy savings, Mitsubishi Electric now offers deluxe units (PLA-ZM) to complete the line-up of models in this series, from 35-140. Compared to the standard models (PLA-M), deluxe models provide additional energy savings, contributing to a significant reduction in electricity costs.

■Line-up

Series	Model	35	50	60	71	100	125	140	
R32	Deluxe 4-way Cassette (PLA-ZM)								
R32	Standard 4-way Cassette (PLA-M)								






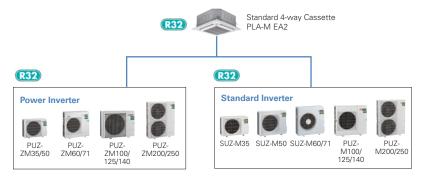

Industry-leading Energy Efficiency

Introduction of R32 refrigerant realises improved cooling efficiency. Rating of more than 7.0 achieved for all capacity range. Introduction of R32 refrigerant reduces energy consumption and realises energy savings.

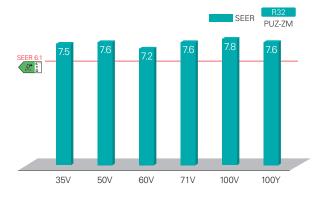

Horizontal Airflow

The new airflow control removes that uncomfortable drafty feeling with the introduction of a horizontal airflow that spreads across the

ceiling. The ideal airflow for offices and restaurants.

[Horizontal airflow]
Model name: PLA-ZM140EA2
Ceiling height: 3.2m
Mode: Cooling



Automatic Grille Lowering Function (PLP-6EAJ, PLP-6EAJE)*

An automatic grille lowering function is available for easy filter maintenance. Special wired and wireless remote controllers can be used to lower the intake grille for maintenance.

*Auto elevation panel(PLP-6EAJ, PLP-6EAJE) cannot be used with Plasma Quad Connect(PAC-SK51FT-E) and Insulation kit (PAC-SK36HK-E).



Grille Elevation Remote Controller (comes with the automatic elevation panel)



Wired Remote Controller



Wireless Remote Controller



Easy Installation

Electrical box wiring

After reviewing the power supply terminal position in the electrical box, the structure was redesigned to improve connectivity. This has made previously complex wiring work easier.

Previous model (B Series



■ New model (E Series)



Increased space for plumbing work

The top and bottom positions of the liquid and gas pipes have been reversed to allow the gas pipe work, which requires more effort, to be completed first. Further, through structural innovations related to the space around the pipes, the area where the spanner can be moved has been increased, thus improving liquid pipe work and enabling it to be completed smoothly.

■ Previous model (B Series)



■ New model (E Series)



Temporary hanging hook

The structure of the panel has been revised and is now equipped with a temporary hanging hook. This has improved work efficiency during panel installation.





No need to remove screws

Installation is possible without removing the screws for the corner panel and the control box, simply loosen them. This lowers the risk of losing screws.

■ Corner panel



■ Control box cover



Lightweight decorative panel

After reviewing the structure and materials, weight has been reduced approximately 20% compared to the previous model, reducing the burden of installation.



3D Fsee Sensor for S & P SERIES

Detects number of people

3D i-see Sensor detects the number of people in the room and sets the air-conditioning power accordingly. This makes automatic power-saving operation possible in places where the number of people entering and exiting is large. Additionally, when the area is continuously unoccupied, the system switches to a more enhanced power-saving mode. Depending on the setting, it will save additional capacity or stop operation altogether.


Detects people's position

Once the position of a person is detected, the duct angle of the vane is automatically adjusted in that direction. Each vane can be independently set to "block wind" or "not block wind" according to taste.




Detects number of people









Floor surface *In case of a 2.7m ceiling

Detects Number of People (3D i-see Sensor)

Room occupancy energy-saving mode

The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air-conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 1°C during both cooling and heating operation is saved. The temperature is controlled according to the number of people.


No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is in the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60min, air-conditioning power equivalent to 2°C during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.

No occupancy Auto-OFF mode*

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10min, ranging from 60 to 180 min.

*When MA Remote Controller is used to control multiple refrigerant systems "No occupancy Auto-OFF mode" cannot be used.

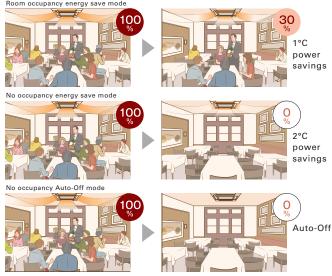

*PAR-41MAA is required for each setting

Detects People's Position (3D i-see Sensor)

Direct/Indirect settings*

Some people do not like the feel of wind, some want to be warm from head to toe. People's likes and dislikes vary. With the 3D i-see Sensor, it is possible to choose to block or not block to the wind for each vane.



*PAR-41MAA or PAR-SL101A-E is required for each setting.

Seasonal airflow*

<When cooling>

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This clever function contributes to keeping a comfortable coolness.

<When heating>

The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is reused via circulation. When a pre-set temperature is reached the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.




*PAR-41MAA is required for each setting.

3D Total Flow*

3D Total Flow is an innovative function. Our original 3D i-see sensor detects the temperature of the floor, and then the newly installed 3D Total Flow unit automatically controls the airflow in the left/right directions in a smart manner.

*3D Total Flow unit(PLP-U160ELR-E) cannot be used with Plasma Quad Connect(PAC-SK51FTE), Insulation kit(PAC-SK36HK-E), Shutter Plate(PAC-SJ37SP-E), Multi functional casement(PAC-SJ41TM-E) and High-efficiency filter element(PAC-SH59KF-E)

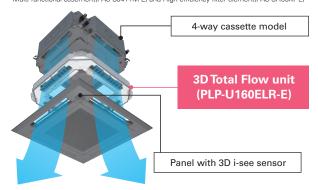

Horizontal Louver (3D Total Flow)

In addition to the ability of conventional models to control airflow in the vertical direction, the adoption of a horizontal louver unit allows each outlet to blow air over a horizontal angle of 90 degrees. The combination of four outlets delivers 360° airflow control around the entire circumference. This now makes it possible to blow air in diagonal directions which eliminates temperature irregularities.



Fine-tuned Sensing & Airflow Direction Control (3D Total Flow)




Swinging

Since airflow can be controlled in the horizontal and vertical directions, you can efficiently make the entire room comfortable.

Horizontal, vertical, and diagonal airflow delivered to every corner

The combination of the vertical vanes with the horizontal louver unit makes it possible to direct airflow in any direction. This quickly makes the entire room comfortable, even when diagonal airflow is necessary.

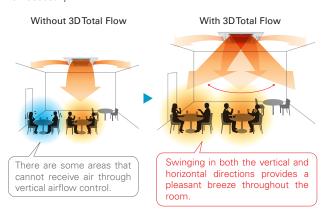



Indirect mode

When set to "Indirect" mode, the system detects the position of a person and maintains comfort while diverting airflow away from them.

Prevents direct airflow and keeps you comfortable

This function prevents people from being directly exposed to airflow while still ensuring comfort. The "Indirect" mode of 3D Total Flow keeps the downward airflow while avoiding direct blow to people, delivering a pleasant warmth.

Without 3D Total Flow

Models that are only equipped with vertical vanes need to swing the airflow upward to avoid people. This makes it difficult to warm up the surrounding space.



With 3D Total Flow

Now, it is easier to warm the surrounding space while still ensuring people do not receive direct blow.



*If people are present throughout the entire airflow range of an outlet, the airflow is shifted horizontally to avoid direct airflow.



Targeting

The system can detect spaces with uneven temperatures and target them by sending air even if they are in a diagonal direction.

Detects and targets areas with uneven temperatures

3D i-see sensor detects areas with uneven temperatures, even if they are caused by the installation orientation of the air conditioner or the influence of strong sunlight. Efficient air conditioning is possible thanks to the ability to send focused airflow to such areas, even those in a diagonal position.





Direct mode

When set to "Direct" mode, the system detects the position and diverts airflow towards wherever they are located.

Delivers airflow even in diagonal directions

You can freely turn on "Direct" mode depending on personal prefereuce. This allows for air conditioning in diagonal directions which was difficult for models that could only swing the airflow up and down. This feature is perfect for when you come back home on a hot day.

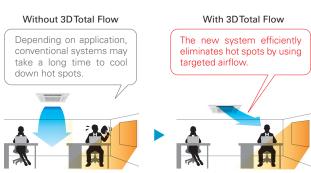

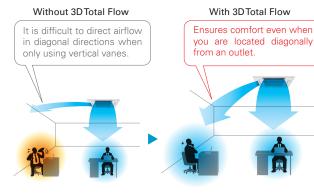


Connectable to Plasma Quad Connect*

The optional Plasma Quad Connect PAC-SK51FT-E can be installed on the indoor units.


*Plasma Quad Connect(PAC-SK51FTE) cannot be used with PLP-U160ELR-E(3D Total Flow unit), Insulation kit (PAC-SK36HK-E), Auto elevation panel(PLP-6EAJ, PLP-6EAJE), Multi functional casement(PAC-SJ41TM-E) and High-efficiency filter element(PAC-SH59KF-E).



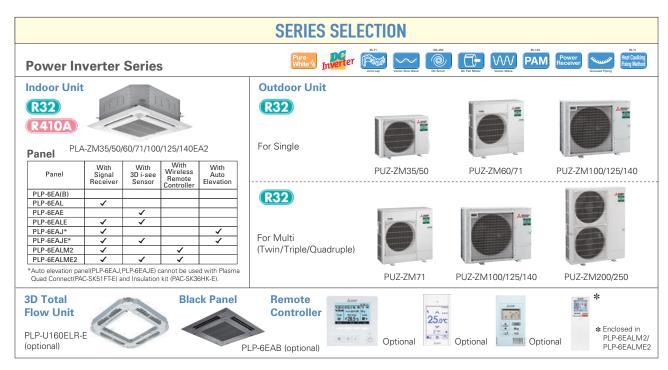

PLA-ZM EA2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																				
			For Single								ForTwin						F	ForTriple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250	
Power Inverter (PUZ-ZM)		35x1	50x1	60×1	71x1	100x1	125x1	140x1	-	-	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4	
	Distribution Pipe	-	-	-	-	-	_	_	-	_	N	MSDD-50TR2-E MS 50W		DD- /R2-E	MSDT-111R3-E				SDF- R2-E			

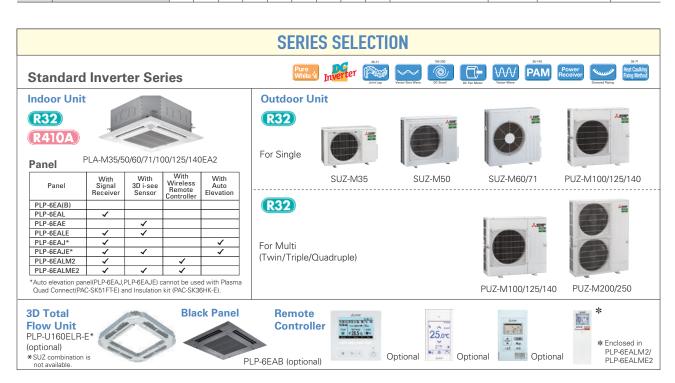

PLA-M EA2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single								ForTwin						ForTriple			For Quadruple		
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standa	Standard Inverter (SUZ & PUZ-M)		50x1	60x1	71x1	100x1	125x1	140x1	-	-	-	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	-	-	-	-	-	-	-	-	-	-	MSDD-50TR2-E			MSDD- 50WR2-E		MSDT-111R3-E			SDF- R2-E	























































		Opti	onal	Optional	Optional		Optional	Optio	onal					
Type								Inverter F	leat Pump					
Indoor Unit		·		PLA-ZM35EA2	PLA-ZM50EA2	PLA-ZM60EA2	PLA-ZM71EA2	PLA-ZM100EA2	PLA-ZM100EA2	PLA-ZM125EA2	PLA-ZM125EA2	PLA-ZM140EA2	PLA-ZM140EA2	
Outdoor U	nit			PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VDA	PUZ-ZM100YDA	PUZ-ZM125VDA	PUZ-ZM125YDA	PUZ-ZM140VDA	PUZ-ZM140YDA	
Refrigerant	(*1)							R:	32					
Power	Source							Outdoor po	ower supply					
Supply	Outdoor(V/Phase/Hz)				VKA·VHA:230/Single/50 VDA:230/Single/50, YDA/400/Three/50									
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
		Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.1 - 14.0	5.1 - 14.0	5.4 - 15.0	5.4 - 15.0	
	Total Input	Rated	kW	0.705	1.106	1.452	1.651	2.160	2.160	3.473	3.473	3.622	3.622	
	EER			5.10	4.52	4.20	4.30	4.40	4.40	3.60	3.60	3.70	3.70	
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	_				
	Annual electricity consump	otion (*2)	kWh/a	168	230	296	327	426	436	-				
	SEER (*4)			7.5	7.6	7.2	7.6	7.8	7.6	-				
		Energy efficiency class		A++	A++	A++	A++	A++	A++	-			_	
Heating	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0	
		Min-Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	2.7 - 14.0	2.7 - 14.0	3.2 - 16.0	3.2 - 16.0	3.7 - 18.0	3.7 - 18.0	
	Total Input	Rated	kW	0.820	1.363	1.707	1.818	2.667	2.667	3.889	3.889	4.572	4.572	
	COP			5.00	4.40	4.10	4.40	4.20	4.20	3.60	3.60	3.50	3.50	
	Design load		kW	2.5	3.8	4.4	4.7	7.8	7.8	-				
	Declared Capacity	at reference design temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)					
		at bivalent temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)					
		at operation limit temperature	kW	2.1 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)					
	Back up heating capacity		kW	0.0	0.0	0.0	0.0	0.0	0.0					
	Annual electricity consump	otion (*2)	kWh/a	744	1086	1339	1371	2273	2274					
	SCOP (*4)			4.7	4.9	4.6	4.8	4.8	4.8					
		Energy efficiency class		A++	A++	A++	A++	A++	A++					
	Current(Max)		А	13.2	13.2	19.2	19.3	27.0	8.5	27.0	9.5	30.7	9.7	
Indoor	Input [cooling / Heating]	Rated	kW	0.03 / 0.03	0.03 / 0.03	0.03 / 0.03	0.05 / 0.05	0.07 / 0.07	0.07 / 0.07	0.08 / 0.08	0.08 / 0.08	0.10 / 0.10	0.10 / 0.10	
Unit	Operating Current(Max)	1	Α	0.21	0.22	0.22	0.34	0.47	0.47	0.52	0.52	0.66	0.66	
	Dimensions	H*W*D	mm		10-840 <40-950					10-840 <40-950				
	Weight Air Volume (Lo-Mi2-Mi1-Hi)		kg m³/min	21 <5>	21 <5>	21 <5>	24 <5> 17-19-21-23	26 <5> 19-22-25-28	26 <5> 19-22-25-28	26 <5> 21-24-26-29	26 <5>	26 <5> 24-26-29-32	26 <5> 24-26-29-32	
	Sound Level (Lo-Mi2-Mi1-Hi) (S	CDI)	dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-33-36	31-34-37-40	31-34-37-40	33-36-39-41	33-36-39-41	36-39-42-44	36-39-42-44	
	Sound Level (PWL)	SFL)	dB(A)	51	54	54	57	61	61	62	62	65	65	
Outdoor	Dimensions	H*W*D	mm	630-809-300			943-950-330(+25)					870-1100-460(+45)		
Unit	Weight	11 44 5	kg	46	46	67	67	107	114	107	116	107	121	
0	Air Volume	Cooling	m³/min	45	45	55	55	80	80	84	84	97	97	
	7 iii Tolailio	Heating	m³/min	45	45	55	55	58	58	77	77	80	80	
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	44	44	47	47	49	49	
		Heating	dB(A)	46	46	49	49	48	48	50	50	51	51	
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	63	63	66	66	68	68	
	Operating Current(Max)	13	A A	13	13	19	19	26.5	8	26.5	9	30	9	
	Breaker Size		A	16	16	25	25	32	16	32	16	40	16	
Ext.Piping	Diameter(*5)	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88		9.52 / 15.88	9.52 / 15.88	
pg	Max.Length	Out-In	m	50	50	55	55	100	100	100	100	100	100	
	Max.Height	Out-In	m	30	30	30	30	30	30	30	30	30	30	
Guarantee	d Operating Range (Outdoor)	Cooling(*3)	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-20 ~ 46	-20 ~ 46	-20 ~ 46	-20 ~ 46	-20 ~ 46	-20 ~ 46	
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ 21	-20 ~ 21	-20 ~ 21	-20 ~ 21	-20 ~ 21	-20 ~ 21	
		1		1 11 121		1 20 121	1 20 121							

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the producy ourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than -5°C.
*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.
*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

























































Pl	_A-	M	SERIES	
S	TANDA	RD IN	VERTER	

























Type									leat Pump				
Indoor Unit							PLA-M71EA2						
Outdoor Un	it			SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA2	PUZ-M100YKA2	PUZ-M125VKA2	PUZ-M125YKA2	PUZ-M140VKA2	PUZ-M140YKA2
Refrigerant ⁽	1)							R	32	•			
Power	Source							Outdoor po	ower supply				
Supply	Outdoor(V/Phase/Hz)						VA-VKA	A:230/Single/5	50, YKA:400/TI	hree/50			
Cooling	Capacity	Rated	kW	3.6	5.5	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4
		Min-Max	kW	0.8 - 3.9	1.2 - 5.6	1.6 - 6.3	2.2 - 8.1	4.0 - 10.6	4.0 - 10.6	5.8 - 13.0	5.8 - 13.0	5.8 - 14.1	5.8 - 14.1
	Total Input	Rated	kW	0.900	1.617	1.848	1.918	2.714	2.714	4.019	4.019	4.962	4.962
	EER			4.00	3.40	3.30	3.70	3.50	3.50	3.01	3.01	2.70	2.70
	Design load		kW	3.6	5.5	6.1	7.1	9.5	9.5	-	-	-	-
	Annual electricity consumpti	ion (*2)	kWh/a	170	285	320	331	475	475	-	-	-	-
	SEER (*4)			7.4	6.7	6.6	7.5	7.0	7.0	-	-	-	-
		Energy efficiency class		A++	A++	A++	A++	A++	A++	-	-	-	-
Heating	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0
		Min-Max	kW	1.0 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	2.8 - 12.5	2.8 - 12.5	4.1 - 15.0	4.1 - 15.0	4.2 - 15.8	4.2 - 15.8
	Total Input	Rated	kW	0.976	1.734	1.842	2.216	3.018	3.018	3.638	3.638	4.398	4.398
	COP			4.20	3.46	3.80	3.61	3.71	3.71	3.71	3.71	3.41	3.41
	Design load		kW	2.6	4.3	4.6	5.8	8.0	8.0	-	-	-	-
	Declared Capacity	at reference design temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	-	-	-	-
		at bivalent temperature	kW	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	_	_	-	-
		at operation limit temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	-	-	-	-
	Back up heating capacity	_	kW	0.3	0.5	0.5	0.6	2.0	2.0	-	-	-	-
	Annual electricity consumpti	ion (*2)	kWh/a	774	1458	1459	1798	2406	2406	-	-	-	_
	SCOP (*4)			4.7	4.1	4.4	4.5	4.6	4.6	-	-	-	-
		Energy efficiency class		A++	A+	A+	A+	A++	A++	-	-	-	_
Operating	Current(Max)		A	8.7	13.7	15.0	15.1	20.5	12	27.2	12.2	30.7	12.2
Indoor	Input [cooling / Heating]	Rated	kW	0.03 / 0.03	0.03 / 0.03	0.03 / 0.03	0.04 / 0.04	0.07 / 0.07	0.07 / 0.07	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
Unit	Operating Current(Max)		А	0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66	0.66
	Dimensions	H*W*D	mm		258-840-840						<40-950-950>		
	Weight		kg	19 <5>	19 <5>	21 <5>	21 <5>	24 <5>	24 <5>	26 <5>	26 <5>	26 <5>	26 <5>
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	11-13-15-16	12-14-16-18		14-17-19-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31		24-26-29-32
	Sound Level (Lo-Mi2-Mi1-Hi) (S	PL)	dB(A)	26-28-29-31	27-29-31-32	27-29-31-32		31-34-37-40	31-34-37-40			36-39-42-44	
	Sound Level (PWL)	T	dB(A)	51	54	54	56	61	61	65	65	65	65
Outdoor	Dimensions	H*W*D	mm				880-840-330				981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)
Unit	Weight	Te ::	kg	35	41	54	55	76	78	84	85	84	85
	Air Volume	Cooling	m³/min	34.3	45.8	50.1	50.1	79	79	86	86	86	86
		Heating	m³/min	32.7	43.7	50.1	50.1	79	79	92	92	92	92
	Sound Level (SPL)	Cooling	dB(A)	48	48	49	49	51	51	54	54	55	55
		Heating	dB(A)	48	49	51	51	54	54	56	56	57	57
	Sound Level (PWL)	Cooling	dB(A)	59	64	65	66	70	70	72	72	73	73
	Operating Current(Max)		A	8.5	13.5	14.8	14.8	20	11.5	26.5	11.5	30	11.5
	Breaker Size		A	10	20	20	20	32	16	32	16	40	16
Ext.Piping	Diameter(*5)	Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7		9.52 / 15.88				9.52 / 15.88		9.52 / 15.88
	Max.Length	Out-In	m	20	30	30	30	55	55	65	65	65	65
	Max.Height	Out-In	m	12	30	30	30	30	30	30	30	30	30
Guarantee	d Operating Range (Outdoor)	Cooling(*3)	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46





























	TIVI SERIES	Silent Silent 60-14W Ampere	Rotation Back-up Optional	Optional Gro	oup trol M-NET connection Optional		Wi-Fi 1) Interface Optional	oning free, Wiri	ing Drain Lift Up	Pump Down	Flare connection	Self lagnosis Failur Reca	re I
Туре									leat Pump				
Indoor Ur	nit											PLA-M140EA2	
Outdoor I	Jnit			PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VDA	PUZ-ZM100YDA	PUZ-ZM125VDA	PUZ-ZM125YDA	PUZ-ZM140VDA	PUZ-ZM140Y
Refrigera	nt ^(*1)				•	•		R	32				
Power	Source							Outdoor po	ower supply				
Supply	Outdoor(V/Phase/Hz)				VKA·VHA:23	30/Single/50			VDA	:230/Single/50	, YDA/400/Thr	ee/50	
	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.1 - 14.0	5.1 - 14.0	5.4 - 15.0	5.4 - 15.0
	Total Input	Rated	kW	0.751	1.175	1.523	1.716	2.210	2.210	3.572	3.572	3.744	3.744
Cooling	EER	·		4.79	4.25	4.00	4.14	4.30	4.30	3.50	3.50	3.58	3.58

Outdoor U				PUZ-ZIVI35VKAZ	PUZ-ZIVI5UVKAZ	PUZ-ZIMbUVHAZ	PUZ-ZIVI/TVHAZ			PUZ-ZIVI I Z5VDA	PUZ-ZM125YDA	PUZ-ZM140VDA	PUZ-ZM140YDA
Refrigerant		<u> </u>							32				
	Source							Outdoor po					
Supply	Outdoor(V/Phase/Hz)				VKA·VHA:23	80/Single/50					, YDA/400/Thre	ee/50	
	Capacity	Rated kV		3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min-Max kV		1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.1 - 14.0	5.1 - 14.0	5.4 - 15.0	5.4 - 15.0
	Total Input	Rated kV	W	0.751	1.175	1.523	1.716	2.210	2.210	3.572	3.572	3.744	3.744
Cooling	EER			4.79	4.25	4.00	4.14	4.30	4.30	3.50	3.50	3.58	3.58
Cooming	Design load	kV		3.6	5.0	6.1	7.1	9.5	9.5				
	Annual electricity consump	otion(*2) kV	Wh/a	172	234	301	336	437	448				-
	SEER(*4)			7.3	7.4	7.1	7.4	7.6	7.4				
		Energy efficiency class		A++	A++	A++	A++	A++	A++				
	Capacity	Rated kV		4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
		Min-Max kV		1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	2.7 - 14.0	2.7 - 14.0	3.2 - 16.0	3.2 - 16.0	3.7 - 18.0	3.7 - 18.0
	Total Input	Rated kV	W	0.890	1.581	1.863	2.014	2.686	2.686	4.000	4.000	4.572	4.572
	СОР			4.61	3.79	3.76	3.97	4.17	4.17	3.50	3.50	3.50	3.50
Heating	Design load	kV		2.5	3.8	4.4	4.7	7.8	7.8				
(Average	Declared Capacity	at reference design temperature kV		2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)				
Season)				2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)				
		at operation limit temperature kV		2.1 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)				
	Back up heating capacity		W	0.0	0.0	0.0	0.0	0.0	0.0				
	Annual electricity consump	otion(*2) kV	Wh/a	798	1187	1422	1429	2489	2490				
	SCOP(*4)			4.3	4.4	4.3	4.6	4.3	4.3				
		Energy efficiency class		A+	A+	A+	A++	A+	A+				
Operating	Current(Max)	A		13.2	13.2	19.2	19.3	27.0	8.5	27.2	9.7	30.7	9.7
	Input [cooling / Heating]	Rated kV		0.03 / 0.03	0.03 / 0.03	0.03 / 0.03	0.04 / 0.04	0.07 / 0.07	0.07 / 0.07	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
	Operating Current(Max)	A		0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66	0.66
	Dimensions		nm		258-840-840						<40-950-950>		
Indoor	Weight	kg		19 <5>	19 <5>	21 <5>	21 <5>	24 <5>	24 <5>	26 <5>	26 <5>	26 <5>	26 <5>
Unit	Air Volume (Lo-Mid-Hi)			11-13-15-16	12-14-16-18	12-14-16-18	14-17-19-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31	24-26-29-32	24-26-29-32
	Sound Level (Lo-Mid-Hi) (SPL			26-28-29-31	27-29-31-32	27-29-31-32	28-30-32-34	31-34-37-40	31-34-37-40	33-37-41-44	33-37-41-44	36-39-42-44	36-39-42-44
	Sound Level (PWL)		B(A)	51	54	54	56	61	61	65	65	65	65
	Dimensions Weight		_	630-809-300				107		107		870-1100-460(+45)	121
	Air Volume	Coolina m	g n³/min	46 45	46 45	67 55	67 55	80	114 80	84	116 84	107 97	97
	Air volume		13/min	45	45 45	55	55	58	58	77	77	80	80
Outdoor	Sound Level (SPL)		B(A)	45	45	47	47	44	58 44	47	47	49	49
Unit	Soulid Level (SPL)		B(A)	44	44	47	47	44	44	50	50	51	51
Oiiit	Sound Level (PWL)		B(A)	65	65	67	67	63				68	
	Operating Current(Max)	Cooling di		13	13	19	19	26.5	63 8	66 26.5	66 9	30	68 9
	Breaker Size	Α Α		16	16	25	25	32	16	26.5 32	16	40	16
	Diameter(*5)	/ 1		6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Evt Dinina	Max.Length	Out-In m		50	50	55	55	100	100	100	100	100	100
Ext.Piping	Max.Height	Out-in m		30	30	30	30	30	30	30	30	30	30
Cuerentes	d Operating Range (Outdoor)	Cooling(*3)		-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-20 ~ 46	-20 ~ 46	-20 ~ 46	-20 ~ 46	-20 ~ 46	-20 ~ 46
Guarantee	d Operating hange (Outdoor)			-15 ~ +46	-15 ~ +46	-15 ~ +46 -20 ~ +21	-15 ~ +46 -20 ~ +21						
		Heating °C	~	-11 ~ +Z	-11 ~ +Z	-ZU ~ +Z l	-ZU ~ +Z l	-20 ~ 21	-20 ~ 21	-20 ~ 21	-20 ~ 21	-20 ~ 21	-20 ~ 21

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or diassessemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/12/ECC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.






Energy efficiency has been improved. A reduced electricity consumption contributes to a further reduction in operating cost. The thin body with a wide-ranged external static pressure of this series is the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space.

ErP Lot-10 Compliant, Achieving High Energy Efficiency





The shape of fan wing and casing is improved to provide more smooth air flow, increasing the operation efficiency. All models under 12kW(M35~M100) are complied with ErP Lot 10 and energy rankings of A++ for cooling and A+ for heating. This contributes to a reduction in the cost of annual electricity.

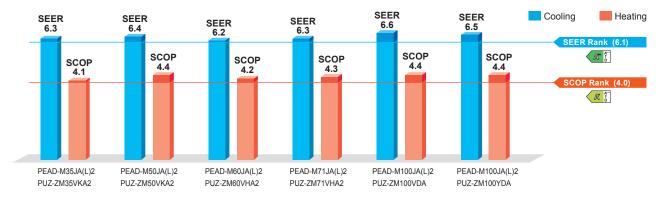

Compact Indoor Units


The height of the models from 35-140 has been unified to 250 mm, which makes installation in low ceiling with minimal clearance space possible.


Selectable Static Pressure Levels

External static pressure conversion can be set up to five levels. Capable of being set to a maximum of 150 Pa, units are applicable to a wide range of building types.

Drain Pump is Optionally Selectable

The line-up consists of two types: models with or without a built-in drain pump, thus allowing more freedom in piping design.






Connectable to Plasma Quad Connect

The optional Plasma Quad Connect MAC-100FT-E can be installed on the indoor unit's air inlet side. For installation, PQ attachment or PQ box is required.



PEAD-M JA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

										Outd	oor Ur	nit Cap	acity								
Indoor Unit Combination		For Single								ForTwin					ForTriple			For Quadruple			
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power I	Inverter (PUZ-ZM)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	_	-	-	-	-	_	_	-	-	N	ISDD-	50TR2-	·Ε	MS 50W		MSI	DT-1111	R3-E	MS 1111	DF- R2-F

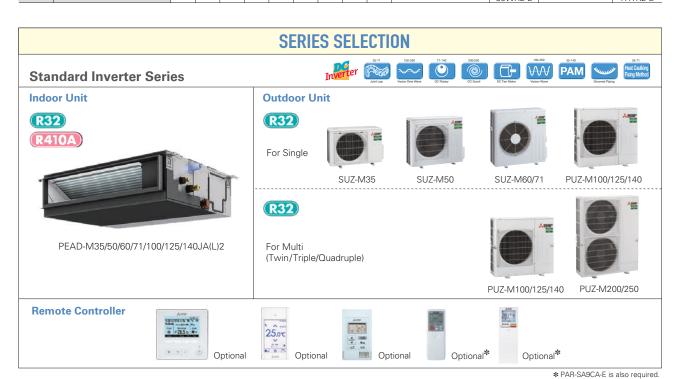

PEAD-M JA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

. –,	(L/L		00																		
										Outd	oor Uı	nit Cap	pacity								
Indoor Unit Combination					Fo	or Sing	gle						For	Twin			F	or Trip	le	For Qu	adruple
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Stan	dard Inverter (PUZ-M&SUZ)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	_	_	-	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	-	-	-	-	-	_	-	-	-	-	MSE	D-50T	R2-E	MS 50W	DD- 'R2-E	MSI	DT-111	R3-E		DF- R2-E















































Туре								Invertor H	eat Pump				
Indoor Unit	t			DEVD W3E IVII IS	DEAD MEDIA/13	DEVD Web IVII 13	PEAD-M71JA(L)2			DEAD M125 IAII \2	DEAD M125 (A/I)2	DE AD 1/11/10 1A/11/2	DEAD MIANIAN
Outdoor U				PI 17.7M35V/KΔ2	PLIZ-7M50V/KA2	PLIZ-ZM60V/HA2	PUZ-ZM71VHA2	PLIZ-ZM1000A(L)Z	PLI7-7M1000A(L)2	PI 17-7M1255A(L)2	PLI7-7M1255A(L)Z	PLI7_7M1400A(L)2	PLI7_7M1400A(L
Refrigerant				1 OZ ZIVIOOVIO-IZ	I OZ ZIVIOUVIONZ	I OL LIVIOUVI IAL	1 OZ ZIVIJ I VI IPAZ	R:		I OL LIVITZOVDA	I OL LIVITZOTDA	1 02 ZIVI 140 V DA	02 ZW11401D
Power	Source							Outdoor po					
	Outdoor(V/Phase/Hz)				V/ΚΔ V/HΔ·2	30/Single/50		Cutuooi pe		·230/Single/50	, YDA/400/Thre	aa/50	
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
Cooming	Capacity	Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.1 - 14.0	5.1 - 14.0	5.4 - 15.0	5.4 - 15.0
	Total Input	Rated	kW	0.837	1.190	1.487	1.775	2.262	2.262	3.379	3.379	3.702	3.702
	EER(*4)	nateu	KVV	4.30	4.20	4.10	4.00	4.20	4.20	3.379	3.379	3.702	3.702
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	3.70	3.70	3.02	3.02
	Annual electricity consump		kWh/a	199	273	342	393	499	499				
	SEER(*4)(*5)	otion ·	kvvn/a	6.3	6.4	6.2	6.3	6.6	6.6		_		
	SEEN W. S.	Energy efficiency class		0.3 A++	0.4 A++	0.2 A++	0.3 A++	0.0 A++	0.0 A++		_	_	
114:	Composite :		1.3.67										
Heating	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
	Tetallanut	Min-Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	2.7 - 14.0	2.7 - 14.0	3.2 - 16.0	3.2 - 16.0	3.7 - 18.0	3.7 - 18.0
	Total Input COP(*4)	Rated	kW	0.911	1.363	1.590	1.904	2.546	2.546	3.764	3.764	4.103	4.103
	Design load		kW	4.50 2.4	4.40 3.8	4.40 4.4	4.20 4.9	4.40 7.8	4.40 7.8	3.72	3.72	3.90	3.90
		I. f. I. i. i.											
	Declared Capacity		kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	-	-	_	
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)		_	-	
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)		-	-	
	Back up heating capacity	- (10)	kW	0.0	0.0	0.0	0.0	0.0	0.0		-	-	
	Annual electricity consump SCOP(*4)(*5)	otion(*2)	kWh/a	816	1202	1459	1585	2445	2445	-	_	-	
	SCOP(*4)(*9)			4.1	4.4	4.2	4.3	4.4	4.4	-	-	-	
		Energy efficiency class		A+	A+	A+	A+	A+	A+				
	Current(Max)		A	14.2	14.4	20.9	20.9	28.8	10.3	28.8	11.3	32.6	11.6
Indoor	Input [cooling / Heating]	Rated	kW	0.05	0.07	0.08	0.09	0.14	0.14	0.20	0.20	0.21	0.21
Unit	Operating Current(Max)	H*W*D	А	1.16	1.35	1.85	1.9	2.25	2.25	2.34	2.34	2.63	2.63
	Dimensions Weight	H-M-D	mm	25(24.5)		29.5(29)	250×1100×732 29.5(29)	37(36)	37(36)	38(37)	38(37)	42(41)	42(41)
	Air Volume (Lo-Mid-Hi)		kg m³/min		26.5(25.5) 12.0-14.5-17.0		14.5-18.0-23.0						
	External Static Pressure(*7)		Pa	35-<50>-<70>	100-14.5-17.0		40-<50>-<70>		23.0-20.0-32.0			-<100>-<150>	29.0-30.0-40
	Sound Level (Lo-Mid-Hi) (SPI	1	dB(A)	24-29-32	27-33-35	26-32-35	26-32-37	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41	34-38-41
	Sound Level (PWL)	-/	dB(A)	54	58	56	58	62	62	66	66	66	66
Outdoor	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)		870-1100-460(+45)	870-1100-460(+45)	870-1100-460(+45)	870-1100-460(+45)		870-1100-460(+4
Unit	Weight		kg	46	46	67	67	107	114	107	116	107	121
	Air Volume	Cooling	m³/min	45	45	55	55	80	80	84	84	97	97
	, iii voidino	Heating	m³/min	45	45	55	55	58	58	77	77	80	80
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	44	44	47	47	49	49
		Heating	dB(A)	46	46	49	49	48	48	50	50	51	51
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	63	63	66	66	68	68
	Operating Current(Max)	Tooming	A	13	13	19	19	26.5	8	26.5	9	30	9
	Breaker Size		A	16	16	25	25	32	16	32	16	40	16
	Diameter(*6)	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.8
-and ipilig	Max.Length	Out-In	m	50	50	55	55	100	100	100	100	100	100
	Max.Height	Out-In	m	30	30	30	30	30	30	30	30	30	30
	ed Operating Range (Outdoor)	Cooling(*3)	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-20 ~ 46	-20 ~ 46	-20 ~ 46	-20 ~ 46	-20 ~ 46	-20 ~ 46
Juai dillet	operating name (Outdoor)	Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-15 ~ +46 -20 ~ +21	-20 ~ 46 -20 ~ 21	-20 ~ 40 -20 ~ 21	-20 ~ 40 -20 ~ 21	-20 ~ 40	-20 ~ 40 -20 ~ 21	-20 ~ 40

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP | leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than –5°C. *4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 35Pa, for M100 at ESP 37Pa, for M125/140 at ESP 50Pa.
*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.
*7 The factory setting of ESP is shown without < >.





















































		Optional											
Туре								Inverter H	leat Pump				
Indoor Unit	i			PEAD-M35JA(L)2	PEAD-M50JA(L)2	PEAD-M60JA(L)2		PEAD-M100JA(L)2					
Outdoor U	nit			SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA2	PUZ-M100YKA2	PUZ-M125VKA2	PUZ-M125YKA2	PUZ-M140VKA2	PUZ-M140YKA2
Refrigerant	(*1)							R	32				
Power	Source								wer supply				
Supply	Outdoor(V/Phase/Hz)							A:230/Single/5					
Cooling	Capacity		kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4
			kW	0.8 - 3.9	1.7 - 5.6	1.6 - 6.3	2.2 - 8.1	4.0 - 10.6	4.0 - 10.6	6.0 - 13.0	6.0 - 13.0	6.1 - 14.1	6.1 - 14.1
	Total Input	Rated	kW	0.923	1.351	1.694	2.028	2.878	2.878	4.019	4.019	4.768	4.768
	EER(*4)			3.90	3.70	3.60	3.50	3.30	3.30	3.01	3.01	2.81	2.81
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	_	_	-	_
	Annual electricity consump	otion (*2)	kWh/a	199	277	345	397	538	538	-	-	-	_
	SEER(*4)(*5)			6.3	6.3	6.1	6.2	6.1	6.1	-	-	-	_
		Energy efficiency class		A++	A++	A++	A++	A++	A++	-	-	-	
Heating	Capacity		kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0
			kW	1.1 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	2.8 - 12.5	2.8 - 12.5	4.1 - 15.0	4.1 - 15.0	4.2 - 15.8	4.2 - 15.8
	Total Input COP(*4)	Rated	kW	1.025	1.463	1.842	2.105	2.947	2.947	3.739	3.739	4.155	4.155
				4.00	4.10	3.80	3.80	3.80	3.80	3.61	3.61	3.61	3.61
	Design load		kW	2.6	4.3	4.6	5.8	8.0	8.0	-	_	-	
	Declared Capacity		kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	-	-	-	
			kW	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C) 5.2 (-10°C)	7.0 (-7°C)	7.0 (-7°C) 4.5 (-15°C)	-	-	-	
	Darlana bardina arasasida	at operation limit temperature	kW kW	2.3 (-10°C) 0.3	3.8 (-10°C) 0.5	4.1 (-10°C) 0.5	0.6	4.5 (-15°C) 2.0	4.5 (-15°C) 2.0	-	-	-	
	Back up heating capacity Annual electricity consump	-4: (*2)	kWh/a	884	1417	1558	1973	2725	2725	_	_		
	SCOP(*4)(*5)	otion ·	KVVn/a	4.1	4.2	4.1	4.1	4.1	4.1	_	_	_	
	SCOP	Energy efficiency class		4.1 A+	4.2 A+	4.1 A+	4.1 A+	4.1 A+	4.1 A+	_	_	_	
Operating	Current(Max)		Α	9.7	14.9	16.7	16.7	22.3	13.8	27.8	12.8	31.4	12.9
Indoor	Input [cooling / Heating]		kW	0.05	0.07	0.08	0.09	0.14	0.14	0.20	0.20	0.21	0.21
Unit	Operating Current(Max)	Tideod	A	1.16	1.35	1.85	1.9	2.25	2.25	2.34	2.34	2.63	2.63
	Dimensions	H*W*D	mm	250×900×732	250×900×732	250×1100×732	250×1100×732	250×1400×732	250×1400×732	250×1400×732	250×1400×732	250×1600×732	250×1600×732
	Weight	•	kg	25(24.5)	26.5(25.5)	29.5(29)	29.5(29)	37(36)	37(36)	38(37)	38(37)	42(41)	42(41)
	Air Volume (Lo-Mid-Hi)		m³/min			14.5-18.0-21.0		23.0-28.0-32.0		28.0-34.0-37.0		29.5-35.5-40.0	29.5-35.5-40.0
	External Static Pressure(*7)		Pa		-<100>-<150>			-<100>-<150>				-<100>-<150>	
	Sound Level (Lo-Mid-Hi) (SPL		dB(A)	24-29-32	27-33-35	26-32-35	26-32-37	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41	34-38-41
0.41	Sound Level (PWL)		dB(A)	54	58	56	58	62	62	66	66	66	66
Outdoor	Dimensions	H*W*D	mm	550-800-285 35	714-800-285 41	880-840-330 54	880-840-330 55	981-1050-330(+40) 76	981-1050-330(+40) 78	981-1050-330(+40) 84	981-1050-330(+40) 85	981-1050-330(+40) 84	981-1050-330(+40) 85
Unit	Weight Air Volume	CE	kg m³/min	34.3	45.8	50.1	50.1	76	78	86	86	86	86
	Air volume	Cooling Heating	m³/min	34.3	43.7	50.1	50.1	79	79	92	92	92	92
	Sound Level (SPL)		dB(A)	48	43.7	49	49	51	51	54	54	55	55
	Soulid Level (SFL)	Heating	dB(A)	48	48	51	51	54	54	56	56	57	57
	Sound Level (PWL)	Cooling	dB(A)	59	64	65	66	70	70	72	72	73	73
	Operating Current(Max)	Legoning	A	8.5	13.5	14.8	14.8	20	11.5	26.5	11.5	30	11.5
	Breaker Size		A	16	20	20	20	32	16	32	16	40	16
Ext Pining	Diameter(*6)	Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
_xt.i ipilig	Max.Length	Out-In	m	20	30	30	30	55	55	65	65	65	65
	Max.Height	Out-In	m	12	30	30	30	30	30	30	30	30	30
Guarantee	ed Operating Range (Outdoor)	Cooling(*3)	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21
		1	-	1.0 121	12 121	12 121	12 121	1 12 121				12 121	121

[|] Heating | °C | -10 = +24 | -10 = +24 | -10 = +24 | -10 = +24 | -10 = +24 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -15 = +21 | -

PEA

The PEA series is a large capacity ceiling-concealed type indoor units which are visually discreet blending into various environments. The PEA model realizes improved energy efficiency with a patented fan called Turbo In Sirocco fan. A wider option of external static pressure up to 250Pa allows authentic ducted air-conditioning with an elegant interior layout. In addition, the PEA series has a separated structure that enables delivery into a narrow space.



PFA-M200/250LA2



The separated structure increases the efficiency of delivery into a narrow space.


Improved Energy Efficiency

R32 refrigerant with designed fan reduces energy consumption and have resulted in higher energy savings for all capacity ranges.



Low input with Fan Design

The PEA series applies a designed fan; a Turbo In Sirocco fan which realizes high efficiency with a lower power input. The design is Mitsubishi Electric's patented technology with a combination of turbo fan inside the sirocco fan.

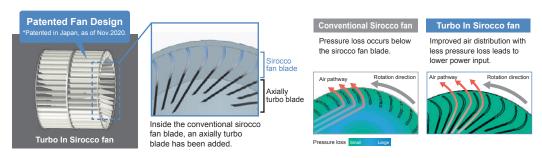

Wide Range of External Static Pressure Allows Flexible Duct Design


250Pa setting is newly added enabling total of five static pressure level. The ability to select additional static pressure enables long duct and more freedom in design.

PEA-M200/250LA2 75/<100>/<150>/<200>/<250> Pa

The factory setting of external static pressure is shown without brackets (< >). Refer to "Fan characteristics curves" according to the external static pressure, in the DATA BOOK for the usable range of airflow rate.

PAR-41MAA Group Control

The PAR-41MAA remote controller can control up to 16 systems as a group, and is ideal for supporting the integrated management of building air conditioners.



- Indoor unit Main remote controller
- Subordinate remote controller
 Standard (Refrigerant address = 00)
 Refrigerant address = 01
 Refrigerant address = 02
- Refrigerant address = 15















































Туре				Inverter	Heat Pump
ndoor Ur	nit	*		PEA-M200LA2	PEA-M250LA2
utdoor l	Unit			PUZ-ZM200YKA2	PUZ-ZM250YKA2
efrigera					R32
ower	Source				power supply
upply	Outdoor(V/Phase/Hz)				Three/50
ooling	Capacity	Rated	kW	19.0	22.0
		Min-Max	kW	9.2 - 22.4	9.9 - 27.0
	Total Input	Rated	kW	5.757	7.213
	EER			3.30	3.05
eating	Capacity	Rated	kW	22.4	27.0
		Min-Max	kW	7.1 - 25.0	7.3 - 31.0
	Total Input	Rated	kW	6.400	7.941
	COP			3.50	3.40
peratin	g Current(Max)		A	27.3	27.3
ndoor	Input [cooling / Heating]	Rated	kW	0.32	0.48
nit	Operating Current(Max)		A	4.8	4.8
	Dimensions	H*W*D	mm		370-1120
	Weight		kg		88
	Air Volume (Lo-Mid-Hi)	Normal airflow mode	m³/min	42.0-51.0-60.0	50.0-61.0-72.0 (75Pa-200Pa)
	,		,	42.0-51.0-60.0	42.0-51.0-60.0 (250Pa)
		High airflow mode	m³/min	50.0-61.0-72.0 (75Pa-200Pa)	58.0-72.0-84.0 (75Pa-150Pa)
			,		50.0-61.0-72.0 (200Pa)
				42.0-51.0-60.0 (250Pa)	42.0-51.0-60.0 (250Pa)
	External Static Pressure	-	Pa	75/(100)/(1	50)/(200)/(250)
	Sound Level (Lo-Mi2-Mi1-Hi)	(SPL)	dB(A)	34.5-39.0-43.0	37.5-42.0-46.0
	Sound Level (PWL)		dB(A)	69.0-70.0-70.0	71.0-71.0-72.0
utdoor	Dimensions	H*W*D	mm	1338-1050-330(+40)	1338-1050-330(+40)
nit	Weight		kg	137	138
	Air Volume	Cooling	m³/min	140	140
		Heating	m³/min	140	140
	Sound Level (SPL)	Cooling	dB(A)	59	59
		Heating	dB(A)	62	62
	Sound Level (PWL)	Cooling	dB(A)	77	77
	Operating Current(Max)		A	22.5	22.5
	Breaker Size		A	32	32
xt.Pipin	g Diameter(*3)	Liquid/Gas	mm	9.52 / 25.4	12.7 / 25.4
	Max.Length	Out-In	m	100	100
	Max.Height	Out-In	m	30	30
uarante	eed Operating Range (Outdoor)	Cooling(*2)	°C	-15 ~ 46	-15 ~ 46
		Heating	°C	-20 ~ 21	-20 ~ 21

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.
*2 Optional air protection guide is required where ambient temperature is lower than -5°C.
*3 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.































PEA-M SERIES	
STANDARD INVERTER	

	Vector Sine Wave	DC Scrol	Rare Earth Magnet	DC Fan Motor	Vector-Wave	
JET ection	Wi-Fi ı)) Interface	Optorial	Pump Down Optional	Hare connection	Self Diagnosis	

Туре				Inverter He	eat Pump
ndoor Un	it			PEA-M200LA2	PEA-M250LA2
utdoor l	Jnit			PUZ-M200YKA2	PUZ-M250YKA2
efrigerar	nt(*1)			R3	2
wer	Source			Separate po	wer supply
pply	Outdoor(V/Phase/Hz)			400/Th	ree/50
oling	Capacity	Rated	kW	19.0	22.0
	11	Min-Max	kW	9.2 - 22.4	9.9 - 27.0
	Total Input	Rated	kW	6.089	7.333
	EER	•		3.12	3.00
ating	Capacity	Rated	kW	22.4	27.0
	11	Min-Max	kW	6.8 - 25.0	7.3 - 31.0
	Total Input	Rated	kW	6.588	8.181
	COP	•		3.40	3.30
erating	Current(Max)		A	27.3	27.3
oor	Input [cooling / Heating]	Rated	kW	0.32	0.48
it	Operating Current(Max)		A	4.8	4.8
	Dimensions	H*W*D	mm	470-137	0-1120
	Weight	•	kg	88	3
	Air Volume (Lo-Mid-Hi)	Normal airflow mode	m³/min	42.0-51.0-60.0	50.0-61.0-72.0 (75Pa-200Pa) 42.0-51.0-60.0 (250Pa)
		High airflow mode	m³/min	50.0-61.0-72.0 (75Pa-200Pa)	58.0-72.0-84.0 (75Pa-150Pa)
				42.0-51.0-60.0 (250Pa)	50.0-61.0-72.0 (200Pa) 42.0-51.0-60.0 (250Pa)
	External Static Pressure	1	Pa	75/(100)/(150	
	Sound Level (Lo-Mi2-Mi1-Hi)	(SPL)	dB(A)	34.5-39.0-43.0	37.5-42.0-46.0
	Sound Level (PWL)	(0.2)	dB(A)	69.0-70.0-70.0	71.0-71.0-72.0
tdoor	Dimensions	H*W*D	mm	1338-1050-330(+40)	1338-1050-330(+40)
t	Weight	10. 11.	kg	129	138
-	Air Volume	Cooling	m³/min	140	140
		Heating	m³/min	140	140
	Sound Level (SPL)	Cooling	dB(A)	58	59
	,5, 2,	Heating	dB(A)	60	62
	Sound Level (PWL)	Cooling	dB(A)	78	77
	Operating Current(Max)	Coomig	Δ	22.5	22.5
	Breaker Size		A	32	32
Pinin	Diameter(*3)	Liquid/Gas	mm	9.52 / 25.4	12.7 / 25.4
piii	Max.Length	Out-In	m	70	70
	Max.Height	Out-In	m	30	30
ovente	ed Operating Range (Outdoor)		°C	-15 ~ 46	-15 ~ 46

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.
*3 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.





The compact, wall-mounted indoor units offer the convenience of simple installation, and a large product line-up (M35-M100 models) ensures a best-match solution. Designed for highly efficient energy savings, the PKA Series is the answer to your air conditioning needs.

New Design (M35-50)


A sharp and simple form that combines beauty and function. The simple square design harmonizes beautifully with the straight lines created by the intersection of the walls, floor and ceiling of the space, leading to a better quality of space. Also adopted a new white body color. It will make your life and space beautiful and comfortable without disturbing the atmosphere of the room. In addition, we realized miniaturization of conventional model. It contributes to space saving of installation area and giving room to room space.



Quietness (M35-50)

The noise level has been significantly reduced compared to the conventional model by reviewing the unit structure and improving the line flow fan.



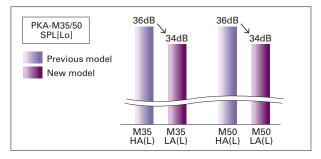

New Wireless Remote Controller Included

The PKA-KAL2 series wireless remote controller has been updated. It now comes with a new stylish remote controller that fits comfortably in your hand and has a wide range of useful functions.




Main Functions of new Wireless Remote Controller

- ·Weekly Timer
- •Backlight
- ·Dual set point
- Battery replacement sign etc...

ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++


Highly efficient indoor unit heat exchangers and newly designed power inverters (PUZ-ZM) contribute to an amazing reduction in electricity consumption throughout a year, and have resulted in models in the full-capacity range attaining the rank A, A+ and A++ energy savings rating.

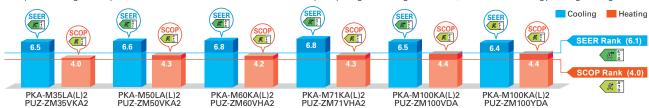


Airflow Control - Horizontal Airflow - (M35-50)

Significantly improved airflow control to achieve horizontal airflow. This reduces the feeling of draft even on a wall-mounted model, and air conditioning the indoor space firmly.


Airflow distributions

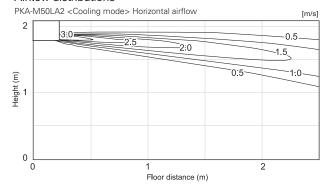

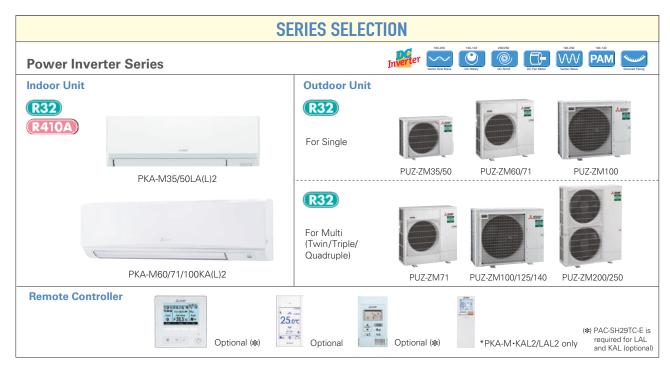

PKA-M LA(L)2/KA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

										Outd	oor Uı	nit Cap	acity								
Indoor	Unit Combination				Fo	or Sing	jle						For	Twin			F	or Trip	le	For Qua	adruple
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power	Power Inverter (PUZ-ZM)			60x1	71x1	100x1	-	-	-	-	35x2	50x2	60x2	71x2	100x2	-	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe		-	-	-	-	-	-	-	-	N	ISDD-	0TR2	-E	MSDD- 50WR2-E	-	MSI	OT-111	R3-E		DF- R2-E

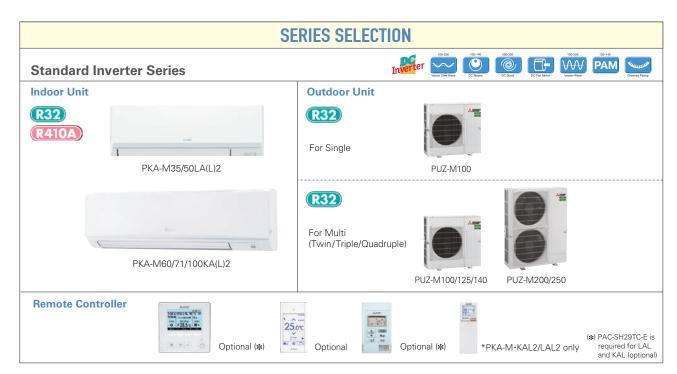

PKA-M LA(L)2/KA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

										Outd	oor U	nit Cap	pacity								
Indoor	Unit Combination				Fo	or Sing	le						For	Twin			ForTriple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standa	rd Inverter (PUZ-M)	-	-	-	-	100×1	-	-	-	-	-	50x2	60x2	71x2	100x2	-	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	-	-	-	-	-	-	-	-	-	-	MSD	D-50T	R2-E	MSDD- 50WR2-E	-	MSI	OT-1111	R3-E	MS 1111	DF- R2-E













































M SERIES	Optional		Орионы					
IVI SEKIES	Wi Eigh		Wiring	Dunin	Pump	Flore		Foilure
VERTER	Interface Co	OMPO Cleaning free,	Reuse	Lift Up	Down	connection	Self	Recall
	Optional		Optional	Optional			Diagnosis	

Туре						Inverter F	leat Pump		
Indoor Unit				PKA-M35LA(L)2	PKA-M50LA(L)2	PKA-M60KA(L)2	PKA-M71KA(L)2	PKA-M100KA(L)2	PKA-M100KA(L)2
Outdoor Unit				PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VDA	PUZ-ZM100YDA
Refrigerant(*1))					R	32		
	ource					Outdoor po	ower supply		
Supply 0	outdoor(V/Phase/Hz)				VKA•VHA:2	30/Single/50		VDA:230/Single/50	, YDA/400/Three/50
Cooling	Capacity	Rated	kW	3.6	4.6	6.1	7.1	9.5	9.5
_	1	Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4
	Total Input	Rated	kW	0.857	1.239	1.560	1.863	2.436	2.436
	EER			4.20	3.71	3.91	3.81	3.90	3.90
	Design load		kW	3.6	4.6	6.1	7.1	9.5	9.5
	Annual electricity consump	tion (*2)	kWh/a	194	244	314	365	508	519
	SEER(*4)			6.5	6.6	6.8	6.8	6.5	6.4
		Energy efficiency class		A++	A++	A++	A++	A++	A++
Heating	Capacity	Rated	kW	4.1	5.0	7.0	8.0	11.2	11.2
		Min-Max	kW	1.6 - 5.2	2.5 - 7.0	2.8 - 8.2	3.5 - 10.2	2.7 - 14.0	2.7 - 14.0
	Total Input	Rated	kW	1.040	1.344	1.732	2.116	3.103	3.103
	COP			3.94	3.72	4.04	3.78	3.61	3.61
	Design load		kW	2.4	3.3	4.4	4.7	7.8	7.8
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)
		at bivalent temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)
		at operation limit temperature	kW	2.2 (-11°C)	3.2 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)
	Back up heating capacity		kW	0.0	0.0	0.0	0.0	0.0	0.0
	Annual electricity consump	tion (*2)	kWh/a	829	1074	1464	1530	2480	2481
	SCOP(*4)			4.0	4.3	4.2	4.3	4.4	4.4
		Energy efficiency class		A+	A+	A+	A+	A+	A+
Operating Co	urrent(Max)		А	13.4	13.4	19.4	19.4	27.1	8.6
Indoor In	put [cooling / Heating]	Rated	kW	0.04 / 0.03	0.04 / 0.03	0.06 / 0.05	0.06 / 0.05	0.08 / 0.07	0.08 / 0.07
	perating Current(Max)		А	0.35	0.35	0.43	0.43	0.57	0.57
		H*W*D	mm	299-898-237	299-898-237	365-1170-295	365-1170-295	365-1170-295	365-1170-295
	/eight		kg	12.6	12.6	21	21	21	21
	ir Volume (Lo-Mi2-Mi1-Hi)		m³/min	7.5-8.2-9.2-10.9	7.5-8.2-9.2-10.9	18-20-22	18-20-22	20-23-26	20-23-26
	ound Level (Lo-Mi2-Mi1-Hi)	(SPL)	dB(A)	34-37-40-43	34-37-40-43	39-42-45	39-42-45	41-45-49	41-45-49
	ound Level (PWL)	Living	dB(A)	60	60	64	64	65	65
		H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)	943-950-330(+25)	870-1100-460(+45)	870-1100-460(+45)
	/eight ir Volume	Io r	kg .	46	46	67	67	107	114
A	ir volume	Cooling	m³/min	45	45	55	55	80	80
	II I (ODI)	Heating	m³/min	45	45	55	55	58	58
50	ound Level (SPL)	Cooling	dB(A)	44	44	47	47	44	44
_		Heating	dB(A)	46	46	49	49	48	48
	ound Level (PWL)	Cooling	dB(A)	65	65	67	67	63	63
	perating Current(Max) reaker Size		A	13	13	19	19	26.5	8
		I.::-1/C	A	16	16	25	25	32	16
Ext.Piping Di		Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	lax.Length	Out-In	m	50	50	55	55	100	100
	lax.Height	Out-In	m	30	30	30	30	30	30
Juaranteed	Operating Range (Outdoor)	Cooling(*3)	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-20 ~ 46	-20 ~ 46
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ 21	-20 ~ 21

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than -5°C.
*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.
*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.























































Туре					eat Pump
ndoor Uni	t			PKA-M10	00KA(L)2
utdoor U	nit			PUZ-M100VKA2	PUZ-M100YKA2
efrigeran	[(*1)			R	32
wer	Source			Outdoor po	wer supply
ipply	Outdoor(V/Phase/Hz)			VKA • VHA: 230/Single/	50, YKA:400/Three/50
ooling	Capacity	Rated	kW	9.5	9.5
		Min-Max	kW	4.0 - 10.6	4.0 - 10.6
	Total Input	Rated	kW	2.941	2.941
	EER	•		3.23	3.23
	Design load		kW	9.5	9.5
	Annual electricity consump	otion (*2)	kWh/a	573	573
	SEER(*4)			5.8	5.8
		Energy efficiency class		A+	A+
ating	Capacity	Rated	kW	11.2	11.2
			kW	2.8 - 12.5	2.8 - 12.5
	Total Input		kW	3.284	3.284
	COP	•		3.41	3.41
	Design load		kW	8.0	8.0
	Declared Capacity	at reference design temperature	kW	6.0 (-10°C)	6.0 (-10°C)
		at bivalent temperature	kW	7.0 (-7°C)	7.0 (-7°C)
		at operation limit temperature	kW	4.5 (-15°C)	4.5 (-15°C)
	Back up heating capacity		kW	2.0	2.0
	Annual electricity consump	otion (*2)	kWh/a	2780	2780
	SCOP(*4)		, , ,	4.0	4.0
		Energy efficiency class		A+	A+
erating	Current(Max)	,	Α	20.6	12.1
oor	Input [cooling / Heating]	Rated	kW	0.08 / 0.07	0.08 / 0.07
t	Operating Current(Max)	•	А	0.57	0.57
	Dimensions	H*W*D	mm	365-1170-295	365-1170-295
	Weight		kg	21	21
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	20-23-26	20-23-26
	Sound Level (Lo-Mi2-Mi1-Hi)	(SPL)	dB(A)	41-45-49	41-45-49
	Sound Level (PWL)		dB(A)	65	65
	Dimensions	H*W*D	mm	981-1050-330 (+40)	981-1050-330(+40)
it	Weight	10	kg	76	78
	Air Volume	Cooling	m³/min	79	79
		Heating	m³/min	79	79
	Sound Level (SPL)	Cooling	dB(A)	51	51
		Heating	dB(A)	54	54
	Sound Level (PWL)	Cooling	dB(A)	70	70
	Operating Current(Max)		Α	20.0	11.5
	Breaker Size		А	32	16
t.Piping	Diameter(*5)	Liquid/Gas	mm	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	55	55
	Max.Height	Out-In	m	30	30
uarante	ed Operating Range (Outdoor)		°C	-15 ~ +46	-15 ~ +46
		Heating	°C	15 + 21	15 21

[°]C -15 ~ +21 Heating -15 ~ +21 *1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.





A stylish new indoor unit design and airflow settings for both high- and low-ceiling interiors expand installation possibilities. Together with exceptional energy-saving performance, these units are the solution to diversified air conditioning needs.

Stylish Indoor Unit Design


A stylish square-like design is adopted for the indoor units of all models. As a result, the units blend in better with the ceiling.



PCA-KA


ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++

A direct-current (DC) fan motor is isntalled in the indoor unit, increasing the seasonal energy efficiency of newly designed Power Inverter series (PUHZ-ZM) and resulting in the full capacity models comply ErP Lot 10 with energy ranking A+/A++ for cooling and A/A+ for heating. This contribute to an impressive reduction in the cost of annual electricity.

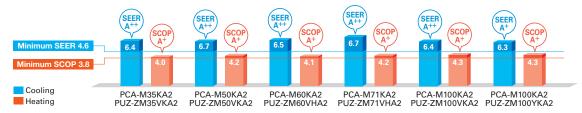


Optional Drain Pump for Full-capacity Models

The pumping height of the optional drain pump has been increased from 400mm to 600mm, expanding flexibility in choosing unit location during installation work.



Outside-air Intake

Units are equipped with a knock-out hole that enables the induction of fresh outside-air.



Equipped with Automatic Air-speed Adjustment

In addition to the conventional 4-speed setting, units are now equipped with an automatic air-speed adjustment mode. This setting automatically adjusts the air-speed to conditions that match the room environment. At the start of heating/cooling operation, the airflow is set to high-speed to quickly heat/cool the room. When the room temperature reaches the desired setting, the airflow speed is decreased automatically for stable comfortable heating/cooling operation.



Equipped with High-/Low-ceiling Modes

Units are equipped with high- and low-ceiling operation modes that make it possible to switch the airflow volume to match room height. The ability to choose the optimum airflow volume makes it possible to optimize the breezy sensation felt throughout the room.


Capacity	High ceiling	Standard ceiling	Low ceiling
35	3.5m	2.7m	2.5m
50	3.5m	2.7m	2.5m
60	3.5m	2.7m	2.5m
71	3.5m	2.7m	2.5m
100	4.2m	3.0m	2.6m
125	4.2m	3.0m	2.6m
140	4.2m	3.0m	2.6m



PCA-M Indoor Unit Combinations Indoor unit combinations shown below are possible.

* PAR-SA9CA is also required

										Outd	oor Ur	nit Cap	acity								
Indoor	Indoor Unit Combination		For Single										ForTwin						le	For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power	Inverter (PUZ-ZM)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	-		-	-	-	-	-		-	N	1SDD-	50TR2	-E	MS 50W	DD- R2-E	MSI	DT-111	R3-E		DF- R2-E

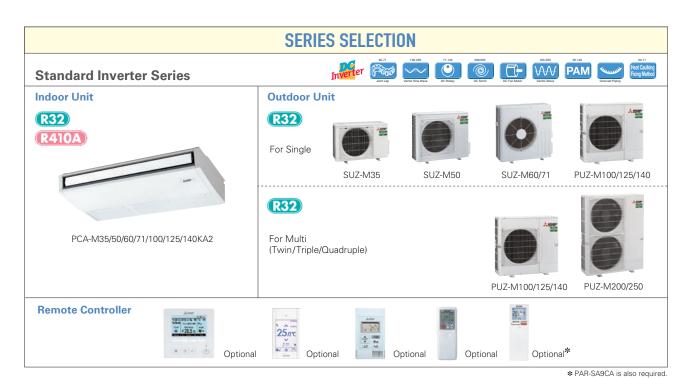

PCA-M Indoor Unit Combinations Indoor unit combinations shown below are possible.

Outdoor Unit Capacity ForTriple For Single ForTwin For Quadruple Indoor Unit Combination 50 60 71 100 125 140 200 250 71 100 125 200 | 250 140 200 250 200 250 Standard Inverter (PUZ-M&SUZ) 35x1 50x1 60x1 100x1 125x1 50x2 60x2 71x2 100x2 125x2 50x3 60x3 71x3 50x4 60x4 MSDF-1111R2-E MSDD-50WR2-Distribution Pipe MSDD-50TR2-E MSDT-111R3-E

POWER INVERTER



























P	CA.	-M	KA SERIES	3

























		Optional Op			tional Optional			Орг	ons options				
Туре									leat Pump				
Indoor Unit				PCA-M35KA2		PCA-M60KA2				PCA-M125KA2			
Outdoor Unit				PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM100YKA2	PUZ-ZM125VKA2	PUZ-ZM125YKA2	PUZ-ZM140VKA2	PUZ-ZM140YK
Refrigerant ^{(*1}	1)								32				
	Source								ower supply				
Supply C	Outdoor(V/Phase/Hz)						VKA•V	HA:230/Single,	/50, YKA:400/T	hree/50			
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
	Total Input	Rated	kW	0.829	1.250	1.521	1.829	2.375	2.375	3.846	3.846	3.941	3.941
	EER			4.34	4.00	4.01	3.88	4.00	4.00	3.25	3.25	3.40	3.40
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	-	-	-	-
	Annual electricity consump	otion(*2)	kWh/a	197	260	328	371	516	527	-	-	-	_
	SEER(*4)			6.4	6.7	6.5	6.7	6.4	6.3	_	-	_	_
		Energy efficiency class		A++	A++	A++	A++	A++	A++	_	-	_	_
leating	Capacity		kW	4.1	5.5	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
		Min-Max	kW	1.6 - 5.2	2.5 - 6.6	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.
	Total Input	Rated	kW	1.019	1.361	1.745	2.156	3.018	3.018	3.954	3.954	4.432	4.432
	COP			4.02	4.04	4.01	3.71	3.71	3.71	3.54	3.54	3.61	3.61
	Design load		kW	2.4	3.8	4.4	4.7	7.8	7.8	-	-	-	-
I	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	_	-	-	_
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	-	-	-	-
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	-	-	-	-
	Back up heating capacity		kW	0.0	0.0	0.0	0.0	0.0	0.0	-	-	-	-
	Annual electricity consump	otion (*2)	kWh/a	838	1266	1501	1567	2536	2537	-	-	-	-
	SCOP(*4)			4.0	4.2	4.1	4.2	4.3	4.3	-	-	_	_
		Energy efficiency class		A+	A+	A+	A+	A+	A+	-	-	_	_
Operating C	Current(Max)		А	13.3	13.4	19.4	19.4	20.7	8.7	27.3	9.8	30.9	12.7
ndoor Ir	nput [cooling / Heating]	Rated	kW	0.04 / 0.04	0.05 / 0.05	0.06 / 0.06	0.06 / 0.06	0.09 / 0.09	0.09 / 0.09	0.11 / 0.11	0.11 / 0.11	0.14 / 0.14	0.14 / 0.1
Jnit C	Operating Current(Max)		A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	0.90	0.90
D	Dimensions	H*W*D	mm	230-96	60-680	230-12	80-680			230-16	00-680		
	Veight		kg	25	26	32	32	37	37	38	38	40	40
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29		24-26-29-32	24-26-29-3
	Sound Level (Lo-Mi2-Mi1-Hi)	(SPL)	dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45		41-43-45-48	41-43-45-
	Sound Level (PWL)		dB(A)	60	60	60	62	63	63	65	65	68	68
	Dimensions	H*W*D	mm	630-809-300				1338-1050-330(+40)				1338-1050-330(+40)	
	Veight		kg	46	46	67	67	105	111	105	114	105	118
A	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120	120
L		Heating	m³/min	45	45	55	55	110	110	120	120	120	120
S	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50
L		Heating	dB(A)	46	46	49	49	51	51	52	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70
	Operating Current(Max)		A	13	13	19	19	20	8	26.5	9	30	11.8
	Breaker Size		A	16	16	25	25	32	16	32	16	40	16
xt.Piping D		Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.8
	/lax.Length	Out-In	m	50	50	55	55	100	100	100	100	100	100
	/lax.Height	Out-In	m	30	30	30	30	30	30	30	30	30	30
Juaranteed	Operating Range (Outdoor)	Cooling(*3)	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; I leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than -5°C.
*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.
*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

































































PCA-M	KA SERIES
STANDARD IN	/erter

60-140V
Ampere
Limit



























		Optional Op	otional	Op	tional Optional			Opt	onal Optional				
Type									eat Pump				
Indoor Unit											PCA-M125KA2		
Outdoor U				SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA2	PUZ-M100YKA2	PUZ-M125VKA2	PUZ-M125YKA2	PUZ-M140VKA2	PUZ-M140YKA2
Refrigerant	t ^(*1)							R	32				
Power	Source								wer supply				
Supply	Outdoor(V/Phase/Hz)						VA•V	KA:230/Single/	50, YKA:400/Th	ree/50			
Cooling	Capacity		kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4
			kW	0.8 - 3.9	1.5 - 5.6	1.6 - 6.3	2.2 - 8.1	4.0 - 10.6	4.0 - 10.6	5.7 - 13.0	5.7 - 13.0	5.7 - 14.1	5.7 - 14.1
	Total Input	Rated	kW	0.900	1.515	1.648	1.972	2.941	2.941	4.019	4.019	5.360	5.360
	EER			4.00	3.30	3.70	3.60	3.23	3.23	3.01	3.01	2.50	2.50
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	_	-	-	_
	Annual electricity consump	otion (*2)	kWh/a	198	291	333	381	553	553	-	-	-	-
	SEER (*4)			6.3	6.0	6.4	6.5	6.0	6.0	-	-	-	-
		Energy efficiency class		A++	A+	A++	A++	A+	A+	-	-	-	_
Heating	Capacity		kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0
		Min-Max	kW	1.0 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	2.8 - 12.5	2.8 - 12.5	4.1 - 15.0	4.1 - 15.0	4.2 - 15.8	4.2 - 15.8
	Total Input	Rated	kW	1.025	1.617	1.750	2.216	3.284	3.284	3.958	3.958	4.285	4.285
	СОР			4.00	3.71	4.00	3.61	3.41	3.41	3.41	3.41	3.50	3.50
	Design load		kW	2.6	4.3	4.6	5.8	8.0	8.0	-	-	-	-
	Declared Capacity	at reference design temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	-	-	-	-
		at bivalent temperature	kW	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	-	-	-	-
		at operation limit temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	-	-	-	-
	Back up heating capacity		kW	0.3	0.5	0.5	0.6	2.0	2.0	-	-	-	-
	Annual electricity consump	otion(*2)	kWh/a	910	1458	1558	1974	2729	2729	-	-	-	-
	SCOP (*4)			4.0	4.1	4.1	4.1	4.1	4.1	-	-	-	-
		Energy efficiency class		A+	A+	A+	A+	A+	A+	-	-	-	-
Operating	Current(Max)		А	8.8	13.9	15.2	15.2	20.7	12.2	27.3	12.3	30.9	12.4
Indoor	Input [cooling / Heating]		kW	0.04 / 0.04	0.05 / 0.05	0.06 / 0.06	0.06 / 0.06	0.09 / 0.09	0.09 / 0.09	0.11 / 0.11	0.11 / 0.11	0.14 / 0.14	0.14 / 0.14
Unit	Operating Current(Max)		Α	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	0.90	0.90
	Dimensions	H*W*D	mm		60-680		80-680			230-16			
	Weight		kg	25	26	32	32	37	37	38	38	40	40
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	23-25-27-29	24-26-29-32	24-26-29-32
	Sound Level (Lo-Mi2-Mi1-Hi)		dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	39-41-43-45	41-43-45-48	
Outdoor	Sound Level (PWL) Dimensions	H*W*D	dB(A)	60	60	60	62	63	63	65	65	68	68
Unit	Weight	H-M-D	mm	550-800-285 35	714-800-285	880-840-330					981-1050-330(+40)		
Unit	Air Volume	lo r	kg .		41	54	55	76	78 79	84 86	85	84	85 86
	Air volume		m³/min	34.3 32.7	45.8	50.1	50.1 50.1	79 79	79	92	86 92	86 92	92
	Sound Level (SPL)		m³/min dB(A)		43.7	50.1			79 51	92 54			55
	Sound Level (SPL)	Cooling		48	48	49	49	51			54	55	
	Sound Level (PWL)	0	dB(A)	48	49	51	51	54	54	56	56	57	57
		Cooling	dB(A)	59	64	65	66	70	70	72	72	73	73
	Operating Current(Max)		A	8.5	13.5 20	14.8 20	14.8 20	20	11.5	26.5	11.5	30	11.5
E / D: :	Breaker Size	1: :10	Α	10				32	16	32	16	40	16
Ext.Piping	Diameter(*5)	Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max.Length	Out-In	m	20	30	30	30	55	55	65	65	65	65
	Max.Height	Out-In	m	12	30	30	30	30	30	30	30	30	30
Guarantee	ed Operating Range (Outdoor)	Cooling(*3)	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

[|] Heating | "C | -10 - ±24 | -10 - ±24 | -10 - ±24 | -10 - ±24 | -10 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -15 - ±21 | -



Tough on Oily Smoke

A durable stainless steel casing that is resistant to oil and grease is provided to protect the surface of the body. Grimy dirt and stains are removed easily, enabling the unit to be kept clean at all times.

High-performance Oil Mist Filter


A high-performance heavy-duty oil mist filter is included as standard equipment. The filtering system is more efficient than conventional filters, thereby effectively reducing the oily smoke entering the air conditioner. The filter is disposable, thereby enabling trouble-free cleaning and maintenance.

Oil Mist Filter Cleaning

When used in kitchens, the oil mist filter should be replaced once every two months. The system comes with 12 filters elements. After these have been used, optional elements (PAC-SG38KF-E) can be purchased.







Pull the handle to easily slide the filter out


Easy Maintenance – Even for Cleaning the Fan

A separate fan casing that can be disassembled in sections is adopted to ensure easy fan cleaning. Drain pan cleaning onsite is also no problem owing to the use of a pipe connector that is easily removed.



Fresh Outside-air Intake (Option)


There is a knock-out opening on the rear panel of the unit that can be used to bring fresh air into the unit. This helps to improve ventilation and make the kitchen comfortable.

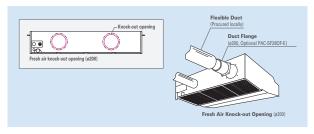

Notes: 1) A fresh-air duct flange is required (sold separately) 2) Intake air is not 100% fresh (outside) air.

Cosmetic Front and Hanging Fixture Covers (Option)

Cosmetic covers are available to prevent the collection of dust and grime on the main body and hanging fixture sections.

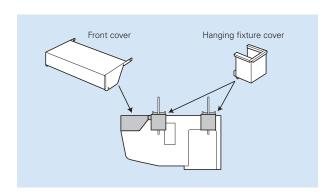



 $\boldsymbol{*}$ PAR-SA9CA is also required.

PCA-M HA Indoor Unit Combinations Indoor unit combinations shown below are possible.

										Outd	oor Ui	nit Cap	acity								
Indoo	Indoor Unit Combination				Fo	or Sing	gle										For Quadruple				
			50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Powe	Power Inverter (PUZ-ZM)		-	-	71x1	-	-	-	-	-	-	-	-	71x2	-	-	-	-	71x3	-	-
	Distribution Pipe	-	-	-	-	-	-	_	-	-	-	-	_	MSDD- 50TR2-F	_	-	-	_	MSDT- 111R3-F	-	-



* PAR-SA9CA is also required.

PCA-M HA Indoor Unit Combinations Indoor unit combinations shown below are possible.

	Indoor Unit Combination									Outd	oor Ui	nit Cap	acity								
Indo			For Single										For	Twin			F	or Trip	le	For Qu	adruple
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Powe	Power Inverter (PUHZ-ZRP)		-	-	71x1	-	-	-	-	-	-	-	-	71x2	-	-	-	-	71x3	-	_
	Distribution Pipe	-	-	-	-	-	-	-	-	-	-	-	-	MSDD-50TR-E	-	-	-	-	MSDT-111R-E	-	_





























Viring	Pump	Flare connection	Self	Failui
Reuse	Down		Diagnosis	Reca

_				
Туре				Inverter Heat Pump
Indoor Uni				PCA-M71HA2
Outdoor U				PUZ-ZM71VHA2
Refrigeran	t ^(*1)			R32
Power	Source			Outdoor power supply
Supply	Outdoor(V/Phase/Hz)			230/Single/50
Cooling	Capacity	Rated	kW	7.1
·	11 ' '	Min-Max	kW	3.3 - 8.1
	Total Input	Rated	kW	2.028
	EER			3.50
	Design load		kW	7.1
	Annual electricity consum	ption(*2)	kWh/a	443
	SEER(*4)	F		5.6
		Energy efficiency c	lass	A+
Heating	Capacity	Rated	kW	7.6
	,	Min-Max	kW	3.5 - 10.2
	Total Input	Rated	kW	2.171
	COP	Indica	KVV	3.50
	Design load		kW	4.7
	Declared Capacity	at reference design to		4.7 (-10°C)
	Decialed Capacity	at bivalent temperat		4.7 (-10°C)
		at operation limit ter		4.7 (*10 c) 3.4 (*20°C)
	Back up heating capacity	at operation innit ter	kW	3.4 (720 U) 0.0
		4: (*2)		
		Annual electricity consumption (*2) kWh/a SCOP(*4)		1684 3.9
	SCOP: */	Energy efficiency c		3.9 A
<u> </u>	0 (00)	Energy emiciency c		
Operating Indoor	Current(Max) Input [cooling / Heating]	Rated	A kW	19.4
inaoor Unit	Operating Current(Max)	nated	Δ	0.10 / 0.10 0.43
Unit	Dimensions	lH*W*D	mm	
	Weight	IL MA D	kg	280-1130-000 42
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	42 16-18
	Sound Level (Lo-Mi2-Mi1-Hi)	\ (CDI \	dB(A)	10-16 37-39
	Sound Level (PWL)	/ (SFL)	dB(A)	57 57
Outdoor	Dimensions	H*W*D	mm	943-950-330(+25)
Unit	Weight	J. 11 D	kg	67
Oilit	Air Volume	Cooling	m³/min	55
	All volume	Heating	m³/min	55 55
	Sound Level (SPL)	Cooling	dB(A)	
	Sound Level (SFL)	Heating	dB(A)	49
	Sound Level (PWL)			
	Operating Current(Max)	Cooling	dB(A)	67
			A	19
E + D: :	Breaker Size	11: :10	A	25
Ext.Piping	Diameter(*5)	Liquid/Gas	mm	9.52 / 15.88
	Max.Length	Out-In	m	55
	Max.Height	Out-In	m	30
Guarante	ed Operating Range (Outdoor)		°C	-15 ~ +46
		Heating	°C	-20 ~ +21

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than –5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.







Installation of this floor-standing series is easy and quick. An excellent choice when there is a sudden need for an air conditioner to be installed.


A slim design the fits neatly into any space

With a width of only 600mm, this slim unit can fit neatly into narrow spaces.





Equipped with a long-life filter as standard

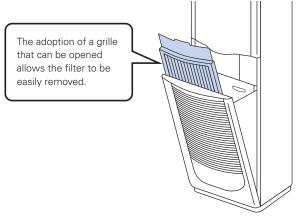


Built-in MA smart remote controller

The large and easy-to-read LCD makes it easy to perform a variety of functions.



A wide airflow range with horizontal swinging


The horizontal swinging function can be turned on or off via the remote controller to deliver comfort over a wider area.

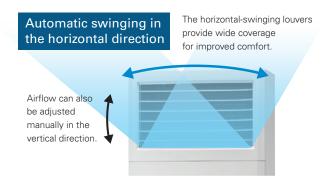

Floor-standing Line-up

The PSA series was previously only able to be connected to P series outdoor units. However, it can now also be connected to S series outdoor units. This wider lineup provides our customers with a more flexible range of options.




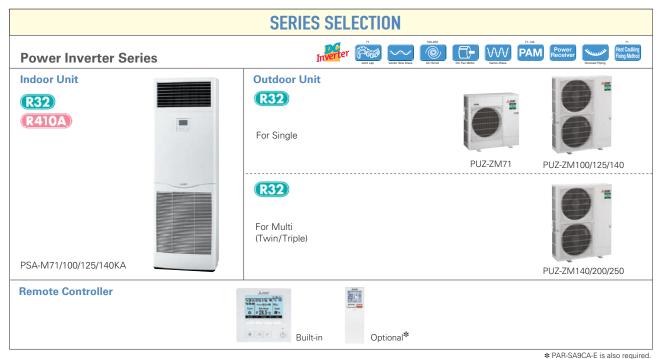

PSA-M Indoor Unit Combinations Indoor unit combinations shown below are possible.

* PAR-SA9CA-E is also required

	Indoor Unit Combination									Outd	oor Ui	nit Cap	pacity															
Indoor			For Single										For	Twin			F	or Trip	le	For Qu	adruple							
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250							
Power	Power Inverter (PUZ-ZM)		-	-	71x1	100x1	125x1	140x1	-	-	-	-	-	71x2	100x2	125x2	-	-	71x3	-	_							
	Distribution Pipe	-	-	-	-	-	-	-	-	-	-	-	-	MSDD -50TR2-E	MSDD-5	0WR2-E	-	-	MSDT -111R3-E	-	_							

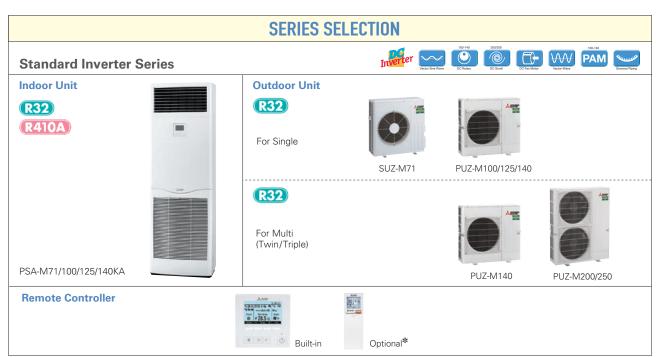

 $\textbf{PSA-M Indoor Unit Combinations} \quad \textbf{Indoor unit combinations shown below are possible}.$

* PAR-SA9CA-E is also required.

										Outd	oor Ui	nit Cap	acity								
Indoor	Indoor Unit Combination		For Single ForTwin									F	or Trip	le	For Qu	adruple					
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standa	Standard Inverter (PUZ-M)		-	-	71x1	100x1	125x1	140x1	-	-	-	-	-	71x2	100x2	125x2	-	-	71x3	-	-
	Distribution Pipe	-	-	-	-	-	-	-	-	-	-	-	-	MSDD -50TR2-E	MSDD-5	60WR2-E	-	-	MSDT -111R3-E	-	-































-										
Туре	-						Inverter Heat Pump			
Indoor Un				PSA-M71KA	PSA-M100KA	PSA-M100KA	PSA-M125KA	PSA-M125KA	PSA-M140KA	PSA-M140KA
Outdoor L			P	PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM100YKA2	PUZ-ZM125VKA2	PUZ-ZM125YKA2	PUZ-ZM140VKA2	PUZ-ZM140YKA2
Refrigerar							R32			
Power	Source						Outdoor power suppl			
Supply	Outdoor(V/Phase/Hz)						230/Single/50, YKA:40			
Cooling	Capacity	Rated kW		7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min-Max kW		3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
	Total Input	Rated kW	/	1.888	2.493	2.493	3.955	3.955	3.976	3.976
	EER			3.76	3.81	3.81	3.16	3.16	3.37	3.37
	Design load	kW	/	7.1	9.5	9.5	_	_	_	_
	Annual electricity consun	nption ^(*2) kW	/h/a	388	581	592	-	-	-	_
	SEER(*4)			6.4	5.7	5.6	-	-	-	_
		Energy efficiency class		A++	A+	A+	-	-	-	-
Heating	Capacity	Rated kW	/	7.6	11.2	11.2	14.0	14.0	16.0	16.0
	11	Min-Max kW	/	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5 - 16.0	5 - 16.0	5.7 - 18.0	5.7 - 18.0
	Total Input	Rated kW	/	2.338	3.172	3.172	4.501	4.501	5.000	5.000
	COP			3.25	3.53	3.53	3.11	3.11	3.20	3.20
	Design load	kW	/	4.7	7.8	7.8	_	_	_	_
	Declared Capacity	at reference design temperature kW	/	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	-	_	_	_
		at bivalent temperature kW		4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	_	_	_	_
		at operation limit temperature kW		3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	-	-	-	-
	Back up heating capacity			0.0	0.0	0.0	_	_	_	_
		nnual electricity consumption(*2) kWh/.			2658	2659	_	_	_	_
	SCOP(*4)		,.	1636 4.0	4.1	4.1	_	_	_	_
		Energy efficiency class		A+	A+	A+	_	_	_	_
Operating	Current(Max)	lA.		19.4	20.7	8.7	27.2	9.7	30.7	12.5
Indoor	Input [cooling / Heating]	Rated kW	/	0.06 / 0.06	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11
Unit	Operating Current(Max)	A		0.4	0.71	0.71	0.73	0.73	0.73	0.73
	Dimensions	H*W*D mr	n	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360
	Weight	kg		46	46	46	46	46	48	48
	Air Volume (Lo-Mi2-Mi1-Hi)		/min	20-22-24	25-28-30	25-28-30	25-28-31	25-28-31	25-28-31	25-28-31
	Sound Level (Lo-Mi2-Mi1-H			40-42-44	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51
	Sound Level (PWL)	dB	(A)	60	65	65	66	66	66	66
Outdoor	Dimensions	H*W*D mr		43-950-330(+25)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)		1338-1050-330(+4
Unit	Weight	kg		67	105	111	105	114	105	118
	Air Volume		/min	55	110	110	120	120	120	120
			/min	55	110	110	120	120	120	120
	Sound Level (SPL)	Cooling dB		47	49	49	50	50	50	50
		Heating dB	(A)	49	51	51	52	52	52	52
	Sound Level (PWL)	Cooling dB	(A)	67	69	69	70	70	70	70
	Operating Current(Max)	A		19	20	8	26.5	9	30	11.8
	Breaker Size	A		25	32	16	32	16	40	16
Ext.Piping	g Diameter(*5)	Liquid/Gas mr	n	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In m		55	100	100	100	100	100	100
	Max.Height	Out-In m		30	30	30	30	30	30	30
Guarante	ed Operating Range (Outdoor			-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
										-20 ~ +21
***		Heating °C		-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.



































































6	4
ы	4
U	Ċ
	-













Туре							Inverter Heat Pump)		
Indoor Unit		·		PSA-M71KA	PSA-M100KA	PSA-M100KA	PSA-M125KA	PSA-M125KA	PSA-M140KA	PSA-M140KA
Outdoor Uni	t			SUZ-M71VA	PUZ-M100VKA2	PUZ-M100YKA2	PUZ-M125VKA2	PUZ-M125YKA2	PUZ-M140VKA2	PUZ-M140YKA2
Refrigerant(*	1)						R32			
	Source					(Outdoor power suppl	V		
Supply C	Outdoor(V/Phase/Hz)						30/Single/50, YKA:40			
Cooling	Capacity	Rated	kW	7.1	9.4	9.4	12.1	12.1	13.6	13.6
	1	Min-Max	kW	2.2 - 8.1	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 13.7	5.8 - 13.7
	Total Input	Rated	kW	1.972	2.686	2.686	4.481	4.481	5.037	5.037
	EER			3.60	3.50	3.50	2.70	2.70	2.70	2.70
	Design load		kW	7.1	9.4	9.4	_	_	_	_
	Annual electricity consump	otion(*2)	kWh/a	394	591	591	_	_	_	_
	SEER(*4)			6.3	5.5	5.5	_	_	_	_
		Energy efficiency class		A++	A	A	_	_	_	_
Heating	Capacity	Rated	kW	8.0	11.2	11.2	13.5	13.5	15.0	15.0
		Min-Max	kW	2.1 - 10.2	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8	4.9 - 15.8
	Total Input	Rated	kW	2.492	3.246	3.246	4.355	4.355	4.761	4.761
	COP	1		3.21	3.45	3.45	3.10	3.10	3.15	3.15
	Design load		kW	5.8	8.0	8.0	-	_	-	-
	Declared Capacity	at reference design temperature	kW	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	_	_	_	_
	,	at bivalent temperature	kW	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	_	_	_	_
		at operation limit temperature	kW	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	_	_	_	_
	Back up heating capacity		kW	0.6	2.0	2.0	_	_	_	_
	Annual electricity consumption(*2)			2003	2745	2745	_	_	_	_
	SCOP(*4)			4.0	4.0	4.0	_	_	_	_
			A+	A+	A+	_	_	_	_	
Operating C	Current(Max)	Energy efficiency class	Α	15.2	20.7	12.2	27.2	12.2	30.7	12.2
	nput [cooling / Heating]	Rated	kW	0.06 / 0.06	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11
	Operating Current(Max)		Α	0.4	0.71	0.71	0.73	0.73	0.73	0.73
	Dimensions	H*W*D	mm	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360
	Veight		kg	46	46	46	46	46	48	48
Δ	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	20-22-24	25-28-30	25-28-30	25-28-31	25-28-31	25-28-31	25-28-31
	Sound Level (Lo-Mi2-Mi1-Hi)	(SPL)	dB(A)	40-42-44	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51
	Sound Level (PWL)		dB(A)	60	65	65	66	66	66	66
	Dimensions	H*W*D	mm	880-840-330		981-1050-330(+40)	981-1050-330(+40)			981-1050-330(+4
	Veight		kg	55	76	78	84	85	84	85
Α	Air Volume	Cooling	m³/min	50.1	79	79	86	86	86	86
L		Heating	m³/min	50.1	79	79	92	92	92	92
S	Sound Level (SPL)	Cooling	dB(A)	49	51	51	54	54	55	55
		Heating	dB(A)	51	54	54	56	56	57	57
	Sound Level (PWL)	Cooling	dB(A)	66	70	70	72	72	73	73
	Operating Current(Max)		A	14.8	20	11.5	26.5	11.5	30	11.5
	Breaker Size		А	20	32	16	32	16	40	16
Ext.Piping D		Liquid/Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	/lax.Length	Out-In	m	30	55	55	65	65	65	65
	/lax.Height	Out-In	m	30	30	30	30	30	30	30
Guaranteed	Operating Range (Outdoor)	Cooling ^(*3)	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

^{-15 ~ +21} **1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂; over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself or disassemble the product yourself or disassemble the product yourself or how the appliance is used and where it is located.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/12/5FC.Erengy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.















PLA-SM SERIES

SERIES SELECTION

Indoor Unit



PLA-SM71/100/125/140EA

Outdoor Unit



SUZ-SM71VA



PUZ-SM100/125/140VKA2 PUZ-SM100/125/140YKA2

PLP-6EAJ - Panel only
PLP-6EALM - Panel with signal receiver and wireless remote controller



PAR-41MAA(B) DELUXE



PAC-YT52CRA



PAR-SL100A*

*Enclosed with PLP-6EALM

PLA-SM SERIES

Туре						Inv	erter Heat Pump			
Indoor Un	it			PLA-SM71EA	PLA-SI	M100EA	PLA-SN	/125EA	PLA-SI	V140EA
Outdoor U	Jnit			SUZ-SM71VA	PUZ-SM100VKA	PUZ-SM100YKA	PUZ-SM125VKA	PUZ-SM125YKA	PUZ-SM140VKA	PUZ-SM140YKA
Refrigerar	nt						R32(*1)			
Power	Source					Ou	door power supply			
Supply	Outdoor (V/Phase/Hz)					VA · VKA:230 / S	Single / 50, YKA:400	/ Three / 50		-
		Rated	kW	7,1	9,5	9,5	12	2,1	1:	3,4
	Capacity	Min-Max	kW	2,2-8,1	4,0-10,6	4,0-10,6	5,8-	13,0	5,8	14,1
	Total Input	Rated	kW	1,97	2,79	2,79	4,	17	5,	.13
	EER			3,6	3,4	3,4	2	.9	2	61
Cooling	EEL Rank			-	-	-				-
	Design load		kW	7,1	9,5	9,5	12	2,1	1:	3,4
	Annual electricity consu	umption (*2)	kWh/a	410	554	554				
	SEER Energy efficiency clas Capacity Total Input COP EEL Rank Design load age on) Declared Capacity Back up heating capa Annual electricity con			6	6	6				-
	Energy efficiency class			A+	A+	A+				-
		Rated	kW	8	11,2	11,2	13	3.5		15
	Capacity	Min-Max	kW	2,0-10,2	2,8-12,5	2,8-12,5	4,1-			15,8
	Total Input	Rated	kW	2,28	3,1	3,1	3,			54
				3,5	3,61	3,61	3,			,3
	EEL Rank			-	-	-	-7			-
Heating			kW	5,8	8	8	8	.5	9	1,4
(Average	-	at reference design temperature	kW	5,2 (-10°C)	6,0 (-10°C)	6,0 (-10°C)	8,5 (-			-10°C)
Season)	Declared Capacity	at bivalent temperature	kW	5,2 (-7°C)	7,0 (-7°C)	7,0 (-7°C)	8,5 (-			-10°C)
		at operation limit temperature	kW	5,2 (-10°C)	4,5 (-15°C)	4,5 (-15°C)	6,0 (-			15°C)
	Back up heating capaci		kW	0,6	2	2)		0
		.*	kWh/a	2066	2482	2482				-
	SCOP	()		3,9	4,5	4,5				-
	Energy efficiency class		A	A+	A+				-	
Operatin	g Current (Max)		Α	15,1	20,5	12	27,2	12,2	30.7	12,2
	Input (cooling/heating)	Rated	kW	0,04	0,07	0,07	0,1	0,1	0,1	0,1
	Operating Current (Max)	- O,		0,27	0,46	0,46	0,66	0,66	0,66	0,66
	Dimensions <panel></panel>	HxWxD	A mm	258x840x840<40x950x950>	0,10	0,10	298x840x840		0,00	0,00
Indoor	Weight <panel></panel>	·	kg	21<5>	24	<5>			<5>	
Unit	Air Volume (Lo-Mid-Hi)		m³/min	14-17-19-21		1-26-29	21-25			-29-32
	Sound Level (Lo-Mid-Hi)	(SPL)	dB(A)	28-30-32-34		-37-40	33-37			-42-44
	Sound Level (PWL)	, (6. 2)	dB(A)	56		31		5		35
	Dimensions	HxWxD	mm	880x840x330	`			981x1050x330 (+40		
	Weight		kg	55	76	78	84	85	84	85
		Cooling	m³/min	50,1	79	79	86	86	86	86
	Air Volume	Heating	m³/min	50,1	79	79	92	92	92	92
Outdoor		Cooling	dB(A)	49	51	51	54	54	55	55
Unit	Sound Level (SPL)	Heating	dB(A)	51	54	54	56	56	57	57
	Sound Level (PWL)	Cooling	dB(A)	66	70	70	72	72	73	73
	Operating Current (Max)		A	14,8	20	11,5	26,5	11,5	30	11,5
	Breaker Size		Α	20	32	16	32	16	40	16
_	Diameter	Liquid/Gas	mm				9,52 / 15,88			
Ext. Piping	Max. Length	Out-In	m		30				40	
riping	Max. Height	Out-In	m				30			
Guarant	eed Operating Range	Cooling	°C							
(Outdoor)	ilanteed Operating nange			°C -10 ~ +24 -15 ~ +21						
. ,	, roading			-10 ~ +24				T41		
Ketriger	gerant/GWP						R32/675(*4)		1	1
Pro-Cha	rged quantity	Weight	kg	1,45	3,1	3,1	3,6	3,6	3,6	3,6
i ie-olia	igou quainty	CO ₂ equivalent	t	0,98	2,09	2,09	2,43	2,43	2,43	2,43
		Weight	kg	2,37	4,1	4,1	5	5	5	5
Max add	led quantity	CO, equivalent	t	1,6	2,77	2,77	3,38	3,38	3,38	3.38
	added quantity	1 002 oquivaiorit		I	۵,11	∠,11	1 0,00	0,00	1 0,00	1 0,00

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less te global warming than a refrigerant with higher GWP, if leaked te the atmosphere. This appliance contains a refrigerant fluid with a GWP equal te 1975. This means that if 1 kg of this refrigerant fluid would be leaked te the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO 2, aver a period of 100 years. Never try to interiere with the refrigerant riccuit yourself or disassemble the product yourself and always ask a professional.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) Optional air protection guide is required where amblient temperature is lower than -5°C.

(*4) This GWP value is based on Regulation(EU) No 517/2014 from IPCC 4th edition,













PEAD-SM SERIES

SERIES SELECTION

Indoor Unit



PEAD-SM71/100/125/140JAL(2)

Outdoor Unit



SUZ-SM71VA



PUZ-SM100/125/140VKA PUZ-SM100/125/140YKA

Remote Controller (Optional)



PAR-41MAA(B) Optional



PAC-YT52CRA Optional



PAR-FL32MA Optional

PEAD-SM SERIES

Туре						Inv	erter Heat Pump						
Indoor Un	it			PEAD-SM71JA (L)	PEAD-SM100JA (L)	PEAD-SM100JA (L)	PEAD-SM125JA (L)	PEAD-SM125JA (L)	PEAD-SM140JA (L)	PEAD-SM140JA (L)			
Outdoor U				SUZ-SM71VA	PUZ-SM100VKA	PUZ-SM100YKA	PUZ-SM125VKA	PUZ-SM125YKA	PUZ-SM140VKA	PUZ-SM140YKA			
Refrigerar						1	R32(*1)						
Power	Source					Out	door power supply						
Supply	Outdoor (V / Phase / Hz)						ingle / 50, YKA:400	/ Three / 50					
		Rated	kW	7,1	9,5	9,5	12	2,1	13	3,4			
	Capacity	Min-Max	kW	2,2-8,1	4,0-10,6	4,0-10,6	6,0-	13,0	6,1-	14,1			
	Total Input	Rated	kW	2,08	2,95	2,95	4,	17	4,	96			
	Joint Int Source Outdoor (V / Phase / Hz) Capacity Rate EER EEL Rank Design load Annual electricity consumpti SEER Energy efficiency class Capacity Total Input Rate COP EEL Rank Design load Annual electricity consumpti SEER Total Input Rate COP EEL Rank Design load Back up heating capacity Annual electricity consumpti SCOP EEL Rank Design load Back up heating capacity Annual electricity consumpti SCOP EEL Rank Design load Back up heating capacity Annual electricity consumpti SCOP EEL Rank Design load Back up heating capacity Annual electricity consumpti SCOP EEL Rank Design load Back up heating capacity Annual electricity consumpti SCOP EEL Rank Design load Back up heating capacity Annual electricity consumpti SCOP EEL Rank Design load Back up heating capacity At to brain graph load Energy efficiency class GOP EEL Rank Design load Back up heating capacity At to brain graph load Energy efficiency class GOP EEL Rank Design load Back up heating capacity At to brain graph load Energy efficiency class GOP EEL Rank Design load Back up heating capacity At to brain graph load Energy efficiency class GOP EEL Rank Design load Energy efficiency class EEL Rank EEL Rank Design load Energy efficiency class EEL Rank EEL Rank Design load Energy efficiency class EEL Rank Energy efficiency class EEL Rank Energy efficiency class EEL Rank EEL Rank Energy efficiency class EEL Rank EEL Rank EEL Rank EEL Rank EEL Rank Energy efficiency class EEL Rank EEL Rank EEL Rank EEL Rank EEL Rank Energy efficiency class EEL Rank EEL Rank EEL Rank EEL Rank EEL Rank Energy efficiency class EEL Rank EEL Rank Energy efficiency class EEL Rank Energy efficiency class EEL Rank EEL Rank EEL Rank EEL Rank EEL Rank E			3,41	3,21	3,21	2	,9	2	,7			
Cooling	EEL Rank			-	-	-							
_	Design load		kW	7,1	9,5	9,5	12	2,1	13	3,4			
	Annual electricity consu	umption (*2)	kWh/a	451	626	626		-		-			
	SEER			5,5	5,3	5,3		-		-			
	Energy efficiency class			A	A	A		-		-			
	0	Rated	kW	8	11,2	11,2	13	3,5	1	5			
	Сараспу	Min-Max	kW	2,0-10,2	2,8-12,5	2,8-12,5	4,1-	15,0	4,2-	15,8			
		Rated	kW	2,21	3,02	3,02	3,	85	4,	28			
				3,61	3,7	3,7	3	,5	3	,5			
	EEL Rank			=	-	-				-			
Heating	Design load		kW	5,8	8	8	8	,5	9	,4			
(Average		at reference design temperature	kW	5,2 (-6°C)	6,0 (-10°C)	6,0 (-10°C)	8,5 (-	10°C)	9,4 (-	10°C)			
Season)	Declared Capacity	at bivalent temperature	kW	5,2 (-7°C)	7,0 (-7°C)	7,0 (-7°C)	8,5 (-	10°C)	9,4 (-	10°C)			
		at operation limit temperature	kW	5,2 (-10°C)	4,5 (-15°C)	4,5 (-15°C)	6,0 (-	15°C)	7,0 (-	15°C)			
				0,6	2	2)		0			
		umption (*²)	kWh/a	2080	2865	2865		-		-			
				3,9	3,9	3,9		-		-			
				A	A	A		-		-			
Operatin			A kW	16,8	22,7	14,2	29,3	14,3	32,8	14,3			
				0,17 / 0,15	0,25 (0,23) / 0,23	0,25 (0,23) / 0,23	0,36 (0,34) / 0,34	0,36 (0,34) / 0,34	0,39 (0,37) / 0,37	0,39 (0,37) / 0,37			
			Α	1,97	2,65	2,65	2,76	2,76	2,78	2,78			
		HxWxD	mm	250-1100-732	250-1400-732	250-1400-732	250-1400-732	250-1400-732	250-1600-732	250-1600-732			
Indoor Unit		p)	kg	30 (29)	39 (38)	39 (38)	40 (39)	40 (39)	44 (43)	44 (43)			
Onit			m³/min Pa	17,5-21,0-25,0	24,0-29,0-34,0	24,0-29,0-34,0	29,5-35,5-42,0	29,5-35,5-42,0	32,0-39,0-46,0	32,0-39,0-46,0			
			dB(A)	00.00.04	00.0		5 / 50 / 70 / 100	0.40	04.0	18-43			
) (SPL)	dB(A)	26-30-34 58		34-38 32		6-40 6		io-43			
	. ,	HxWxD	mm	880x840x330	,	1		981x1050x330 (+40		"			
		LIVAND	kg	55	76	78	84	85	84	85			
		Cooling	m³/min	50,1	79	79	86	86	86	86			
	Air Volume	Heating	m³/min	50,1	79	79	92	92	92	92			
Outdoor		Cooling	dB(A)	49	51	51	54	54	55	55			
Unit	Sound Level (SPL)	Heating	dB(A)	51	54	54	56	56	57	57			
	Sound Level (PWL)	Cooling	dB(A)	66	70	70	72	72	73	73			
	Operating Current (Max	<u> </u>	A	14.8	20	11,5	26,5	11,5	30	11.5			
	Breaker Size		Α	20	32	16	32	16	40	16			
	Diameter	Liquid/Gas	mm	*			9,52 / 15,88						
Ext. Piping	Max. Length	Out-In	m		30			4	10				
Piping	Max. Height	Out-In	m				30						
Guarant	eed Operating Range	Cooling(13)	°C	-15 ~ +46									
(Outdoor)		Heating	°C	-10 ~ +24				+21					
Refriger													
Reinger	ani/GWP	144 : 1 :	l .				R32/675(*4)						
Pre-Cha	rged quantity	Weight	kg	1,45	3,10	3,10	3,60	3,60	3,60	3,60			
		CO ₂ equivalent	t	0,98	2,09	2,09	2,43	2,43	2,43	2,43			
May and	lad auantitu	Weight	kg	2,37	4,10	4,10	5,00	5,00	5,00	5,00			
wax add	led quantity	CO, equivalent	t	1,60	2,77	2,77	3,38	3,38	3,38	3,38			
			_										

^(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO 2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the produci yourself and always ask a professional.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) Optional air protection guide is required where ambient temperature is lower than 1-5°C.

(*4) This GWP value is based on Regulation(EU) No 517/2014 from IPCC 4th edition,

MULT SPLI Series








SELECTION

Choose from types of indoor units and outdoor units that can run up to six indoor units each. Create the system that best matches room shapes and number of rooms.

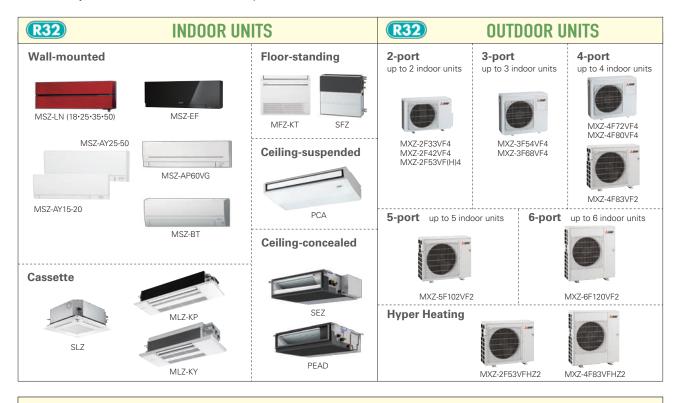

CHECK SYSTEM COMPATIBILITY

Possible combinations depends on the outdoor unit chosen. Please check the following points.

Check Indoor Units

Refer to the "Indoor Unit Compatibility Table" to check if the indoor units selected can be used with the outdoor unit selected. (Indoor units not listed in the table cannot be used.)

Check Indoor Unit Capacity Combination

Refer to the "Indoor Unit Compatibility Table" to check if the capacity combination of the indoor unit selected is connectable. (Combinations not listed cannot be connected.)

If the desired combination cannot be found, please change either the indoor or outdoor unit to match one of the combinations shown in the tables.

MXZ SERIES

Advancements in the MXZ Series include efficiency and flexibility in system expansion capabilities. The best solution when requiring multi-system air conditioning needs.





MXZ-2F33VF4 MXZ-2F42VF4 MXZ-2F53VF(H)4



(3-port) (4-port) (4-

MXZ-3F54VF4 MXZ-3F68VF4 MXZ-4F72VF4 MXZ-4F80VF4



(4-port) (5-port) MXZ-4F83VF2 MXZ-5F102VF2



R32

6-port MXZ-6F120VF2



Units can be Used Even if it is Connected to Only One Indoor Unit (4f83/5f102/6f120)

This unit can be used even if it is connected to only one indoor unit. This offers more flexibility for wide range of application that satisfies various customers' demand.

No Necessity for Refrigerant Charging

Depending on the pipe length and the indoor units that are connected, conventional models have required refrigerant charging, but no R32 MXZ model needs to be charged with additional refrigerant. This eliminates troublesome work at the site of installation, and reduces the amount of additional work for the installer.

Handle Up to 6 Rooms with a Single Outdoor Unit

The MXZ Series for R32 offers a ten-system line-up to choose from, ranging between 3.3 and 12.0kW. All of them are compatible with specific M, S and P series indoor units. A single outdoor unit can handle a wide range of building layouts.


Support Functions

Wiring/Piping Correction Function* (3F54/3F68/4F72/4F80/4F83/5F102/6F120)

Simply press a single button to confirm if wiring and piping are properly connected. Wiring errors are corrected automatically when discovered. This eliminates the need to confirm complicated wiring connections when expanding the system. (For details, refer to the outdoor unit installation manual.)

* Function cannot be used when the outdoor temperature is below 0°C.

The correction process requires 10–20 minutes to complete and must be conducted



Operation Lock

with the unit set to the "Cooling" mode.

To accommodate specific use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service. (For details, refer to the outdoor unit installation manual.)













Type (Inv	Type (Inverter Multi - Split Heat Pump)				Up to 2 In	door Units		Up to 3 In	door Units	Up	to 4 Indoor U	nits	Up to 5 Indoor Units	
Indoor Ur	nit	•			Please refer to*3									
Outdoor I	Jnit			MXZ-2F33VF4	MXZ-2F33VF4 MXZ-2F42VF4 MXZ-2F53VF4 MXZ-2F53VF44 MXZ-3F54VF4 MXZ-3F68VF4 MXZ-4F72VF4 MXZ-4F80VF4 MXZ-4F83VF2 MXZ-5F102VF2									
Refrigera	nt				R32									
Power	Source			Outdoor power supply										
Supply	Outdoor (V/Phase/I	-lz)		220 - 230 - 240V / Single / 50Hz										
Cooling	Capacity	Rated	kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.0	8.3	10.2	
	Input	Rated	kW	0.85	0.98	1.40	1.40	1.32	1.84	1.85	2.25	1.97	2.80	
	Design Load	'	kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.0	8.3	10.2	
	Annual Electricity	Consumption*1	kWh/a	189	169	216	216	222	301	311	368	342	436	
	SEER*3	· ·		6.1	8.7	8.6	8.6	8.5	7.9	8.1	7.6	8.5	8.2	
		Energy Efficiency C	Class*3	A++	A+++	A+++	A+++	A+++	A++	A++	A++	A+++	A++	
Heating	Capacity	Rated	kW	4.0	4.5	6.4	6.4	7.0	8.6	8.6	8.8	9.3	10.5	
·	Input	Rated	kW	0.91	0.88	1.56	1.56	1.40	1.91	1.87	2.00	2.00	2.28	
	Design Load		kW	2.7	3.5	3.5	3.5	5.2	6.8	7.0	7.0	7.0	7.4	
	Declared at referer	nce design temperature	kW	2.2	2.7	2.7	2.7	4.2	5.7	5.6	5.6	5.8	5.9	
	0	nt temperature	kW	2.4	2.9	2.9	2.9	4.8	6.4	6.2	6.2	6.2	6.4	
	at operat	tion limit temperature	kW	1.6	2.3	2.3	2.1	3.2	4.6	4.8	4.8	4.9	4.9	
	Back Up Heating	Capacity	kW	0.5	0.8	0.8	0.8	1.0	1.1	1.4	1.4	1.2	1.5	
	Annual Electricity	Consumption*1	kWh/a	944	1065	1065	1089	1583	2321	2389	2389	2087	2205	
	SCOP*3			4.0	4.6	4.6	4.5	4.6	4.1	4.1	4.1	4.7	4.7	
		Energy Efficiency C	Class*3	A+	A++	A++	A+	A++	A+	A+	A+	A++	A++	
Max. Ope	erating Current (Indo	or+Outdoor)	Α	10.0	12.2	12.2	12.2	18.0	18.0	18.0	18.0	21.4	21.4	
Outdoor	Dimensions	H*W*D	mm		550 - 800 (+69) - 285 (+59.5) 710 - 840 - 330 (+66)						796 - 9	50 - 330		
Unit	Weight		kg	33	37	37	38	58	58	59	59	62	62	
	Air Volume	Cooling	m³/min	30.8	28.4	32.7	32.7	31	35.4	35.4	40.3	57	63	
		Heating	m³/min	32.3	33.5	34.7	34.7	31	39.6	42.7	44.1	62	75	
	Sound Level (SPL)	Cooling	dB(A)	49	44	46	46	46	48	48	50	49	52	
		Heating	dB(A)	50	50	51	51	50	53	54	55	51	56	
	Sound Level (PWL)	Cooling	dB(A)	60	59	61	61	60	63	63	65	61	65	
	Breaker Size	-	Α	15	15	15	15	25	25	25	25	25	25	
Ext.	Port Diameter	Liquid	mm	6.35 × 2	6.35 × 2	6.35 × 2	6.35 × 2	6.35 × 3	6.35 × 3	6.35 × 4	6.35 × 4	6.35 × 4	6.35 × 5	
Piping		Gas	mm	9.52 × 2	9.52 × 2	9.52 × 2	9.52 × 2	9.52 × 3	9.52 × 3	12.7 × 1+9.52 × 3	12.7 × 1+9.52 × 3	12.7 × 1+9.52 × 3	12.7 × 1+9.52 × 4	
	Total Piping Length	(max)	m	20	30	30	30	50	60	60	60	70	80	
	Each Indoor Unit Pi	ping Length (max)	m	15	20	20	20	25	25	25	25	25	25	
	Max. Height		m	10	15 (10)*2	15 (10)*2	15 (10)*2	15 (10)*2	15 (10)*2	15 (10)*2	15 (10)*2	15	15	
	Chargeless Length		m	20	30	30	30	50	60	60	60	70	80	
	ed Operating Range	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	
[Outdoor]	_	Heating	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-20 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	
Refrigera	nt/GWP			R32/675*4	R32/675*4	R32/675*4	R32/675*4	R32/675*4	R32/675*4	R32/675*4	R32/675*4	R32/675*3	R32/675*3	
Pre-Char	ged Quantity	Weight	kg	0.8	1.0	1.0	1.0	2.4	2.4	2.4	2.4	2.4	2.4	
		CO ₂ equivalent	t	0.54	0.68	0.68	0.68	1.62	1.62	1.62	1.62	1.62	1.62	
Max Add	ed Quantity	Weight	kg	0.8	1.0	1.0	1.0	2.4	2.4	2.4	2.4	2.4	2.4	
		CO ₂ equivalent	t	0.54	0.68	0.68	0.68	1.62	1.62	1.62	1.62	1.62	1.62	

Type (Inv	erter Multi - :		Up to 6 Indoor Units		
Indoor Un	it				Please refer to*3
Outdoor U	Jnit				MXZ-6F120VF2
Refrigerar	nt				R32
Power	Source				Outdoor power supply
Supply	Outdoor (V/	Phase/H	z)		220 - 230 - 240V / Single / 50Hz
Cooling	Capacity		Rated	kW	12.0
	Input		Rated	kW	3.60
	Design Lo	ad		kW	12.0
	Annual El	ectricity	Consumption*1	kWh/a	612
	SEER*3				6.86
			Energy Efficiency C	lass*3	A++
Heating	Capacity		Rated	kW	14.0
	Input		Rated	kW	3.31
	Design Lo	ad		kW	8.1
			ce design temperature	kW	6.9
	Capacity	at bivalen	t temperature	kW	7.6
		at operati	on limit temperature	kW	5.7
	Back Up I	Heating C	Capacity	kW	1.2
	Annual El	ectricity	Consumption*1	kWh/a	2794
	SCOP*3				4.06
			Energy Efficiency C	lass*3	A ⁺
Max. Ope	rating Curre	nt (Indoo	r+Outdoor)	Α	29.8
	Dimensions		H*W*D	mm	1048 - 950 - 330
Unit	Weight			kg	87
	Air Volume		Cooling	m³/min	63
			Heating	m³/min	77
	Sound Leve	I (SPL)	Cooling	dB(A)	55
			Heating	dB(A)	57
	Sound Leve	I (PWL)	Cooling	dB(A)	69
	Breaker Size	•		Α	32
Ext.	Port Diamet	er	Liquid	mm	6.35 × 6
Piping			Gas	mm	12.7 × 1 + 9.52 × 5
	Total Piping	Length (max)	m	80
	Each Indoor	Unit Pip	ing Length (max)	m	25
	Max. Height	t		m	15
	Chargeless	Length		m	80
	ed Operating	Range	Cooling	°C	-10 ~ +46
[Outdoor]			Heating	°C	-15 ~ +24
Refrigera	nt/GWP			R32/675*4	
Pre-Charged Quantity Weight					2.4
			CO ₂ equivalent	t	1.62
Max Add	ed Quantity		Weight	kg	2.4
CO ₂ equivalent					1.62

*1 Energy consumption based on standard test results.

Actual energy consumption will depend on how the appliance is used and where it is located.

*2 If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 10 m.

*3 SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2F33VF4

MXZ-2F33VF4

MXZ-2F33VF4

MXZ-LN18VG2 + MXZ-LN25VG2

MXZ-2F53VF4/FH4

MXZ-LN18VG2 + MXZ-LN25VG2

MXZ-3F64VF4

MXZ-LN18VG2 + MXZ-LN35VG2

MXZ-3F68VF4

MXZ-LN18VG2 + MXZ-LN18VG2 + MSZ-LN18VG2

MXZ-4F80VF4

MXZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2

MXZ-4F80VF4

MXZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2

MXZ-4F80VF4

MXZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2

MXZ-4F80VF4

MXZ-4F80VF2

MXZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2

MXZ-4F80VF2

MXZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2

MXZ-6F120VF2

MXZ-6F120VF2

MXZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2

MXZ-6F120VF2

MXZ-6F120VF2

MXZ-6F120VF2

MXZ-6F120VF2

MXZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2

*4 This GWP value is based on Regulation(EU) No 517/2014 from IPCC 4th edition.


MXZ-VFHZ SERIES


New hyper-heating MXZ allows you to create an oasis of comfort throughout your home and office in the rooms you use most, any time of the year.



Standard Rated Heating Capacity is Maintained Even When the Outdoor Temperature Drops to –15°c.

Maintains high capacity output even when outdoor temperature is low.

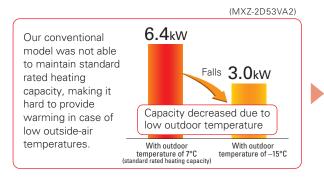

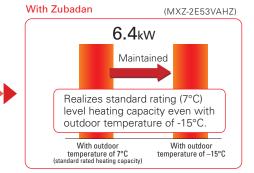


Can Operate at Outdoor Temperature of -25°c

- 1. Incorporated key parts resistant to cold of up to -25°C after rigorous selection.
- 2. Printed circuit board-core of the air conditioner—is coated on both sides to protect it in harsh environments.


Equipped Freeze-prevention Heater as Standard

Prevents capacity loss and operation from stopping due to drain water freezing.

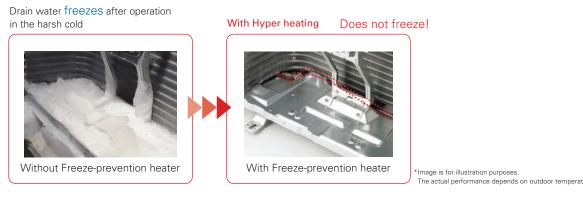

Continuous Heating for Long Periods

Wasteful defrosting operation suppressed to enable more comfortable long-term continuous heating.

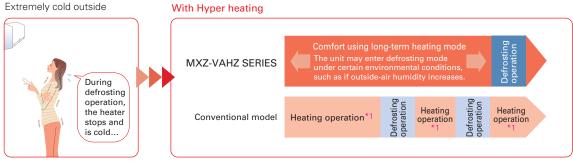



^{*1:} Conventional model performs continuous heating approximately 30min up to a maximum of 90min.

One Outdoor Unit Supports Multiple Indoor Units.

With MXZ-VFHZ, one outdoor unit can cool and heat up to six rooms. They can be installed neatly in sites with limited space such as condominium balconies.

*Please note that cooling and heating modes cannot be run simultaneously in different rooms.

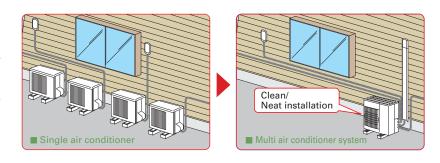


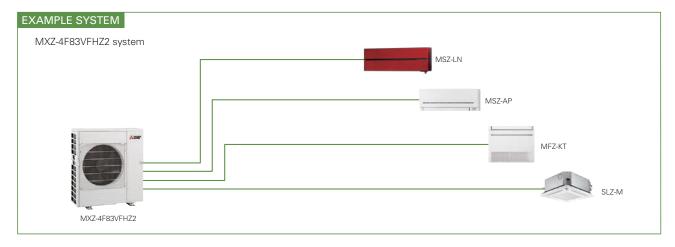

Freedom of Combinations in Cold Region Greatly Enhanced

The variety of indoor unit connection options in cold regions, restricted until now, has been greatly increased. Increased design freedom.



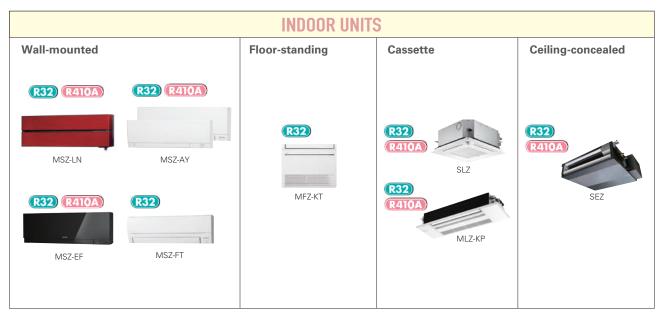

MXZ-VFHZ SERIES























MXZ-4F83VFHZ2

Туре				Inverter H	leat Pump				
Indoor Ur	nit				fer to*2 *3				
Outdoor I	Unit			MXZ-2F53VFHZ2	MXZ-4F83VFHZ2				
Refrigera	nt				12*4				
Power	Source			Outdoor po	ower supply				
Supply	Outdoor (V/Phase/H	lz)		220 - 230 - 240V / Single / 50					
Cooling	Capacity Rated			5.3 8.3					
· ·	, ,	Min - Max	kW	1.1 - 6.0	3.5 - 9.2				
	Total Input	Rated	kW	1.29	1.90				
	Design Load		kW	5.3	8.3				
	Annual Electricity Co	onsumption*1	kWh/a	274	398				
	SEER*5			6.8	7.3				
		Energy Efficiency Class		A++	A++				
Heating	Capacity	Rated (7°C)	kW	6.4	9.0				
(Average		Rated (–7°C)	kW	6.4	9.0				
Season)		Rated (-15°C)	kW	6.4	9.0				
		Min - Max	kW	1.0 - 7.0	3.5 - 11.6				
	Total Input	Rated	kW	1.36	1.70				
	Design Load		kW	6.4	10.1				
	Declared Capacity	at reference design temperature	kW	6.9	10.6				
		at bivalent temperature	kW	7.4	11.5				
		at operation limit temperature	kW	4.1	5.7				
	Back Up Heating Capacity			0.0	0.0				
	Annual Electricity Co	•	kWh/a	2172	3286				
	SCOP*5			4.1	4.3				
	Energy Efficiency Class			A ⁺	A+				
Max. Ope	erating Current (Indoo		Α	15.6	28.0				
	Dimensions	H*W*D	mm	796 × 950 × 330	1048 × 950 × 330				
Unit	Weight	11. 11. 2	kg	61	86				
	Air Volume	Cooling	m³/min	43	63				
		Heating	m³/min	41	77				
	Sound Level (SPL)	Cooling	dB(A)	45	55				
	,	Heating	dB(A)	47	57				
	Sound Level (PWL)	Cooling	dB(A)	55	66				
	Breaker Size		Α	16	30				
Ext.	Diameter	Liquid / Gas	mm	6.35 × 2 / 9.52 × 2	6.35× 4 / 12.7 × 1+9.52 × 3				
Piping	Total Piping Length		m	30	70				
	Each Indoor Unit Pip		m	20	25				
	Max. Height	J - J ()	m	15	15				
	Chargeless Length		m	30	70				
Guarante	ed Operating Range	Cooling	℃	−10 ~ +46	-10 ~ +46				
[Outdoor]		Heating	℃	-25 ~ +24	-25 ~ +24				
		ricuting		20 ° T24					

^{*1} Energy consumption based on standard test results.
Actual energy consumption will depend on how the appliance is used and where it is located.

*2 EER/COP, EEL rank, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

*MX2-FES3VFH22 MSZ-LN18WG2 + MSZ-LN3SWG2

MX2-FES3VFH22 MSZ-LN18WG2 + MSZ-LN2SWG2 + MSZ-LN25VG2

*3 Indoor unit compatibility table is shown on page 120.

*4 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

MXZ-HA SERIES

Multi-port outdoor units exclusively for MSZ-HR indoor units.





Stylish Design with Flat Panel Front

A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.




Easy to Create Various Combinations

Wide range of simple combinations only possible using multi-port outdoor units.


Two bedrooms






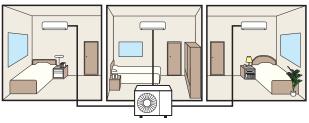

Living room and one bedroom

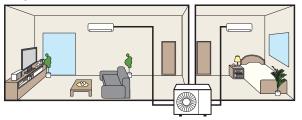

Wide living room

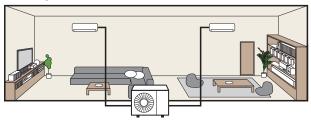












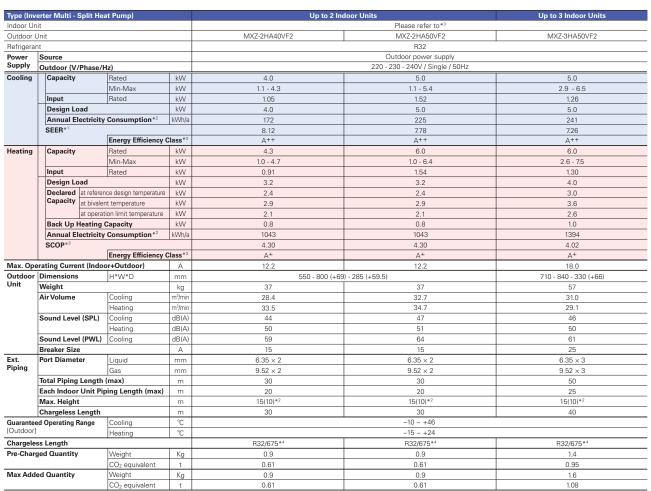

¹ Energy consumption based on standard test results.

Actual energy consumption will depend on how the appliance is used and where it is located.

*2 If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 10 m.

*3 SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2HA40VF2 → MSZ-HR25VF + MSZ-HR25VF

MXZ-2HA50VF2 → MSZ-HR25VF + MSZ-HR25VF

MXZ-3HA50VF2 → MSZ-HR25VF + MSZ-HR25VF

*4 This GWP value is based on Regulation(EU) No 517/2014 from IPCC 4th edition,

^{*4} This GWP value is based on Regulation(EU) No 517/2014 from IPCC 4th edition,

To ensure full capacity in cold and snowy regions...

3 Important Points to Remember When Installing the Outdoor Unit



* RAC/PAC (inc. Air to Water) /MXZ


Wind and snow can significantly reduce capacity.

Be sure to check the infomation below and install the outdoor unit correctly.



Installation Location

Be aware of the prevailing wind direction in winter and install the outdoor unit where it is as sheltered as possible.

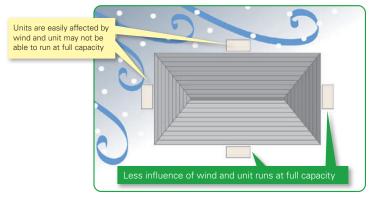


2

Measures for Drainage of Water

Case 1: Unit is installed close to passage (walkway)

Do not install the unit close to passage as drainage water from the unit may freeze and cause a slipping hazard.

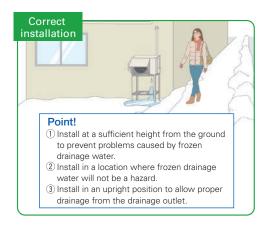







Case 2: Multiple units are installed

Do not install units on top of one another as it may cause frozen drainage water on the bottom unit.





Measures for Snow

Unit is installed on the ground

To avoid the adverse effects of snow and frozen drainage water, install the unit on a stand to ensure a sufficient height from the ground.

[RAC/PAC/MXZ] Correct installation

Point!


- 1) Install at a position/height to prevent the unit being buried in snow *1 and the adverse effects of frozen drainage water.*2
- 2) Install so as to avoid the effects of snow or snowdrift.
- 3 Install so as to avoid the damage from falling snow or icicles.
 - *1 Install at a height above the highest snowfall depth. ** Ilstand at a riegin above uniform single standard and severe may form an icicle which needs to be cleared away regularly to prevent a blocked drainage outlet.





Use a stand to add sufficient height to protect the unit heat exchanger from snow and prevent icicles forming during defrost operation.

Correct installation Minimum height (h) should be higher than the highest snowfall depth (h0) +20cm h0



Install snow protection hood as necessary

[RAC/PAC/MXZ]



Necessity of accessories (drain socket & centralised drain pan, stand, snow protection hood, base heater)

	Snowy region	Cold region				
	Countermeasures for snow	Countermeasures for freezing	Remarks			
Drain socket, Centralised drain pan	Not used	Not used	Prevents freezing			
Stand	Needed	Needed	IRAC / PAC / MXZI 1. Install so as to prevent the unit being buried in snow (at a height greater than the highest snowfall depth). Be sure that the stand does not obstruct drainage. 2. Install so as to prevent damage to the unit due to frozen drainage water (icicles).			
Snow protection hood	Needed *When the installation position is subject to snowfall.	_	Prevents heat exchanger from being covered in snow. Prevents snow accumulating inside the air duct.			
Base heater	_	Needed	[RAC/PAC/MXZ] Outdoor units equipped with a heater for cold regions are those with an "H" in the model name. For the cold-climate zone, use of a unit with a heater is strongly recommended. Even for the moderate-climate zone use of a unit with a heater is recommended for regions subject to high humidity in winter.			

About disposal of drainage water



CAUTION

When the unit is installed in cold or snowy regions:

Drainage water may freeze in the drain socket/hose and prevent the fan from rotating.



Do not attach a drain socket packaged as an accessory to the unit.

* In the case that fitting a drain socket is absolutely necessary, steps must be taken so that the drainage water does not freeze. For more information, please consult Mitsubishi Electric or one of its dealers/resellers.

Arrangement for						
snow protection hood						

[RAC/PAC/MXZ]

Separately sold parts are available for some models.

Please consult Mitsubishi Electric or one of its dealers/resellers at the time of purchase for details.

Indoor Unit Compatibility Table

■ MXZ Series R32
Possible combinations of outdoor units and indoor units are shown below.

			MXZ-*1	MXZ-*1	MXZ-*1	MXZ*1	MXZ-*1	MXZ-*1	MXZ-*1	MXZ-*1	MXZ-	MXZ-	MXZ-	MXZ-	MXZ-*1	MXZ-*1	M
or Unit				2F42VF4				3F68VF4									
eries	Wall-	MSZ-RZ25VU															
	Mounted	MSZ-RZ35VU															
		MSZ-RZ50VU															
		MSZ-RW25VG	•	•	•	•	•	•	•	•	•	•	•	•			Г
		MSZ-RW35VG				•	•						•	•			
		MSZ-RW50VG					•	•	•	•	•	•	•	•			Г
		MSZ-LN18VG2(W)(V)(R)(B)				•	•							•			
		MSZ-LN25VG2(W)(V)(R)(B)	•	•	•	•	•	•	•	•	•	•	•	•			H
		MSZ-LN35VG2(W)(V)(R)(B)			•								•				H
																	┡
		MSZ-LN50VG2(W)(V)(R)(B)					•	•	•	•	•	•	•	•			L
		MSZ-FT25VG															
		MSZ-FT35VG				•						•					L
		MSZ-FT50VG															
		MSZ-AY15VGK(P)								•				•			
		MSZ-AY20VGK(P)															
		MSZ-AY25VGK(P)	•	•	•	•	•	•		•		•	•	•			Г
		MSZ-AY35VGK(P)															
		MSZ-AY42VGK(P)			•	•	•	•	•	•	•	•	•	•			H
		MSZ-AY50VGK(P)			•	•	•	•	•		•	•	•	•			H
																	H
		MSZ-AP60VG(K)						•	•	•		•	•	•			H
		MSZ-AP71VG(K)										•	•	•			
		MSZ-EF18VG(K)(W)(B)(S)	•	•	•	•	•	•	•	•	•	•	•	•			L
		MSZ-EF22VG(K)(W)(B)(S)		•		•	•						•	•			L
		MSZ-EF25VG(K)(W)(B)(S)		•		•	•	•	•	•	•	•	•	•			1
		MSZ-EF35VG(K)(W)(B)(S)		•		•	•	•						•			
		MSZ-EF42VG(K)(W)(B)(S)			•	•	•	•	•	•	•	•	•	•			T
		MSZ-EF50VG(K)(W)(B)(S)				•											
		MSZ-BT20VG(K)	•	•	•	•	•	•	•	•	•	•	•	•			f
		MSZ-BT25VG(K)		•	•						•			•			H
																	H
		MSZ-BT35VG(K)		•	•	•	•	•	•	•	•	•	•	•			L
		MSZ-BT50VG(K)															
		MSZ-HR25VF(K)															
		MSZ-HR35VF(K)															
		MSZ-HR42VF(K)														•	
		MSZ-HR50VF(K)															
		MSZ-HR60VF(K)															H
		MSZ-HR71VF(K)															H
		MSZ-DW25VF													•	•	H
															_		H
		MSZ-DW35VF															L
		MSZ-DW50VF															L
	Floor-	MFZ-KT25VG												•			
	Standing	MFZ-KT35VG															
		MFZ-KT50VG															
	1-way	MLZ-KP25VG		•	•	•	•	•	•	•	•	•	•	•			
	Cassette	MLZ-KP35VG				•	•							•			
		MLZ-KP50VG					•	•	•		•	•	•	•			T
		MLZ-KY20VG					•	•	•					•			H
ies	2×2																H
ies	Cassette	SLZ-M15FA2	•	•	•	•	•	•	•	•	•	•	•	•			H
	Gubbotto	SLZ-M25FA2		•													
		SLZ-M35FA2												•			L
		SLZ-M50FA2					•	•					•	•			L
		SLZ-M60FA2															Γ
	Ceiling-	SEZ-M25DA2 *2		•		•	•	•	•	•	•	•	•	•			
	Concealed	SEZ-M25DAL2 *2	•	•	•	•	•	•	•	•	•	•	•	•			T
		SEZ-M35DA2		•	•	•	•	•	•	•	•	•	•	•			t
		SEZ-M35DAL2		•	•	•	•	•	•	•	•	•	•	•			f
		SEZ-M50DA2					•	•	•		•	•	•	•			-
														_			F
		SEZ-M50DAL2					•	•	•	•	•	•	•	•			L
		SEZ-M60DA2						•					•	•			
		SEZ-M60DAL2						•		•		•	•	•			L
		SEZ-M71DA2									•			•			
		SEZ-M71DAL2									•	•	•	•			Γ
	Concealed	SFZ-M25VA			•	•	•	•	•	•	•	•	•	•			f
	Floor-	SFZ-M35VA		•	•	•	•	•	•	•	•	•	•	•			f
	Standing	SFZ-M50VA					•	•	•	•	•	•	•	•			H
																	F
		SFZ-M60VA							•	•		•	•	•			L
		SFZ-M71VA											•	•			L
ies	Ceiling-	PCA-M50KA2					•	•	•	•							L
	Suspended	PCA-M60KA2															ĺ
		PCA-M71KA2															Г
	Ceiling-	PEAD-M35JA2					* 3	* 3	*3	* 3	* 3	*3*4	* 3	* 3			t
	Concealed	PEAD-M35JAL2					•*3	*3	•*3	*3	•*3	*3*4	• *3	•*3			f
									_								\vdash
		PEAD-M50JA2					●*3	●*3	* 3	●*3	●*3	●*3*4 ●*0*4	●*3	●*3			F
		PEAD-M50JAL2					* 3	* 3	* 3	●*3	*3	●*3*4	*3	● *3			L
		PEAD-M60JA2									* 3	● *3*4	●*3	●*3			
		PEAD-M60JAL2									* 3	● *3*4	●*3	●*3			L
	i .	PEAD-M71JA2									■ *3	*3*4	* 3	* 3			
		T ET ID THIT TOTAL															

^{*1} MXZ outdoor units are not designed to operate with a single indoor unit with one-to-one piping work. Please install at least two indoor units.

*2 SEZ-M25 cannot be connected with MXZ-2F/3F/4F when total capacity of connected indoor units is equivalent to outdoor capacity (capacity ratio is 1).

*3 Maximum total current of indoor units: 3A or less

*4 P series cannot be connected with MXZ-4F83VFHZ2 when ampere limit adjustment function is operated.

SERIES







SELECTION

Choose from types of indoor units and outdoor units.
Create the system that best matches room shapes and number of rooms.





Check Indoor Units Refer to the "Indoor Unit Compatibility Table" to check if the indoor units selected can be used with the outdoor unit selected. (Indoor units not listed in the table cannot be used.) Check Indoor Unit Capacity Combination Refer to the "Combination Table" to check if the capacity combination of the indoor unit selected is connectable. (Combinations not listed cannot be connected.) If the desired combination cannot be found, please change either the indoor or outdoor unit to match one of the combinations shown in the tables.


PUMY-SP SERIES

Air conditioning system supports replacement work by simplifying the installation process. Ideal for supporting renewal needs at small offices and stores, home offices, etc.



R410A

PUMY-SP112/125/140VKM2 PUMY-SP112/125/140YKM2

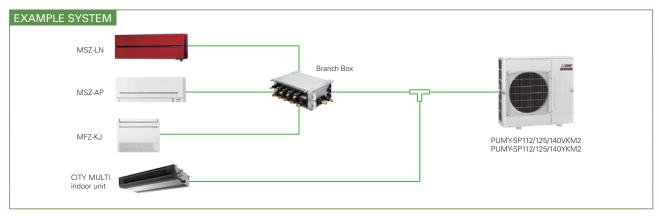

Light Weight and Compact Size


Compact design fits into narrow outdoor unit space of condominiums and offices. Light weight design facilitates easy installation and transportation.



Unobstructive, compact, and easy to hide from view

Conventional 2-fan type outdoor units may spoil the view. Due to its compact size, the new outdoor fan unit can be installed in loca-

tions that would have been inappropriate.



Easy installation and transportation

The reduced weight and height allow for better transportation performance. Carrying and installing become easier.

could not before.



Industry's Top Energy Efficiency

Even with its compact size and light weight, it has a high EER and COP. Costs are reduced with the industry's best energy saving abilities.



Super Silent Mode*

Noise level can be reduced up to 10dB(A). This allows you to operate the unit even in the night in a residential zone.


- *Capacity reduction differs by mode setting.
- *PAC-SC36NA-E is required to activate Super Silent mode

Rear Piping is Available

Freedom with layout due to its piping pullout locations in four directions

The in-door unit allows piping from any four directions; front, back, bottom, or right. This enables easier horizontal connection for collective layout.

The out-door unit with an expanded piping layout flexibility greatly improves piping workability.




The installation location is flexible.

thanks to its 30Pa static pressure.


You can install it in locations that you

An External Static Pressure of 30Pa

An external static pressure of 30Pa allows outdoor unit to be installed on balconies in high-rise building or spaces near louvers.



*Noise level will increase when using this function.



















Model			PUMY-SP112VKM2 (-BS)	PUMY-SP125VKM2 (-BS)	PUMY-SP140VKM2 (-BS)	PUMY-SP112YKM2 (-BS)	PUMY-SP125YKM2 (-BS)	PUMY-SP140YKM2 (-BS)
Power Source			1-phas	se 220-230-240V 50Hz, 220V	/ 60Hz	3-phas	se 380-400-415V 50Hz, 380V	/ 60Hz
Cooling Capacity		⁺¹ kW	12.5	14.0	15.5	12.5	14.0	15.5
(Nominal)	Power Input	kW	4.46	5.11	5.34	4.46	5.11	5.34
	Current Input	А	20.69 - 19.79 - 18.97, 20.69	23.71 - 22.68 - 21.73, 23.71	24.77 - 23.70 - 22.71, 24.77	7.14 - 6.78 - 6.54, 7.14	8.18 - 7.77 - 7.49, 8.18	8.55 - 8.12 - 7.83, 8.55
	EER	kW / kW	2.80	2.74	2.90	2.80	2.74	2.90
Temp. Range of	Indoor Temp.	W.B.	15.0~24.0°C (59~75°F)					
Cooling	Outdoor Temp. *2	D.B.	-5.0~52.0°C (23~126°F)					
Heating Capacity		⁺³ kW	14.0	16.0	16.5	14.0	16.0	16.5
(Nominal)	Power Input	kW	3.66	4.31	4.36	3.66	4.31	4.36
	Current Input	А		20.00 - 19.13 - 18.33, 20.00	20.23 - 19.35 - 18.54, 20.23	5.86 - 5.57 - 5.36, 5.86	6.90 - 6.55 - 6.32, 6.90	6.98 - 6.63 - 6.39, 6.98
	COP	kW/kW		3.71	3.78	3.83	3.71	3.78
Temp. Range Of	Indoor Temp.	D.B.	15.0~27.0°C (59~81°F)	15.0~27.0°C(59~81°F)				
Heating	Outdoor Temp.	W.B.	-20.0~15.0°C (-4~59°F)					
Indoor Unit	Total Capacity		50~130 % of outdoor unit capacity					
Connectable	Model / Quantity		10-140/12	10 - 140 / 12	10 - 140 / 12	10 - 140 / 12	10 - 140 / 12	10 - 140 / 12
		Branch Box*5	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8
	Mixed Branch System Box	unity minutes		10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5
	1 unit	Branch Box*5		15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5
	Branch Box	Oity Ividiti		10 - 140 / 3	10 - 140 / 3	10 - 140 / 3	10 - 140 / 3	10 - 140 / 3
	2 units	Branch Box*	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8
Sound Pressure Lev (Measured In Anech		dB <a>	52/54	53/56	54/56	52/54	53/56	54/56
Sound Power Level (Measured In Anech		dB <a>	72/74	73/76	74/76	72/74	73/76	74/76
Refrigerant Piping	Liquid Pipe	mm (in.)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)
Diameter	Gas Pipe	mm (in.)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
Fan	Type × Quantity		Propeller Fan x 1					
	Air Flow Rate	m³/min	77	83	83	77	83	83
		L/s	1,283	1,383	1,383	1,283	1,383	1,383
		cfm	2,719	2,931	2,931	2,719	2,931	2,931
	Motor Output	kW	0.20 × 1	0.20 × 1	0.20 × 1	0.20 × 1	0.20 × 1	0.20 × 1
	External Static	Press.	0Pa / 30Pa*6					
Compressor	Type × Quantity				Twin rotary herme	tic compressor x 1		
Starting Method						erter		
	Motor Output	kW	3.9	3.9	4.2	3.9	3.8	4.1
External dimension	H*W*D	mm				× 330 (+40)		
		in.			38-5/8 × 41-3/8	× 13 (+1-37/64)		
Net Weight		kg (lbs)		93 (205)*7			94 (207)*8	

	Indoor	Outdoor	Piping Length	Level Difference	External Static Press. (Outdoor Unit)
Cooling	27°C DB / 19°C WB	35°C	7.5m (24 - 9 / 16ft.)	0m (0ft)	0 Pa
Heating	20°C DB	7°C DB / 6°C WB	7.5m (24 - 9 / 16ft.)	0m (0ft)	0 Pa

^{*2 10} to 52°C; incase of connecting PKFYP15/P20/P25/P32VLE(R)M indoor unit and M series indoor unit with connection kit and M series, S series, and P series type indoor unit with branch box.

*4 It is possible to connect 1 Fresh Air type indoor unit to 1 outdoor unit. (1:1 system)

*5 At least 2 indoor units must be connected when using branch box.

*6 OP as initial setting

*7 94 (207), for PUMYSP112/125/140YKM2-BS

*8 95 (209), for PUMYSP112/125/140YKM2-BS

Туре				Branch Box			
Model Name	•			PAC-MK54BC	PAC-MK34BC		
Connectable	Number of Indoo	r Units		Maximum 5	Maximum 3		
Power Supp	ly (from outdoor u	ınit)		~ / N, 220 / 230 / 240 V, 50 Hz, ~ / N, 220 / 230 V, 60 Hz			
Input			kW	0.0	003		
Running Cur	rent		Α	0.05 (Max. 6)			
Dimensions		H*W*D	mm	170 × 450 × 280			
Weight			kg	7.4	6.7		
Piping	Branch	Liquid	mm	ø6.35 × 5	ø6.35 × 3		
Connection (Flare)	[Indoor Side]	Gas	mm	ø9.52 × 4, ø12.7 × 1	ø9.52 × 3		
(riare)	Main	Liquid	mm	ø9.52			
	[Outdoor Side]	Gas	mm	ø15	5.88		

<Branch box compatible table>


2.4					
Outdoor unit	Branch box	PAC-MK31/ 51BC(B)	PAC-MK32/ 52BC(B)	PAC-MK33/ 53BC(B)	PAC-MK33/ 54BC
Outdoor unit 1fan	PUMY-SP112/125/140V/YKM2(-BS)	N/A	N/A	√*	✓*
Outdoor unit 2fan	PUMY-P112/125/140VKM6(-BS)	N/A	N/A	✓	✓
	PUMY-P112/125/140YKM5(-BS)	N/A	N/A	✓	✓
	PUMY-P200YKM3(-BS)	N/A	N/A	√*	✓*
	PUMY-P250/300YBM2(-BS)	N/A	N/A	√*	√*

^{*}ecodan is NG

[SP112-140V/YKM2(-BS)]

Refrigerant Piping Lengths	Maximum meters
Total length	120
Maximum allowable lengthTo	City Multi indoor
ι	ınit: 70
Th	rough Branch box: 80

Vertical differentials between units	Maximum meters
Indoor/outdoor (outdoor higher)	50
Indoor/outdoor (outdoor lower)	30
Indoor/indoor	15*



*In case of branch box connection: 12m

The piping connection size differs according to the type and capacity of outdoor/indoor units.

Match the piping connection size of branch box with outdoor/indoor unit. If the piping connection size of branch box with outdoor/indoor unit. If the piping connection size of branch box does not match the piping connection size of outdoor/indoor unit, use optional different-diameter (deformed) joints to the branch box side. (Connect deformed joint directly to the branch box side.)

PUMY-P SERIES


Air conditioning system supports replacement work by simplifying the installation process. Ideal for supporting renewal needs at small offices and stores, home offices, etc.





R410A


PUMY-P112/125/140VKM6 PUMY-P112/125/140YKM5 PUMY-P200YKM3 PUMY-P250/300YBM2

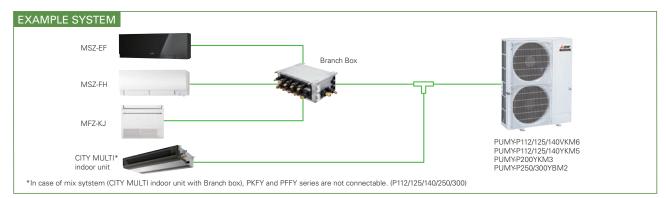

The Two-pipe Zoned System Designed for Heat Pump Operation

PUMY series make use of a two-pipe refrigerant system, which allows for system changeover from cooling to heating, ensuring that a constant indoor climate is maintained in all zones. The compact outdoor unit utilizes R410A refrigerant and an INVERTER-driven compressor to use energy effectively.

With a wide range of indoor unit line-up in connection with a flexible piping system, PUMY series can be configured for all applications. Up to 12 (P250/300: Up to 30) indoor units can be connected with up to 130% connected capacity to maximize engineer's design options. This feature allows easy air conditioning in each area with convenient individual controllers.

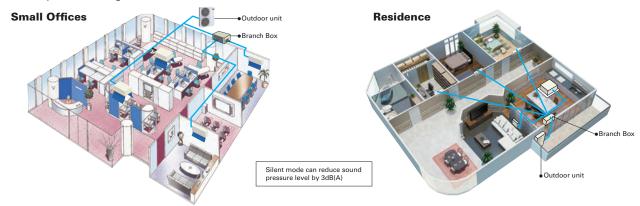

				Maxim	um Meters		
			Only City Multi*1	Only Branch Box	Mixed System (City Multi*	Indoor Unit + Branch Box)	
			Indoor Unit	Connection	City Multi*1 Indoor Unit	Via Branch Box	
P112/125/140	Refrigerant Piping Length	Total Length	300	150	240 (2 Branch boxes) / 300 (1 Branch box)	
		Maximum Allowable Length	150 (175 equivalent)	80	85 (95 equivalent)	80	
		Farthest Indoor From First Branch	30	-	30	-	
		Piping Length Between Outdoor Unit and Branch Boxes	-	55	-	55	
	Vertical Differentials	Indoor/Outdoor (Outdoor higher)	50	50	Ę	iO	
	Between Units	Indoor/Outdoor(Outdoor Lower)	40*2	40	4	10	
		Indoor/Indoor	15	12	1	2	
P200	Refrigerant Piping Length	Total Length	150	150	1	50	
		Maximum Allowable Length	80 (90 equivalent)	80	80 (90 equivalent)	80	
		Farthest Indoor From First Branch	30	-	30	-	
		Piping Length Between Outdoor Unit and Branch Boxes	-	55	-	55	
	Vertical Differentials	Indoor/Outdoor (Outdoor higher)	50	50	50		
	Between Units	Indoor/Outdoor (Outdoor Lower)	40	40	40		
		Indoor/Indoor	15	12	12		
P250/300	Refrigerant Piping Length	Total Length	310	240	3	10	
		Maximum Allowable Length	150 (175 equivalent)	80	85 (95 equivalent)	80	
		Farthest Indoor From First Branch	30	-	30	-	
		Piping Length Between Outdoor Unit and Branch Boxes	-	95	-	95	
	Vertical Differentials	Indoor/Outdoor (Outdoor higher)	50	50	50		
	Between Units	Indoor/Outdoor (Outdoor Lower)	40	40	40		
		Indoor/Indoor	15	12	1	2	

^{*1} Include system with connection kit *2 In case of including PKFY or PFFY, height between units is 30m.

30Pa External Static Pressure* Option (requires PAC-SJ71FM-E)

An external static pressure of 30Pa enables the outdoor unit to be installed on balconies in high-rise building or spaces near louvers.

- *PUMY-P112/125/140VKM6(-BS),PUMY-P112/125/140YKM5(-BS)only.
- * Noise level will increase when using this function

















Model			PUMY-P112VKM6 (-BS)	PUMY-P125VKM6 (-BS)	PUMY-P140VKM6 (-BS)	PUMY-P112YKM5 (-BS)	PUMY-P125YKM5 (-BS)	PUMY-P140YKM5 (-BS)	PUMY-P200YKM3 (-BS)	PUMY-P250YBM2 (-BS)	PUMY-P300YBM2 (-BS)	
Power Source			1-phase 220	1-230-240V 50Hz, 220)-230V 60Hz	3-phase 3	80-400-415V 50Hz, 3	80V 60Hz	3-pl	nase 380-400-415V 5	0Hz	
Cooling Capacity	*1	kW	12.5	14.0	15.5	12.5	14.0	15.5	22.4	28.0	33.5	
(Nominal)	Power Input	kW	4.34	5.00	5.17	4.34	5.00	5.17	7.18	8.21	11.96	
	Current Input	Α	20.03 - 19.16 - 18.36, 20.03 - 19.16	23.08 - 22.08 - 21.16, 23.08 - 22.08	23.86 - 22.83 - 21.87, 23.86 - 22.83	7.76 - 7.37 - 7.11, 7.76	8.45 - 8.02 - 7.73, 8.45	8.27 - 7.86 - 7.58, 8.27	11.73 - 11.15 - 10.75	13.41 - 12.74 - 12.28	19.54 - 18.56 - 17.89	
	EER	kW/kW	2.88	2.80	3.00	2.88	2.80	3.00	3.12	3.41	2.80	
Temp. Range of	Indoor Temp.	W.B.	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	15.0~24.0°C (59 ~75°F)	
Cooling	Outdoor Temp. *2,*3	D.B.	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	
Heating Capacity	*4	kW	14.0	16.0	18.0	14.0	16.0	18.0	25.0	31.5	37.5	
(Nominal)	Power Input	kW	3.49	4.06	4.63	3.49	4.06	4.63	5.85	7.91	9.69	
	Current Input	Α	16.11 - 15.41 - 14.77, 16.11 - 15.41	18.74 - 17.93 - 17.18, 18.74 - 17.93			6.86 - 6.52 - 6.28, 6.86		9.56 - 9.08 - 8.76	12.92 - 12.28 - 11.83	15.83 - 15.04 - 14.50	
	COP	kW/kW	4.01	3.94	3.89	4.01	3.94	3.89	4.27	3.98	3.87	
Temp. Range Of	Indoor Temp.	D.B.	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	
Heating	Outdoor Temp.	W.B.	-20.0~15.0°C (-4~59°F)	-20.0~15.0°C (-4~59°F)	-20.0~15.0°C (-4~59°F)	-20.0~15.0°C (-4~59°F)	-20.0~15.0° C(-4~59°F)	-20.0~15.0°C (-4~59°F)	-20.0~15.0°C (-4~59°F)	-20.0~15.0°C (-4~59°F)	-20.0~15.0°C (-4~59°F)	
Indoor Unit	Total Capacity		50~130 % of outdoor unit capacity	50~130 % of outdoor unit capacity	50~130 % of outdoor unit capacity	50~130 % of outdoor unit capacity	50~130 % of outdoor unit capacity	50~130 % of outdoor unit capacity	50~130 % of outdoor unit capacity	50~130% of outdoor unit capacity	50~130% of outdoor unit capacity	
Connectable	Model / Quantity City Multi*		10 - 140 / 9	10 - 140 / 10	10 - 140 / 12	10 - 140 / 9	10 - 140 / 10	10 - 140 / 12	10 - 140 / 12	10 - 250 / 30	10 - 250 / 30	
		Branch Box*6	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 50 / 12	15 - 50 / 12	
Cooling Capacity (Nominal) Temp. Range of Cooling Heating Capacity (Nominal) Temp. Range Of Heating Indoor Unit Connectable Sound Pressure Level (Measured In Anechoi Sound Power Level (Measured In Anechoi Refrigerant Piping Diameter Fan Compressor	Mixed Branch System Box	City Multi	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 140 / 5	10 - 200 / 5	10 - 250 / 25	10 - 250 / 25	
	1 unit	Branch Box*6	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	
	Branch Box	City Multi	10 - 140 / 3 or 2*3	10 - 140 / 3	10 - 140 / 3	10 - 140 / 3 or 2*3	10 - 140 / 3	10 - 140 / 3	10 - 200 / 3	10 - 250 / 23	10 - 250 / 23	
	2 units	Branch Box*6	15 - 100 / 7 or 8*3	15 - 100 / 8	15 - 100 / 8	15 - 100 / 7 or 8*3	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 50 / 10	15 - 50 / 10	
		City Multi	-	-	-	-	-	-	-	10 - 250 / 22	10 - 250 / 22	
	3 units	Branch Box*6	-	-	-	-	-	-	-	15 - 50 / 12	15 - 50 / 12	
		dB <a>	49/51	50/52	51/53	49/51	50/52	51/53	57/61	55/61	57/62	
	oic Room) dB <a>		69/71	70/72	71/73	69/71	70/72	71/73	76/80	74/79	75/79	
Refrigerant Piping	Liquid Pipe	mm (in.)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)*7	9.52 (3/8) *8	12.7 (1/2)	
	Gas Pipe	mm (in.)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	19.05 (4/3)	22.4 (7/8)	22.4 (7/8)	
Fan	Type x Quantity		Propeller Fan x 2	Propeller Fan x 2	Propeller Fan x 2	Propeller Fan x 2	Propeller Fan x 2	Propeller Fan x 2	Propeller Fan x 2	Propeller Fan x 2	Propeller Fan x 2	
	Air Flow Rate	m³/min	110	110	110	110	110	110	139/141	165/183	165/183	
		L/s	1,833	1,833	1,833	1,833	1,833	1,833	2,317/2,350	2,750/3,050	2,750/3,050	
		cfm	3,884	3,884	3,884	3,884	3,884	3,884	4,909/4,979	5,826/6,462	5,826/6,462	
	Motor Output	kW	0.074 × 2	0.074 × 2	0.074 × 2	0.074 × 2	0.074 × 2	0.074 × 2	0.20 × 2	0.375 × 2	0.375 × 2	
Compressor	Type x Quantity					Scrol	I hermetic compress	or × 1				
	Starting Method						Inverter					
	Motor Output	kW	2.9	3.5	3.9	2.9	3.5	3.9	5.3	8.87	10.15	
External Dimension I	I*W*D	mm				338 × 1,050 × 330 (+					0 × 460 (+45)	
		in.			52-11/	16 × 41-11/32 × 13 (+				65-7/16 × 41-11/32 × 187/64 (+1		
Net Weight				123 (271)			125 (276)		141 (311)	192 (423)		

*1.*4 Nominal conditions

	Indoor	Outdoor	Piping Length	Level Difference
Cooling	27°C DB / 19°C WB	35°C	7.5m	0m
Heating	20°C DB	7°C DB / 6°C WB	7.5m	0m

2 10 to 52°C D.B.: When connecting PKFVP10/15/20/25/32VLM, PKFVP15/20/25VBM, PFFYP20/25/32VKM and PFFYP20/25/32VCM, PFFYP20/25/32VLE(R)M, PEFYP-VMA3, M, S and P series indoor unit.

- *3 When connecting 7 indoor units via branch box, connectable City Multi indoor units are 3; connecting 8 indoor units via branch box, connectable indoor units are 2.

 *5 It is possible to connect 1 Fresh Air type indoor unit to 1 outdoor unit. (1:1 system)

 *6 At least 2 indoor units must be connected when using branch box.

 *7 Liquid pipe diameter: 12.7mm when piping length is more than 60m.

 *8 Liquid pipe diameter: 12.7mm, when further piping length is longer than 90m, and when PEFYP200 or P250 is connected.

Туре				Branch	Вох			
Model Name)			PAC-MK54BC	PAC-MK34BC			
Connectable	Number of Indoo	or Units		Maximum 5	Maximum 3			
Power Supp	ly (from outdoor	unit)		~ / N, 220 / 230 / 240 V, 50 H	lz, ~ / N, 220 / 230 V, 60 Hz			
Input			kW	0.00	03			
Running Cur	Running Current			0.05 (M	lax. 6)			
Dimensions		H*W*D	mm	170 × 450 × 280				
Weight			kg	7.4	6.7			
Piping	Branch	Liquid	mm	ø6.35 × 5	ø6.35 × 3			
Connection	[Indoor Side]	Gas	mm	ø9.52 × 4, ø12.7 × 1	ø9.52 × 3			
(Flare)	Main Liquid			ø9.52				
	[Outdoor Side] Gas			ø15.i	88			

* The piping connection size differs according to the type and capacity of outdoor/indoor units. Match the piping connection size of branch box with outdoor/indoor unit. If the piping connection size of branch box does not match the piping connection size of outdoor/indoor unit, use optional different-diameter (deformed) joints to the branch box side. (Connect deformed joint directly to the branch box side.)


PUMY-SM

Air conditioning system supports replacement work by simplifying the installation process. Ideal for supporting renewal needs at small offices and stores, home offices, etc.




(R32) PUMY-SM112/125/140VKM PUMY-SM112/125/140YKM

System of R32 PUMY

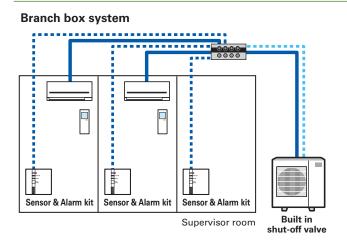

Free plan system

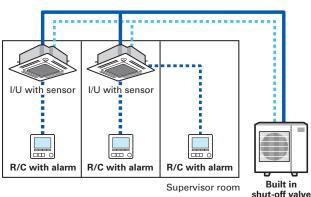

* Solid lines are refrigerant piping. Dotted lines are communication lines

Summary of System Component

S&A kit • Remote controller

	Appearance	System	Features
S&A kit	PAC-SK60SA-E	Branch box	Connected from branch box Sensor and alarm in the device Have 3 types of LED (operation, detection, error) Detection of refrigerant leakage, a kit alerts and LED flashes in red Alarm can be stopped only by a kit in a room that refrigerant leakage occurred
Remote controller	PAR-41MAAB	• Free Plan	Connected from indoor unit Alarm in the device Have a display In case of refrigerant leakage, R/C alerts and error code and address of indoor unit is shown Alarm can be stopped by a R/C in a room that refrigerant leakage occurred and a supervisor room

* Can be used as a Wired remote control in a Branch box system. However, in this case, a separate S/A kit connection is

Branch box

		A STATE	- Western
Model nar	ne	PAC-MMK40BC(B)	PAC-MMK60BC
Number of ports		4 ports	6 ports
Refrigerar	it	R32	R32
Input(kW)		0.003	0.006
Running c	urrent(A)	0.15	0.30
Size(mm)	Н	170	170
	W	450	665
	D	372	420
Installation	Ceiling-suspended	/	/
	Floor-standing	1	/
	Vertical	✓	/
	No need drainpan	/	/
Connection	Flare connection	/	/
	Blazing	/	_

1st	6.35/9.52
2nd	6.35/9.52
3rd	6.35/12.7
4th	6.35/9.52
5th	6.35/9.52
6th	9.52/15.88

wiring connection from one side.

If necessary, you need to flip over only electrical box to connect from the Possible to make piping connection


Possible to make piping connection from both side.
 Flipping over only electrical box is not difficult for installer.
 99.52/e15.88 can be connected to a large indoor unit placed in a living room or other large room.

Energy Efficiency

Even with its compact size and lightweight, it has a high EER and COP. Costs are reduced with the energy saving abilities.


* Temperature conditions EER : Indoor 27°C DB / Outdoor 35°C DB COP : Indoor 20°C DB / Outdoor 7°C DB SCOP/SEER: Based on ErP Lot 21/6 calculation method to EN14825.

EER < EER / COP > COP 4.20 4.21 3.76 3.34 3.22 SM112 SM125 SM140



Super Silent Mode*

- Noise level can be reduced up to 10dB(A). dB(A)
- This allows you to operate the unit even in the night in a residential zone.
 - * Capacity reduction differs by mode setting.
 - * PAC-SC36NA-E is required to activate Super Silent mode.
 - * Cooling mode only.

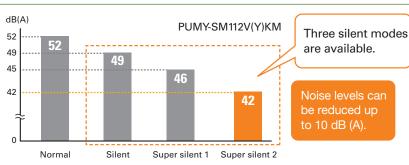















Model				PUMY-SM112VKM	PUMY-SM125VKM	PUMY-SM140VKM	PUMY-SM112YKM	PUMY-SM125YKM	PUMY-SM140YKM
Power source					se 220-230-240V 50Hz, 220\	/ 60Hz		se 380-400-415V 50Hz, 380\	/ 60Hz
Cooling Capacity			kW	12.5	14.0	15.5	12.5	14.0	15.5
(Nominal)	Power In	put	kW	3.32	4.19	4.81	3.32	4.19	4.81
	Current I	Input	А	15.40 - 14.73 - 14.12 / 15.40	19.43 - 18.59 - 17.81 / 19.43	22.45 - 21.47 - 20.58 / 22.45	5.31 - 5.04 - 4.86 / 5.31	6.70 - 6.37 - 6.14 / 6.70	7.74 - 7.35 - 7.09 / 7.74
	EER		kW/kW	3.76	3.34	3.22	3.76	3.34	3.22
Temp. Range of	Indoor Te	emp.*1	W.B.	15.0~24.0°C (59~75°F)					
Cooling	Outdoor T	emp.*2*3	D.B.	-5.0~52.0°C (23~126°F)					
Heating Capacity			kW	14.0	16.0	17.5	14.0	16.0	17.5
(Nominal)	Power In	put	kW	3.33	3.74	4.16	3.33	3.74	4.16
	Current I	Input	А	15.45 - 14.77 - 14.16 / 15.45	17.30 - 16.55 - 15.86 / 17.30	19.25 - 18.41 - 17.64 / 19.25	5.33 - 5.06 - 4.88 / 5.33	5.97 - 5.67 - 5.46 / 5.97	6.64 - 6.31 - 6.08 / 6.64
	COP		kW/kW	4.20	4.28	4.21	4.20	4.28	4.21
Temp. Range Of	Indoor Te	emp.	D.B.	15.0~27.0°C (59~81°F)	15.0~27.0°C(59~81°F)				
Heating	Outdoor	Temp.	W.B.	-20.0~15.0°C (-4~59°F)					
Indoor Unit	Total Cap	pacity		50~130 % of outdoor unit capacity					
Connectable	model, dualitaty only make 10 11		10-140/12	10 - 140 / 12	10 - 140 / 12	10 - 140 / 12	10 - 140 / 12	10 - 140 / 12	
			Branch Box	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8
	Branch City N		City Multi	10 - 140 / 3 or 5*4					
		box 1unit	Branch Box	15 - 100 / 4 or 6*5					
		Branch	City Multi	10 - 140 / 2 or 3*6					
		box 2unit	Branch Box	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8
Sound Presuure Le (Cooling/Heating)	vel		dB <a>	52/54	53/56	54/56	52/54	53/56	54/56
Sound Power Level (Cooling/Heating)			dB <a>	72/74	74/76	74/76	72/74	74/76	74/76
Refrigerant Piping			mm (in.)	9.52 Flare					
Diameter	Gas Pipe	•	mm (in.)	15.88 Flare					
Fan	Type x Q	uantity		Propeller Fan x 1	Propeller Fan x 1	Propeller Fan x 1	Propeller Fan × 1	Propeller Fan x 1	Propeller Fan x 1
	Air Flow	Rate	m³/min	77	83	83	77	83	83
			L/s	1,283	1,383	1,383	1,283	1,383	1,383
			cfm	2,719	2,931	2,931	2,719	2,931	2,931
	Motor O	utput	kW	0.20 × 1	0.20 × 1	0.20 × 1	0.20 × 1	0.20 × 1	0.20 × 1
	External	Static Pr	ess.	0Pa / 30Pa*7					
Compressor	Type x Q	uantity			•	Twin rotary hermet	tic compressor × 1		•
•	Starting	Method				Inve	rter		
	Motor O	utput	kW	2.3	2.6	3.0	2.3	2.6	3.0
External Dimension	H*W*D		mm		•	981 × 1,050	× 330 (+40)		
			in.			38-5/8 × 41-3/8	× 13 (+1-37/64)		
Net Weight			kg (lbs)		95 (209)*8			97(214) *9	
Pre-Charged	Weight		kg	3.0	3.0	3.0	3.0	3.0	3.0
Quantity	CO ₂ equi	ivalent	t	2.03	2.03	2.03	2.03	2.03	2.03
Max System	Weight		kg	7.5	7.5	7.5	7.5	7.5	7.5
Quantity	CO ₂ equi	ivalent	t	5.06	5.06	5.06	5.06	5.06	5.06

Indoor unit connectable table

Model		PUMY-SM112V(Y)KM	PUMY-SM125V(Y)KM	PUMY-SM140V(Y)KM
CM Indoor Only		12	12	12
Branch Box Only		8	8	8
Mix System	CM Indoor	3	3	3
Branch Box 1unit	Branch Box	6	6	6
PAC-MMK60BC		9	9	9
Mix System	CM Indoor	5	5	5
Branch Box 2unit	Branch Box	4	4	4
PAC-MMK40BC(B)		9	9	9
Mix System	CM Indoor	2	2	2
Branch Box 2unit	Branch Box	8	8	8
PAC-MMK60BC + P	AC-MMK40BC(B)	10	10	10
Mix System	CM Indoor	3	3	3
Branch Box 2unit	Branch Box	8	8	8
PAC-MMK40BC(B)	2unit	11	11	11

Author of Para Service (1988)

■ PUMY-SP Series
Branch Box Connection Compatibility Table for PUMY-SP112/125/140

Series	Tune	Model Name						Capacity					
Series	Type	Model Name	15	18	20	22	25	35	42	50	60	71	100
M series	Wall-Mounted	MSZ-LN•VG2					•						
		MSZ-RW•VG-E					•	•		•			
		MSZ-AP•VG(K)	•		•		•	•	•	•			
		MSZ-AY•VG(K)(P)			•		•	•	•				
		MSZ-FH•VE2					•						
		MSZ-EF•VG(K)		•		•	•	•	•	•			
		MSZ-SF•VA			•								
		MSZ-AP•VF-E	•		•								
		MSZ-SF•VE3					•		•				
		MSZ-GF•VE2									•	•	
	Floor-Standing	MFZ-KT•VG					•						
		MFZ-KJ•VE-E					•	•					
	1-way Cassette	MLZ-KP•VG					•	•					
		MLZ-KA•VA-E					•	•					
S series	Ceiling-Concealed	SEZ-M•DA(L)(2)					● *1	● *1		● *1	● *1	• *1	
		SEZ-KD•VA-E					● *1	● *1		● *1	● *1	● *1	
	2×2 Cassette	SLZ-M•FA(2)	● *1				● *1	● *1		● *1			
		SLZ-KF•VA-E					● *1	● *1		● *1			
P series	Ceiling-Suspended	PCA-M•KA(2)						● *1		● *1	●*1	• *1	● *1
		PCA-RP•KAQ-E						● *1		● *1	● *1	● *1	● *1
	4-way Cassette	PLA-M•EA(2)						* 1		● *1	● *1	• *1	● *1
		PLA-RP•EA-E						● *1		● *1	● *1	● *1	● *1
	Ceiling-Concealed	PEAD-M•JA(L)(2)								● *1	● *1	• *1	● *1
		PEAD-RP•JAQ(L)-E								●*1	*1	● *1	● *1

^{*1} Some functions that can be used by connecting to the P series outdoor unit cannot be used with the PUMY series.

LEV Kit Connection Compatibility Table for PUMY-SP112/125/140

Series	I/U Type	Model Name					Cap	acity				
Selles	1/O Type	Wiodel Name	15	18	20	22	25	35	42	50	60	71
M series	Wall-Mounted	MSZ-LN•VG2										
		MSZ-AP•VG(K)	•		•		•			•		
		MSZ-AY•VG(K)(P)	•		•		•	•		•		
		MSZ-FH•VE2					•	•		•		
		MSZ-EF•VG(K)				•	•	•	•	•		
		MSZ-SF∙VA	•		•							
		MSZ-AP•VF-E	•		•							
		MSZ-SF•VE3					•	•		•		
	Floor-Standing	MFZ-KT•VG					•	•		•		

CITY MULTI Indoor Unit Compatibility Table for PUMY-SP112/125/140

Series	Type	Model Name							Cap	acity						
Genes	туре	Wodel Name	P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140	P200
	-way cassette	PMFY-P•VBM-E			•											
MULTI 2-	-way cassette	PLFY-P•VLMD-E			•	•		•					•	•		
series 4-	-way cassette	PLFY-M•VEM-E				•		•					•			
		PLFY-M•VEM6-E						•			•					
		PLFY-P•VBM-E														
		PLFY-P•VEM-E														
		PLFY-P•VCM-E														
		PLFY-P•VFM-E														
С	Ceiling-concealed	PEFY-P•VMR-E-L/R														
		PEFY-P•VMS1(L)-E														
		PLFY-P•VMA(L)-E														
		PEFY-M•VMA(L)-A(1)			•	•		•				•	•			
		PEFY-P•VMH(S)-E										•	•			
		PEFY-P•VMH-E-F										•				
		PEFY-P•VMHS-E-F														
С	Ceiling-suspended	PCFY-P•VKM-E														
W	Vall-mounted	PKFY-P•VLM-E	•													
		PKFY-P•VBM-E														
		PKFY-P•VHM-E														
		PKFY-P•VKM-E														
В	Built in	PDFY-P•VM-E														
FI	loor-standing	PFFY-P•VKM-E2														
		PFFY-P•VLEM-E				•		•								
		PFFY-P•VLRM-E				•		•								
		PFFY-P•VLRMM-E						•								
		PFFY-P•VCM-E				•		•								
Lo	ossnay *1								GUF-50/	100RD(H)4						

^{*1} Do not connect Lossnay remote controller(s). (PZ-61DR-E, PZ-60DR-E, PZ-52SF-E, PZ-43SMF-E)

■ PUMY-P Series

Branch Box Connection Compatibility Table for PUMY-P112/125/140/200

Series	Type	Model Name						Capacity					
Series	туре	woder name	15	18	20	22	25	35	42	50	60	71	100
M series	Wall-Mounted	MSZ-LN•VG2					•	•		•			
		MSZ-AP•VG(K)	•		•		•	•	•	•			
		MSZ-AY•VG(K)(P)			•		•	•	•	•			
		MSZ-FH•VE2					•	•		•			
		MSZ-EF∙VE				•	•	•	•	•			
		MSZ-EF•VG(K)		•		•	•	•	•	•			
		MSZ-SF∙VA			•								
		MSZ-AP•VF			•								
		MSZ-SF•VE3					•			•			
		MSZ-GF•VE2									•	•	
	Floor-Standing	MFZ-KT•VG					•			•			
		MFZ-KJ•VE-E					•	•		•			
	1-way Cassette	MLZ-KP•VG					•	•		•			
		MLZ-KA•VA-E					•	•		•			
S series	Ceiling-Concealed	SEZ-M•DA(L)					•	•		•	•	•	
		SEZ-KD•VA-E					•	•		•	•	•	
		SEZ-M•DA(L)2-E						•		•	•	•	
	2×2 Cassette	SLZ-M•FA(2)					•	•		•			
		SLZ-KF•VA-E					•	•		•			
P series	Ceiling-Suspended	PCA-M•KA(2)						•		•	•	•	•
		PCA-RP•KAQ-E						•		•	•	•	•
	4-way Cassette	PLA-M•EA(2)						•		•	•	•	•
		PLA-RP•EA-E						•		•	•		
	Ceiling-Concealed	PEAD-M•JA(L)								•	•	•	•
		PEAD-RP•JA(L)Q-E								•	•	•	•
		PEAD-M•DA(L)2								•	•	•	•

LEV Kit Connection Compatibility Table for PUMY-P112/125/140/200

Series	I/U Type	Model Name					Cap	acity				
Series	70 Type	Woder Name	15	18	20	22	25	35	42	50	60	71
M series	Wall-Mounted	MSZ-LN•VG2										
		MSZ-AP•VG(K)										
		MSZ-AY•VG(K)(P)										
		MSZ-FH•VE2										
		MSZ-EF•VG(K)										
		MSZ-SF•VA										
		MSZ-SF•VE3										
	Floor-Standing	MFZ-KT•VG						•		•		

CITY MULTI Indoor Unit Compatibility Table for PUMY-P112/125/140

Series	Type	Model Name							Cap	acity						
Series	туре	Model Name	P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140	P200
CITY	1-way cassette	PMFY-P•VBM-E				•										
MULTI	2-way cassette	PLFY-P•VLMD-E														
series	4-way cassette	PLFY-M•VEM-E														
		PLFY-M•VEM6-E														
		PLFY-P•VFM-E														
	Ceiling-concealed	PEFY-P•VMR-E-L/R														
		PEFY-P•VMS1(L)-E														
		PEFY-M•VMA(L)-A(1)			•				•			•				
		PEFY-P•VMHS-E										•				
		PEFY-P•VMHS-E-F														
	Ceiling-suspended	PCFY-P•VKM-E														
	Wall-mounted	PKFY-P•VLM-E			•	•			•							
		PKFY-P•VKM-E														
	Floor-standing	PFFY-P•VKM-E2			•											
		PFFY-P•VLEM-E			•											
		PFFY-P•VLRM-E			•											
		PFFY-P•VLRMM-E			•	•										
		PFFY-P•VCM-E			•	•				•						
	ATW	PWFY-P•VM-E1 *1														
	Lossnay *2								GUF-50/	100RD(H)4						

CITY MULTI Indoor Unit Compatibility Table for PUMY-P200

Series	Type	Model Name							Cap	acity						
Selles	Туре	Widder Name	P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140	P200
CITY	1-way cassette	PMFY-P•VBM-E			•											
MULTI	2-way cassette	PLFY-P•VLMD-E					•			•						
series	4-way cassette	PLFY-M•VEM-E					•									
		PLFY-M•VEM6-E					•			•	•					
		PLFY-P•VFM-E					•									
	Ceiling-concealed	PEFY-P•VMR-E-L/R			•	•	•									
		PEFY-M•VMA(L)-A(1)			•	•	•	•				•	•		•	
		PEFY-P•VMHS-E						•	•					•		•
		PEFY-P•VMHS-E-F														
	Ceiling-suspended	PCFY-P•VKM-E						•		•						
	Wall-mounted	PKFY-P•VLM-E				•	•	•	•							
		PKFY-P•VKM-E											•			
	Floor-standing	PFFY-P•VKM-E2			•		•	•								
		PFFY-P•VLEM-E			•		•	•	•							
		PFFY-P•VLRM-E			•	•	•	•	•							
		PFFY-P•VLRMM-E			•	•	•	•	•							
		PFFY-P•VCM-E			•	•	•	•								
	Lossnay *2								GUF-50/1	00RD(H)4						

^{*1} Note that connection is not allowed inside EU countries and UK. PWFY can not connect to PUMY-P200YKM3.
*2 Do not connect Lossnay remote controller(s). (PZ-61DR-E, PZ-60DR-E, PZ-52SF-E, PZ-43SMF-E)

■ PUMY-P Series

Branch Box Connection Compatibility Table for PUMY-P250/300

Series	Type	Model Name					Capacity						
Series	Туре	Model Name	15	18	20	22	25	35	42	50	60	71	100
M series	Wall-Mounted	MSZ-LN•VG2						•		•			
		MSZ-RW•VG-E						•					
		MSZ-AP•VG(K)						•					
		MSZ-AY•VG(K)(P)	•		•			•	•	•			
		MSZ-FH•VE2											
		MSZ-EF•VG(K)				•	•	•					
	Floor-Standing	MSZ-KT•VG											
S series	Ceiling Concealed	SEZ-M•DA(L)2					•	•		•	•	•	
	2×2 Cassette	SLZ-M•FA2	•										
P series	Ceiling Suspended	PCA-M•KA2						•		•	•	•	•
	4-way Cassette	PCA-M•EA2						•		•	•	•	•
	Ceiling Concealed	PEAD-M•JA(2)								•	•	•	

LEV Kit Connection Compatibility Table for PUMY-P250/300

Series	I/U Type	Model Name				Сар	acity			
Series	70 Type	Model Name	15	18	20	22	25	35	42	50
M series	Wall-Mounted	MSZ-LN•VG2					•	•		•
		MSZ-AP•VG(K)	•		•			•	•	
		MSZ-AY•VG(K)(P)			•		•	•	•	
		MSZ-FH•VE2								
		MSZ-EF•VG(K)		•		•	•		•	
	Floor-Standing	MFZ-KT•VG								

CITY MULTI Indoor Unit Compatibility Table for PUMY-P250/300

Series	T	Model Name								Capacity							
Series	Type	Model Name	P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140	P200	P250
CITY	1-way cassette	PMFY-P•VBM-E			•	•		•									
MULTI series	2-way cassette	PLFY-P•VLMD-E			•	•		•	•	•		•	•	•			
361163	4-way cassette	PLFY-M•VEM-E			•				•	•							
		PLFY-M•VEM6-E			•	•		•	•		•		•				
		PLFY-P•VFM-E			•			•	•								
	Ceiling-concealed	PEFY-P•VMR-E-L/R			•	•											
		PEFY-P•VMS1(L)-E			•			•	•	•							
		PEFY-M•VMA(L)-A			•	•		•	•								
		PEFY-P•VMA(L)-A1			•	•		•	•	•							
		PEFY-P•VMHS-E						•	•	•			•			•	
		PEFY-P•VMHS-E-F															
	Ceiling-suspended	PCFY-P•VKM-E						•		•			•				
	Wall-mounted	PKFY-P•VLM-E			•	•		•	•								
		PKFY-P•VKM-E								•			•				
	Floor-standing	PFFY-P•VKM-E2			•	•	•	•									
		PFFY-P•VLEM-E			•	•			•	•							
		PFFY-P•VCM-E			•	•	•	•	•	•							
	Lossnay *1								GUF	-50/100RE	D(H)4						

^{*1} Do not connect Lossnay remote controller(s). (PZ-61DR-E, PZ-60DR-E, PZ-52SF-E, PZ-43SMF-E)

■ PUMY-SM Series

Branch Box Connection Compatibility Table for PUMY-SM112/125/140

Model Na	me	15	18	20	22	25	35	42	50	60	71	100
M series	MSZ-RW•VG								•			
	MSZ-LN•VG2					•	•					
	MSZ-AP•VG(K)	•		•		•	•	•				
	MSZ-AY•VG(K)(P)	•		•		•	•	•				
	MSZ-EF∙VG(K)		•		•	•	•	•				
	MSZ-BT•VG(K)					•	•					
	MLZ-KY•VG			•								
	MLZ-KP•VG					•	•					
S series	SEZ-M•DA(L)2					•	•			•		
	SLZ-M•FA2	•				•	•					
P series	PCA-M•KA2						•			•	•	•
	PLA-M•EA2									•		•
	PEAD-M•JA(L)2								•		•	•

CITY MULTI Indoor Unit Compatibility Table for PUMY-SM112/125/140

Model Na	me	Sensor	10	15	20	25	32	40	50	63	71	80	100	125	140
CITY	PLFY-M•VEM6-E				•	•	•	•	•	•	•	•	•	•	
MULTI series	PEFY-M•VMA(L)-A1					•	•	•	•	•	•	•	•	•	
Selles	PLFY-MS•VEM-E	√				•	•	•	•	•		•	•	•	
	PLFY-MS•VFM-E	✓				•	•	•	•						
	PCFY-MS•VKM-E	✓						•		•			•	•	
	PKFY-MS•VLM-E	~				•	•	•	•						
	PKFY-MS•VKM-E	✓								•					
	PEFY-MS•VMA(L)-A	✓				•	•	•	•	•	•	•	•	•	

Outdoor Unit Functions

Demand Control


This function reduces the capacity of the outdoor/heat source unit by way of the external input to the outdoor unit.

The capacity of the outdoor unit can be reduced in steps, with patterns ranging from 2 to 12 control steps depending on the system. The number of steps that can be set and the corresponding capacity are shown below.

• 2 steps (0-100%) • 4 steps (0-50-75-100%) • 8 steps (0-25-38-50-63-75-88-100%) • 12 steps (0-17-25-34-42-50-59-67-75-84-92-100%)

Possible usage

When power consumption is centrally-controlled within a building, the system can be made to operate in capacity-save mode by receiving external signals



Pump Down Function

This function collects the refrigerant that remains in the indoor unit and the outdoor/heat source unit piping when the refrigerant piping needs to be removed, such as when the air conditioner is relocated.

This function can also be used to stop the operation of the indoor unit and return the refrigerant to the outdoor/heat source unit in the event that a r efrigerant leak is detected.

* To detect a refrigerant leak, a circuit that includes a refrigerant leak detection sensor must be designed and prepared on site

Dual Set Point

Normally, the desired room temperature is set to the same value for cooling and heating. However, the dual set point function allows different temperatures to be set for cooling and heating. When operation switches from cooling to heating or vice versa, the preset temperature changes accordingly.

Setting dual set points in Auto mode on R2 models improves energy efficiency, compared to setting a single set point.


When the operation mode is set to Auto (dual set point) mode, two preset temperatures (one each for cooling and heating) can be set. Depending on the room temperature, the indoor unit will automatically operate in either the cooling or heating mode and keep the room temperature within the preset range.

The outdoor unit does not operate in the comfortable temperature band defined by two temperature points where the thermostat is off. This cuts down on unnecessary operation of the air conditioning system.


This function is supported only when all the indoor units, remote controllers, and system control lers that are connected to a given group are compatible with the function.

Individual LEV Control

Even if one of the indoor units stops for repair, the LEV of the indoor unit can be closed so that the other indoor units can continue to operate. (No preliminary setting is necessary.)

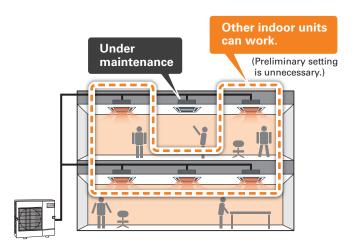

• Operation pattern in Auto (dual set point) mode

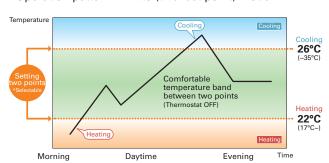

NEW ECODESIGN DIRECTIVE

WHAT IS THE ErP DIRECTIVE?

The Ecodesign Directive for Energy-related Products (ErP Directive) establishes a framework to set mandatory standards for ErPs sold in the European Union (EU). The ErP directive introduces new energy-efficiency ratings across various product categories and affects how products such as computers, vacuum cleaners, boilers and even windows are classified in terms of environmental performance.

Regulations that apply to air conditioning systems of rated capacity up to 12kW came into effect as of January 1, 2013. Based the use of future-orientated technologies, Mitsubishi Electric is one step ahead of these changes, with our air conditioning systems already achieving compliance with these new regulations.


NEW ENERGY LABEL AND MEASUREMENTS

Under regulation 2011/626/EU, supplementing directive 2010/30/EU, air conditioning systems are newly classified into energy-efficiency classes on the basis of a new energy labelling system, which includes three new classes: A+, A++ and A+++.

Revisions to the measurement points and calculations of the seasonal energy efficiency ratio (SEER) and seasonal coefficient of performance (SCOP) has resulted in changes to how air conditioning systems are classified into energy-efficiency classes.

Specifically, for cooling mode, air conditioning systems must achieve at least class B. For heating mode, air conditioning systems must achieve at least a SCOP value of 3.8.


■New Energy Efficiency Label

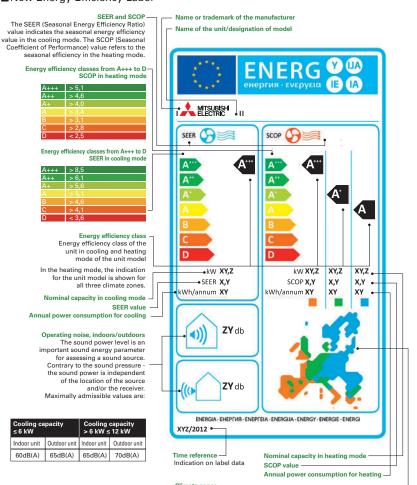

For heating mode, the EU is divided into three climate zones for calculation and classification purposes. This aims at calculating the energy efficiency taking into consideration the actual regional

■Climate Zones for Heating Mode

Reference climate zones for calculating the SCOP
Since the climate conditions have a great influence on the operating
behaviour in the heat pump mode, three climate zones have
been stipulated for the EU: warm, moderate, cold. The measurement
points are homogenous at 12°C, 7°C, 2°C and –7°C.



	Temperat	ure conditions	
Partial	Outdoors		Indoors
oad	DB	WB	DB
-	-	-	20°C
00%	2°C	1°C	20°C
64%	7°C	6°C	20°C
29%	12°C	11°C	20°C


Moderate (Strasbourg) Temperature conditions											
Partial	Outdoors		Indoors								
load	DB	WB	DB								
88%	-7°C	-8°C	20°C								
54%	2°C	1°C	20°C								
35%	7°C	6°C	20°C								
15%	12°C	11°C	20°C								

	Tempera	ture conditions	
Partial	Outdoors		Indoors
load	DB	WB	DB
61%	-7°C	-8°C	20°C
37%	2°C	1°C	20°C
24%	7°C	6°C	20°C
11%	12°C	11°C	20°C

SEER/SCOP

Air conditioning systems were previously assessed using the energy-efficiency rating (EER), which evaluated efficiency in cooling mode, and the coefficient of performance (COP), which defined the efficiency, or the ratio of consumed and output power, in heating mode. Under this system, assessments were not truly reflective of performance as they were based on a single measurement point, which led to manufacturers optimising products accordingly in order to achieve higher efficiency ratings. SEER and SCOP address this problem by including seasonal variation in the ratings via use of realistic measurement points. For cooling mode, measurements at outside temperatures of 20, 25, 30 and 35°C are incorporated and weighted in accordance with climate data for Strasbourg, which is used as a single reference point for the whole EU. For instance, for partial-load operation, which represents more than 90% of operation, there is a correspondingly high weighting for the efficiency classification. For heating mode, a comprehensive temperature profile for the whole EU was not possible, so the EU has been divided into three climate zones, north, central and south, and load profiles created. The same measurement points, at outside temperatures of 12, 7, 2 and -7°C, are used for all three zones.

■SCOP Calculation

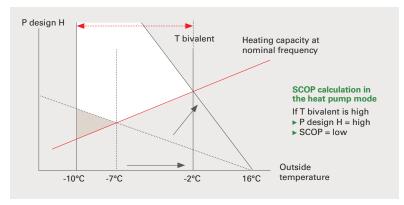

Technical Terms with Respect to the SCOP

P design H: Corresponds to a heating load of 100%. The value depends on the selected bivalence point. T design: Outside temperature which determines

T design: Outside temperature which determines the P design H point. The latter is determined from the area conditions.

T bivalent: Corresponds to the lowest temperature at which full heating performance can be achieved with the heat pump (without additional heating). This point can be freely selected within the prescribed temperature ranges (T design -T bivalent).

SOUND PRESSURE LEVEL

Consumers will also receive more information on the noise levels emitted by split-system air conditioners to help them make their purchasing decision. Specifically, the sound power level of indoor and outdoor units is to be indicated in decibels as an objective parameter. Knowing the sound power makes it possible to calculate sound emissions while considering distance and radiation characteristics, which is beneficial because it allows the noise levels of different air conditioning systems to be compared regardless of the usage location and how the sound pressure is measured. This is an improvement on sound pressure values which are usually measured at an approximate distance of 1m where all modern split-system air conditioning systems tend to be very quiet at an average of 21 decibels

■Sound Pressure vs Sound Power Level



Sound pressure level dB(A)

The sound pressure level is a sound field parameter which indicates the perceived operating noise of an indoor unit within a certain distance.

Sound power level dB(A)


The sound power is an acoustic parameter which describes the source strength of a sound generator and is thus independent of the distance to the receiver location.

COMFORT

3D i-see Sensor


3D Fsee Sensor for M SERIES

The LN Series and FH Series are equipped with the 3D i-see Sensor, an infrared-ray sensor that measures the temperature at distant positions. While moving to the left and right, eight vertically arranged sensor elements analyze the room temperature in three dimensions. This detailed analysis makes it possible to judge where people are in the room, thus allowing creation of features such as "Indirect airflow," to avoid airflow hitting people directly, and "direct airflow" to deliver airflow to where people are.

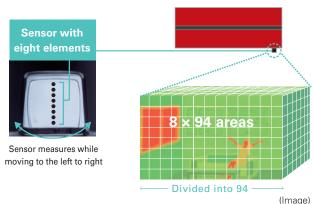

No occupancy energy-saving mode

The sensors detect whether there are people in the room. When no-one is in the room, the unit automatically switches to energy-saving mode.




The "3D i-see Sensor" detects people's absence and the power consumption is automatically reduced approximately 10% after 10 minutes and 20% after 60 minutes.

Indirect Airflow

The indirect airflow setting can be used when the flow of air feels too strong or direct. For example, it can be used during cooling vaert airflow and prevent body temperature from becoming excessively cooled.



Even Airflow *LN Series only Normal swing mode



The airflow is distributed equally throughout the room, even to spaces where there is no human movement.

Direct Airflow

This setting can be used to directly target airflow at people such as for immediate comfort when coming indoors on a hot (cold) day.



Even airflow mode



The 3D i-see sensor memorizes human movement and furniture positions, and efficiently distributes airflow.

No occupany Auto-OFF mode *LN Series only

The sensors detect whether or not there are people in the room. When there is no one in the room, the unit turns off automatically.





ENERGY-SAVING



Econo Cool Energy-Saving Feature

"Econo Cool" is an intelligent temperature control feature that adjusts the amount of air directed towards the body based on the air-outlet temperature. The setting temperature can be raised by as much as 2°C without any loss in comfort, thereby realising a 20% gain in energy efficiency. (Function only available during manual cooling operation.)

	Conventional	Econo Cool		
Ambient temperature	35°C	35°C		
Set temperature	25°C	27°C		
Perceived temperature	30°C	29.3°C		

Econo Cool Mode

A comfortable room environment is maintained even when setting the temperature 2°C higher than the conventional cooling mode.

Econo Cool on



Temperature distribution (°C) 16 18 20 22 24 26 28





Demand Function (Onsite Adjustment)

The demand function can be activated when the unit is equipped with a commercially available timer or an On/Off switch is added to the CNDM connector (option) on the control board of the outdoor unit. Energy consumption can be reduced up to 100% of the normal consumption according to the signal input from outside.

[Example: Power Inverter Series]

Limit energy consumption by changing the settings of SW7-1, SW2 and SW3 on the control board of the outdoor unit. The following settings are possible.

SW7-1	SW2	SW3	Energy consumption	
	OFF	OFF	100%	
ON	ON OFF		75%	
ON	ON	ON	50%	
	OFF	ON	0% (Stop)	

*PUHZ outdoor only

AIR DISTRIBUTION



Double Vane

Double vane separates the airflow in the different directions to deliver airflow not only across a wide area of the room, but also simultaneously to two people in different locations.



Horizontal Vane

The air outlet vane swings up and down so that the airflow is spread evenly throughout the room.



Vertical Vane

The air outlet fin swings from side to side so that the airflow reaches every part of the room.



High Ceiling Mode

In the case of rooms with high ceilings, the outlet-air volume can be increased to ensure that air is circulated all the way to the floor.

Low Ceiling Mode

If the room has a low ceiling, the airflow volume can be reduced for less draft.

∿ոս Auto Fan Speed Mode

The airflow speed mode adjusts the fan speed of the indoor unit automatically according to the present room conditions.

Circulator Mode

After reaching the target temperature, heating mode will automatically switch to circulator mode, which makes the unit go into "fan-only" state and mixes warm air to eliminate uneven temperature in the room.



New Circulator

The new circulator mode enhances room comfort by using the i-See sensor to detect temperature variations between the ceiling and the

AIR QUALITY



Plasma Quad Plus is a plasma-based filter system that effectively removes six kinds of air pollutants. Plasma Quad Plus captures mold and allergens more effectively than Plasma Quad. It can also capture PM2.5 and particles smaller than 2.5µm, creating healthy living spaces

Bacteria

<LN series> Neutralizes 99% of Staphylococcus aureus in 162 minutes in a 25 m³

test space. Test No.2016-0118 tested by KRCES-Bio.

<AY series 25-50> Neutralizes 99% of Staphylococcus aureus in 186 minutes in a 25 m³ test space. Test No.22046475001-0301 tested by KRCES-Bio

<AY series 15/20 > Neutralizes 99% of Staphylococcus aureus in 20 minutes.*1 Test No.2022_1528

tested by KRCES-Bio. Neutralizes 93.9% in one pass conversion.

Viruses

<LN series> Neutralized 99.8% of SARS-CoV-2 in 360 minutes.*1

Test No.20KB070569 tested by Japan Textile

Products Quality and Technology Center Neutralizes 99% of Influenza A virus particles in 72minutes in a 25 m³ test space. Test No 28-002

tested by vrc.center, SMC

<AY series 25-50> Neutralized 99.8% of SARS-CoV-2 in 360 minutes.*1

Test No.20KB070569

tested by Japan Textile Products Quality and Technology Center Neutralizes 99% of Influenza A virus particles in 210.5minutes in a 25 m3 test space.

Test No. R4-001 tested by National Hospital Organization Sendai Medical Center

<AY series 15/20 > Neutralizes 99% of Influenza A virus particles in 20 minutes.*1

Test No. 2022_0528 tested by KRCES-Bio. Neutralizes 95.8% in one pass conversion

Molds

<LN series> Neutralizes 99% of Penicillium citrinum in 135 minutes in a 25 m³ test space.

Test No. 16069353001-0201 tested by Japan Food Research Laboratories

<AY series 25-50> Neutralizes 99% of Penicillium citrinum in 251 minutes in a 25 m³ test space. Test No.22046475001-0401 tested by Japan Food Research Laboratories

<AY series 15/20 > Neutralizes 99% of Penicillium citrinum in 191 minutes in a 25 m3 test space. Test No. LSRL-21010-G060 tested by Japan Food Research Laboratories

Allergens

<LN series> Neutralizes 98% of cat fur and pollen.* Test No. T1606028 tested by ITEA Inc.




<AY series 25-50> Neutralizes 98% of cat fur and pollen.*1 Test No. T1606028 tested by ITEA Inc

<AY series 15/20 > Neutralizes 91.8% of pollen.*1 Test No. T2301012 tested by ITEA Inc

PM2.5

<LN series> Neutralizes 90% of PM2.5 particles in 83minutes 99% of PM2.5 particles in 166minutes in a 28 m² test space. In-Company Investigation



tested by Life Science Research Laboratory

<AY series 15/20 > Neutralizes 90% of PM2.5 particles in one pass. Test No. LSRL_21010_G063 tested by Life Science Research Laboratory

Dust

<LN series> Neutralizes 99.7% of dust and mites.* Test No.T1606028 tested by ITEA Inc.



<AY series 25-50> Neutralizes 99.7% of dust and mites.*1 Test No T1606028 tested by ITEA Inc.


<AY series 15/20 > Neutralizes 97% of dust (JIS test POWDER 1 Class 11(JIS11)),* Test No.LSRL-21010_G063 tested by ITEA Inc.

*1 The test was conducted on the Plasma Quad Plus device alone, not designed to evaluate product performance

Image of Plasma Quad Plus



Principle of Plasma Quad Plus



Dust, PM2.5 🥶 Viruses 🍟 Bacteria Mold
Ø Allergens

1st stage


- Make plasma.
 Break mold and allergens. Inhibit viruses.
 Dust and PM2.5 given an electrical charge (+).

Make a strong electrical field.
 The charged dust and PM2.5 (+) are absorbed in the strong electrical field (-).

Quad Connect (Optional Parts) Plasma

Plasma Quad Connect is an high-performance air purifying device which can even be installed on the existing units, contributing to a better air quality in your room. Plasma Quad Connect applies a voltage of 6,000 volts to the electrode to generate plasma, effectively removing various kinds of particles such as viruses, bacteria, molds, allergens, dust, and PM2.5.



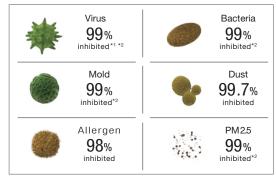

- * 1 The result of test with Influenza A virus
- *2 The result is based on the test with a device installed on the representative indoor unit. (MSZ-AP series)

Specifications

Model Name	MAC-100FT-E	PAC-HA11PAR, PAC-HA31PAR PAC-HA21PAU, PAC-HA31PAU (Attachment for Ducted Indoor Units)*1,*3	PAC-KE91PTB-E, PAC-KE92PTB-E PAC-KE93PTB-E, PAC-KE94PTB-E PAC-KE95PTB-E (Box for Ducted Indoor Units) *1, *3	PAC-SK51FT-E '4	SLP-2FAP , SLP-2FALP SLP-2FALMP2	
Product Image		PQ attachment	*5 PQ box			
Compatible with	MSZ, PKA, and PKFY*2 (Wall mounted models)	SEZ, PEAD, and PEFY*2	PEAD, and PEFY*2	PLA and PLFY*2 (4-way Cassette 3×3 models)	SLZ, and PLFY*2 (2×2 Cassette)	
Input Voltage	Single Phase AC220~240V	_	_	Single Phase AC220~240V	Single Phase AC220~240V	
Fequency	50/60Hz	-	-	50/60Hz	50/60Hz	
Power Consumption	4W	-	-	4W	4W	
Size H×W×D	56mm × 499.5mm × 168mm	*6	247mm×917mm×179mm*7	134mm×840mm×840mm	20mm×625mm×625mm	
Weight	1,600g	360g* ⁶	4,570g *7	8,700g	4,400g	

- *1 Both MAC-100FT-E and PQ Attachment or PQ box will be required when using with ducted models. *2 Please contact your nearest sales office about compatible model. *3 Specifications are subject to change without notice.
 *4 When multi-functional casement or automatic filter elevation panel is used/installed, PAC-SK51FT-E can not be used. *5 The image shows rear suction. *6 Depends on model. Shows weight of PAC-HA11PAR.
 *7 Depends on model. Shows size/weight of PAC-KE92PTB-E. *8 Plasma Quad Connect cannot be used with PAC-SK54/46KFE (V blocking filter).

Test Report Results The following results were obtained from the test conducted under a controlled laboratory conditions. Performance might differ in real life environment.

Tested Materials		Tested Standard	Capacity	Time	Result	Testing Organization	Test Report
Virus	New Coronavirus (SARS-CoV-2)	Original	_*8	360min	99.8% inhibited*9	Japan Textile Products Quality and Technology Center	20KB070569
Viius	Influenza A	JEM1467	25m ³	175min	99% inhibited* ¹⁰	SMC Virus Research Center Japan (JAPAN)	R2-003
Bacteria	Staphylococcus Aureus	GB21551.6-2010	30m ³	335min	99% inhibited* ¹⁰	CHEARI (Beijing) Certification & Testing Co., Ltd.	WK-21-50161
Mold	Penicillium Citrinum	JEM1467	25m ³	160min	99% inhibited* ¹⁰	Life Science Research Laboratory (JAPAN)	LSRL- 51021E-E091
Allergen	Cat Fur and Pollen	Original	— i=8	-	98% inhibited* ¹¹	Institute of Tokyo Environmental Allergy (JAPAN)	No.T1606028
Dust	Dust and Mites	Original	*8	-	99.7% inhibited* ¹¹	Institute of Tokyo Environmental Allergy (JAPAN)	No.T1606028
PM 2.5	Cigarette smoke	JEM1467	25m [®]	300min	99% inhibited* ¹⁰	Life Science Research Laboratory (JAPAN)	SRL-21010E- E091

^{*8} The test was conducted on the Plasma Quad device alone, not designed to evaluate product performance. *9 The result without the effect of natural attenuation is 96.3%.
*10 The result is based on the test with a device installed on the representative indoor unit. (MSZ-AP series) *11 It shows the result when allergen and dust pass through the device once.

AIR QUALITY



Self Clean mode

When Self Clean Mode is activated, fan operation starts after cooling/dry mode. This operation helps to dry inside indoor unit to prevent molds and odors. You can feel the clean air without frequent cleaning by yourself.

1 High humidity inside the unit, which can lead to mold growth and odors.



2 Airflow operation suppresses mycelial growth.



3 Maintains clean unit interior.



*The picture is for illustrative purposes only.

Filters & Cleaning Functions



Fresh-air Intake

Indoor air quality is enhanced by the direct intake of fresh exterior air.



High-efficiency Filter

This high-performance filter has a much finer mesh compared to standard filters, and is capable of capturing minute particulates floating in the air that were not previously caught.



Air Purifying Filter

The filter has a large capture area and also generates antibacterial, antifungal, and deodorant effects.



Oil Mist Filter

The oil mist filter prevents oil mist from penetrating into the inner part of the air conditioner.



Long-life Filter

A special process for the entrapment surface improves the filtering effect, making the maintenance cycle longer than that of units equipped with conventional filters.



Filter Check Signal

Air conditioner operating time is monitored, and the user is notified when filter maintenance is necessary.

Silver-ion

Silver-ionized Air Purifier Filter

Silver-ionized Air Purifier Filter made of non-woven fabric can capture tiny particles. Silver ions and enzymes contained in the filter effectively act on bacteria and allergens and neutralises them.

Dual Barrier Coating

Dual Barrier Coating

A two-barrier coating which prevents hydrophobic and hydrophillic dirt from sticking to the inner surface and inner parts of the indoor unit

Dual Barrie Coating

Dual Barrier Material

Antifouling materials are kneaded into horizontal vane and vertical vane, preventing dust and greasy dirt accumulating on the surface of indeer unit



Deodorising Filter

The catalyst in the Deodorising Filter denatures the odorous components and destroys them from the source of the odour, quickly delivering fresh air to your room.



V Blocking Filter

V Blocking Filter with antiviral effect inhibits 99% of adhered virus, and other harmful substances, such as bacteria, mold and allergen. Two-layered filter with non-woven fabric and electrostatic filter can effectively capture and remove small particles from the air in your room.

CONVENIENCE

CONVENIENCE




"i save" Mode

"i save" is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller. Press the same button twice in repetition to immediately return to the previous temperature setting.

Using this function contributes to comfortable waste-free operation, realising the most suitable air conditioning settings and saving on power consumption when, for example, leaving the room or going to bed.







*Temperature can be preset to 10°C when heating in the "i-save" mode.



Auto Changeover

The air conditioner automatically switches between heating and cooling modes to maintain the desired temperature.



Low-temperature Cooling

Intelligent fan speed control in the outdoor unit ensures optimum performance even when the outside temperature is low.



Ampere Limit Adjustment

Dip switch settings can be used to adjust the maximum electrical current for operation. This function is highly recommended for managing energy costs.

*Maximum capacity is lowered with the use of this function.



Operation Lock (Indoor Unit)

To accommodate specific-use applications, cooling or heating operation can be specified using the wireless remote controller. A convenient option when a system needs to be configured for exclusive cooling or heating service.



Operation Lock (Outdoor Unit)

To accommodate specific-use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service.



Auto Restart

Especially useful at the time of power outages, the unit turns back on automatically when power is restored.



10°C Heating

During heating operation, the temperature can be set in 1°C increments down to 10°C.

*MLZ and MFZ series: Only when using "i-save" mode, the temperature can be set to 10°C, but not in 1°C increments.

Night Mode

When Night Mode is activated using the wireless remote controller, it will switch to the settings described below.

- The brightness of the operation indicator lamp will become dimmer.
- The beeping sound will be disabled.
- The outdoor operating noise will drop to 3dB lower than the rated specification operating noise.
- *The cooling/heating capacity may drop.
- *Night mode does not function when connected to MXZ.

Low-noise Operation (Outdoor Unit)

System operation can be adjusted to prioritise less noise from the outdoor unit over air conditioning performance.



On/Off Operation Timer

Use the remote controller to set the times of turning the air conditioner On/Off.

Built-in Weekly Timer Function

Easily set desired temperatures and operation ON/OFF times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

Example Operation Pattern (Winter/Heating mode)

	Mon.		Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.	
5.00	ON 20°C		ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	
5:00				Automatically change	es to high-power opera	tion at wake-up time			
8:00 (0:00	OFF		OFF	OFF	OFF	OFF	ON 18°C	ON 18°C	
14:00 12:00			Automatically turned off during work hours					Midday is warmer, so the temperature is set lower	
15:00									
18:00	ON	22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C	
2000 2000			Automatically turns on, synchronized with arrival at home			Automatically raises temperature setting to match time when outside-air temperature is low			
(during sleeping hours)	ON	18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	
		Automatically lowers temperature at bedtime for energy-saving operation at night							


Settings

Pattern Settings: Input up to four settings for each day

Settings: •Start/Stop operation •Temperature setting •The operation mode cannot be set.

Easy set-up using dedicated buttons



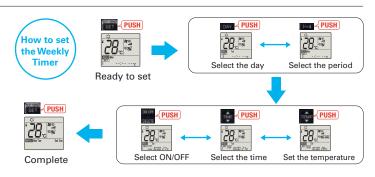

- · Start by pushing the "SET" button and follow the instructions to set the desired patterns. Start by pushing the "SEI" button and follow the instructions to set the desired patterns. Once all of the desired patterns are input, point the top end of the remote controller at the indoor unit and push the "SET" button one more time. (Push the "SET" button only after inputting all of the desired patterns into the remote controller memory. Pushing the "CANCEL" button will end the set-up process without sending the operation patterns to the indoor unit).
 It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent.

Back Light Remote Controller

Not only the indoor units, but the wireless remote controllers come in four colours as well. Each remote controller matches the indoor unit. Even the textures are the same.



The setting can be easily checked in the dark.

INSTALLATION & MAINTENANCE

INSTALLATION



Cleaning-free Pipe Reuse

It is possible to reuse the same piping. It allows cleaning-free renewal of air conditioning systems that use R22 or R410 refrigerant.


Wiring Reuse of Existing Wiring

Wiring recycling problem solved! Compatible with other wiring connection methods*


The wiring method has been improved, making it possible to use methods different from that utilized for control and power supply. Units are compatible with the dual harness control line/power line method and the separate power supply method. Using a power supply terminal kit, wire can be efficiently reused at the time of system renewal regardless of the method the existing system uses.

*Optional. Usage may be limited due to wiring type diameter.


Single Harness Control/Power Line Method (Current method)



Dual Harness Control Line/Power Line Method




Separate Power Supply Method



Wiring/Piping Correction Function*


The push of a single button is all that is required to confirm that piping and wiring are properly connected. Corrections are made automatically if a wiring error is detected, eliminating the need for complicated wiring confirmation work when expanding the number of rooms served.

* This function cannot be used when the outdoor temperature is below 0°C. The correction process requires 10-20 minutes, and only works when the unit is set to the Cooling mode.

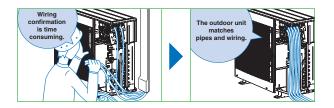

Drain Pump

A built-in drain pump enables drain piping to be raised.





Flare connection to cooling pipe work is possible.

Pump Down Switch

Enables smooth and easy recovery of refrigerant. Simply press the "Pump Down" switch before moving or changing the unit.

Outdoor unit control circuit board





is opened/closed.)

MAINTENANCE



Self-Diagnostic Function (Check Code Display)

Check codes are displayed on the remote controller or the operation indicator to inform the user of malfunctions detected.

Failure Recall Function

Operation failures are recorded, allowing confirmation when needed.

SYSTEM CONTROL

SYSTEM CONTROL



PAR-41MAA/PAC-YT52CRA/PAC-CT01MAA

Units are compatible for use with the PAR-41MAA, PAC-YT52CRA or PAC-CT01MAA remote controller, which has a variety of management



System Group Control

The same remote controller is capable of controlling the operational status of up to 16 refrigerant systems.



M-NET Connection

Units can be connected to MELANS system controllers (M-NET controllers) such as the AG-150A.

COMPO (Simultaneous Multi-unit Operation)

Multiple indoor units can be connected to a single outdoor unit. (Depending on the unit combination, connection of up to four units is possible; however, all indoor units must operate at the same settings.)



MXZ Connection

Connection to the MXZ multi-split outdoor unit is possible.



MELCloud (Wi-Fi Interface)

MELCloud for fast, easy remote control and monitoring

MELCloud is a Cloud-based solution for controlling air-conditioner either locally or remotely by computer, tablet or smartphone via the Internet. Setting up and remotely operating via MELCloud is simple and straight forward. All you need is wireless computer connectivity in your home or the building where the air-conditioner is installed and an Internet connection on your mobile or fixed terminal. To set up the system, the router and the Wi-Fi interface must be paired, and this is done simply and quickly using the WPS button found on all mainstream routers.

You can control and check air-conditioner via MELCloud from virtually anywhere an Internet connection is available.

That means, thanks to MELCloud, you can use much more easily and conveniently.

Key control and monitoring features

- Turn system on/off
- See status of operating & adjust set point
- 6 Live weather feed from your location Schedule timer - Set 7 day weekly schedule Error status
- Energy Consumption Monitoring











MELCloud uses the MAC-587IF interface

When mounting on the wall

The interface can be mounted simply by affixing the holder to the wall on either side of the unit and inserting the interface unit into the holder.



*When mounting on the right side of the unit

When mounting on the outer side of the unit


The interface can be mounted on the right side, left side, bottom right, or bottom left of the indoor unit. After inserting the clip into the holder, slip the clip over the edge of the corner box.








Bottom right



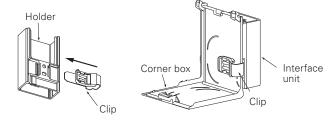








Bottom left

CONTROL TECHNOLOGIES

Extended Cooling Set Temperature Range*

In environments such as gyms where people do strenuous exercise, even if the room is cooled to an appropriate temperature, people may feel that it is hot, and they need a cooler air. To satisfy such demands, we have extended the lower limit of the cooling set temperature range from 19-30°C. to 14-30°C.

^{*}Insulation kit (PAC-SK36HK-E) is required when indoor unit is PLA series.
*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

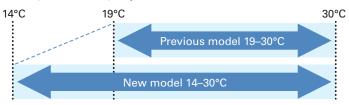






Display of Model Names and Serial Numbers*

The model names and serial numbers of the indoor/outdoor units that are connected to the MA smart remote controller can be automatically acquired and displayed through one simple operation. This eliminates the need to directly check each unit and helps with inquiries in the case of an abnormality.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Model name display (example)



Serial number display (example)

— AC	aares	৪ 🛨			5/W
Col	lect	mode l	names	and	S/N
0 OU	1ZU0	0001			
IU1	1ZA0	0001			
IU2	1ZA0	0002			
IU3	1ZA0	0003			
IU4	1ZA0	0004			
Colled	et da	rta: 🗸	,		
-Ac	ddres	s +		N N	/lode l

Preliminary Error History*

In addition to error history, the history of permissible abnormalities can be displayed. The feature enables the unit status check during inspection and maintenance *Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Error history (Sample)

	Error	history	1/4
Error	Unt#	dd/mm/yy	
E0		21/10/20	
E0		20/12/20	
E0		20/11/20	
E0	@ - 1	20/10/20	PM12:01
Error hi	story	menu:🖎	
▼ Pag	e 🛦		De ete

Preliminary error history (Sample)

Preli	minary	/ error	hist.	1/8
Error	Unt#	dd/mm/s	/У	
E0		21/10/2		
E0		20/12/2		
E0		20/11/3		
E0	0-1	20/10/2	20 PM1	2:01
Error hi	story	menu: Ĉ	,	
▼ Fala	⊢ 🛦		De	⊢t⊬

Display of Power Consumption*

It is possible to measure, acquire, and display the amount of energy used by each air conditioning system.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller

< Data Collection Period >

Time data: Every 30 minutes over the past month Monthly/daily data: Monthly over the past 14 months Energy consumption values are calculated from estimated power consumption values according to the operating conditions. They may vary from the actual power consumption values. Please note that the power consumption of optional parts is not included except in the case of optional parts that have their power supplied directly by the outdoor unit.

Every 30 minutes (example)

Energy	/ data
2019- 1-1	1234.5kWh 1/6
0:30 123.4kWh	2:30 123.4kWh
1:00 123,4kWh	3:00 123,4kWh
1:30 123.4kWh	3:30 123.4kWh
2:00 123.4kWh	4:00 123.4kWh
Return: 3	
— Date —	▼ Page ▲

●Daily (example)

	Energy	/ data		
2019-	1 1	23456.	7kWh	1/4
31 1	234.5kWh	27	1234.	5kWh
30 1	234.5kWh	26	1234.	5kWh
29 1	234.5kWh	25	1234.	5kWh
28 1	234.5kWh	24	1234.	5kWh
Return	:৩			
▼ F	age 🛕			


•Monthly (example)

F	inergy data
▶2019-1	123456. 7kWh 1/3
2018-12	123456, 7kWh
2018-11	123456, 7kWh
2018-10	123456. 7kWh
2018- 9	123456, 7kWh
View daily	data:✓
▼ Ourson	

Horizontal Airflow Settings

The 4-way cassette model with 3D Total Flow system lets you easily set the horizontal airflow direction. This allows you to freely tailor the air conditioning performance according to your particular space and purpose.


*PLP-P160ELR-E is required to activate this function.



The horizontal airflow direction can be fixed for each outlet					
Airflow direction set (Horiz)					
4 2	ZAIL -	Centre-left Front Centre-right Right			
Select:✓					
1 = 64 +	▼ Shore ▲	N 126			

Wi-Fi Interface Setting

When setting up a wireless LAN connection, it is now possible to switch between WPS and AP modes via the remote controller. You can configure a wireless network using the most convenient method according to the installation environment.

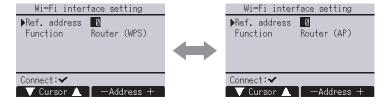

Easy To Read & Easy To Use Inverted Display Screen

The screen background color can be set to black to suit the atmosphere of the installation location.




Full Dot Liquid-crystal Display Adopted

Easier to read thanks to use of a full dot liquid-crystal display with backlight, and easier to use owing to adopting a menu format that has reduced the number of operating buttons.

Display Example [Operation Mode]

Full Dot LCD



Multi-language Display



Control panel operation in fourteen different languages

Choose the desired language, among the following languages.

English	Spanish	Italian	Turkish
French	Greek	Portuguese	Swedish
German	Russian	Polish	Czech
Hangarian	Dutch		

Temperature Control




Two preset temperatures

When the operation mode is set to the Auto (Dual Set Point) mode, two preset temperatures (one each for cooling and heating) can be set. Depending on the room temperature, indoor unit will

automatically operate in either the COOL or HEAT mode and keep the room temperature within the preset range.





^{*}Please refer to the function list on page 205-211 for the combination of the available units

Energy-efficient Control Operation Control Functions



Precise control of power consumption

The amount of power consumed in each time period is managed so that the demand value is not exceeded. The demand control function can be set to start and finish in 5-minute units.

Additionally, the level can be adjusted to 0, 50, 60, 70, 80 or 90% of maximum capacity, and up to 4 patterns can be set per day. Airconditioning operation is automatically controlled to ensure that electricity in excess of the contracted volume is not consumed.

■ Setting pattern example

Start time		Finish time	Capacity savings
8:15	\rightarrow	12:00	80%
12:00	\rightarrow	13:00	50%
13:00	\rightarrow	17:00	90%
17:00	\rightarrow	21:00	50%



Prevents wasteful operation by automatically returning to the preset temperature after specified operating time

After adjusting the temperature for initial heating in winter or cooling on a hot summer day, it is easy to forget to return the temperature setting to its original value. The Auto-return function automatically resets the temperature back to the original setting after a specified period of time, thereby preventing overheating/overcooling. The Auto-return activation time can be set in 10-minute units, in a range between 30 and 120 minutes

Auto-off Timer

Turns heating/cooling off automatically after preset time elapses

When using Auto-off Timer, even if one forgets to turn off the unit, operation stops automatically after the preset time elapses, thereby preventing wasteful operation. Auto-off Timer can be set in 10minute units, in a range between 30 minutes and 4 hours. Eliminates all anxiety about forgetting to turn off the unit.

Recommended for Meeting room Changing room

^{*}Auto-return cannot be used when Temperature Range Restrictions is in use.

CONTROL TECHNOLOGIES

MA Touch Remote Controller
PAR-CT01MAA-SB
PAR-CT01MAA-PB





PAC-CT01MAA-SB

PAR-CT01MAA-PB

User-friendly Visible big size icons on the full color touch panel display

Full color touch panel display





Operation panels





Louver Control

Flexibility Customized display, color on parameter and background, editable parameter, logo image on the initial display

Multiple color pattern

180 color patterns can be selected for control parameters or background on the display.

Control parameter customize

Users can customize the panel to display the selected parameters only.

• Control parameter customize

Simple operation panel is preferred by users, especially in hotels. It is available to display only ON/OFF, set temp., fan speed.



Logo image customization

Logo image can be displayed on the initial screen.



Available in a wide variety of colors to suit the decor of any room.





Expandability Smartphone / tablet App is available for setting, customize, and control.

Bluetooth® low energy technology

Remote controller can communicate with smartphone or tablet device via Bluetooth Low Energy (BLE). Operation & Setting App are available on the App store.



- *The Bluetooth® word mark is trademark of Bluetooth SIG, Inc., USA.
- *Contact the sales company for information on "Bluetooth" function.





Convenient BLE transmission functions for installation contractors

Initial setup for the remote controller can be easily performed using BLE transmission via a smartphone.

Previous model

Previously, initial setup (selecting function parameters) was only available via the remote controller installed each room.



The initial setup (selecting function parameters) can now be performed in advance on a smartphone, with the settings transmitted to the remote controller by enabling BLE transmission upon entry to the room.





Convenient BLE transmission functions for guests

The remote controller has been further upgraded with hotels in mind, to allow smartphone connectivity and multilingual support.

Smartphone connectivity

For example, hotel guests can operate the air conditioner via their smartphones, without getting out of bed.



Multilingual support

The smartphone app can be displayed in the language that the guest's smartphone is set to.



CONTROL TECHNOLOGIES


Wireless Remote Controller PAR-SL101A-E

Extended Cooling Set Temperature Range*

In environments such as gyms where people do strenuous exercise, even if the room is cooled to an appropriate temperature, people may feel that it is hot, and they need a cooler air. To satisfy such demands, we have extended the lower limit of the cooling set temperature range from 19–30°C. to 14–30°C.



*Insulation kit (PAC-SK36HK-E) is required when indoor unit is PLA series. *Availability of this function is depending on outdoor unit, indoor unit and remote controller.






A MISSES

Horizontal Airflow Settings

The 4-way cassette model complete with the Smart 360-degree Airflow system lets you easily set the horizontal airflow direction. This allows you to freely tailor the air conditioning performance according to your particular space and purpose.

Front	Centre-right	Right	Centre-left	Left	No setting



★ Milene*


* WIERE

WeeklyTimer

The Weekly Timer enables the setting of operation start and finish times and adjusting the temperature as standard features. Up to 4 patterns per day can be set, providing operation that matches the varying conditions of each period, such as the number of customers in the store.

■ Example Operation Pattern (Winter/Heating mode)

	Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.
5.00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
6:00			Automatically change	es to high-power opera	tion at wake-up time		
800							
10:00	OFF	OFF	OFF	OFF	OFF	ON 18°C	ON 18°C
15:00						Midday is warmer.	
1400		Automatic	ally turned off during v	vork hours		so the temperature	e is set lower
15:00							
1800	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
5000		Automatically turn	ns on, synchronized wi	th arrival at home		Automatically raises ten	perature setting to
22:00		Automatically turi	is on, syndironized wi	tii dilival at nome		match time when outsic	le-air temperature is low
(during	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C
sleeping	014 10 0			ture at bedtime for ene			014 10 0
hours)		Automa	itically lowers terripera	ture at bedtime for ene	ergy-saving operation a	t nignt	



^{*}Only for SLZ-KF25/35/50/60VA2, PLA-ZP/RP35/50/60/71/100/125/140EA

Backlight

Backlight function incorporated, making screen easy to read in the dark. Even in dimly lit rooms, the screen can be seen clearly for trouble-free remote controller operation.






Individual Vane Settings

The airflow directions of the four vanes can each be adjusted independently. Easily set the optimum airflow according to the room setting.





140

Battery Replacement Sign

Previous wireless remote controllers were not easy to read, understand or use sometimes because the battery was low. Beginning with the PAR-SL101A-E, a battery charge indicator that shows the charge status is included in the LCD so it can be seen when the battery is low and needs to be changed.




Dual Set Point

When the operation mode is set to the Auto (Dual Set Point) mode, two preset temperatures (one each for cooling and heating) can be set. Depending on the room temperature, the indoor unit will automatically operate in either the COOL or HEAT mode and keep the room temperature within the preset range.





Operation pattern during Auto (Dual Set Point) mode

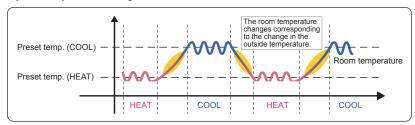


^{*} Only available for compatible models.

3D i-see Sensor (Direct/Indirect Airflow)

Pressing the i-see button enables direct or indirect setting of all vanes.









*Only available for models equipped with 3D i-see Sensor.

Basic Functions

Functions	Button	Liquid crystal
OFF / ON	① OFF/ON	
Preset temperature	●TEMP●	88 .š
Mode	MODE	Cool Dry Heat Fan Auto Dual set point *Dual Set Point function not operational first use.
Fan speed	FAN	4-Speed Auto
Vane angle	VANE	5-step Swing Auto
Louver	WIDE VANE	Fixed Swing
3D i-see Sensor	i-see	Direct Indirect
Send sign		*
Battery replacement sign		
Function setting		[FUNCTION]
Test run		TEST
Self check		CHECK
Not available		N/A


^{*}This remote controller is only compatible with the following models: SLZ-M15/25/35/50/60FA, PLFY-P15/20/25/32/40/50VFM-E1, PLA-ZM/RP35/50/60/71/100/125/140EA, PLFY-P20/25/32/40/50/63/80/100/125VEM-E

^{*}Functions available vary according to the model.

SYSTEM CONTROL

Versatile system controls can be realised using optional parts, relay circuits, control panels, etc.

MAJOR SYSTEM CONTROL

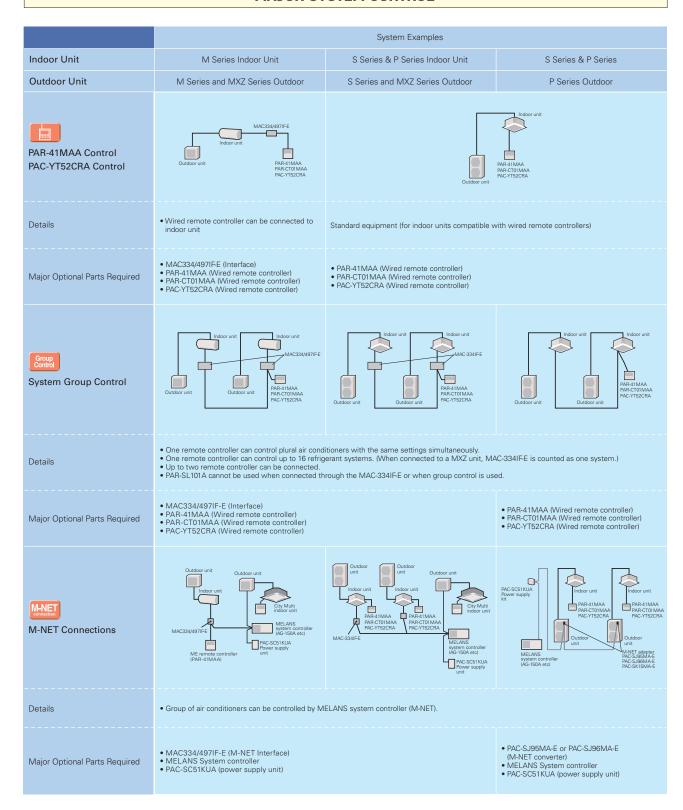


OTHERS

For M Series Indoor Units (New A-control Models Only)

	System Examples	Connection Details	Control Details	Major Optional Parts Required
Remote On/Off Operation • Air conditioner can be started/ stopped remotely. (and () can be used in combination)	MAC-334IFE Switch Outdoor unit Remote control section (to be purchased locally)	Connect the interface to the air conditioner. Then connect the locally purchased remote controller to the terminal in the interface.	On/Off operation is possible from a remote location.	MAC-334IF-E (Interface) Parts for circuit such as relay box, lead wire, etc. (to be purchased locally)
2 Remote Display of Operation Status The On/Off status of air conditioners can be confirmed remotely. The one of the operation of the operat	Power supply Resistance LED Outdoor unit Remote monitor section (to be purchased locally)	Connect the interface to the air conditioner. Then connect the locally purchased remote controller to the terminal in the interface.	The operation status (On/Off) or error signals can be monitored from a remote location.	MAC-334IF-E (Interface) Parts for circuit to be purchased locally (DC power source needed) External power source (12V DC) is required when using MAC-334IF-E.

For P Series and S Series Indoor Units

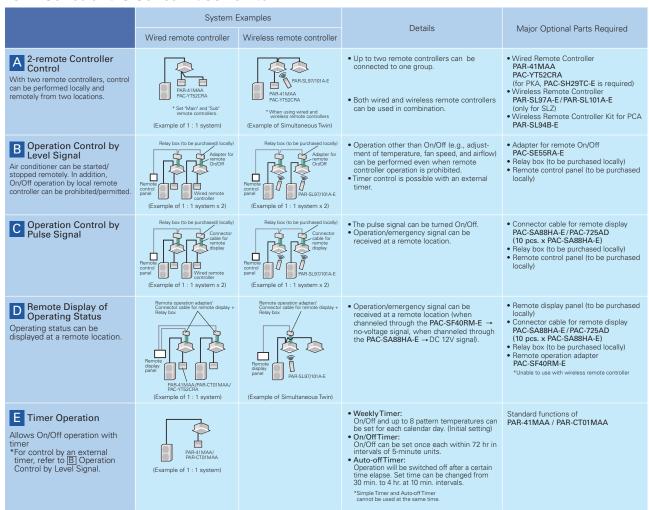

FUNCTION LIST (1)

Category	Icon					M SERIES					
	5 Indoor unit	MSZ-RZ25/35/ 50VU	MSZ-RW25/35/ 50VG	MSZ-LN18/25/35/ 50/60VG2 (W)(V)(R)(B)	MSZ-FT25/35/ 50VG	MSZ-AY15/ 20VGK(P)	MSZ-AY25/35/ 42/50VGK(P)	MSZ-AP60/71VG	MSZ-EF18/22/25/35/ 42/50VG(W)(B)(S)	MSZ-BT20/25/ 35/50VG	
	Outdoor unit Outdoor unit	MUZ-RZ	MUZ-RW	MUZ-LN	MUZ-FT	MUZ-AY	MUZ-AY	MUZ-AP	MUZ-EF	MUZ-BT	
echnology	DC Inverter	•	•	•	•	•	•	•	•	•	$\overline{}$
	Joint Lap DC Motor	•	•	•	•	•	•	•	•	•	
	Reluctance DC Rotary Compressor										
	Heating Caulking (Compressor)	•	•	•	•	•	•	•	•	•	
	DC Fan Motor	•	•	•	•	•	•	•	•	•	
	PAM (Pulse Amplitude Modulation)	•	•	•	•	•	•	•	•	•	
	Power Receiver and Twin LEV Control										
	Grooved Piping	•	•	•	•	•	•	•	•	•	
i-see Sensor	Felt Temperature Control (3D i-see Sensor)	•	•	•							Г
	AREA Temperature Monitor	•	•	•							
Energy	Econo Cool Energy-saving Feature	•	•	•	•	•	•	•	•	•	
Saving	Standby Power Consumption Cut	•	•	•	•	•	•	•	•	•	
Air Quality	Plasma Quad Plus	•	•	•		•*1	*1				_
	Plasma Quad	-	-	-		-	-				
	Dual Barrier Coating	•	•	•							
	Dual Barrier Coating Dual Barrier Material					•	•				
		•	•	0.1		0.1	0.1	0.1		0.1	H
	Silver-ionized Air Purifier Filter			Opt	•	Opt	Opt	Opt	•	Opt	
	V Blocking Filter	Opt	Opt	Opt	•	*2	•*2	•	•	•	
	Air Purifying Filter				•	•	•	•	•	•	
	Self Clean Mode					•	•				
Air Distribution	Double Vane	•	•	•							_
	Horizontal Vane	•	•	•	•	•	•	•	•	•	
	Vertical Vane	•	•	•	•		•	•			
	High Ceiling Mode										
	Auto Fan Speed Mode	•	•	•	•	•	•	•	•	•	
	Circulator Mode	•*3	•*3	•*3	•*3		•*3				
Convenience	On/Off Operation Timer	•	•	•	•	•	•	•	•	•	
	"i save" Mode	•	•	•	•	•	•	•	•	•	
	Auto Changeover	•	•	•	•	•	•	•	•	•	
	Auto Restart	•	•	•	•	•	•	•	•	•	П
2	Low-temperature Cooling	•	•	•	•	•	•	•	•	•	
	10°C Heating	•	•	•	•	•	•	•		•	
	Low-noise Operation (Outdoor Unit)	•									Γ
	Night Mode		•	•	•	•	•	•		•	Г
	Ampere Limit Adjustment										_
	Operation Lock (Indoor)	•	•	•	•	•	•	•		•	П
	Operation Lock (Outdoor)										Т
	Built-in Weekly Timer Function	•	•	•	•	•	•	•	•		
	Drive Mode Selector	•	•								_
System	PAR-41MAA Control *5	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
Control	PAR-CT01MAA Control *5	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	_
	PAC-YT52CRA Control *5										
	Centralised On/Off Control *5	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	_
	System Group Control *5	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
	M-NET Connection *5 Wi-Fi Interface *6	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		•	•	•	•	•	•	•	•	•	
Installed	Energy Consumption Monitoring through MELCloud										
Installation	Cleaning-free Pipe Reuse	•	•	•	•	•	•	•	•	•	
	Wiring/Piping Correction Function										_
	Drain Pump										
	Flare Connection	•	•	•	•	•	•	•	•	•	_
Maintenance	Self-Diagnosis Function (Check Code Display)	•	•	•	•	•	•	•	•	•	
	Failure Recall Function	•				•					

^{*1} Only VGKP model.

*2 Equipped as standard for VGK model.

*3 Available only for Scandinavian model.

*4 When connected to MXZ outdoor units, the outdoor operating sound will not change.

*5 Please refer to "System Control" on pages for details.

*6 Only VGK model.

The figures listed in the table are "only when combined with an outdoor unit with the appropriate capacity range".
 Opt: Separate parts must be purchased.

MSZ-HB25/SSY MSZ-DW25/SSY MSZ-			Me	EDIES		
			MFZ-KT25/35/	MFZ-KW25/35/		MLZ-KY20VG
	MUZ-HR	MUZ-DW	SUZ-M	MUFZ-KW	SUZ-M	Multi
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
	•	•	•	•	•	•
Opt	•	•	•	•	•	•
Opt						
Opt						
Opt	-	-				
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
	Opt	Opt	Opt	Opt	Opt	Opt
	Opt	Opt	•	•	Opt	•
	•	•	•	•	•	•
	•	•	•	•	•	•
					•	•
	•	•	•	•	•	•
	•	•				
						-
Opt			-		-	
Opt						
Opt						
Opt Opt <td></td> <td></td> <td></td> <td></td> <td>•</td> <td>•</td>					•	•
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Opt Opt <td></td> <td></td> <td>•</td> <td>•</td> <td>•</td> <td>•</td>			•	•	•	•
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Opt Opt <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
	-		Орт	Орт	Орт	Орт
			•			
	•	•	•	•		

FUNCTION LIST (2)

Category	Icon				S SERIES				P se	RIES	
	ation	Indoor unit	SLZ-M15/25/	35/50/60FA2 *1	SEZ-M25/35/5	50/60/71DA(L)2	SFZ-M25/35/ 50/60/71VA	PLA-ZM35/50/60/ 71/100/125/140EA2	PLA-M35	5/50/60/71/100/12	5/140EA2
	Combination	Outdoor unit	SUZ-M	PUZ-ZM	SUZ-M	PUZ-ZM	SUZ-M	PUZ-ZM	PUZ-ZM	SUZ-M	PUZ-M
Function	3D Total Flow	7						•	•		•
merit-up	2+1 Back-up rota	tion		•		•		•	•		•
		set temperature range						•	•		•
				•		•		•	•		•
		ames and serial numbers						_			_
	Display of power		•	•	•	•	•	•	•	•	•
	Avoiding simmitar	neous defrosting		•		•		•	•		•
	Defrosting when p	people are absent		•				•	•		
	Defrosting when operation is stopped			•		•		•	•		
	Collection of operation data via MELCloud			•		•		•	•		•
	Demand control v	ia MELCloud		•		•		•	•		•
	Notification of poter	ntial abnormality via MELCloud		•		•		•	•		•
Technology	DC Inverter		•	•	•		•	•	•	•	•
	Joint Lap DC Mot	or	•		•		•	35-71	35-71	•	100
	Magnetic Flux Vector	or Sine Wave Drive		•				•	•		•
	Reluctance DC Rota	ary Compressor	•		•		•	35-71	35-71	•	100-140
	Highly Efficient DC			•				100-250	100-250		200-250
	Heating Caulking		•		•		•	35-71	35-71	•	100
		(Compressor)									
	DC Fan Motor Vector-Wave Eco	Invartor	•	•	•		•	•	•	•	•
				•				•	•		•
	PAM (Pulse Ampli		•	•	•		•	35-140	35-140	•	100-140V
	Power Receiver and	I Twin LEV Control		•				35-250	35-250		100-250
	Grooved Piping		•	•	•		•	•	•	•	•
i-see Sensor	Felt Temperature Con	trol (3D i-see Sensor)	Opt	Opt				Opt	Opt	Opt	Opt
	AREA Temperatur	e Monitor	Opt	Opt				Opt	Opt	Opt	Opt
Energy Saving	Demand Function							Opt	Opt		Opt
Attractive	Pure White		•	•				•	•	•	•
	Auto Vane		•	•				•	•	•	•
Air Quality	Fresh-air Intake		•	•				•	•	•	•
	High-efficiency Filter							Opt	Opt	Opt	Opt
	Oil Mist Filter							Орг	Орг	Opt	Орг
	Long-life Filter		•	•				•	•	•	•
	Filter Check Signa	al .	•	•				•	•	•	•
Air Distribution	Horizontal Vane		•	•				•	•	•	•
	Vertical Vane										
	High Ceiling Mode	е	•	•				•	•	•	•
	Low Ceiling Mode	•						•	•	•	•
	Auto Fan Speed N	Mode	•	•	•		•	•	•	•	•
Convenience	On/off Operation	Timer	•	•	•		•	•	•	•	•
	Auto Changeover		•	•	•		•	•	•	•	•
	Auto Restart		•	•	•		•	•	•	•	•
	Low-temperature	Cooling	•	•	•		•	•	•	•	•
ω	Low-noise Operat	ion (Outdoor Unit)		•				•	•		•
Functions	Ampere Limit Adju			60-140V				60-140V	60-140V		
Ε	Operation Lock										
		nd 2nd Stage Cut-in Functions		•				•	•		•
	Dual Set Point *2	2.nd Glage Gat-III I unotions									
0		real #2		•				•	0.1		•
System Control	PAR-41MAA Cont		Opt	Opt	Opt		Opt	Opt	Opt	Opt	Opt
	PAR-CT01MAA C		Opt	Opt	Opt		Opt	Opt	Opt	Opt	Opt
	PAC-YT52CRA Co		Opt	Opt	Opt		Opt	Opt	Opt	Opt	Opt
	Centraliesd On/Ot		Opt	Opt	Opt		Opt	Opt	Opt	Opt	Opt
	System Group Co	ntrol *3	Opt	Opt	Opt		Opt	•	•	Opt	•
	M-NET Connection *3		Opt		Opt		Opt	Opt	Opt	Opt	Opt
	СОМРО			71-140				71-250	71-250		•
Installation	Cleaning-free Pipe	e Reuse	•	•	•		•	•	•	•	•
	Reuse of Existing	Wiring						Opt	Opt		Opt
	Wiring/Piping Cor	rection Function									
	Drain Pump		•	•	Opt			● *4	•*4	•*4	•*4
	Pump Down Swite	ch						•	•		•
	Flare Connection		•	•	•		•	•	•	•	•
Maintenance		action (Check Code Display)	•	•	•		•	•	•	•	•
IVIAII ILEI IAI ICE											
	Failure Recall Fun	2 MYZ only	•	•	•	1	•	•	•	with the outdoor u	•

[&]quot;1 SLZ-M15 can be connected with R32 MXZ only.

"2 This function is only available with PAR-41MAA, PAC-YT52CRA, PAR-SL101A-E.

"3 Please refer to "System Control" on pages for details.

"4 PEAD-M JAL are not equipped with a drain pump.

<sup>If a numerical figure is listed, the feature is only available with the outdoor unit of that capacity.
Opt: Optional parts must be purchased.</sup>

FUNCTION LIST (3)

Category	Icon						P SERIES					
		E Indoor unit	PEAD-M3	5/50/60/71/100/125	i/140JA(L)2	PEA-M2	00/250LA2	PKA-M3	5/50LA(L)2	PKA-M60/7	71/100KA(L)2	
		Indoor unit Outdoor unit	PUZ-ZM	PUZ-M	SUZ-M	PUZ-ZM	PUZ-M	PUZ-ZM	PUZ-M	PUZ-ZM	PUZ-M	
unction	3D Total Flow											
nerit-up	2+1 Back-up rotation		•	•		•	•	•	•	•	•	
	Extended cooling set t	emperature range						•	•	•	•	
	Display of model name	es and serial numbers	•	•		•	•	•	•	•	•	
	Display of power cons	umption	•	•	•	•	•	•	•	•	•	
	Avoiding simmltaneous	s defrosting	•	•		•	•	•	•	•	•	
	Defrosting when people	e are absent										
	Defrosting when opera	ition is stopped	•			•		•		•		
	Collection of operation	data via MELCloud	•	•		•	•	•	•	•	•	1
	Demand control via Mi	ELCloud	•	•		•	•	•	•	•	•	
	Notification of potential	abnormality via MELClou	d •	•		•	•	•	•	•	•	_
echnology	DC Inverter		•	•	•	•	•	•	•	•	•	
	Joint Lap DC Motor		35-71	100				35-71	100	60/71	100	_
	Magnetic Flux Vector S	Sine Wave Drive	•	•		•	•	•	•	•	•	
	Reluctance DC Rotary		35-71	100-140	•			35-71	•	60/71	100-140	1
	Highly Efficient DC Scr	•	100-250	200/250		•	•	100-200		100-250	200/250	
	Heating Caulking (Com		35-71	100	•			35-71		60/71	100	+
	DC Fan Motor	/	35-71	100	•	•	•	35-71	•	60/71	100	
	Vector-Wave Eco Inver	tor	•	•		•	•	•	•	•	•	
	PAM (Pulse Amplitude											
	Power Receiver and Tv		35-140	100-140V	•			35-140	100V-140V	60-140	100-140V	
		WIII LEV CONTROL	35-250	100-250		•	•	35-200	100-140	60-250	100-250	_
: 0	Grooved Piping	1(00: 0)	•	•	•	•	•	•	•	•	•	_
i-see Sensor	Felt Temperature Contro											_
	AREA Temperature Mo	nitor										
	Demand Function		Opt	Opt		Opt	Opt	Opt	Opt	Opt	Opt	_
Attractive	Pure White							•	•	•	•	
	Auto Vane							•	•	•	•	
Air Quality	Fresh-air Intake											
	High-efficiency Filter											
	Oil Mist Filter											
	Long-life Filter		•	•	•	Opt	Opt					
	Filter Check Signal		•	•	•	•	•	Opt	Opt	Opt	Opt	
Air Distribution	Horizontal Vane							•	•	•	•	
Distribution	Vertical Vane											
	High Ceiling Mode											
	Low Ceiling Mode											
	Auto Fan Speed Mode		•	•	•	•	•	•	•	•	•	
Convenience	On/off Operation Time	r	•	•	•	•	•	•	•	•	•	
	Auto Changeover		•	•	•	•	•	•	•	•	•	
	Auto Restart		•	•	•	•	•	•	•	•	•	
	Low-temperature Cool	ing	•	•	•	•	•	•	•	•	•	
SI	Low-noise Operation (Outdoor Unit)	•	•		•	•	•	•	•	•	
Functions	Ampere Limit Adjustme	ent	60-140V					71-140V		60-140V		
호	Operation Lock											
	Rotation, Back-up and 2	2nd Stage Cut-in Function	is •	•		•	•	•	•	•	•	
	Dual Set Point *1		•	•		•	•	•	•	•	•	
System	PAR-41MAA Control *2)	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	_
Control	PAR-CT01MAA Contro		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
	PAC-YT52CRA Contro		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
	Centraliesd On/Off Cor											_
	System Group Control		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
	M-NET Connection *2	-			Opt			Opt	Opt	Opt	Opt	
	COMPO		Opt 71.250	Opt	Opt	Opt	Opt	Opt 71, 200	Opt	Opt 71, 250	Opt	
Installation		100	71-250					71-200	•	71-250		+
Installation	Cleaning-free Pipe Reu		•	•	•	•	•	•	•	•	•	
	Reuse of Existing Wirir		Opt	Opt				Opt	Opt	Opt	Opt	1
	Wiring/Piping Correction	on Function										
	Drain Pump		●*3	●*3	•*3	Opt	Opt	Opt	Opt	Opt	Opt	₩
	Pump Down Switch		•	•		•	•	•	•	•	•	
	Flare Connection		•	•	•	•	•	•	•	•	•	
Maintenance	Self-Diagnosis Functio	n (Check Code Display)	•	•	•	•	•	•	•	•	•	

¹¹ This function is only available with PAR-41MAA, PAC-YT52CRA, PAR-SL101A-E.
22 Please refer to "System Control" on pages for details.
3 PEAD-M JAL are not equipped with a drain pump.

			P SERIES			
PCA-M3	5/50/60/71/100/125	i/140KA2	PCA-M71HA2	PS/	A-M71/100/125/14	JKA
PUZ-ZM	PUZ-M	SUZ-M	PUZ-ZM	PUZ-ZM	PUZ-M	SUZ-M
•	•		•			
•	•		•	•	•	
•	•		•	•	•	
•	•	•	•	•	•	•
•	•		•	•	•	
•			•	•		
•	•		•	•	•	
•	•		•	•	•	
•	•		•	•	•	
•	•	•	•	•	•	•
35-71	100	•	71	71	100	•
•	•		•	•	•	
35-71	100-140	•	71	71	100-140	•
100-250	200/250		100-250	200-250	200/250	
35-71	100	•	71	71	100	•
•	•	•	•	•	•	•
•	•		•	•	•	
35-140	100-140V	•	71-140	71-140	100-140V	•
35-250	100-250		71-250	71-250	100-250	
•	•	•	•	•	•	•
Opt	Opt		Opt	Opt	Opt	
Ф	Ф	•	Орг	Θ ρι	Ф	•
•	•	•				
•	•	•	•			
Opt	Opt	Opt				
			•			
•	•	•		•	•	•
•	•	•	•	•	•	•
•	•	•				
				•	•	•
•	•	•				
•	•	•		_	_	
•	•	•		•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•		•	•	•	
60-140V				71-140V		
•	•		•	•	•	•
•	•					
Opt	Opt	Opt	Opt	•	•	•
Opt	Opt	Opt	Opt			
Opt	Opt	Opt	Opt			
Opt	Opt	Opt	Opt	Opt	Opt	Opt
•	•	Opt	0.1	Opt	Opt	Opt
Opt 71, 250	Opt	Opt	Opt 71.250	Opt 71.250	Opt	Opt
71-250	•	•	71-250	71-250	•	•
Opt	Opt		Opt	Opt	Opt	
Opt	Орг		Орг	Ορι	Орг	
Opt	Opt	Opt				
•	•	- F-	•			
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
		If a numarical figure	o in linted the feet	ro io only available	with the outdoor	init of that consoits

If a numerical figure is listed, the feature is only available with the outdoor unit of that capacity.
 Opt: Optional parts must be purchased.

FUNCTION LIST (4)

Category	Icon						MXZ:	SERIES					PXZ s	SERIES
	Series		Lo-	std		Std			Std		Hyper H	leating	PXZ	-VG
	0.44		MXZ	-VF2		MXZ-VF4			MXZ-VF2		MXZ-\	/FHZ2	PXZ	-VG
	Outdoo	or unit	2HA	ЗНА	2F	3F	4F	4F	5F	6F	2F	4F	4F75	5F85
echnology	DC Inverter		•	•	•	•	•	•	•	•	•	•	•	•
	Joiint Lap DC Motor		•	•	•	•	•	•	•		•		•	•
	Magnetic Flux Vector Sine W	/ava Drive												
	Heating Caulking (Compress	sor)	•	•	•	•	•	•	•	•	•	•	•	•
	DC Fan Motor		•	•	•	•	•	•	•	•	•	•	•	•
	Vector-Wave Eco Inverter													
	PAM (Pulse Amplitude Modu	ılation)	•	•	•	•	•	•	•	•	•	•	•	•
	Power Receiver and Twin LE	V Control		•		•	•						•	
	Grooved Piping		•	•	•	•	•	•	•	•	•	•	•	•
i-see Sensor	Felt Temperature Control (3D) i-see)												
	AREA Temperature Monitor	,												
Energy Saving	•													
Attractive	Pure White													
	Auto Vane													
Air Quality	Fresh-air Intake													
	High-efficiency Filter													
	Oil Mist Filter													
	Filter Check Signal													
Air	Horizontal Vane													
Distribution	Vertical vane													
	High Ceiling Mode													
	Auto Fan Speed Mode													
Convenience	On/off Operation Timer													
	Auto Changeover		•	•	•	•	•	•	•	•	•	•	•	•
	Auto Restart		•	•	•	•	•	•	•	•	•	•	•	•
	Low- temperature Cooling		•	•	•	•	•	•	•	•	•	•	•	•
	10°C Heating				• *1	• *1	• *1	• *1	•*1	• *1	• *1	• *1	•	•
	Low-noise Operation (Outdo	or)	•	•	•	•	•	•	•	•	•	•	•	•
	Night Mode	,												
2	Ampere Linit Adjustment									•	•	•		
runctions	Operation Lock (Indoor)													
2	Operation Lock (Outdoor)		•	•	•	•	•	•	•	•	•	•	•	•
	Built-in Weekly Timer Function	on												
	Rotation, Back-up abd 2nd Stag	e Cut-in Functions												
	Dual Set Point													
System	PAR-41MAA Control		Opt	Opt	Opt									
Control	PAR-CT01MAA Cotrol													
			Opt	Opt	Opt									
	PAC-YT52CRA Control		Opt	Opt	Opt									
	Centralised On/off Control		Opt	Opt	Opt									
	System Group Control		Opt	Opt	Opt									
	M-NET Connection												Opt	Opt
	Wi-Fi Interface												Opt	Opt
	Energy/Consumption Monitaring	trouth MEL Cloud	•	•	•	•	•	•	•	•	•	•	•	•
	MXZ Connection		• *2	•	•									
Installation	Cleaning-free Pipe Reuse		• 3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3		
	Reuse of Existing Wiring		3	3	3	3	- 3	- 3	3	- 3	3	- 0		
	Wiring/Piping Correction Fur	nction	•	•	•	•	•	•	•	•	•	•	•	•
	Drain Pump													
	Pump Down Switch			•		•	•							
	Flare Connection		•	•	•	•	•	•	•	•	•	•	•	•
Maintenance	Self-Diagnosis Function (Check	Code Display)	•	•	•	•	•	•	•	•	•	•	•	•
		. "	_	_		_			_	_				

^{*1} When multiple indoor units connected to an MXZ outdoor unit are running at the same time, simultaneous cooling and heating is not possible.
*2 For the possible connectivity of MXZ outdoor units and indoor units, please refer to the list on page 120 for details.
*3 Please refer to "System Control" on pages for details.

<sup>The figures listed in the table are "only when combined with an outdoor unit with the appropriate capacity range".
Opt: Separate parts must be purchased.</sup>

Major Optional Parts

Part Name	Description	Part Name	Description
Plasma Quad Connect High performance air purifying device that effectively removes various kinds of air pollutants and is even installable on the existing indoor unit.	Plasma Quad Connect	Multi-functional Casement Casement for fresh-air intake and attaching the high-efficiency filter element (optional).	Indoor unit body Multi-functional casement
Deodorising Filter Captures small foul-smelling substances in the air.	Deodorising filter	Fresh-air Intake Duct Flange Flange attachment for adding a duct to take in fresh air from outside.	"For 4-way cassette units (PLA)
Air-cleaning Filter Removes fine dust particles from the air by means of static electricity.	Air-cleaning filter	Space Panel Decorative cover for the installation when the ceiling height is low.	Space Panel Panel
V Blocking Filter Inhibits 99% of adhered virus, and other harmful substances, such as bacteria, mold and allergen.	V Blocking Filter	Drain Pump Pumps drain water to a point higher than that where the unit is installed.	*for ceiling-suspended units
Silver-ionized Air Purifier Filter Captures the bacteria, pollen and other allergens in the air and neutralises them.	Silver-ionized Air Purifier Filter	Decorative Cover To be attached to the upper section of ceiling- suspended models for professional kitchen use. Helps prevent dust accumulation.	Decorative cover
Oil Mist Filter Element Filter element (12 pieces) that blocks the oil mist for ceiling-suspended models used in professional kitchens.	Filter frame Filter élément	MA Interface Interface for connecting with the PAR-41MAA remote controller and PAC-YT52CRA.	MA & contact terminal interface
High-efficiency Filter Element Element for high-efficiency filter. Removes fine dust particles from the air.	Plug (for directing airflow) High-efficiency filter element *For 4-way cassette units (PLA)	System Control Interface Interface to connect with M-NET controllers.	System control interface Indoor unit
3D i-see Sensor Corner Panel for SLZ Corner panel holding the 3D i-see Sensor.	i-see Sensor corner panel	Wi-Fi Interface Interface enabling users to control air conditioners and check operating status via devices such as personal computers, tablets and smartphones.	WiFi Interface Indoor unit Smartphone
3D Total Flow for PLA Casement equipped with horizontal louver.		Connector Cable This product is an adaptor which inputs the incoming signals from an open/close switch to the air conditioner and outputs the on/off signals from the air conditioner.	Switch Indoor unit Relay
3D i-see Sensor Corner Panel for PLA Corner panel holding the 3D i-see Sensor.	i-see Sensor corner panel	Power Supply Terminal Kit Terminal bed to change the power supply from outdoor power supply to separate indoor/ outdoor power supplies.	
Shutter Plate Plate for blocking an air outlet of the 4-way cassette (PLA) indoor unit.	Shutter Plate	Wired Remote Controller Advanced deluxe remote controller with full- dot liquid-crystal display and backlight. Equipped with convenient functions like night- setback.	a Div. (i)

Part Name	Description
MA Touch Remote Controller Remote controller with the full color touch display. Smartphone/Tublet App is available for setting, customize and control.	00.0°C
Simple Wired Remote Controller Remote controller with liquid-crystal display, and backlight function for operation in dark location.	Accer
Remote Controller Terminal Block Kit for PKA The terminal block is used as a relay to wire an indoor unit and to two remote controllers or to wire a remote controller and multiple indoor units in order to perform group control.	
Wireless Remote Controller Signal Sender Handheld unit for sending operation signals to the indoor unit.	Handheld unit
Wireless Remote Controller Signal Receiver Receives operation signals from the wireless remote controller handheld unit.	Signal receiver
Wireless Remote Controller Kit (Sender & Receiver) Remote controller handheld unit (signal sender) and receiver (signal receiver) for ceiling-suspended units.	Signal receiver
Control Holder Holder for storing the remote controller.	Control holder
Remote Sensor Sensor to detect the room temperature at remote positions.	Remote sensor
Remote On/Off Adapter Connector for receiving signals from the local system to control the on/off function.	Remote on/off adapter
Remote Operation Adapter Adapter to display the operation status and control on/off function from a distance.	Remote operation adapter
Connector Cable for Remote Display Connector used to display the operation status and control on/off function from a distance.	Connector cable for remote display Brown Red Orange Yellow Green
Distribution Pipe Branch pipe for P Series simultaneous multisystem use, or to connect two branch boxes for PUMY.	Indoor unit Indoor unit Indoor unit Distribution pipe *P Series with 2 indoor units

*P Series with 2 indoor units

Part Name	Description
Fait Name	Description
Joint Pipe Part for connecting refrigerant pipes of different diametres.	Indoor unit Joint pipe Onsite
Liquid Refrigerant Dryer Removes water and minute particles from refrigerant pipes.	
Branch Box Outer Cover Casement for branch boxes.	Complete view Branch box outer cover
Air Outlet Guide Changes the direction of air being exhausted from the outdoor unit.	
Air Protection Guide Protects the outdoor unit from the wind.	
Drain Socket A set of caps to cover unnecessary holes at the bottom of the outdoor unit, and a socket to guide drain water to the local drain pipe.	Cap
Centralised Drain Pan Catches drain water generated by the outdoor unit.	Outdoor unit Centralised drain pan Base (local construction)
M-NET Converter Used to connect P Series A-control models to M-NET controllers.	Group remote controller M-NET Conventer Fower scaph and for transmit codels
Control/Service Tool Monitoring tool to display operation and self-diagnosis data.	Control/service tool
Step Interface Interface for adjusting the capacity of inverter- equipped outdoor units.	Case interior Installed in case
High-static Fan Motor Static pressure enhanced up to +30pa.	
	_

Optional Parts List <Indoor>

	Option						Filter							System				
				ionized lier Filter			V Block	ing Filter			orising Iter	Plasma Quad Connect	Softdry Cloth	System Control Interface	MA Interface	Wi-Fi Interface		nector able
ndoor Unit		MAC- 2360 FT	MAC- 2370 FT	MAC- 2380 FT	MAC- 2390 FT	MAC- 2450 FT	MAC- 2460 FT	MAC- 2470 FT	MAC- 2490 FT	MAC- 3000 FT-E	MAC- 3010 FT-E	MAC- 100 FT-E	MAC- 1001 CL-E	MAC- 334 IF-E	MAC- 497 IF-E	MAC- 587 IF-E	MAC- 1702 RA-E	MAC- 1710 RA-E
Wall -	MSZ-RZ25VU								•		•			•	•		•	•
mounted	MSZ-RZ35VU								•		•			•	•		•	•
	MSZ-RZ50VU								•		•			•	•		•	•
	MSZ-RW25VG								•		•			•	•		•	•
	MSZ-RW35VG								•		•			•	•		•	•
1	MSZ-RW50VG								•		•			•	•		•	•
	MSZ-LN18VG2(W)(V)(R)(B) MSZ-LN25VG2(W)(V)(R)(B)								•		•		•	•	•		•	•
	MSZ-LN35VG2(W)(V)(R)(B)								•		•				•		•	•
	MSZ-LN50VG2(W)(V)(R)(B)								•		•		•	•	•		•	•
	MSZ-LN60VG2(W)(V)(R)(B)								•		•		•	•	•		•	•
	MSZ-FT25VG							•				•				●,3		
	MSZ-FT35VG							•				•		•	•	●,3	•	•
	MSZ-FT50VG							•				•			•	•,3	•	•
	MSZ-AY15VGK(P)							●*1 ●*1				*2		•	•	●,3	•	•
	MSZ-AY20VGK(P) MSZ-AY25VGK(P)		_		_		-	011				0.5		•	•	0.3	•	•
	MSZ-AY35VGK(P)							*1				0.5			•	9.3	•	
,	MSZ-AY42VGK(P)							•11				• '2		•	•	.3	•	•
	MSZ-AY50VGK(P)							● *1				•*2		•	•	●*3	•	•
	MSZ-AP60VG											•		•		●,3		
	MSZ-AP71VG						•					•		•	•	●,3	•	•
	MSZ-EF18VG(W)(B)(S)							•				•	•	•	•	●.3	•	•
	MSZ-EF22VG(W)(B)(S)							•				•	•	•	•	●,3 ●,3	•	•
	MSZ-EF25VG(W)(B)(S) MSZ-EF35VG(W)(B)(S)						 	•				•	•	•	•	9.3	•	•
	MSZ-EF35VG(W)(B)(S) MSZ-EF42VG(W)(B)(S)							•					•	•	•	.3	•	
	MSZ-EF50VG(W)(B)(S)							•				•	•	•	•	.3	•	•
	MSZ-BT20VG							•				•		•	•	●,3	•	•
	MSZ-BT25VG							•				•		•		●.3		•
	MSZ-BT35VG							•				•		•	•	●,3	•	•
	MSZ-BT50VG							•				•		•	•	●,3	•	•
	MSZ-HR25VF MSZ-HR35VF							•				•		•	•	●,3	•	•
	MSZ-HR35VF MSZ-HR42VF						 	•				•		•	•	9.3	•	•
	MSZ-HR50VF														•	.3	•	•
	MSZ-HR60VF							•				•		•	•	.3	•	•
	MSZ-HR71VF							•				•		•	•	●,3	•	•
	MSZ-DW25VF							•				•		•	•	●,3	•	•
	MSZ-DW35VF						-	•				•		•	•	●.3	•	•
	MSZ-DW50VF							•				•		•	•	• 3	•	•
	MSY-TP35VF MSY-TP50VF							•				•		•	•	● *3	•	•
	MSZ-FH25VE2			•			1	-		•		-		•	•	9.3	•	•
	MSZ-FH35VE2			•						•					•	.3		•
	MSZ-FH50VE2			•						•				•	•	●,3	•	•
	MSZ-SF15VA											•		•	•	●,3		
	MSZ-SF20VA											•		•	•	●,3		
	MSZ-SF25VE3		•									•		•	•	●,3		
	MSZ-SF35VE3		•									•		•	•	•*3 •*3		
	MSZ-SF42VE3 MSZ-SF50VE3		•									•		•	•	0,3		
	MSZ-GF60VE2	•	_				•					•		•	•	9.3		
	MSZ-GF71VE2	•					•					•		•	•	.3		
	MSZ-WN25VA		•									•		•	•	●,3	•	•
	MSZ-WN35VA		•									•		•	•	●,3	•	•
	MSZ-DM25VA		•									•		•	•	•.3		
	MSZ-DM35VA		•									•		•	•	●*3	•	•
	MSZ-HJ25VA		•														•	•
	MSZ-HJ35VA MSZ-HJ50VA		•														•	•
	MSZ-HJ60VA		•														•	•
	MSZ-HJ71VA		•														•	
Floor-	MFZ-KT25VG		•					•						•	•	●,3	•	•
	MFZ-KT35VG		•					•						•	•	●,3	•	•
	MFZ-KT50VG		•					•						•	•	●.3		
	MFZ-KT60VG		•		-			•				-		•	•	●.3	•	•
	MFZ-KW25VG MFZ-KW35VG		•					•						•	•	●*3	•	•
	MFZ-KW35VG MFZ-KW50VG		•					•						•	•	9.3	•	•
	MFZ-KW60VG		•					•						•	•	.3	•	•
	MLZ-KP25VG		•					•						•	•	•,3	•	
	MLZ-KP35VG		•					•						•	•	●,3	•	•
	MLZ-KP50VG		•					•						•	•	●,3	•	•
	MLZ-KY20VG		•					•								●,3		

^{**1} Equipped as standard for VGK model.

**2 Plasma quad plus is equipped as standard for VGKP model.

**3 Outside attachment only.

**4 Either MAC-334IF-E or MAC-497IF-E is required. Up to two wired remote controllers can be connected at the same time.

**5 Either MAC-334IF-E or MAC-497IF-E is required. Only one wired remote controller can be connected.

**6 Available only for LN18/25/35/50/60VG2B/R/V.

**7 Available only for LN18/25/35/50/60VG2W.

Wired R	lemote Co	ntroller	Wireless Remote Controller	Coi	ntroller Ho	lder
PAR- 41MAA	PAR- CT01 MAA	PAC- YT52 CRA	MAC- SL100 M-E	MAC- 286 RH-E	MAC- 1200 RC-E	MAC- 1300 RC-E
• *4	6 *5	●*4				•
•*4	*5	● *4				•
•*4 •*4	*5 *5	• 4				•
0'4	•*5	0'4				•
•*4	*5	• 4				
6 *4	6 *5	●*4		6 *6		•*7
●*4	6 *5	●*4		6 *6		•*7
● *4	6 *5	●*4		6 *6		•*7
●*4	* 5	●*4		●,6		●*7
●*4	● *3	●*4		●,6		●*7
•*4	* 5	•*4				•
• 4	*5	● *4				•
●'4	• *5	●°4				•
●*4 ●*4	*5 *5	• 4				
0'4	6 '5	0.4				•
-4	•*5	-4				
0*4	•*5	0.4				•
• 4	•*5	0.4				•
•*4	*5	•*4				•
6 *4	* 5	●*4				•
●*4	6 *5	●*4				•
- 4	* 5	●*4				•
●*4	* 5	●*4				•
•*4	*5	●*4				•
6 *4	* 5	•*4				
●'4 ●'4	•*5 •*5	●°4				•
•*4 •*4	*5 *5	●°4				
•°4	•*5	• 4				
• 4	• ·5	0.4				
1	6 *5	0*4			•	
-4	*5	0.4			•	
• *4	* 5	0.4			•	
•*4	* 5	• 4			•	
•*4	*5	●*4			•	
•*4	* 5	●*4			•	
* 4	* 5	● *4				
●*4	* 5	●*4			•	
6 *4	*5	● *4			•	
6 *4	* 5	● '4	•			
●*4 ●*4	•*5 •*5	●°4	•			
• °4	• *5	-4				•
0'4	• '5	0'4				•
0'4	•*5	0'4				•
*4	*5	-4				
●'4	•*5	●'4				•
6 *4	* 5	●*4				•
• *4	* 5	●*4				•
●*4	* 5	●*4				•
●*4	* 5	●*4				•
● *4	*5	● *4				•
●°4	•*5	●°4				•
6 *4	6 *5	●°4				•
•°4	*5 *5	•°4			•	
-		-			•	
					•	
					•	
					•	
					•	
●*4	* 5	●*4				•
•*4	* 5	●*4				•
•*4	* 5	•*4				•
●*4	* 5	●*4				•
•*4	*5	●*4				•
● *4	* 5	● *4				•
●°4	•*5	• '4				•
●°4	•*5 •*5	• '4				•
•*4 •*4	•*5 •*5	•*4 •*4				•
0'4	6 *5	0'4				•
• 4	*5	-4				
9	-	-				

Optional Parts List < Indoor>

		Option	Oilkii-	Larra							Filt	ıer									
			Oil Mist Filter Element	Long Life Filter			nent			I		ocking F		ı			ı	Filter Bo	x	ı	
door U	Init		PAC- SG38 KF-E	PAC- KE85 LAF	PAC- SH59 KF-E	PAC- SH88 KF-E	PAC- SH89 KF-E	SH90	PAC- SK53 KF-E	PAC- SK54 KF-E	PAC- SK55 KF-E	PAC- SK56 KF-E	PAC- SK57 KF-E	MAC- 2470 FT-E	MAC- 1416 FT-E	PAC- KE92 TB-E	PAC- KE93 TB-E	PAC- KE94 TB-E	PAC- KE95 TB-E	PAC- KE250 TB-F	
4-way cassett		SLZ-M15FA2																			
Cassell	.10	SLZ-M25FA2																			
		SLZ-M35FA2																			
		SLZ-M50FA2																			
		SLZ-M60FA2																			
Ceiling concea		SEZ-M25DA(L)2																			
CONCE	aiu	SEZ-M35DA(L)2																			
		SEZ-M50DA(L)2																			
		SEZ-M60DA(L)2																			
		SEZ-M71DA(L)2																			
Conce		SFZ-M25VA																			
noor st	tanding	SFZ-M35VA																			
		SFZ-M50VA																			
		SFZ-M60VA																			
		SFZ-M71VA																			
4-way		PLA-ZM35EA2																			
cassett	ite	PLA-ZM50EA2			•				•												
		PLA-ZM60EA2																			
		PLA-ZM71EA2			•				•												
		PLA-ZM100EA2																			
		PLA-ZM125EA2																			
		PLA-ZM140EA2																			
		PLA-M35EA2																			
		PLA-M50EA2																			
		PLA-M60EA2																			
		PLA-M71EA2																			
		PLA-M100EA2																			
		PLA-M125EA2																			
		PLA-M140EA2			•				•												
Ceiling) -	PEAD-M35JA(L)2																			
concea	ald	PEAD-M50JA(L)2														•					
		PEAD-M60JA(L)2																			
		PEAD-M71JA(L)2															•				
		PEAD-M100JA(L)2																			
		PEAD-M125JA(L)2																			
		PEAD-M140JA(L)2																			
		PEA-M200LA2																			
		PEA-M250LA2																		•	
Wall -		PKA-M35LA(L)2																			
mounte		PKA-M50LA(L)2																			
		PKA-M60KA(L)2													•						
		PKA-M71KA(L)2																			
		PKA-M100KA(L)2																			
Ceiling	1 -	PCA-M35KA2													-						
suspen		PCA-M35KA2 PCA-M50KA2																			
		PCA-M50KA2 PCA-M60KA2																			
		PCA-M60KA2 PCA-M71KA2																			
		PCA-M100KA2																			
		PCA-M125KA2						•					•								
		PCA-M140KA2																			
Flori		PCA-M71HA2																			
Floor - standir		PSA-M71KA																			
		PSA-M100KA																			
		PSA-M125KA																			
		PSA-M140KA											1				1				I

^{*1 3}D Total Flow unit(PLP-U160ELR-E) cannot be used with Plasma Quad Connect(PAC-SK51FT-E), Insulation kit(PAC-SK36HK-E), Shutter Plate(PAC-SJ37SP-E), Multi functional casement(PAC-SJ41TM-E) and High-efficiency filter element(PAC-SH59KF-E).

*2 Plasma Quad Connect(PAC-SK51FT-E) cannot be used with PLP-U160ELR-E(3D Total Flow unit), Insulation kit (PAC-SK36HK-E), Auto elevation panel(PLP-6EAJ, PLP-6EAJE), Multi functional casement(PAC-SJ41TM-E) and High-efficiency filter element(PAC-SH59KF-E).

*3 Insulation kit(PAC-SK36HK-E) cannot be used with 3D Total Flow unit(PLP-U160ELR-E), Plasma Quad Connect(PAC-SK51FT-E), Auto elevation panel(PLP-6EAJ, PLP-6EAJE), Shutter Plate(PAC-SJ37SP-E), Multi functional casement(PAC-SJ41TM-E) and High-efficiency filter element(PAC-SH59KF-E).

*4 V Blocking Filter(PAC-SK53KF-E) cannot be used with High-efficiency filter element(PAC-SH59KF-E).

*5 V Blocking Filter(PAC-SK56KF-E) cannot be used with High-efficiency filter element(PAC-SH89KF-E).

*6 V Blocking Filter(PAC-SK56KF-E) cannot be used with High-efficiency filter element(PAC-SH89KF-E).

*8 Shutter Plate(PAC-SJ37SP-E) cannot be used with High-efficiency filter element(PAC-SH89KF-E).

*8 Shutter Plate(PAC-SJ37SP-E) cannot be used with High-efficiency filter element(PAC-SH89KF-E).

*9 Multi functional casement(PAC-SJ41TM-E) cannot be used with 3D Total Flow unit(PLP-U160ELR-E) and Insulation kit(PAC-SK56TF-E) and Insulation kit(PAC-SK56TF-E) and Insulation kit(PAC-SK56TF-E) and Insulation kit(PAC-SK56TF-E).

					Plasm	a Quad Co	onnect						3D i	-see	3D			
		a Quad C	onnect		Attach	ment for [Ducted		Во	x for Duc	ted		Ser Co	nsor rner nel	Total Flow unit	Shutter Plate	Insulation kit	Multi- functional Casement
MAC- 100 FT-E	PAC- SK51 FT-E	SLP- FAP	SLP- FALP	SLP- FALMP2	PAC- HA11 PAR	PAC- HA31 PAR	PAC- HA31 PAU	PAC- KE91 PTB-E	PAC- KE92 PTB-E	PAC- KE93 PTB-E	PAC- KE94 PTB-E	PAC- KE95 PTB-E	PAC- SF1 ME-E	PAC- SE1 ME-E	PLP- U160 ELR-E	PAC- SJ37 SP-E	PAC- SK36 HK-E	PAC- SJ41 TM-E
	•													•	•	•	•	
															•			
															•	•		
																•		
	•													•	•	•	•	
	•													•	•	•	•	
									•									
•											•							
•																		
•																		

^{*10} High-efficiency filter element(PAC-SH59KF-E) cannot be used with 3D Total Flow unit(PLP-U160ELR-E), Plasma Quad Connect(PAC-SK51FT-E), Insulation kit (PAC-SK36HK-E) and V Blocking Filter(PAC-SK53KF-E).

*11 High-efficiency filter element(PAC-SH88KF-E) cannot be used with V Blocking Filter(PAC-SH88KF-E).

*12 High-efficiency filter element(PAC-SH89KF-E) cannot be used with V Blocking Filter(PAC-SH89KF-E).

*13 High-efficiency filter element(PAC-SH90KF-E) cannot be used with V Blocking Filter(PAC-SH90KF-E).

Optional Parts List < Indoor>

_		Option	Fresh-a	ir Intake	0:							Da	System	140 F	
			D	uct nge	Space Panel			Drain	Pump			Decorative Cover	Control Interface	Wi-Fi Interface	
In	door Unit		PAC- SH65 OF-E	PAC- SF28 OF-E	PAC- SJ65 AS-E	PAC- SL48 DM-E	PAC- SJ92 DM-E	PAC- SJ93 DM-E	PAC- SJ94 DM-E	PAC- KE07 DM-E	PAC- KE06 DM-FI	PAC- SF81 KC-E	MAC- 334 IF-E	MAC- 587 IF-E	
	4-way	SLZ-M15FA2	0	0. 2	7.0 2	J 2	J 2	J 2	J 2	J 2	J	1.0 2	•	•	
	cassette	SLZ-M25FA2											•	•	
		SLZ-M35FA2											•	•	
		SLZ-M50FA2											•	•	
		SLZ-M60FA2											•	•	
	Ceiling -	SEZ-M25DA(L)2								•			•	•	
rn	conceald	SEZ-M35DA(L)2								•			•	•	
SEMES		SEZ-M50DA(L)2								•			•		
S		SEZ-M60DA(L)2								•			•		
		SEZ-M71DA(L)2								•			•		
	Concealed	SFZ-M25VA											•	•	
	floor standing	SFZ-M35VA											•		
		SFZ-M50VA											•	•	
		SFZ-M60VA											•	•	
		SFZ-M71VA											•	•	
	4-way	PLA-ZM35EA2											•1	•	
	cassette	PLA-ZM50EA2	•		•								•11	•	
		PLA-ZM60EA2	•		•								•11		
		PLA-ZM71EA2	•		•								•1		
		PLA-ZM100EA2	•										•1		
		PLA-ZM125EA2	•										•"1		
		PLA-ZM140EA2											•1		
		PLA-M35EA2											•"1		
		PLA-M50EA2											•11		
		PLA-M60EA2	•		•								•1	•	
		PLA-M71EA2											•1		
		PLA-M100EA2	•		•								•1	•	
		PLA-M125EA2													
		PLA-M140EA2	•										•		
	Ceiling -	PEAD-M35JA(L)2											•"1		
	conceald	PEAD-M50JA(L)2											•1		
		PEAD-M60JA(L)2											•1		
		PEAD-M71JA(L)2											•1		
		PEAD-M100JA(L)2											•"1		
OFFIE OF OFFIE OFF		PEAD-M125JA(L)2											•1	•	
		PEAD-M140JA(L)2											•"1		
		PEA-M200LA2									•		•"	•	
		PEA-M250LA2											•*1		
	Wall -	PKA-M35LA(L)2											•1		
	mounted	PKA-M50LA(L)2											•"1		
		PKA-M60KA(L)2				•							•"1	•	
		PKA-M71KA(L)2											•11		
		PKA-M100KA(L)2											•11		
	Ceiling -	PCA-M35KA2											•"1		
	suspended	PCA-M50KA2											•1	•	
		PCA-M60KA2											•"1		
		PCA-M71KA2											•1		
		PCA-M100KA2													
		PCA-M125KA2													
		PCA-M140KA2													
		PCA-M71HA2												•	
	Floor -	PSA-M71KA													
	standing	PSA-M100KA												•	
		PSA-M125KA													
		PSA-M140KA													
_															

					Wi	red Remo	te Contro	ller		Wire	less Rem	note Cont	roller					
	Power S	upply Teri	minal Kit			Controller		Terminal Block kit for PKA	Signal	Sender		gnal Recei		Controller Kit (Sender & Receiver)	Remote Sensor	Remote On/Off Adapter	Operation	Connector Cable for Remote Display
PAC-	PAC-	PAC-	PAC-	PAC-	PAR-	PAR-	PAC-	PAC-	PAR-	PAR-	PAR-	PAR- SF9	PAR- SE9	PAR- SL94	PAC- SE41	PAC- SE55	PAC- SF40	PAC- SA88
SK38 HR-E	SG94 HR-E	SG96 HR-E	SG97 HR-E	SJ39 HR-E	41 MAA	CT01 MAA	YT52 CRA	SH29 TC-E	SL97 A-E	SL101 A-E	SA9 CA-E	FA	FA-E	B-E	TS-E	RA-E	RM-E	HA-E
										•*4		•					*2	
										•*4							*2	
										•*4							*2	
										•*4		•					•*2	
						•	•		•	•*4		•				•	•*2	
					DA2	DA2	DA2			•*4							*2	
					DA2	DA2	DA2		•	•*4						•	*2	
					DA2	DA2	DA2			•*4						•	•*2	
					DA2	DA2	DA2		•	• 4						•	•*2	•
					DA2	DA2	DA2			•*4						•	*2	
									•	•*4	•					•	•*2	•
					•	•	•		•	•*4	•				•	•	•*2	•
					•	•	•		•	• 4	•				•	•	*2	•
						•	•		•	• 4	•						•*2	
							•			• 4							•*2	
					•					*4							•*2	
										• 4			_				•*2	
						•	•			•*4			•			•	*2	
										•*4						•	•*2	
					_					•*4							•*2	
										• 4			•				•*2	
				•			•		•				•		•	•		
										• '4							•*2	
							•		•	• 4			•			•	•*2	
																	•*2	
									•	• 4			•			•	•*2	•
										•*4							•*2	
										• 4			•				•*2	
										•*4							•*2	
										•*4			•			•	*2	
										• 4							*2	
										•*4							•*2	
										•*4							*2	
										•*4							•*2	
										•*4							•*2	
			•				•		•	•*4	•				•	•	•*2	•
										•*4							•*2	
							•		•	•*4	•					•	•*2	•
										•*4							•*2	
					•,3	•,3	•*3		•	•*4						•	•*2	
					*3	*3	•*3			•*4							*2	
					•*3	•,3	•.3			• 4								
					*3	•*3	•,3			•*4								
					•*3	•3	•,3			•*4								
										•*4							•*2	
										•*4							•*2	•
										•*4							•*2	
										•*4							•*2	
										•*4							*2	
									•	•*4				•	•	•	•*2	•
										•*4							*2	
										•*4							•*2	•
										•*4	•						*2	
										• 4							•*2	•
										•*4							*2	
										• 4							*2	•
		not be use															_	_

Optional Parts List <Outdoor>

	Option			Distribut	tion Pipe	1		11. %	11.5	11.7	Joint				11.5	Liquid	Refrigera I	int Dryei	4
			Twin :50)	For ¹ (33:3	Friple 3:33)	For Qu (25:25	adruple :25:25)	ø6.35 > Pipe ø9.52	> Pipe ø12.7		Unit ø9.52 > Pipe ø15.88	Unit ø6.35 > Pipe ø9.52	ø9.52 > Pipe ø12.7	> Pipe	ø12.7 > Pipe		ø9.52		7
Outdoor Unit		MSDD- 50TR-E	MSDD- 50WR-E	MSDT- 111R-E	MSDT- 111R3-E	MSDF- 111R-E	MSDF- 111R2-E	PAC- SG72 RJ-E	PAC- SG73 RJ-E	PAC- SG75 RJ-E	PAC- SG76 RJ-E	PAC- 493 PI	Flare MAC- A454 JP-E	MAC- A455 JP-E	MAC- A456 JP-E	PAC- SG81 DR-E	PAC- SG82 DR-E	PAC- SG85 DR-E	5
RZ Series	MUZ-RZ25VU																		4
	MUZ-RZ25VUHZ MUZ-RZ35VU																		+
	MUZ-RZ35VUHZ																		ŧ
	MUZ-RZ50VU																		ፗ
DW 0	MUZ-RZ50VUHZ																		4
RW Series	MUZ-RW25VGHZ MUZ-RW35VGHZ																		+
	MUZ-RW50VGHZ																		1
L Series	MUZ-LN25VG2																		Ţ
	MUZ-LN25VGHZ2																		4
	MUZ-LN35VG2 MUZ-LN35VGHZ2																		Ŧ
	MUZ-LN50VG2																		↥
	MUZ-LN50VGHZ2																		4
FT Series	MUZ-LN60VG2 MUZ-FT25VGHZ																		+
1 1 Octios	MUZ-FT35VGHZ																		1
10.1	MUZ-FT50VGHZ																		7
A Series	MUZ-AY15VG MUZ-AY20VG																		+
	MUZ-AY25VG MUZ-AY25VG																		+
	MUZ-AY25VGH																		
	MUZ-AY35VG																		4
	MUZ-AY35VGH MUZ-AY42VG																		+
	MUZ-AY42VGH																		#
	MUZ-AY50VG																		1
	MUZ-AY50VGH MUZ-AP60VG																		+
	MUZ-AP60VG MUZ-AP71VG2																		1
E Series	MUZ-EF25VG																		
	MUZ-EF25VGH																		4
	MUZ-EF35VG MUZ-EF35VGH																		+
	MUZ-EF42VG																		4
BT Series	MUZ-EF50VG																		Ī
BT Series	MUZ-BT20VG																		4
	MUZ-BT25VG MUZ-BT35VG																		Ŧ
	MUZ-BT50VG																		↥
HR Series	MUZ-HR25VF																		4
	MUZ-HR35VF MUZ-HR42VF																		+
	MUZ-HR50VF																		4
	MUZ-HR60VF																		Ī
DW Carias	MUZ-HR71VF																		4
DW Series	MUZ-DW25VF MUZ-DW35VF																		1
	MUZ-DW50VF																		
TP Series	MUY-TP35VF																		4
F Series	MUY-TP50VF MUZ-FH25VE						-	_											+
1 Jenes	MUZ-FH25VEHZ																		1
	MUZ-FH35VE																		1
	MUZ-FH35VEHZ																		1
	MUZ-FH50VE MUZ-FH50VEHZ																		4
S Series	MUZ-SF25VE																		1
	MUZ-SF25VEH																		4
	MUZ-SF35VE MUZ-SF35VEH							<u> </u>						-		-			+
	MUZ-SF35VEH MUZ-SF42VE																		1
	MUZ-SF42VEH																		_1
	MUZ-SF50VE																		4
G Series	MUZ-SF50VEH MUZ-GF60VE																		4
	MUZ-GF71VE																		_
W Series	MUZ-WN25VA																		4
D Series	MUZ-WN35VA MUZ-DM25VA							<u> </u>	-					-		-			+
D Genes	MUZ-DM25VA MUZ-DM35VA																		j
H Series	MUZ-HJ25VA																		_
	MUZ-HJ35VA																		ا_
	MUZ-HJ50VA MUZ-HJ60VA																		4
	MUZ-HJ60VA MUZ-HJ71VA																		+
Compact	MUFZ-KW25VGHZ																		1
floor	MUFZ-KW35VGHZ																		1
	MUFZ-KW50VGHZ	I		I					1							l		1	- 1

				Air C	Outlet G	auide				Air Pro	tection	Guide	Dra	ain Soc	ket	р	Freeze- reventio Heater Drain P	n	Centra	lized Dra	ain Pan	M-NET Adapter	M-N Conv	IET erter	Control/ Service Tool	Step Interface 1 PC board w/attach- ment kit	Insul fo Accun	ation or nulator	High Static Fan Motor
	MAC- 890 SG-E	MAC- 881 SG	MAC- 882 SG	MAC- 856 SG	MAC- 886 SG-E	MAC- 883 SG	PAC- SJ07 SG-E	PAC- SG59 SG-E	PAC- SH96 SG-E	PAC- SJ06 AG-E	PAC- SH63 AG-E	PAC- SH95 AG-E	PAC- SJ08 DS-E	PAC- SG60 DS-E	PAC- SG61 DS-E	MAC- 643 BH-E	MAC- 644 BH-E	MAC- 646 BH-E	PAC- SG63 DP-E	PAC- SG64 DP-E	PAC- SH97 DP-E	PAC- IF01 MNT-E	PAC- SJ96 MA-E	PAC- SJ95 MA-E	PAC- SK52ST	PAC- IF012 B-E	MAC- 892 INS-E	MAC- 893 INS-E	PAC- SJ71 FM-E
			•																										
			•																										
	•																												
			•																										
			•																										
	•	•																											
		•																											
		•																											
			•																										
	•																												
		•																											
			•			_																							
		•				•																							
		•																											
		•																											
		•																											
			•																										
	•	•																											
		•																											
		•																											
		•	•													•		•											
						•																							
						•																							
		•				•																							
						•																							
		•																											
			•																										
			•																										
																													$\vdash \vdash \vdash$
						0																							
\vdash		•				•																							
		•																											
		•																											
		•																											
					•																								
		•																											
		•																											
		•				•																							
		•				•																							
					•	•																							
					•	•																							
		•			•	•																							
					•																								$\vdash \vdash \vdash$
		•																											
		•			•																								\vdash
					•																								

Optional Parts List <Outdoor>

	Option			Dis	stribu	tion F	ире	1			anch F		Head	er (Jo	oint)	Unit		П			Joint	Pipe							Liquia i	Refrigera	int Dryei					
				Twin):50)		For ⁻ (33:3	Triple 33:33	Quad (25:25	or druple :25:25)	2-	n case of usin -brand boxes	g ch	Branch Pipe	Hea	ader	ø15.88 > Pipe	Unit ø : Pipe ø	·		it ø6.: > e ø9.			it ø9.5 > e ø12		Unit ø > Pipe ø	,		>	pipe	For pipe ø9.52	pipe			ir Outl Guide		
ıtdoor Uni	it	MSDD- 50TR -E	MSDD- 50TR2	MSDD- 50WR	- MSDD- 50WR2	MSDT- 111R	MSDT- 111R3	MSDF- 1111R	MSDF-	FI	are	Brazina	CMY- Y62-	CMY- Y64-		ø19.05 PAC- SG75		PAC-	PAC- 493	PAC- SG72	PAC- SJ87	Fla MAC- A454	re PAC- I	PAC-	MAC- F A455 S	PAC-	MAC- A456	PAC- SK89	PAC- SG81	PAC- SG82	PAC- SG85	MAC- 890	MAC- 881	-MAC- 882	MAC- 856	MAC 88f
SERIES	SUZ-M25VA									JUAN-E	JUANZ-E	OUDN-E	G-L	G-E	G-E	nJ=L	RJ-E	RJ-E	PI	RJ-E	RJ-E	JP-E	RJ-E I	RJ-E	JP-E I	RJ-E	JP-E	RJ-E	DN-E	DN-L	DN-L	JG-L	0	30	30	3G-
32)	SUZ-M35VA																								•								•			
	SUZ-M50VA																																	•		П
	SUZ-M60VA																																			•
	SUZ-M71VA																																			•
Power Inverter	PUZ-ZM35VKA2																				•								•							
(R32)	PUZ-ZM50VKA2																				•			•					•			L		_	_	
	PUZ-ZM60VHA2																				•			•						•				_		<u> </u>
	PUZ-ZM71VHA2		•																					•						•				_		H
	PUZ-ZM100VDA PUZ-ZM100YDA		•				•																	•						•				_		_
	PUZ-ZM1001DA PUZ-ZM125VDA		•				•		•															•						•						
	PUZ-ZM125VDA PUZ-ZM125VDA		•				•		•														_	•	_					•						
	PUZ-ZM140VDA		•				•		•															•						•						
	PUZ-ZM140YDA		•				•		•															•						•						
	PUZ-ZM200YKA2				•		•		•															•						•						
	PUZ-ZM250YKA2				•		•		•																						•					
Standard	PUZ-M100VKA2		•																											•						
Inverter (R32)	PUZ-M125VKA2		•																											•		L				
	PUZ-M140VKA2		•				•																_							•		L		_		
	PUZ-M100YKA2		•																											•						
	PUZ-M125YKA2		•																				_							•		-		₩		
	PUZ-M140YKA2 PUZ-M200YKA2		•				•		•																					•						H
	PUZ-M250YKA2				•		•		•																						•			+-		
Z	MXZ-2F33VF4				Ť																												•			H
IIES	MXZ-2F42VF4																																•			
2)	MXZ-2F53VF(H)4																					•											•			
	MXZ-2F53VFHZ2																					•														Г
	MXZ-3F54VF4																					•													•	
	MXZ-3F68VF4																•					•													•	L
	MXZ-4F72VF4																•		•			•			•		•								•	
	MXZ-4F80VF4																•		•			•			•		•							_	•	L
	MXZ-4F83VF2																•		•			•			•		•							_		
	MXZ-4F83VFHZ2 MXZ-5F102VF2																•		•			•			•		•									H
	MXZ-6F120VF2																•		•			•	_				•					-		_		-
	MXZ-2HA40VF2																																•			
	MXZ-2HA50VF2																																•			Т
	MXZ-3HA50VF2																																		•	
MY	PUMY-SP112VKM2(-BS)									•		•	•	•	•																					
RIES 10A)	PUMY-SP112YKM2(-BS)									•		•	•	•	•																					
,	PUMY-SP125VKM2(-BS)									•		•	•	•	•										_							L		_		L
	PUMY-SP125YKM2(-BS)									•					•																					
	PUMY-SP140VKM2(-BS)									•		•	•	•	•																			_		L
	PUMY-SP140YKM2(-BS) PUMY-P112VKM6(-BS)									•		•	•	•	•	•							•											-		H
	PUMY-P112YKM5(-BS)									•		•	•	•	•	•							•													
}	PUMY-P125VKM6(-BS)									•		•	•	•	•	•							•													
	PUMY-P125YKM5(-BS)									•		•	•	•	0	•							0													
	PUMY-P140VKM6(-BS)									•		•	•	•	•	•							•													Г
	PUMY-P140YKM5(-BS)									•		•	•	•	•	•							•													
	PUMY-P200YKM3(-BS)									•		•	•	•	•	•							•													Ĺ
	PUMY-P250YBM2(-BS)									•		•	•	•	•																					
1.47.6	PUMY-P300YBM2(-BS)				_					•		•	•	•	•											-								_		L
MY RIES	PUMY-SM112VKM(-BS)										•	•	•		•			•			•			•		•		•								
2)	PUMY-SM112YKM(-BS)										•	•	•	•	•			•			•			•		•		•								H
	PUMY-SM125VKM(-BS) PUMY-SM125YKM(-BS)										•	•	•	•	•			•			•			•		•		•								
	PUMY-SM140VKM(-BS)										•	•	•	•	•			•			•			•		•		•								H
	PUMY-SM140YKM(-BS)										•	•	•	•	•			•			•			•		•		•								
Z	PXZ-4F75VG																•		•			•			•		•								•	F
RIES								1																								-	_	-	-	-

	Branch Box	Reactor Box				Different Dia	ameter Joint			
	Outer Cover	neactor box	ø9.52>ø12.7	ø12.7>ø9.52	ø12.7>ø15.88	ø6.35>ø9.52	ø9.52>ø15.88	ø15.88>ø19.05	ø15.88>ø22.2	ø15.88>ø25.4
	PAC-AK350CVR-E	PAC-RB01BC	MAC-A454JP	MAC-A455JP	MAC-A456JP	PAC-493PI	PAC-SG76RJ-E	PAC-SG75RJ-E	PAC-SG71RJ-E	PAC-SG77RJ-E
PAC-MK34BC (Flare)	•	•	•	•	•	•	•	•	•	•
PAC-MK54BC (Flare)	•	•	•	•	•	•	•	•	•	•

	O0 A 1-i+						Different Diamete	er Joint				
	S&A kit	ø6.35	->ø9.52	ø9.52	->ø12.7	ø15.88>ø9.52	ø15.88>ø12.7	ø12.7	>ø9.52	ø12.7>	>ø15.88	
	PAC-SK60SA-E	PAC-SJ87RJ-E	PAC-SG77RJB-E	PAC-SJ88RJ-E	PAC-SG78RJB-E	PAC-SK82RJ-E	PAC-SK85RJ	PAC-SK88RJ-E	PAC-SG79RJB-E	PAC-SK89RJ-E	PAC-SG80RJB-E	
PAC-MMK40BC (Flare)	•	•		•		•	•	•		•		
PAC-MMK60BC (Flare)	•	•		•		•	•	•		•		
PAC-MMK60BCB (Brazing)												

			Outle					ir Prot						in So						Drain	Pan)				Dr	ntraliz ain P	an		M-NET Adapter		M-N Conv	erter		Control/ Service Tool	men	ooard ach- t kit	Accur			IVIOLOI	Muffler	CON- NECTOR FOR DRAIN HOSE HEATER
N	IAC- 883 SG	PAC- SJ07 SG-E	PAC- SG59 SG-E	PAC- SH96 SG-E	PAC- SK22 SG-E	PAC- SL12 SG-F	PAC- SJ06 AG-E	PAC- SH63 AG-E	PAC- SH95 AG-E	PAC- SK21 AG-F	PAC- SL13	PAC- SJ08 DS-E	PAC- SG60 DS-E	PAC- SG61 DS-E	PAC- SK27 DS-E	PAC- SL14 DS-E	MAC- 643 BH-E	MAC- 644 BH-E	MAC- 646 BH-E	PAC- 645 BH-E	PAC- 646 BH-E	PAC- SJ10 BH-E	PAC- SJ20 BH-E	PAC- SG63 DP-E	PAC- SG64 DP-E	PAC- SH97 DP-E	PAC- SJ83 DP-E	PAC- SL15 DP-E	PAC- IF01 MNT-E	PAC- SK15 MA-E	PAC- SJ96 MA-E	PAC- SJ95 MA-E	PAC- SL16 MA-E	PAC- SK52 ST	PAC- IF012 B-E	PAC-(S) IF013 B-E	MAC- 892 INS-E	MAC- 893 INS-E	PAC- LV11 M-J	PAC- SJ71 FM-E	MAC- 001 MF-E	MAC- 062 RA-E
1																																										
																																									\blacksquare	
		•					•					•												•						•				•		•						
		•					•	•				•		•										•						•		•		•		•						
			•					•						•											•							•		•		•						
						•					•					•												•					•	•		•						
+						•					•					•												•					•	•		•						
						•					•					•												•					•	•		•						
+						•					•					•												•					•	•		•					\Box	
				•					•					•												•						•		•		•						
				•					•					•												•						•		•		•						
				•					•					•												•						•		•								
				•					•					•												•						•		•								
				•					•					•												•						•		•								
				•					•					•												•						•		•		•						
				•					•					•												•						•		•		•						
																	•																									
																	•																									
				•																	•																					
+																					•																					
																					•																					
				•									•							•	•																					
_				•																																						
+	-			•									•							•																						
1				•					•					•								•				•													•			
1				•					•					•								•				•													•		H	
				•					•					•								•				•													•			
				•					•					•								•				•													•			
				•					•					•									•			•													•	•		
+				•					•					•									•			•													•	•	\blacksquare	
				•					•					•									•			•													•	•		
				•					•					•									•			•													•	•		
				•					•					•									•			•													•			
+					•					•					•												•												•		H	
				•					•					•								•				•																
				•					•					•								•				•																
				•					•					•								•				•																
4				•					•					•								•				•																
																					•																				•	•
				•									•							•																					•	•

^{**}Please connect the muffler to the gas piping within 3 meters from the piping connection port of the outdoor unit. Please attach this if you are concerned about refrigerant noise.


ø9.52	>ø15.88	ø9.52>ø6.35
PAC-SK90RJ-E	PAC-SG76RJB-E	PAC-SK91RJ-E
•		•
•		•

Unit: mm

MSZ-RZ25VU MSZ-RZ35VU MSZ-RZ50VU MSZ-RW25VG MSZ-RW35VG MSZ-RW50VG

INDOOR UNIT



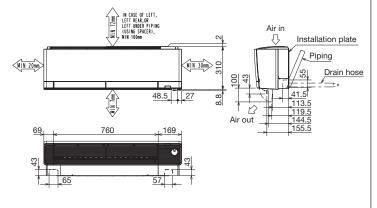





MSZ-LN25VG2(W)(V)(R)(B) MSZ-LN35VG2(W)(V)(R)(B) MSZ-LN50VG2(W)(V)(R)(B) MSZ-LN60VG2(W)(V)(R)(B)

INDOOR UNIT


890

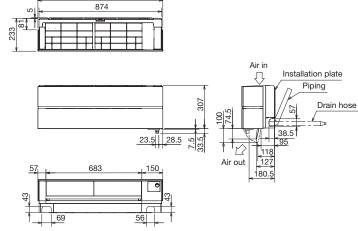




MSZ-FT25VG MSZ-FT35VG MSZ-FT50VG MSZ-FT25VGK MSZ-FT35VGK MSZ-FT50VGK

INDOOR UNIT

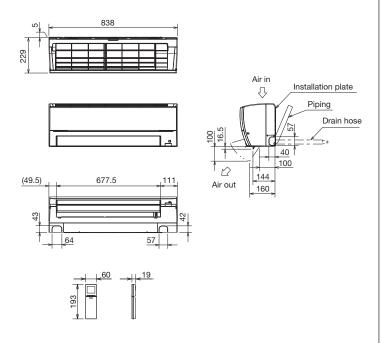


MSZ-AY15VGK(P) MSZ-AY20VGK(P)

INDOOR UNIT

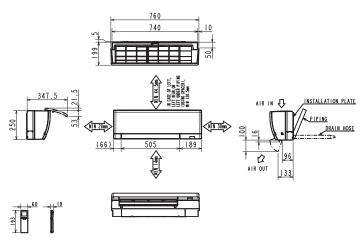


MSZ-AY25VGK(P) MSZ-AY50VGK(P) MSZ-AY35VGK(P) MSZ-AY42VGK(P)

INDOOR UNIT

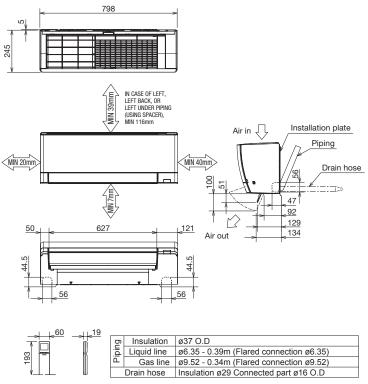


MSZ-AP60VG MSZ-AP71VG MSZ-AP60VGK MSZ-AP71VGK

INDOOR UNIT

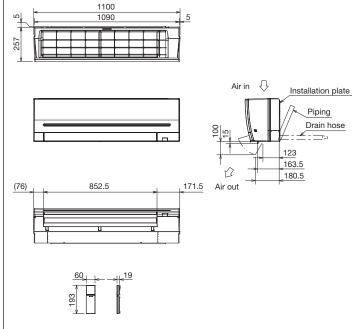


MSZ-EF18VG(W)(B)(S)
MSZ-EF25VG(W)(B)(S)
MSZ-EF42VG(W)(B)(S)
MSZ-EF42VG(W)(B)(S)
MSZ-EF18VGK(W)(B)(S)
MSZ-EF25VGK(W)(B)(S)
MSZ-EF25VGK(W)(B)(S)
MSZ-EF25VGK(W)(B)(S)
MSZ-EF42VGK(W)(B)(S)
MSZ-EF42VGK(W)(B)(S)

INDOOR UNIT

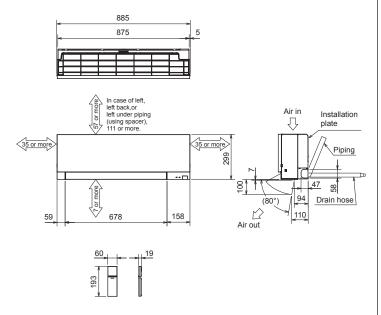

MSZ-BT20VG MSZ-BT25VG MSZ-BT35VG MSZ-BT50VG MSZ-BT20VGK MSZ-BT25VGK MSZ-BT35VGK MSZ-BT50VGK


INDOOR UNIT

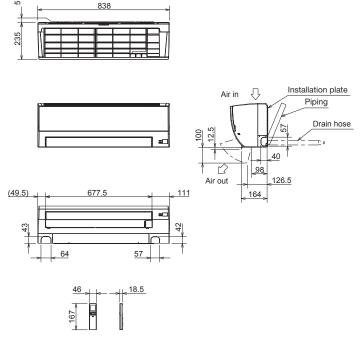


Unit: mm

MSZ-HR25VF(K) MSZ-HR35VF(K) MSZ-HR42VF(K) MSZ-HR50VF(K)

INDOOR UNIT




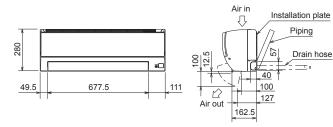



MSZ-HR60VF(K) MSZ-HR71VF(K)


INDOOR UNIT

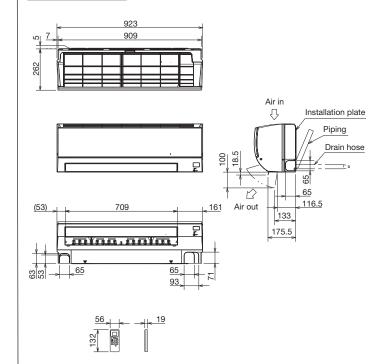

MSZ-DW25VF MSZ-DW35VF MSZ-DW50VF

INDOOR UNIT



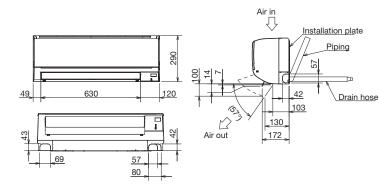




MSZ-FH25VE2 MSZ-FH35VE2 MSZ-FH50VE2

INDOOR UNIT

925

905

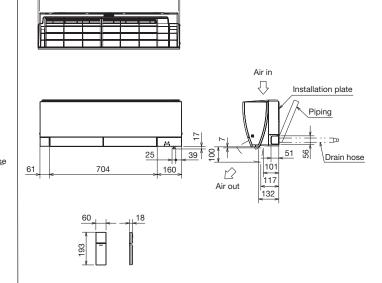

10


Unit: mm

MSZ-SF15VA MSZ-SF20VA

INDOOR UNIT













MSZ-SF25VE3 MSZ-SF35VE3 MSZ-SF42VE3 MSZ-SF50VE3

INDOOR UNIT











MSZ-GF60VE2 MSZ-GF71VE2

INDOOR UNIT



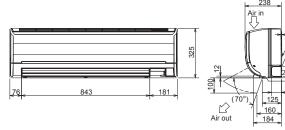





MSZ-WN25VA MSZ-WN35VA

INDOOR UNIT

Drain hose




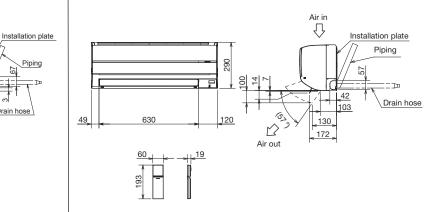


MSZ-DM25VA MSZ-DM35VA

INDOOR UNIT











MSZ-HJ25VA MSZ-HJ35VA MSZ-HJ50VA

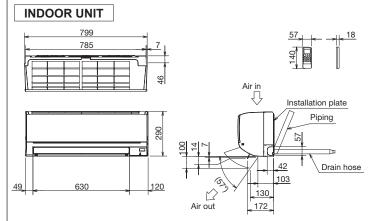


MSZ-HJ60VA MSZ-HJ71VA MSY-TP35VF MSY-TP50VF

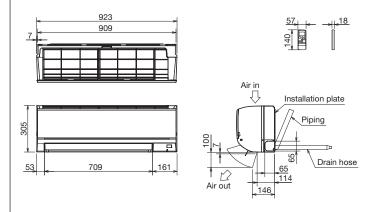

MFZ-KT25VG MFZ-KT35VG MFZ-KT50VG MFZ-KT60VG INDOOR UNIT


MFZ-KW25VG MFZ-KW35VG MFZ-KW50VG MFZ-KW60VG INDOOR UNIT

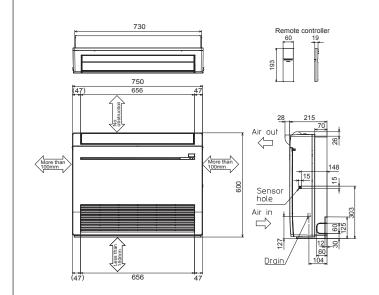


MLZ-KP25VG MLZ-KP35VG MLZ-KP50VG

INDOOR UNIT


INDOOR UNIT OUTLINE DRAWING

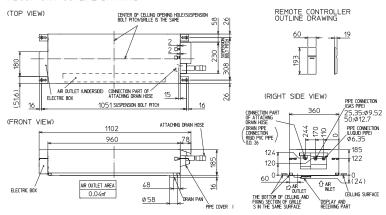

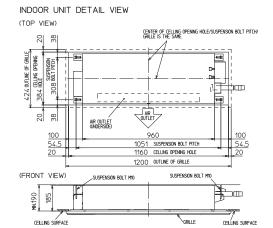

GRILLE OUTLINE DRAWING (MLP-444W) 967 MAX PROTRISION DRESION OF FLAP 1200 24 12 166.5 83.8 166.5 17734 10 166.5 1784 10 166.5 10 166


		KP25/35VF	KP50VF
EXTENSION	LIQUID PIPE O.D.	Ø6	.35
PIPE	GAS PIPE 0.D.	ø9.52	ø12.7
CONNECTIONS	LIQUID PIPE	FLARED CO Ø6	nnection .35
OF PIPE	GAS PIPE	FLARED CONNECTION Ø9.52	FLARED CONNECTION Ø12.7
DRAIN HOSE		HEAT INSULATER O.D. CONNECT Ø32 Ø2	
DRAIN PIPE CO	INNECTION	RIGID PVC PIPE	O.D. 26





NOTE1. CUTTING ATTACHING DRAIN HOSE CAN BE USED.


MLZ-KY20VG

INDOOR UNIT











EXTENSION PIPE	LIQUID PIPE O.D.	ø 6 . 35		
	GAS PIPE O.D.	ø9.52		
CONNECTIONG OF PIPE	LIQUID PIPE	FLARED CONNECTION ♦6.35		
	GAS PIPE	FLARED CONNECTION \$9.52		
DRAIN HOSE		HEAT INSULATER O.D. CONNECTION I.D. EFFECTIVE LENGTH		
		ø32 ø25 480		
DRAIN PIPE CONNECTION RIGID PVC PIPE O.D. \$26				
NOTEL. CUT THE DRAIN HOSE (ACCESSORY) FOR USE, IF NECESSARY.				



MUZ-LN25VG	MUZ-LN25VGHZ	
MUZ-LN35VG MUZ-AY20VG	MUZ-LN35VGHZ	
MUZ-AY25VG	MUZ-AY25VGH	
MUZ-AY35VG	MUZ-AY35VGH	
MUZ-AY42VG	MUZ-AY42VGH	MUZ-HR42VF
MUZ-FT25VGHZ		MUZ-HR50VF
MUZ-FH25VE	MUZ-FH35VE	MUZ-DW50VF
MUZ-FH25VEHZ	MUZ-FH35VEHZ	
MUZ-EF25VG	MUZ-EF25VGH	
MUZ-EF35VG	MUZ-EF35VGH	MUY-TP50VF
MUZ-EF42VG	MUY-TP35VF	MUZ-SF35VE
MUZ-SF25VE	MUZ-SF25VEH	MUZ-SF42VEH
MUZ-SF35VEH	MUZ-SF42VE	
MUZ-HJ50VA		
MUFZ-KJ25VE	MUFZ-KJ35VE	
MUFZ-KJ25VEHZ	MUFZ-KJ35VEHZ	MUZ-BT50VG

OUTDOOR UNIT

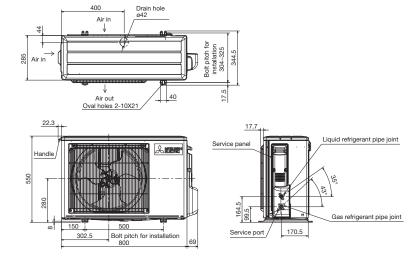

 MUZ-FH50VE
 MUZ-FH50VEHZ
 MUZ-AP71VG


 MUZ-SF50VE
 MUZ-SF50VEH

 MUZ-GF60VE
 MUZ-GF71VE

 MUZ-HJ71VA
 MUZ-HJ71VA


 MUFZ-KJ50VE
 MUFZ-KJ50VEHZ

OUTDOOR UNIT

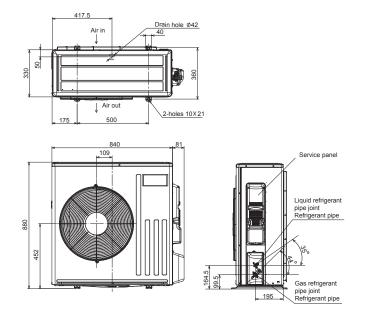

MUZ-AY15VG MUZ-BT20VG


OUTDOOR UNIT

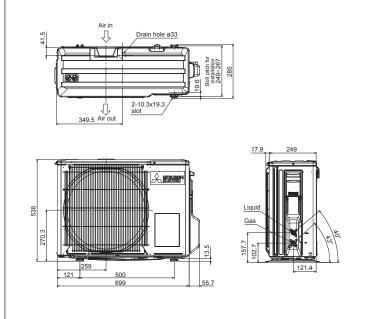


Unit: mm

MUZ-WN25VA MUZ-WN35VA MUZ-HR25VF MUZ-BT25VG MUZ-DM25VA MUZ-DM35VA MUZ-HR35VF MUZ-BT35VG MUZ-DW25VF MUZ-DW35VF


OUTDOOR UNIT

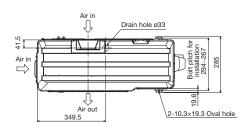


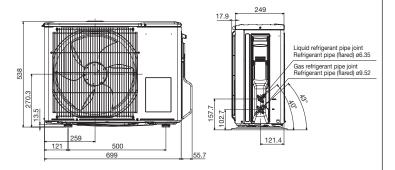


MUZ-RZ25VU(HZ) MUZ-RZ35VU(HZ)
MUZ-RW25VGHZ MUZ-RW35VGHZ
MUZ-LN50VG
MUZ-FT35/50VGHZ
MUZ-AY50VG MUZ-AY50VGH MUZ-AP60VG
MUZ-EF50VG
MUZ-HR60VF MUZ-HR71VF

OUTDOOR UNIT



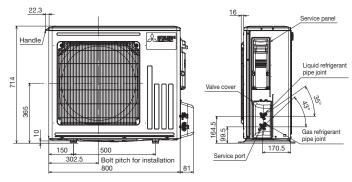



MUZ-RZ50VU(HZ) MUZ-RW50VGHZ MUZ-LN60VG2 MUZ-LN50VGHZ2

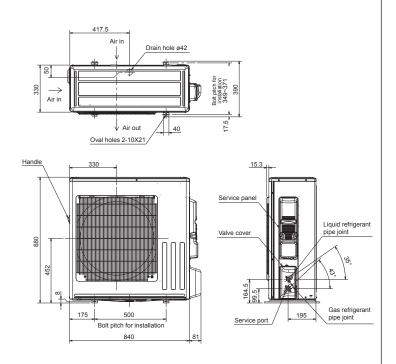


SLZ-M15FA2 SLZ-M25FA2 SLZ-M35FA2 SLZ-M50FA2 SLZ-M60FA2

INDOOR UNIT








Models	Refrigerent pipe (liquid)	② Refrigerent pipe (gas)	Α	В
SLZ-M15FA2 SLZ-M25FA2 SLZ-M35FA2			63mm	72mm
SLZ-M50FA2		\$\phi\$12.7mm flared connection 1/2F	63mm	78mm
SLZ-M60FA2			63mm	78mm

SEZ-M25DA(L)2 SEZ-M35DA(L)2 SEZ-M50DA(L)2 SEZ-M60DA(L)2 SEZ-M71DA(L)2


INDOOR UNIT

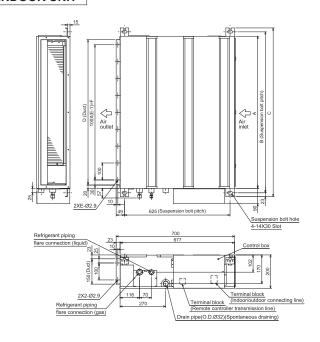

Model	Α	В	С	D	Е	F	G	Н	J	K	L	Gas pipe	Liquid pipe	
SEZ-M25DA(L)2	700	752	798	660	7	600	800	660	5	500	16	00 E0		
SEZ-M35DA(L)2	900	952	998	860	9	800	1000	860	-	700	20	Ø9.52	Ø6.35	
SEZ-M50DA(L)2	900	952	998	800	9	800	1000	860	l ′	700	20	Ø12.7		
SEZ-M60DA(L)2	1100	1152	1198	1060	11	1000	1200	1060	9	900	24	Ø15 88		
SEZ-M71DA(L)2	1100	1152	1198	1060	- 11	1000	1200	1060	9	900	24	D15.88	Ø9.52	


SFZ-M25VA SFZ-M35VA SFZ-M60VA SFZ-M71VA

INDOOR UNIT

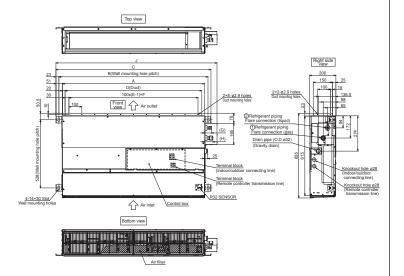


MODEL	Α	В	С	D	Е	F	G	Н	J	①Gas pipe	②Liquid pipe
SFZ-M25VA	700	756	802	660	7	600	50	55	848	ø9.52	ø6.35
SFZ-M35VA	900	956	1002	860	9	800	50	55	1048	ø9.52	ø6.35
SFZ-M50VA	900	956	1002	860	9	800	50	61	1048	ø12.7	ø6.35
SFZ-M60VA	1100	1156	1202	1060	11	1000	50	66	1248	ø15.88	ø6.35
SFZ-M71VA	1100	1156	1202	1060	11	1000	55	66	1248	ø15.88	ø9.52


SUZ-M25VA SUZ-M35VA

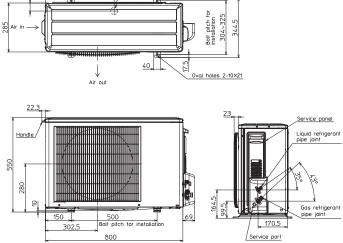


SUZ-M50VA


OUTDOOR UNIT




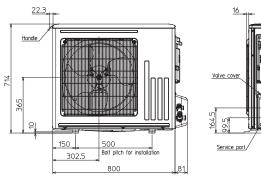




SUZ-M60VA SUZ-M71VA



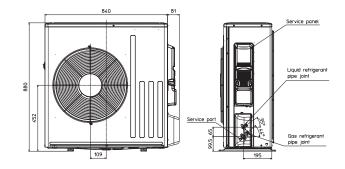



P SERIES Unit: mm


PLA-ZM35EA2 PLA-ZM50EA2 PLA-ZM60EA2 PLA-ZM71EA2 PLA-ZM100EA2 PLA-ZM125EA2 PLA-ZM140EA2 PLA-M35EA2 PLA-M50EA2 PLA-M60EA2 PLA-M71EA2 PLA-M100EA2 PLA-M125EA2 PLA-M140EA2

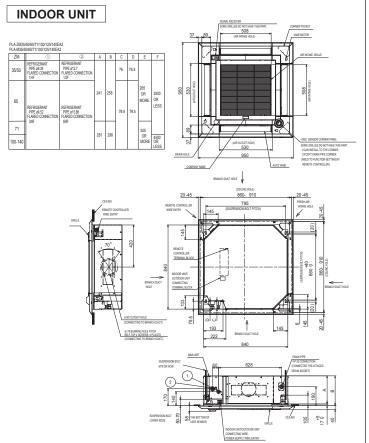

PKA-M35LA(L)2 PKA-M50LA(L)2 INDOOR UNIT










PKA-M60KA(L)2 PKA-M71KA(L)2 PKA-M100KA(L)2

INDOOR UNIT

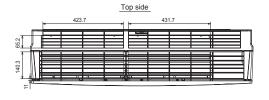


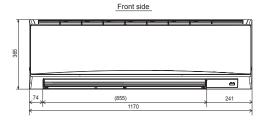



PCA-M35KA2 PCA-M50KA2

INDOOR UNIT

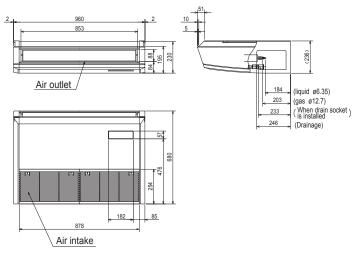


NOTES.

- 1.Use M10 or W3/8 screw for anchor bolt.
- 2.Please be sure when installing the drain pump (option parts), refrigerant pipe will be only upward.

Unit: mm

PCA-M60KA2 PCA-M71KA2

INDOOR UNIT

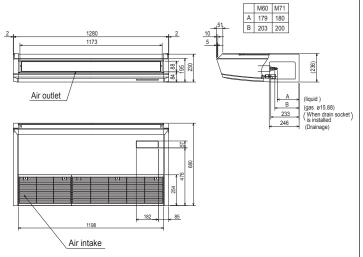


NOTES.

- 1.Use M10 or W3/8 screw for anchor bolt.
- 2.Please be sure when installing the drain pump (option parts), refrigerant pipe will be only upward.

Use the current nuts meeting the pipe size of the outdoor unit. Available pipe size

PCA-M100KA2 PCA-M125KA2 PCA-M140KA2

INDOOR UNIT

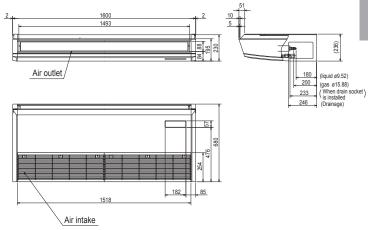



NOTES.

- 1.Use M10 or W3/8 screw for anchor bolt.
- 2. Please be sure when installing the drain pump (option parts), refrigerant pipe will be only upward.

PCA-M71HA2

INDOOR UNIT




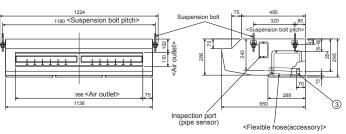

- ①Refrigerant pipe connection(gas pipe side/flared connection)
 ②Refrigerant pipe connection(liquid pipe side/flared connection)
 ③Flexible hose(accessory) —Drainage pipe connection


PSA-M71KA PSA-M100KA PSA-M125KA PSA-M140KA


INDOOR UNIT

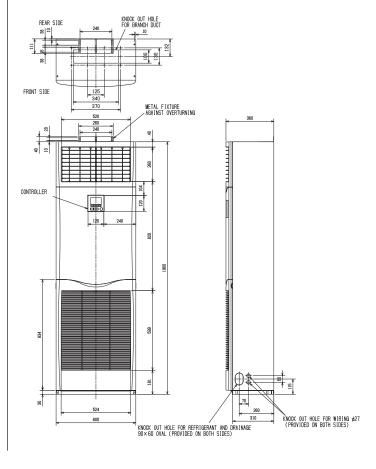

PEAD-M35JA2 PEAD-M50JA2 PEAD-M60JA2 PEAD-M71JA2 PEAD-M100JA2 PEAD-M125JA2 PEAD-M140JA2

INDOOR UNIT

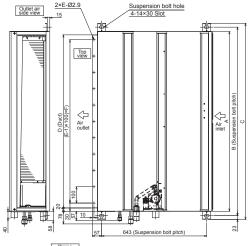


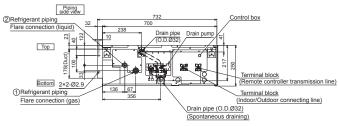


Model	Α	В	С	D	Е	F	G	① Gas pipe	② Liquid pipe	
PEAD-M35, 50JA2	900	954	1000	860	9	800	858	Ø12.7	Ø6.35	
PEAD-M60, 71JA2	1100	1154	1200	1060	11	1000	1058		Ø9.52	
PEAD-M100, 125JA2	1400	1454	1500	1360	14	1300	1358	Ø15.88		
PEAD-M140JA2	1600	1654	1700	1560	16	1500	1558			

PEAD-M35JAL2 PEAD-M50JAL2 PEAD-M60JAL2 PEAD-M71JAL2 PEAD-M100JAL2 PEAD-M125JAL2 PEAD-M140JAL2

INDOOR UNIT

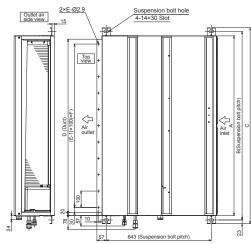


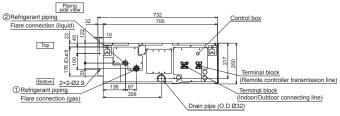

Model	Α	В	С	D	Е	F	G	① Gas pipe	② Liquid pipe	
PEAD-M35, 50JAL2	900	954	1000	860	9	800	858	Ø12.7	Ø6.35	
PEAD-M60, 71JAL2	1100	1154	1200	1060	11	1000	1058		Ø9.52	
PEAD-M100, 125JAL2	1400	1454	1500	1360	14	1300	1358	Ø15.88		
PEAD-M140JAL2	1600	1654	1700	1560	16	1500	1558			

PEA-M200LA2 PEA-M250LA2

INDOOR UNIT

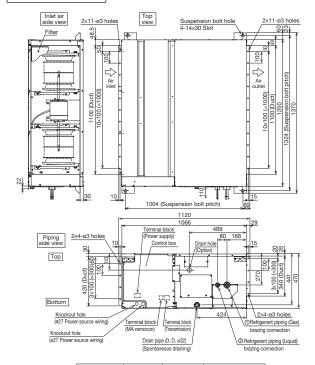


	Model	① Gas pipe	②Liquid pipe	Outdoor unit
		ø22.2	ø9.52	PUZ-M200YDA
	PEA-M200LA2	Ø25.4 **Reducer Accessory	ø9.52	PUZ-M200YKA2 PUZ-ZM200YKA2 PUHZ-P200YKA3 PUHZ-ZRP200YKA3
		ø22.2	ø9.52	PUZ-M250YDA
F	PEA-M250LA2	ø25.4 **Reducer Accessory	ø12.7 **Reducer Accessory	PUZ-M250YKA2 PUZ-ZM250YKA2 PUHZ-P250YKA3 PUHZ-ZRP250YKA3

Unit: mm


PUZ-ZM35VKA2 PUZ-ZM50VKA2


OUTDOOR UNIT

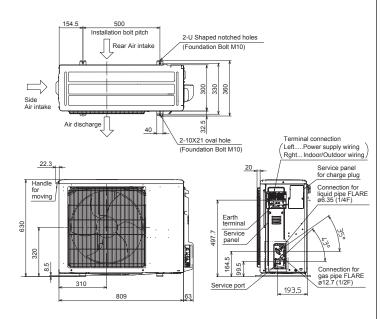

PUZ-ZM60VHA2 PUZ-ZM71VHA2

OUTDOOR UNIT

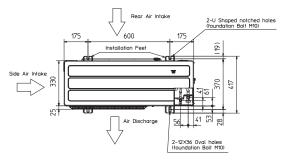


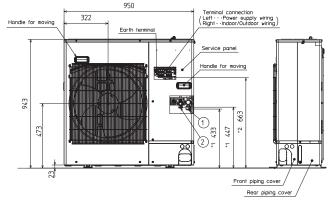


- $\textcircled{1}\cdots \textbf{Refrigerant GAS pipe connection (FLARE)} \quad \textbf{015.88 (5/8F)}$
- ② · · · Refrigerant LIQUID pipe connection (FLARE)
 Ø9.52 (3/8F)
- *1 ··· Indication of STOP VALVE connection location.
 *2 ··· Indication of Terminal connection location.

PUZ-ZM100VDA PUZ-ZM125VDA PUZ-ZM140VDA PUZ-ZM100YDA PUZ-ZM125YDA PUZ-ZM140YDA

OUTDOOR UNIT

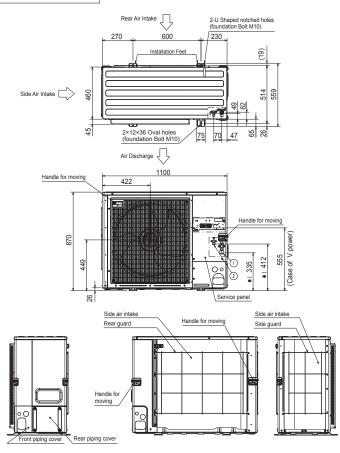



PUZ-ZM200YKA2 PUHZ-ZM250YKA2

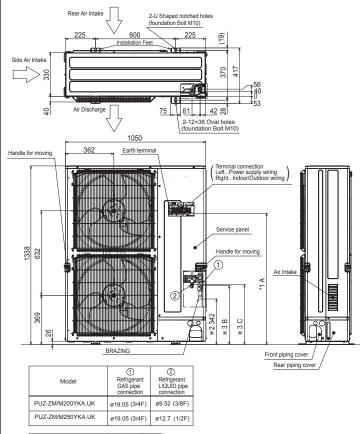

PUZ-M100VKA2 PUZ-M100YKA2 PUZ-M125VKA2 PUZ-M125YKA2 PUZ-M140VKA2 PUZ-M140YKA2


OUTDOOR UNIT

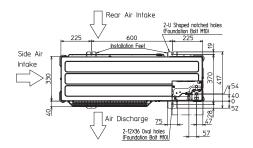

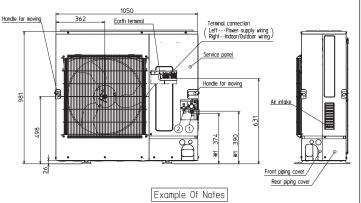

- ①···Refrigerant GAS pipe connection (FLARE) Ø15.88 (5/8F)
 ②···Refrigerant LIQUID pipe connection (FLARE) Ø9.52 (3/8F)
- **※1···Indication of STOP VALVE connection location.**


PUZ-M200YKA2 PUZ-M250YKA2 **OUTDOOR UNIT**

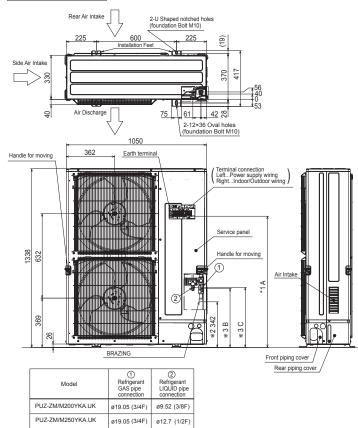


MXZ SERIES Unit: mm

MXZ-2HA40VF2 MXZ-2HA50VF2 MXZ-2F33VF4 MXZ-2F53VF4 MXZ-2F53VF4 MXZ-2F53VF4

OUTDOOR UNIT

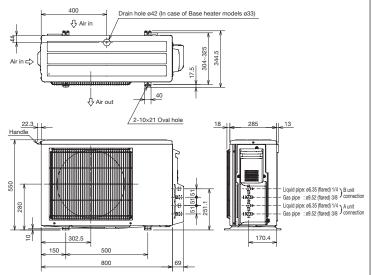


MXZ-2F53VFHZ2 OUTDOOR UNIT

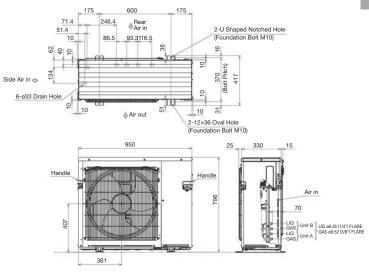


MXZ-3DM50VA MXZ-3HA50VF2 MXZ-3F54VF4 MXZ-3F68VF4

OUTDOOR UNIT

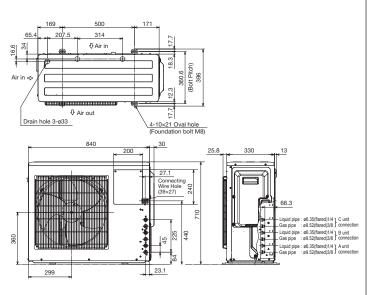


MXZ-4F72VF4 MXZ-4F80VF4

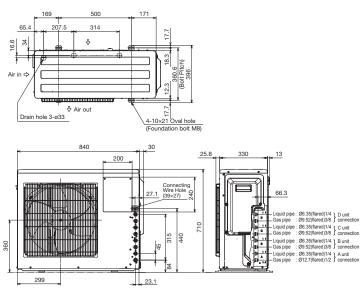


Unit: mm

MXZ-4E83VA MXZ-5E102VA MXZ-4F83VF2 MXZ-5F102VF2 OUTDOOR UNIT

MXZ-4E83VAHZ MXZ-4F83VFHZ2 OUTDOOR UNIT

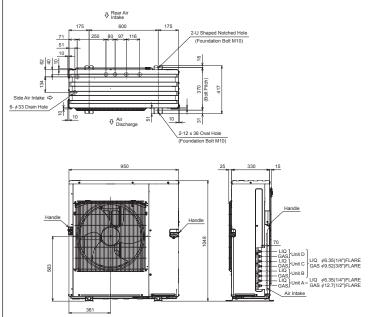


MXZ-6D122VA2 MXZ-6F120VF2 OUTDOOR UNIT

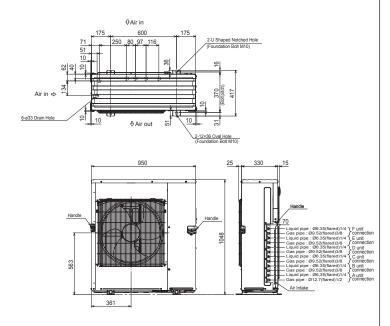

PUMY-P112/125/140VKM6(-BS)

OUTDOOR UNIT

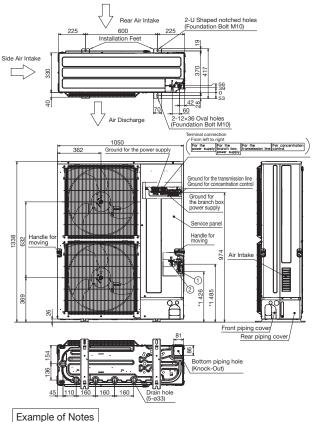


Example of Notes

1 ·· Refrigerant GAS pipe connection (FLARE) ø15.88 (5/8F) 2 ·· Refrigerant LIQUID pipe connection (FLARE) ø9.52 (3/8F) *1 ·· Indication of STOP VALVE connection location.

PUMY-P112/125/140YKM5(-BS)

OUTDOOR UNIT

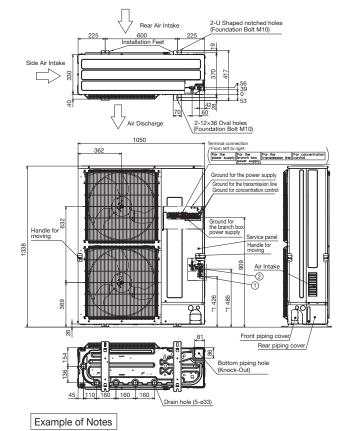


- Unit: mm

- ...Refrigerant GAS pipe connection (FLARE) ø15.88 (5/8F)
 ...Refrigerant LIQUID pipe connection (FLARE) ø9.52 (3/8F)
 ...Indication of STOP VALVE connection location.

PUMY-P200YKM3(-BS)

OUTDOOR UNIT

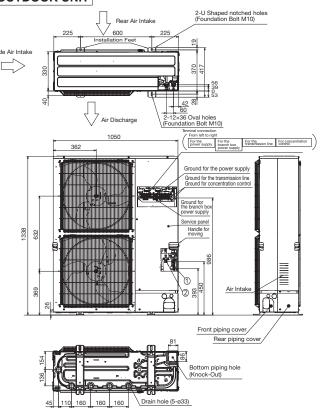


Example of Notes

...Refrigerant GAS pipe connection (FLARE) ø19.05 (3/4F)
...Refrigerant LIQUID pipe connection (FLARE) ø3.52 (3/8F)
...Indication of STOP VALVE connection location.

PUMY-SP112/125/140VKM2(-BS) PUMY-SP112/125/140YKM2(-BS)

OUTDOOR UNIT

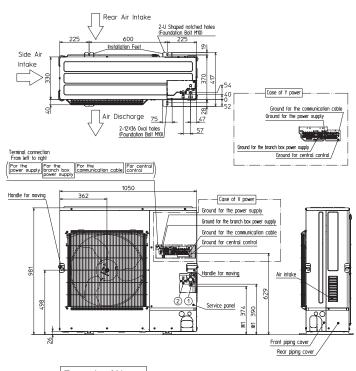

Example of Notes


- ...Refrigerant GAS pipe connection (FLARE) #15.00 1276 ,
 ...Refrigerant LIDUID pipe connection (FLARE) #9.52 (3/8F)
 **4...Indication of STOP VALVE connection location.

Unit: mm

PAC-MK54BC

Suspension bolt: W3/W8 (M10)

Branch box

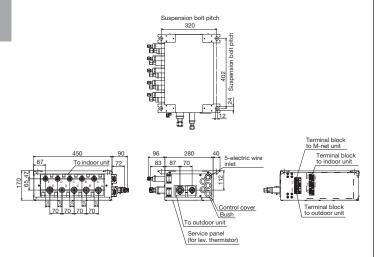


Suspension bolt : W3/8(M10) Refrigerant pipe flared connection

	Α	В	С	D	E	To outdoor unit
Liquid pipe	ø6.35	ø6.35	ø6.35	ø6.35	ø6.35	ø9.52
Gas pipe	a9 52	a9 52	a9 52	a9 52	a12.7	ø15.88

PAC-MK34BC

Suspension bolt: W3/W8 (M10)


Refrigerant pipe flared connection A B C Liquid pipe Ø6.35 Ø6.35 Ø6.35 Gas pipe Ø9.52 Ø9.52 Ø9.52

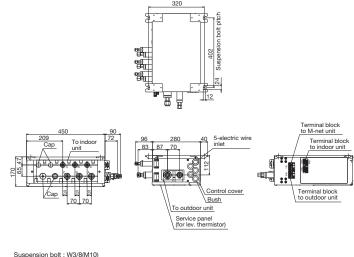

To outdoor unit ø9.52 ø15.88

PUMY-P250YBM2(-BS) PUMY-P300YBM2(-BS)

OUTDOOR UNIT

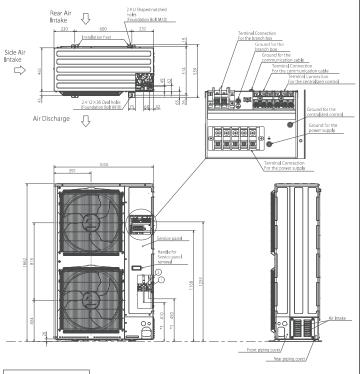


Example of Notes

· · · Refrigerant GAS pipe connection #22.2(7/8F)
 · · · Refrigerant LIQUID pipe connection #9.52(3/8F)
*1 · · · Indication of STOP VALVE and BALL VALVE connection location.

191

Branch box




Unit: mm

PAC-MMK40BCB

Suspension bolt: W3/W8 (M10)

Branch box

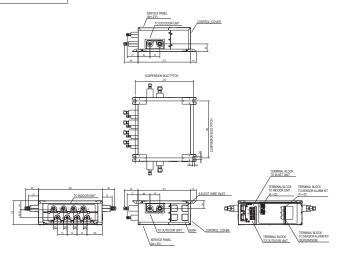


SUSPENSION BOLT: W3/8(M10) REFRIGERANT PIPE FLARED CONNECTION

	A	В	С	D	TO OUTDOOR UNIT
LIQUID PIPE	ø6.35	ø6.35	ø8.35	e6.35	ø9.52
GAS PIPE	ø9.52	ø9.52	ø9.52	ø9.52	ø15.88

PAC-MMK60BCB

Suspension bolt: W3/W8 (M10)


Branch box

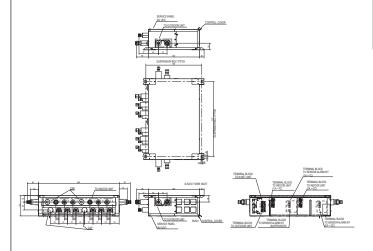

USPENSION BOLT: W3/8(M10) EFRIGERANT PIPE FLARED CONNECTION

	1A	18	1C	2A	2B	2C	TO OUTDOOR UNIT
	¢6.35						
GAS PIPE	ø9.52	ø9.52	ø12.7	ø9.52	ø9.52	a15.88	ø15.88

PUMY-SM112V(Y)KM(-BS) PUMY-SM125V(Y)KM(-BS) PUMY-SM140V(Y)KM(-BS)

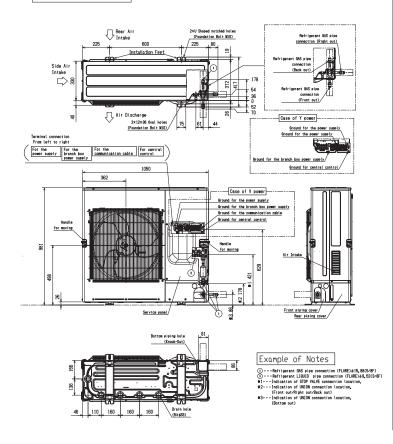

Piping Installation

M SERIES

Single type

Series	Class	Maximum Piping Length (m)	Maximum Height Difference (m)	Maximum Number of Bends	
Selles	<outdoor unit=""></outdoor>	Total length (A)	Outdoor unit - Indoor unit (H)	Total number	
SZ-RZ	25 / 35	20	12	10	
	50	30	15	10	
SZ-RW	25 / 35	20	12	10	
	50	30	15	10	
SZ-L	25 / 35	20	12	10	
	50	20	12	10	
	60	30	15	10	
SZ-FT	25	20	12	10	
	35 / 50	30	15	10	
SZ-A	15 / 20 / 25 / 35 / 42 / 50	20	12	10	
	60 / 71	30	15	10	
SZ-EF	25 / 35 / 42	20	12	10	
	50	30	15	10	
SZ-BT	20 / 25 / 35 / 50	20	12	10	
SZ-HR	25 / 35 / 42 / 50	20	12	10	
	60 / 71	30	15	10	
SY-DW	25 / 35 / 50	20	12	10	
SY-TP	35 / 50	20	12	10	
SZ-F FZ	25 / 35	20	12	10	
-2	50	30	15	10	
SZ-S	25 / 35 / 42	20	12	10	
	50 / 60	30	15	10	
SZ-G	60 / 71	30	15	10	
SZ-W SZ-D	25 / 35	20	12	10	
SZ-HJ	25 / 35 / 50	20	12	10	
	60 / 71	30	15	10	

S SERIES & P SERIES

Single type

:					
Series	Class	Maximum Piping Length (m)	Maximum Height Difference (m)	Maximum Number of Bends	
Series	<outdoor unit=""></outdoor>	Total length (A)	Outdoor unit - Indoor unit (H)	Total number	
Power Inverter (PUZ-ZM)	35 / 50	50	30	15	
	60 / 71	55	30	15	
	100 / 125 / 140	100	30	15	
Standard Inverter (PUZ-M & SUZ-M)	25 / 35	20	12	10	
	50 / 60 / 71	30	30	10	
	100	55	30	45	
	125 / 140	65	30	15	

Twin type


i wiii type							
		Ma	aximum Piping Length	(m)	Maximum Heigl	Maximum Number of Bends	
Series	Class <outdoor unit=""></outdoor>	Total length A+B+C	Pipe length difference from distribution pipe B-C	Indoor unit - Distribution pipe B	Outdoor unit - Indoor unit H	Indoor unit - Indoor unit h	Total number
Power Inverter (PUZ-ZM)	71	55	8	20	30	1	15
	100 / 125 / 140	100	8	20	30	1	15
	200 / 250						
Standard Inverter (PUZ-M)	100	55					
	125 / 140		8	20	30	1	15
	200 / 250						


Triple type


	Maximum Piping Length (m)		(m)	Maximum Height Difference (m)		Maximum Number of Bends	
Series	Class <outdoor unit=""></outdoor>	Total length A+B+C+D	Pipe length difference from distribution pipe B-C	Indoor unit - Distribution pipe B	Outdoor unit - Indoor unit H	Indoor unit - Indoor unit h	Total number
Power Inverter (PUZ-ZM)	140	100	8	20	30	1	15
	200 / 250						
Standard Inverter (PUZ-M)	140	65	8	20	30	1	15
	200 / 250						


Quadruple type

		Ma	aximum Piping Length (m)		Maximum Height Difference (m)		Maximum Number of Bends
Series	Class <outdoor unit=""></outdoor>	Total length A+B+C+D+E	Pipe length difference from distribution pipe B-C	Indoor unit - Distribution pipe B	Outdoor unit - Indoor unit H	Indoor unit - Indoor unit h	Total number
Power Inverter (PUZ-ZM)	200 / 250	100	8	30	30	1	15
Standard Inverter (PUZ-M)	200 / 250	70	8	22	30	1	15










MXZ SERIES

MXZ-2F33VF4

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b)	15m
Total length (a+b)	20m

Maximum Number of Bends		
Outdoor unit - Indoor unit (a,b)	15	
Total number (a+b)	20	

^{*} When connecting MFZ-KJ Series indoor unit, additional refrigerant is required. For details, please contact Mitsubishi Electric.

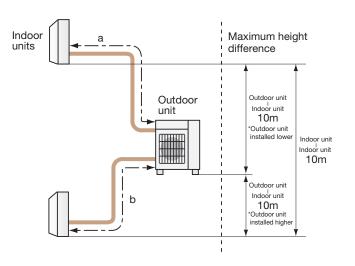

MXZ-2F42VF4


Maximum Piping Length	
Outdoor unit - Indoor unit (a,b)	20m
Total length (a+b)	30m

Maximum Number of Bends		
Outdoor unit - Indoor unit (a,b)	20	
Total number (a+b)	30	

MXZ-2F53VF(H)4, MXZ-2F53VFHZ2

Maximum Piping Length		
Outdoor unit - Indoor unit (a,b) 20m		
Total length (a+b)	30m	

Maximum Number of Bends		
Outdoor unit - Indoor unit (a,b) 20		
Total number (a+b)	30	

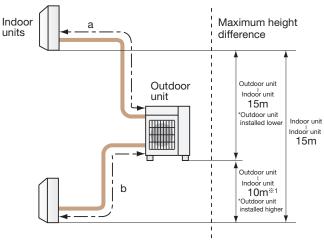


%1 in case of MXZ-2F53VFHZ2: 15m

MXZ SERIES

MXZ-2HA40VF2, MXZ-2HA50VF2

,		
Maximum Piping Length		
Outdoor unit - Indoor unit (a,b)	20m	
Total length (a+b)	30m	

Maximum Number of Bends		
Outdoor unit - Indoor unit (a,b) 20		
Total number (a+b)	30	

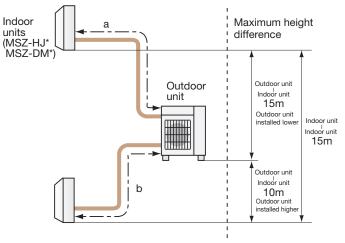


*Only MSZ-HJ and DM model is connectable.

MXZ-3HA50VF2

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b,c)	25m
Total length (a+b+c)	50m

Maximum Number of Bends		
Outdoor unit - Indoor unit (a,b,c) 25		
Total number (a+b+c)	50	

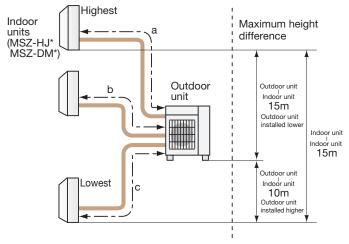


*Only MSZ-HJ and DM model is connectable.

MXZ-3F54VF4

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b,c,d)	25m
Total length (a+b+c+d)	50m

Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b,c,d)	25
Total number (a+b+c+d)	50

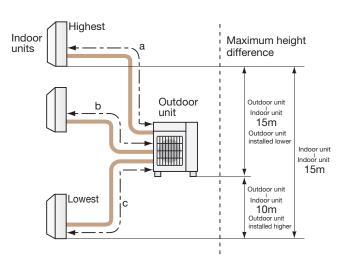

MXZ-3F68VF4, MXZ-4F72VF4, MXZ-4F80VF4


Maximum Piping Length	
Outdoor unit - Indoor unit (a,b,c,d)	25m
Total length (a+b+c+d)	60m

Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b,c,d)	25
Total number (a+b+c+d)	60

MXZ-4F83VF2, MXZ-4F83VFHZ2

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b,c,d)	25m
Total length (a+b+c+d)	70m

Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b,c,d)	25
Total number (a+b+c+d)	70

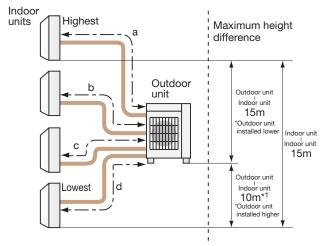


^{*1} in case of MXZ-4F83VF2 and MXZ-4F83VFHZ2: 15m

MXZ-5F102VF2

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b,c,d,e)	25m
Total length (a+b+c+d+e)	80m


Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b,c,d,e)	25
Total number (a+b+c+d+e)	80

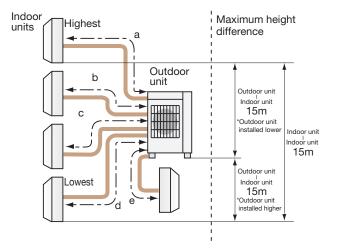


MXZ-6F120VF2

Maximum Piping Length		
	Outdoor unit - Indoor unit (a,b,c,d,e,f)	25m
	Total length (a+b+c+d+e+f)	80m

Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b,c,d,e,f)	25
Total number (a+b+c+d+e+f)	80

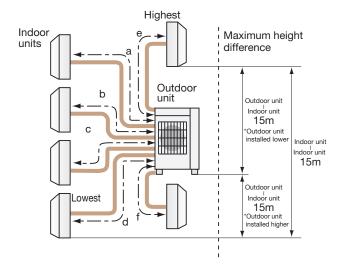


PUMY SERIES

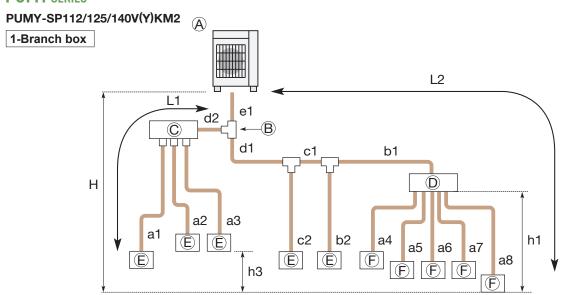

- ♠ Outdoor Unit
 働 First joint (CMY, MSDD)
 ⊕ Branch header (CMY)
 ⊕ Branch box (PAC-MK•BC(B))
 ⊕ CITY MULTI Indoor unit
 ⊕ M/S/P series Indoor unit

Permissible length	Total piping length	e1 + d1 + d2 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8≦ 120 m
(One-way)	Farthest piping length (L1)	e1 + d2 + a1 or e1 + d1 + c1 + b2 ≦ 70 m
	Farthest piping length. Via Branch box (L2)	e1 + d1 + c1 + b1 + a8≦ 80 m
	Piping length between outdoor unit and branch box	e1 + d1 + c1 + b1≦ 55 m
	Farthest piping length from the first joint	d1 + c1 + b1 or d1 + c1 + b2≦ 50 m
	Farthest piping length after branch box	a8 ≦ 25 m
	Total piping length between branch boxes and indoor units	a4 + a5 + a6 + a7 + a8 ≦ 95 m
Permissible height difference (One-way)	In indoor/outdoor section (H)*1	H ≤ 50 m (In case of outdoor unit is set higher than indoor unit)
		H ≦ 30 m (In case of outdoor unit is set lower than indoor unit)
	In branch box/indoor unit section (h1)	h1 ≦ 15 m
	In each indoor unit (h3)	h3 ≦ 12 m
Number of bends		e1 + d2 + a1 , $ e1 + d2 + a2 $, $ e1 + d2 + a3 $, $ e1 + d1 + c2 $, $ e1 + d1 + c1 + b2 $,
		e1 + d1 + c1 + b1 + a4 , $ e1 + d1 + c1 + b1 + a5 $, $ e1 + d1 + c1 + b1 + a6 $,
		$ e1 + d1 + c1 + b1 + a7 $, $ e1 + d1 + c1 + b1 + a8 \le 15$


*1: Branch box should be placed within the level between the outdoor unit and indoor units.

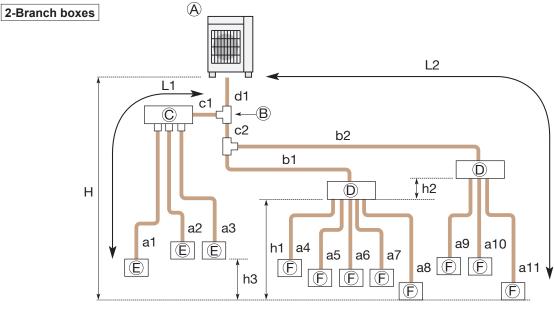

- A Outdoor Unit
 B First joint (CMY, MSDD)
 C Branch header (CMY)
 D Branch box (PAC-MK•BC(B))
 C CITY MULTI Indoor unit
 F M/S/P series Indoor unit


Permissible length	Total piping length	$d1 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 \le 120 \text{ m}$
(One-way)	Farthest piping length (L1)	d1 + c1 + a1 ≦ 70 m
	Farthest piping length. Via Branch box (L2)	d1 + c2 + b2 + a11≦ 80 m
	Piping length between outdoor unit and branch boxes	d1 + c2 + b1 + b2≦ 55 m
	Farthest piping length from the first joint	c2 + b2 or c1 + a1≦ 50 m
	Farthest piping length after branch box	a11 ≦ 25 m
	Farthest branch box from outdoor unit	d1 + c2 + b2 ≤ 55 m
	Total piping length between branch boxes and indoor units	a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 ≦ 95 m
Permissible height difference (One-way)	In indoor/outdoor section (H)*1	H ≦ 50 m (In case of outdoor unit is set higher than indoor unit)
		H ≦ 30 m (In case of outdoor unit is set lower than indoor unit)
	In branch box/indoor unit section (h1)	h1 + h2 ≦ 15 m
	In each branch unit (h2)	h2 ≦ 15 m
	In each indoor unit (h3)	h3 ≦ 12 m
Number of bends		$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$

^{*1:} Branch box should be placed within the level between the outdoor unit and indoor units.

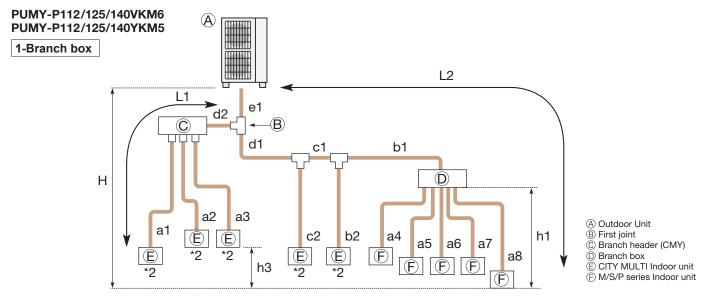


Permissible length	Total piping length	e1 + d1 + d2 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8≦ 300 m			
(One-way)	Farthest piping length (L1)	e1 + d2 + a1 or e1 + d1 + c1 + b2 ≦ 85 m			
	Farthest piping length. Via Branch box (L2)	e1 + d1 + c1 + b1 + a8 ≦ 80 m			
	Piping length between outdoor unit and branch box	e1 + d1 + c1 + b1≦ 55 m			
	Farthest piping length from the first joint	d1 + c1 + b1 or d1 + c1 + b2≦ 30 m			
	Farthest piping length after branch box	a8 ≦ 25 m			
	Total piping length between branch boxes and indoor units	a4 + a5 + a6 + a7 + a8 ≦ 95 m			
Permissible height	In indoor/outdoor section (H)*1	H ≤ 50 m (In case of outdoor unit is set higher than indoor unit)			
difference (One-way)	III IIIdoor/outdoor section (H) 1	H ≦ 40 m (In case of outdoor unit is set lower than indoor unit)			
	In branch box/indoor unit section (h1)	h1 ≦ 15 m			
	In each indoor unit (h3)	h3 ≦ 12 m			
Number of bends		e1 + d2 + a1 , $ e1 + d2 + a2 $, $ e1 + d2 + a3 $, $ e1 + d1 + c2 $, $ e1 + d1 + c1 + b2 $,			
		e1 + d1 + c1 + b1 + a4 , e1 + d1 + c1 + b1 + a5 , e1 + d1 + c1 + b1 + a6 ,			
		e1 + d1 + c1 + b1 + a7 , e1 + d1 + c1 + b1 + a8 ≦ 15			

- *1: Branch box should be placed within the level between the outdoor unit and indoor units.
 2: PKFY-P•VBM, PKFY-P10-32VLM, PFFY-P•VKM, PFFY-P•VCM, and PFFY-P•VL type indoor units cannot be used in a mixed system.

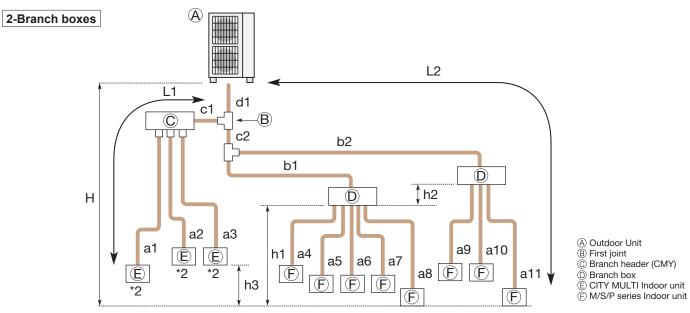


Permissible length	Total piping length	$d1 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 \le 240 \text{ m}$			
(One-way)	Farthest piping length (L1)	d1 + c1 + a1 ≦ 85 m			
	Farthest piping length. Via Branch box (L2)	d1 + c2 + b2 + a11≦ 80 m			
	Piping length between outdoor unit and branch boxes	d1 + c2 + b1 + b2≦ 55 m			
	Farthest piping length from the first joint	c2 + b2 or c1 + a1≦ 30 m			
	Farthest piping length after branch box	a11 ≦ 25 m			
	Farthest branch box from outdoor unit	d1 + c2 + b2 ≦ 55 m			
	Total piping length between branch boxes and indoor units	a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 ≦ 95 m			
Permissible height	In indeed (authors are tion // DX1	H ≦ 50 m (In case of outdoor unit is set higher than indoor unit)			
difference	In indoor/outdoor section (H)*1	H ≦ 40 m (In case of outdoor unit is set lower than indoor unit)			
(One-way)	In branch box/indoor unit section (h1)	h1 + h2 ≦ 15 m			
	In each branch unit (h2)	h2 ≦ 15 m			
	In each indoor unit (h3)	h3 ≦ 12 m			
Number of bends		$ \begin{array}{l} d1+c1+a1 , d1+c1+a2 , d1+c1+a3 , d1+c2+b1+a4 , d1+c2+b1+a5 , \\ d1+c2+b1+a6 , d1+c2+b1+a7 , d1+c2+b1+a8 , d1+c2+b2+a9 , \\ d1+c2+b2+a10 , d1+c2+b2+a11 \leq 15 \end{array} $			

- *1: Branch box should be placed within the level between the outdoor unit and indoor units.
 2: PKFY-P•VBM, PKFY-P10-32VLM, PFFY-P•VKM, PFFY-P•VCM, and PFFY-P·VL type indoor units cannot be used in a mixed system.

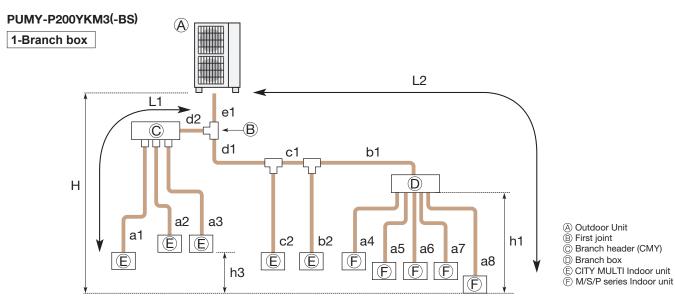


Permissible length	Total piping length	e1 + d1 + d2 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8≦ 150 m				
(One-way)	Farthest piping length (L1)	e1 + d2 + a1 or e1 + d1 + c1 + b2 ≦ 80 m				
	Farthest piping length. Via Branch box (L2)	e1 + d1 + c1 + b1 + a8 ≦ 80 m				
	Piping length between outdoor unit and branch box	e1 + d1 + c1 + b1≦ 55 m				
	Farthest piping length from the first joint	d1 + c1 + b1 or d1 + c1 + b2≦ 30 m				
	Farthest piping length after branch box	a8 ≦ 25 m				
	Total piping length between branch boxes and indoor units	a4 + a5 + a6 + a7 + a8 ≦ 95 m				
Permissible height	In indept/putdent continu (I D*1	H ≤ 50 m (In case of outdoor unit is set higher than indoor unit)				
difference (One-way)	In indoor/outdoor section (H)*1	H ≤ 40 m (In case of outdoor unit is set lower than indoor unit)				
	In branch box/indoor unit section (h1)	h1 ≦ 15 m				
	In each indoor unit (h3)	h3≦12 m				
Number of bends		e1 + d2 + a1 , e1 + d2 + a2 , e1 + d2 + a3 , e1 + d1 + c2 , e1 + d1 + c1 + b2 ,				
		e1 + d1 + c1 + b1 + a4 , e1 + d1 + c1 + b1 + a5 , e1 + d1 + c1 + b1 + a6 ,				
		$ e1 + d1 + c1 + b1 + a7 $, $ e1 + d1 + c1 + b1 + a8 \le 15$				

^{*1:} Branch box should be placed within the level between the outdoor unit and indoor units.

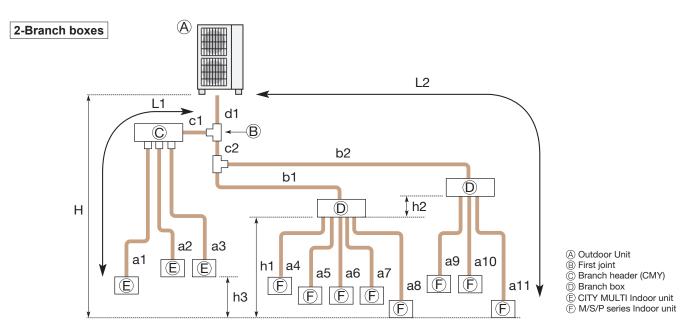


Permissible length	Total piping length	$d1 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 \le 150 \text{ m}$		
(One-way)	Farthest piping length (L1)	d1 + c1 + a1 ≦ 80 m		
	Farthest piping length. Via Branch box (L2)	d1 + c2 + b2 + a11≦ 80 m		
	Piping length between outdoor unit and branch boxes	d1 + c2 + b1 + b2≦ 55 m		
	Farthest piping length from the first joint	c2 + b2 or c1 + a1≦ 30 m		
	Farthest piping length after branch box	a11 ≦ 25 m		
	Farthest branch box from outdoor unit	d1 + c2 + b2 ≦ 55 m		
	Total piping length between branch boxes and indoor units	a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 ≦ 95 m		
Permissible height	In indoor/outdoor section (H)*1	H ≦ 50 m (In case of outdoor unit is set higher than indoor unit)		
difference	III IIIdoor/outdoor Section (A) 1	H ≤ 40 m (In case of outdoor unit is set lower than indoor unit)		
(One-way)	In branch box/indoor unit section (h1)	h1 + h2 ≦ 15 m		
	In each branch unit (h2)	h2 ≦ 15 m		
	In each indoor unit (h3)	h3 ≦ 12 m		
Number of bends		d1 + c1 + a1 , d1 + c1 + a2 , d1 + c1 + a3 , d1 + c2 + b1 + a4 , d1 + c2 + b1 + a5 ,		
		d1 + c2 + b1 + a6 , d1 + c2 + b1 + a7 , d1 + c2 + b1 + a8 , d1 + c2 + b2 + a9 ,		
		$ d1 + c2 + b2 + a10 $, $ d1 + c2 + b2 + a11 \le 15$		

 $^{^{\}star}$ 1: Branch box should be placed within the level between the outdoor unit and indoor units.

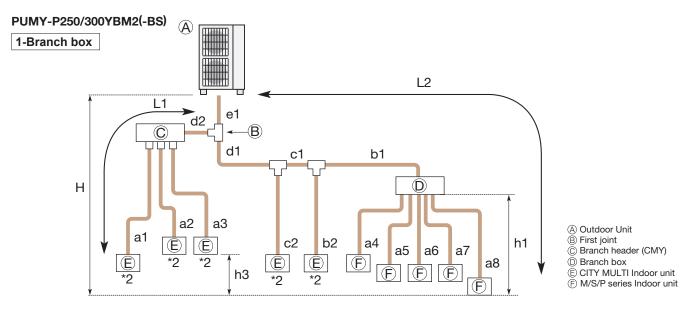


Permissible length	Total piping length	e1 + d1 + d2 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8≦ 310 m		
(One-way)	Farthest piping length (L1)	e1 + d2 + a1 or e1 + d1 + c1 + b2 ≦ 85 m		
	Farthest piping length. Via Branch box (L2)	e1 + d1 + c1 + b1 + a8 ≦ 80 m		
	Piping length between outdoor unit and branch box	e1 + d1 + c1 + b1≦ 80 m		
	Farthest piping length from the first joint	d1 + c1 + b1 or d1 + c1 + b2≦ 30 m		
	Farthest piping length after branch box	a8 ≦ 25 m		
	Total piping length between branch boxes and indoor units	a4 + a5 + a6 + a7 + a8 ≦ 145 m		
Permissible height	In indeed/authors are tion // D*1	H ≤ 50 m (In case of outdoor unit is set higher than indoor unit)		
difference (One-way)	In indoor/outdoor section (H)*1	H ≦ 40 m (In case of outdoor unit is set lower than indoor unit)		
	In branch box/indoor unit section (h1)	h1 ≦ 15 m		
	In each indoor unit (h3)	h3≦12 m		
Number of bends		$ \begin{array}{c} \text{e1}+\text{d2}+\text{a1} , \text{e1}+\text{d2}+\text{a2} , \text{e1}+\text{d2}+\text{a3} , \text{e1}+\text{d1}+\text{c2} , \text{e1}+\text{d1}+\text{c1}+\text{b2} , \\ \text{e1}+\text{d1}+\text{c1}+\text{b1}+\text{a4} , \text{e1}+\text{d1}+\text{c1}+\text{b1}+\text{a5} , \text{e1}+\text{d1}+\text{c1}+\text{b1}+\text{a6} , \\ \text{e1}+\text{d1}+\text{c1}+\text{b1}+\text{a7} , \text{e1}+\text{d1}+\text{c1}+\text{b1}+\text{a8} \leq 23 \end{array} $		

- *1: Branch box should be placed within the level between the outdoor unit and indoor units.
 2: PKFY-P•VBM, PKFY-P10-32VLM, PFFY-P•VKM, PFFY-P•VCM, and PFFY-P•VL type indoor units cannot be used in a mixed system.

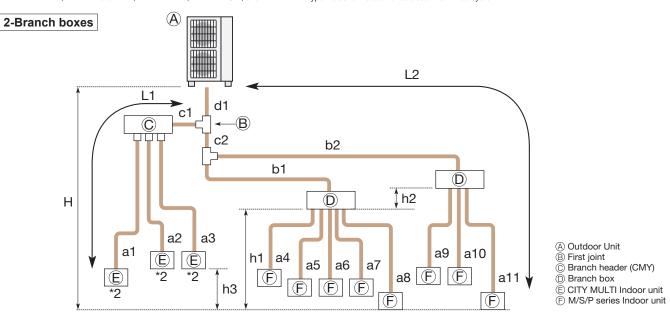


Permissible length	Total piping length	$d1 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 \le 310 \text{ m}$		
(One-way)	Farthest piping length (L1)	d1 + c1 + a1 ≦ 85 m		
	Farthest piping length. Via Branch box (L2)	d1 + c2 + b2 + a11≦ 80 m		
	Piping length between outdoor unit and branch boxes	$d1 + c2 + b1 + b2 \le 95 \text{ m}$		
	Farthest piping length from the first joint	c2 + b2 or c1 + a1≦ 30 m		
	Farthest piping length after branch box	a11 ≦ 25 m		
	Total piping length between branch boxes and indoor units	a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 ≦ 145 m		
Permissible height	In indoor/outdoor section (H)*1	H ≦ 50 m (In case of outdoor unit is set higher than indoor unit)		
difference	III IIIdooi/outdoor section (H) 1	H ≦ 40 m (In case of outdoor unit is set lower than indoor unit)		
(One-way)	In branch box/indoor unit section	h1 + h2 ≦ 15 m		
	In each branch unit (h2)	h2 ≦ 15 m		
	In each indoor unit (h3)	h3 ≦ 12 m		
Number of bends		$ \begin{array}{c} d1+c1+a1 , d1+c1+a2 , d1+c1+a3 , d1+c2+b1+a4 , d1+c2+b1+a5 , \\ d1+c2+b1+a6 , d1+c2+b1+a7 , d1+c2+b1+a8 , d1+c2+b2+a9 , \\ d1+c2+b2+a10 , d1+c2+b2+a11 &\leq 23 \end{array} $		

^{*1:} Branch box should be placed within the level between the outdoor unit and indoor units
2: PKFY-P•VBM, PKFY-P10-32VLM, PFFY-P•VKM, PFFY-P•VCM, and PFFY-P•VL type indoor units cannot be used in a mixed system.

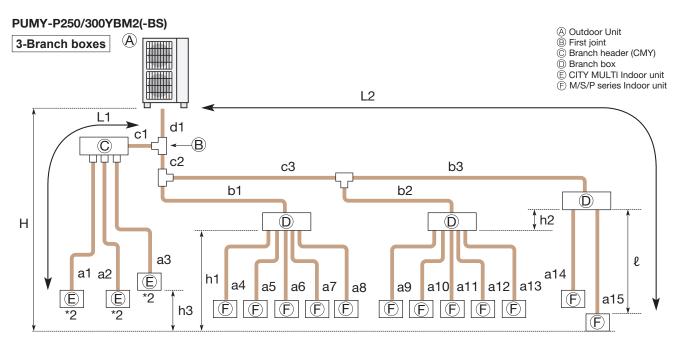

Permissible length (One-way)	Total piping length	d1 + c1 + c2 + c3 + b1 + b2 + b3 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 + a12 + a13 + a14 + a15 \leq 310 m		
	Farthest piping length (L1)	d1 + c1 + a1 ≦ 85 m		
	Farthest piping length. Via Branch box (L2)	d1 + c2 + c3 + b3 + a15≦ 80 m		
	Piping length between outdoor unit and branch boxes	$d1 + c2 + c3 + b1 + b2 + b3 \le 95 \text{ m}$		
	Farthest piping length from the first joint	c2 + c3 + b3 or c1 + a1≦ 30 m		
	Farthest piping length after branch box (ℓ)	a15 ≦ 25 m		
	Total piping length between branch boxes and indoor units	a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 + a12 + a13 + a14 + a15 ≦ 145 m		
Permissible height	In indeputed our postion (LD*1	H ≤ 50 m (In case of outdoor unit is set higher than indoor unit)		
difference	In indoor/outdoor section (H)*1	H ≤ 40 m (In case of outdoor unit is set lower than indoor unit)		
(One-way)	In branch box/indoor unit section	h1 + h2 ≦ 15 m		
	In each branch unit (h2)	h2 ≦ 15 m		
	In each indoor unit (h3)	h3 ≦ 12 m		
Number of bends		$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$		

^{*1:} Branch box should be placed within the level between the outdoor unit and indoor units.
2: PKFY-P•VBM, PKFY-P10-32VLM, PFFY-P•VKM, PFFY-P•VCM, and PFFY-P•VL type indoor units cannot be used in a mixed system.

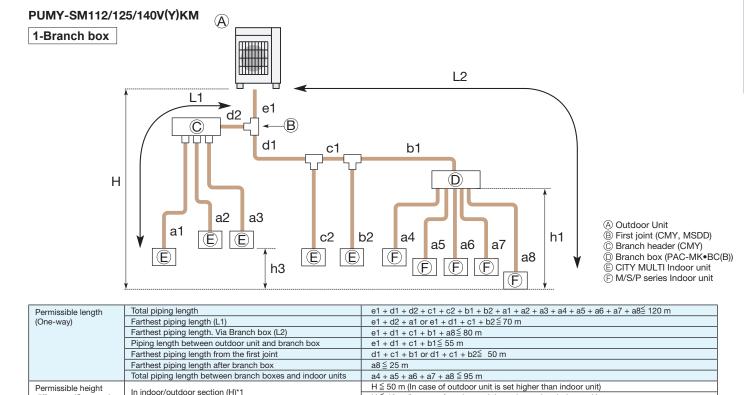

h1 ≦ 15 m h3 ≦ 12 m

H ≤ 40 m (In case of outdoor unit is set lower than indoor unit)


 $\begin{aligned} &|e1+d2+a1|,\,|e1+d2+a2|,\,|e1+d2+a3|,\,|e1+d1+c2|,\,|e1+d1+c1+b2|,\\ &|e1+d1+c1+b1+a4|,\,|e1+d1+c1+b1+a5|,\,|e1+d1+c1+b1+a6|,\\ &|e1+d1+c1+b1+a7|,\,|e1+d1+c1+b1+a8| \leqq 15 \end{aligned}$

In branch box/indoor unit section (h1)

In each indoor unit (h3)

difference (One-way)

Number of bends

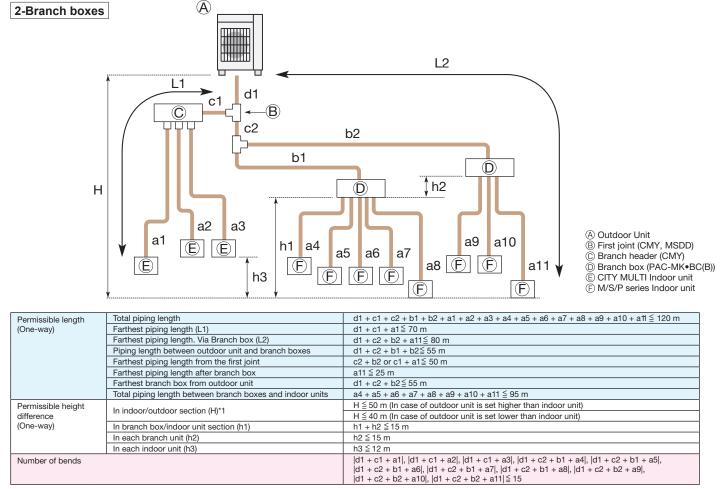

^{*1:} Branch box should be placed within the level between the outdoor unit and indoor units.

^{*1:} Branch box should be placed within the level between the outdoor unit and indoor units.

Explanation of Terminology

Maximum piping length:

This is the maximum allowable length of the refrigerant piping. The amount of refrigerant pipe used cannot be longer than the length specified.

Total length:

The maximum allowable combined length of all the refrigerant piping between the outdoor unit and indoor unit(s).

Outdoor Unit - Indoor Unit:

The maximum allowable length of the refrigerant piping between the outdoor unit and indoor units installed when multiple units are connected to a single outdoor unit. This distance limitation refers to the maximum length between the outdoor unit and the farthest indoor unit.

Pipe length difference from distribution pipe:

The maximum allowable difference in refrigerant piping length from the distribution pipe to the farthest indoor unit and from the distribution pipe to the closest indoor unit when multiple indoor units are connected to a single outdoor unit using a distribution pipe.

Indoor Unit - Distribution Pipe:

The maximum allowable length of the refrigerant piping between indoor units and the distribution pipe when multiple indoor units are connected to a single outdoor unit.

Maximum height difference:

This is the maximum allowable height difference. It is necessary to install the air conditioning system so that the height distance is no more than the difference specified. (Specified differences may vary if the outdoor unit is installed higher or lower than the indoor units).

Outdoor unit - Indoor unit:

The maximum allowable difference in height between the outdoor unit and indoor units when installed (when multiple indoor units are connected to a single outdoor unit, this distance limitation refers to the maximum height difference between the outdoor unit and an indoor unit).

Indoor unit - Indoor unit:

The maximum allowable difference between the heights of indoor units when multiple indoor units are connected to a single outdoor unit.

Maximum number of bends:

This is the maximum allowable number of bends in the refrigerant piping. The total number of bends in the refrigerant piping used cannot exceed the number specified.

Total number:

The maximum allowable number of bends for all refrigerant piping between the outdoor unit and indoor units.

Outdoor unit - Indoor unit:

The maximum allowable number of bends between the outdoor unit and each indoor unit when multiple indoor units are connected to a single outdoor unit.

Appendix

Indoor U	nit					Please refi	er below (*1)		
Outdoor	Unit			MXZ-3HA50VF2	MXZ-4F80VF4	MXZ-4F83VF2	MXZ-4F83VFHZ2	MXZ-2F42VF4	MXZ-3F68VF4
Refrigerant/GWP				R32/675 ⁽²⁾					
Power	Source			Outdoor power supply					
Supply	Outdoor (V/Phase/Hz)			220-230-240V/Single/50Hz					
Cooling	Capacity	Rated	kW	5.00	6.80	7.80	8.30	4.00	6.20
	Input	Rated	kW	1.47	2.20	2.65	2.78	1.05	2.07
	Design load		kW	5.00	6.80	7.80	8.30	4.00	6.20
	Annual electricity cons	sumption (*3)	kWh/a	257.00	345.00	404.00	473.00	183.00	350.00
	SEER (*4)			6.80	6.90	6.80	6.14	7.64	6.21
		Energy efficiency	y class (14)	A++	A++	A++	A++	A++	A++
Heating	Capacity	Rated	kW	6.00	8.60	9.00	9.00	4.40	8.00
	Input	Rated	kW	1.56	2.60	2.30	2.74	1.13	2.53
	Design load		kW	3.80	7.00	7.00	9.00	3.20	6.80
		Annual electricity consumption (13) kWh/a		1324.00	2492.00	2336.00	3155.00	1172.00	2498.00
	SCOP (*4) Energy efficiency class			4.02	3.93	4.20	4.00	3.82	3.81
			y class (*4)	A+	A	A+	A+	A	A
Outdoor	Dimensions	H*W*D	mm	710 - 840 - 330 (+66)	710 - 840 - 330 (+66)	796 - 950 - 330	1048 - 950 - 330	550 - 800 (+69) - 285 (+59.5)	710 - 840 - 330 (+66)
Unit	Weight		kg	57	59	62	86	37	58
	Air Volume	Cooling	m³/min	31.0	40.3	57	63	28.4	35.4
		Heating	m³/min	29.1	44.1	62	77	33.5	39.6
	Sound Level (SPL)	Cooling	dB (A)	46	50	49	55	44	48
		Heating	dB (A)	50	55	51	57	50	53
	Sound Level (PWL)	Cooling	dB (A)	61	65	61	66	59	63
	Breaker Size		A	25	25	25	30	15	25
Ext.	Port diameter	Liquid	mm	6.35×3	6.35×4	6.35×4	6.35×4	6.35×2	6.35×3
Piping		Gas	mm	9.52×3	12.7×1+9.52×3	12.7×1+9.52×3	12.7×1+9.52×3	9.52×2	9.52×3
	Total piping length (Ma	ax.)	m	50	60	70	70	30	60
	Each indoor unit pipin	g length (Max.)	m	25	25	25	25	20	25
	Max. Height		m	15 (10) ⁽¹⁵⁾	15 (10) ^(*5)	15	15	15 (10) ⁽⁵⁾	15 (10) (15)
	Chargeless length m			40	60	70	70	30	60
	ed Operating Range	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
(Outdoor))	Heating	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-25 ~ +24	-15 ~ +24	-15 ~ +24

Indoor Unit				Please refer below (*1)						
Outdoor	Unit			MXZ-4F72VF4	MXZ-5F102VF2	MXZ-6F120VF2	PXZ-4F75VG	PXZ-5F85VG		
Refrigerant/GWP			R32/675 ⁽²⁾							
Power Source					Outdoor power supply					
Supply	Outdoor (V/Phase/Hz)			220-230-240V/Single/50Hz			230V/1 pha	ase/50Hz		
Cooling	Capacity	Rated	kW	6.40	8.30	8.30	6.40	7.80		
	Input	Rated	kW	1.99	3.05	2.78	1.99	2.65		
	Design load		kW	6.40	8.30	8.30	6.40	7.80		
	Annual electricity cons	umption (13)	kWh/a	297.00	450.00	473.00	297.00	404.00		
	SEER (*4)			7.54	6.46	6.14	7.54	6.76		
		Energy efficiency	/ class (*4)	A++	A++	A++	A++	A++		
Heating	Capacity	Rated	kW	8.60	9.00	9.00	8.60	9.00		
	Input	Rated	kW	2.23	2.30	2.74	2.23	2.30		
	Design load		kW	7.00	7.00	9.00	7.00	7.00		
		Annual electricity consumption (3) kWh/a		2406.00	2423.00	3159.00	2406.00	2336.00		
	SCOP (*4)			4.07	4.05	3.99	4.07	4.20		
		Energy efficiency	/ class (*4)	A ⁺	A ⁺	A	A ⁺	A ⁺		
Outdoor	Dimensions	H*W*D	mm	710 - 840 - 330 (+66)	796 - 950 - 330	1048 - 950 - 330	710 - 840 (+30) - 330 (+66)	796 - 950 - 330		
Unit	Weight		kg	59	62	87	59	62		
	Air Volume	Cooling	m³/min	35.4	63	63	35.4	57		
		Heating	m³/min	42.7	75	77	42.7	62		
	Sound Level (SPL)	Cooling	dB (A)	48	52	55	48	49		
		Heating	dB (A)	54	56	57	54	51		
	Sound Level (PWL)	Cooling	dB (A)	63	65	69	63	61		
	Breaker Size		Α	25	25	32	25	25		
Ext.	Port diameter	Liquid	mm	6.35×4	6.35×5	6.35×6	6.35×4	6.35×5		
Piping		Gas	mm	12.7×1+9.52×3	12.7×1+9.52×4	12.7×1+9.52×5	12.7×1+9.52×3	12.7×1+9.52×4		
	Total piping length (Ma	x.)	m	60	80	80	60	70		
	Each indoor unit piping	Each indoor unit piping length (Max.) m		25	25	25	30	30		
	Max. Height		m	15 (10) ⁽¹⁸⁾	15	15	20	20		
	Chargeless length		m	60	80	80	60	70		
	ed Operating Range	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46		
(Outdoor		Heating	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-20 ~ +24	-20 ~ +24		

(*1) This combination data is the SPEC when the following indoor units are connected, and is registered with Eurovent.

MXZ-3HA50VF2 → MSZ-HR25VFx2

MXZ-4F80VF4 → MSZ-MY42VG/MSZ-LN35VG2

MXZ-4F83VF2 → MSZ-AY42VG

MXZ-4F83VF2 → MSZ-AY42VG

MXZ-4F83VF42 → MSZ-AY42VG

MXZ-2F83VF42 → MSZ-AY42VG

MXZ-2F83VF42 → MSZ-AY20VGMSZ-AY42VG

MXZ-3F86VF4 → MSZ-AY20VGMSZ-AY50VG

MXZ-3F86VF4 → MSZ-AY20VGMSZ-AY50VG

MXZ-4F72VF4 → MSZ-LN35VG2/MSZ-LN35VG2

PXZ-4F75VG → MSZ-LN35VG2/MSZ-LN35VG2

PXZ-5F80VG → MSZ-LN35VG2/MSZ-LN35VG2

MXZ-5F102VF2 → MSZ-AY20VGMSZ-AY50VG

MXZ-5F102VF2 → MSZ-AY20VG/MSZ-AY50VG

MXZ-5F102VF2 → MSZ-AY42VG/MSZ-AY50VG

MXZ-5F102VF2 → MSZ-AY42VG

M

Conditions for specifications

Temperature conditions are based on ISO 5151.

Cooling	Indoor	27°C DB, 19°C WB
	Outdoor	35°C DB, 24°C WB
Heating	Indoor	20°C DB
Heating	Outdoor	7°C DB, 6°C WB

Refrigerant piping length; 5m

The figures for total input are based on the following voltages.

Series	Indoor unit	Outdoor unit
M Series S Series P Series (except for PEA) MXZ Series POWERFUL HEATING Series	-	VF, VG, VE, VA, VHA, VKA, VDA: 230V/Single phase/50Hz YA, YHA, YKA, YDA: 400V/Three phase/50Hz
PEA Series	400V/Three phase/50Hz	400V/Three phase/50Hz

Sound pressure level

- The sound pressure measurement is conducted in an anechoic chamber.
- The actual sound level depends on the distance from the unit and the acoustic environment.

How to read a model name

1) M & S Series

M	M: M Series S: S Series
S	"S"= Wall-mounted , "F"= Compact floor-standing , "E"= Compact ceiling-concealed ,
3	"L"= 4- or 1-way cassette , "U"= Outdoor unit
Z	"Z"= Inverter heat pump , "H"= Fixed-speed heat pump , "blank"= Cooling only of Non-inverter , "Y"= Cooling only of inverter
_	
F	Series
Н	Generation
25	Rated cooling capacity (kW base)
V	230V / Single phase / 50Hz
	"A"= R410A with new A control , "B"= R410A with conventional control ,
Е	"E"= R410A with new A control & ErP correspondance, "G"=R32 with new A control & ErP correspondance,
	"F"= R32 with new A control
	"HZ"= Hyper Heating model , "H"= Anti-freeze heater equipped model ,
HZ	"S"= Silver indoor unit , "W"= White/Natural White indoor unit , "B"= Black/Onyx Black indoor unit ,
	"V"= Pearl White indoor unit , "R"= Ruby Red indoor unit

2) P Series

P	P Series
U	"K"= Wall-mounted , "S"= Floor-standing , "L"= 4-way cassette , "E"= Ceiling-concealed ,
	"C"= Ceiling-suspended, "U"= Outdoor unit
Н	"H"= For heating and cooling
Z	"Z"= Inverter
_	
ZM/M	"ZM"= R32 Eco-conscious Power Inverter , "M"= R32 &R410A
71	Rated cooling capacity (kW base)
V	"V"= 230V / Single phase / 50Hz , "Y"= 400V / Three phase / 50Hz
Н	Generation
Α	"A"= A control

3) MXZ Series

M	M Series
X	Multi-system outdoor unit (heat pump)
Z	Inverter heat pump
_	
4	Maximum number of connectable indoor units
D/E/F/HJ/DM/HA	Generation / Type
72	Rated cooling capacity (kW base)
V	"V"= 230V / Single phase / 50Hz, "F"= R32 with new A control
A/F	"A"= R410A with new A control
HZ	"HZ"= Hyper Heating model , "H"= Anti-freeze heater equipped model

Refrigerant Amount

M/S/P/Multi/Zubadan/ATW


		Refrige	erant	Pre- qu	charged lantity	Max. added quantity		
	Model Name		GWP	Weight [kg]	CO ₂ equivalent [t]	Weight [kg]	CO ₂ equivalent [t]	
	MUZ-RZ25VU	R290	3	pending	pending	pending	pending	
	MUZ-RZ25VUHZ	R290 R290	3	pending 0.39	pending 0.01	pending 0.49	pending 0.01	
	MUZ-RZ35VU MUZ-RZ35VUHZ	R290	3	0.39	0.01	0.49	0.01	
	MUZ-RZ50VUHZ	R290	3	0.70	0.01	0.85	0.01	
	MUZ-RW25VG	R32	675	1.20	0.81	1.40	0.95	
	MUZ-RW35VG	R32	675	1.10	0.74	1.30	0.88	
	MUZ-RW50VG	R32	675	1.21	0.82	1.51	1.02	
	MUZ-LN25VG	R32	675	1.00	0.68	0.26	0.18	
	MUZ-LN25VG2 MUZ-LN35VG	R32	675 675	0.8	0.54	0.20	0.135	
	MUZ-LN35VG MUZ-LN35VG2	R32 R32	675	1.00 0.85	0.68 0.57	0.26	0.18	
	MUZ-LN50VG	R32	675	1.25	0.85	0.26	0.14	
	MUZ-LN50VG2	R32	675	1.25	0.85	0.10	0.07	
	MUZ-LN60VG	R32	675	1.45	0.98	0.46	0.32	
	MUZ-LN25VGHZ	R32	675	1.00	0.68	0.26	0.18	
	MUZ-LN35VGHZ	R32	675	1.00	0.68	0.26	0.18	
	MUZ-LN50VGHZ	R32	675	1.45	0.98	0.46	0.32	
	MUZ-FT25VGHZ MUZ-FT35VGHZ	R32 R32	675 675	0.85	0.58	0.25	0.17	
	MUZ-FT50VGHZ	R32	675	0.95	0.65	0.45	0.31	
	MUZ-AY15VG	R32	675	0.49	0.34	0.45	0.18	
	MUZ-AY20VG	R32	675	0.55	0.37	0.25	0.18	
	MUZ-AY25VG	R32	675	0.55	0.37	0.26	0.18	
	MUZ-AY35VG	R32	675	0.55	0.37	0.26	0.18	
	MUZ-AY42VG	R32	675	0.70	0.47	0.26	0.18	
	MUZ-AY50VG MUZ-AP60VG	R32	675	1.00	0.68	0.26	0.18	
	MUZ-AP60VG MUZ-AP71VG	R32 R32	675 675	1.05 1.50	1.02	0.30	0.20	
	MUZ-AY25VGH	R32	675	0.55	0.37	0.36	0.18	
	MUZ-AY35VGH	R32	675	0.55	0.37	0.26	0.18	
	MUZ-AY42VGH	R32	675	0.70	0.47	0.26	0.18	
	MUZ-AY50VGH	R32	675	1.00	0.68	0.26	0.18	
	MUZ-EF25VG(H)	R32	675	0.62	0.42	0.26	0.18	
	MUZ-EF35VG(H)	R32	675	0.74	0.50	0.26	0.18	
M-Series	MUZ-EF42VG	R32	675	0.74	0.50	0.26	0.18	
	MUZ-EF50VG MUZ-BT20VG	R32 R32	675 675	1.05 0.45	0.71	0.46	0.32 0.18	
	MUZ-BT25VG	R32	675	0.50	0.34	0.26	0.18	
	MUZ-BT35VG	R32	675	0.50	0.34	0.26	0.18	
	MUZ-BT50VG	R32	675	0.70	0.47	0.26	0.18	
	MUZ-HR25VF	R32	675	0.40	0.27	0.26	0.18	
	MUZ-HR35VF	R32	675	0.45	0.30	0.26	0.18	
	MUZ-HR42VF	R32	675	0.70	0.47	0.26	0.18	
	MUZ-HR50VF MUZ-HR60VF	R32 R32	675 675	0.80	0.54	0.26	0.18	
	MUZ-HR60VF MUZ-HR71VF	R32	675	1.05	0.71	0.46	0.32	
	MUZ-DW25VF	R32	675	0.50	0.34	0.25	0.17	
	MUZ-DW35VF	R32	675	0.55	0.38	0.25	0.17	
	MUZ-DW50VF	R32	675	0.97	0.66	0.25	0.17	
	MUY-TP35VF	R32	675	0.85	0.57	0.13	0.09	
	MUY-TP50VF	R32	675	0.85	0.57	0.13	0.09	
	MUFZ-KW25VGHZ MUFZ-KW35VGHZ	R32 R32	675 675	1.0	0.68	1.26 1.26	0.86	
	MUFZ-KW35VGHZ MUFZ-KW50VGHZ	R32	675	1.0	0.68	1.26	1.19	
	MUFZ-KW60VGHZ	R32	675	1.3	0.88	1.76	1.19	
	MXZ-2F33VF4	R32	675	0.8	0.54	0.8	0.54	
	MXZ-2F42VF4	R32	675	1.0	0.675	1.0	0.675	
	MXZ-2F53VF(H)4	R32	675	1.0	0.675	1.0	0.675	
	MXZ-3F54VF4	R32	675	2.4	1.62	2.4	1.62	
	MXZ-3F68VF4	R32	675	2.4	1.62	2.4	1.62	
	MXZ-4F72VF4 MXZ-4F80VF4	R32 R32	675 675	2.4	1.62 1.62	2.4	1.62 1.62	
	MXZ-4F80VF4 MXZ-4F83VF2	R32	675	2.4	1.62	2.4	1.62	
	MXZ-5F102VF2	R32	675	2.4	1.62	2.4	1.62	
	MXZ-6F120VF2	R32	675	2.4	1.62	2.4	1.62	
	MXZ-2F53VFHZ2	R32	675	2.4	1.62	2.4	1.62	
	MXZ-4F83VFHZ2	R32	675	2.4	1.62	2.4	1.62	
	MXZ-2HA40VF2	R32	675	0.9	0.61	0.9	0.61	
	MXZ-2HA50VF2	R32	675	0.9	0.61	0.9	0.61	
	MXZ-3HA50VF2	R32	675	1.4	0.95	1.6	1.08	

		Refrigerant		Pre- qu	charged Jantity	Max qu	k. added Jantity	
	Model Name		GWP	Weight [kg]	CO ₂ equivalent [t]	Weight [kg]	CO ₂ equivalent [t]	
	SUZ-M25VA	R32	675	0.65	0.44	0.26	0.18	
	SUZ-M35VA	R32	675	0.90	0.61	0.26	0.18	
S-Series	SUZ-M50VA	R32	675	1.20	0.81	0.46	0.31	
	SUZ-M60VA	R32	675	1.25	0.84	0.46	0.31	
	SUZ-M71VA	R32	675	1.45	0.98	0.92	0.62	
	PUZ-ZM35VKA2 PUZ-ZM50VKA2	R32 R32	675 675	2.0	1.35 1.35	0.3	0.20	
	PUZ-ZIVI50VNA2 PUZ-ZIM60VHA2	R32	675	2.0	1.35	0.3	0.20	
	PUZ-ZM71VHA2	R32	675	2.8	1.89	0.8	0.54	
	PUZ-ZM100VDA	R32	675	3.6	2.43	2.4	1.62	
	PUZ-ZM100YDA	R32	675	3.6	2.43	2.4	1.62	
	PUZ-ZM125VDA	R32	675	3.6	2.43	2.4	1.62	
	PUZ-ZM125YDA	R32	675	3.6	2.43	2.4	1.62	
	PUZ-ZM140VDA	R32	675	3.6	2.43	2.4	1.62	
P-Series	PUZ-ZM140YDA	R32	675	3.6	2.43	2.4	1.62	
	PUZ-ZM200YKA2	R32	675	6.3	4.25	9.2	6.21	
	PUZ-ZM250YKA2 PUZ-M100VKA2	R32 R32	675 675	6.8 3.1	4.59 2.1	9.2 4.8	6.21 0.7	
	PUZ-M100VKA2 PUZ-M100YKA2	R32	675	3.1	2.1	1.0	0.7	
	PUZ-M125VKA2	R32	675	3.6	2.4	1.0	0.95	
	PUZ-M125YKA2	R32	675	3.6	2.4	1.4	0.95	
	PUZ-M140VKA2	R32	675	3.6	2.4	1.4	0.95	
	PUZ-M140YKA2	R32	675	3.6	2.4	1.4	0.95	
	PUZ-M200YKA2	R32	675	5.6	3.78	1.4	1.08	
	PUZ-M250YKA2	R32	675	6.8	4.59	1.6	1.62	
	PUMY-SP112VKM2(-BS)	R410A	2088	3.5	7.31	9.0	18.79	
	PUMY-SP112YKM2(-BS) PUMY-SP125VKM2(-BS)	R410A R410A	2088	3.5	7.31 7.31	9.0	18.79 18.79	
	PUMY-SP125VKM2(-BS)	R410A	2088	3.5	7.31	9.0	18.79	
	PUMY-SP140VKM2(-BS)	R410A	2088	3.5	7.31	9.0	18.79	
	PUMY-SP140YKM2(-BS)	R410A	2088	3.5	7.31	9.0	18.79	
	PUMY-P112VKM6(-BS)	R410A	2088	4.8	10.02	13.8	28.81	
	PUMY-P125VKM5(-BS)	R410A	2088	4.8	10.02	13.8	28.81	
	PUMY-P140VKM5(-BS)	R410A	2088	4.8	10.02	13.8	28.81	
PUMY	PUMY-P112YKM(E)5(-BS)	R410A	2088	4.8	10.02	13.8	28.81	
	PUMY-P125YKM(E)6(-BS)	R410A	2088	4.8	10.02	13.8	28.81	
	PUMY-P140YKM(E)5(-BS)	R410A	2088	4.8	10.02	13.8	28.81	
	PUMY-P200YKM3(-BS)	R410A	2088	7.3	15.24	13.1	27.35	
	PUMY-P250YBM2(-BS) PUMY-P300YBM2(-BS)	R410A R410A	2088	9.3 9.3	19.42 19.42	32.1 32.1	67.03 67.03	
	PUMY-SM112VKM(-BS)	R32	675	3.0	2.03	7.5	5.06	
	PUMY-SM112YKM(-BS)	R32	675	3.0	2.03	7.5	5.06	
	PUMY-SM125VKM(-BS)	R32	675	3.0	2.03	7.5	5.06	
	PUMY-SM125YKM(-BS)	R32	675	3.0	2.03	7.5	5.06	
	PUMY-SM140VKM(-BS)	R32	675	3.0	2.03	7.5	5.06	
	PUMY-SM140YKM(-BS)	R32	675	3.0	2.03	7.5	5.06	
	PUZ-WM50VHA	R32	675	2.0	1.35	-	-	
ATW	PUZ-WM60VAA	R32	675	2.2	1.49	-	-	
Packaged	PUZ-WM85V/YAA	R32	675	2.2	1.49	-	-	
	PUZ-WM112V/YAA PUZ-HWM140V/YHA	R32 R32	675 675	3.0	2.03 2.2275	_	_	
	SUZ-SWM40VA	R32	675	1.2	0.81	0.4	0.27	
	SUZ-SWM60VA	R32	675	1.2	0.81	0.4	0.27	
	SUZ-SWM80VA	R32	675	1.2	0.81	0.4	0.27	
	PUD-SWM60VAA	R32	675	1.3	0.8775	0.3	0.20	
	PUD-SWM80V/YAA	R32	675	1.3	0.8775	0.3	0.20	
	PUD-SWM100V/YAA	R32	675	1.6	1.08	0.23	0.16	
	PUD-SWM120V/YAA	R32	675	1.6	1.08	0.23	0.16	
ATW	PUD-SHWM60VAA	R32	675	1.4	0.945	0.3	0.20	
Split	PUD-SHWM80V/YAA	R32	675	1.4	0.945	0.3	0.20	
	PUD-SHWM100V/YAA	R32	675	1.7	1.1475	0.13	0.09	
	PUD-SHWM120V/YAA	R32	675 675	1.7 1.7	1.1475	0.13	0.09	
	PUD-SHWM140V/YAA PUHZ-SW75V/YAA	R32 R410A	2088	3.0	1.1475 6.27	0.13	3.76	
	PUHZ-SW100V/YAA	R410A	2088	4.2	8.77	1.6	3.76	
	PUHZ-SW120V/YHA	R410A	2088	4.6	9.61	2.9	6.06	
	PUHZ-SW160YKA	R410A	2088	7.1	14.83	4.0	8.36	
	PUHZ-SW200YKA	R410A	2088	7.7	16.08	5.2	8.36	
	PUHZ-SHW230YKA2	R410A	2088	7.1	14.83	8.4	17.54	

R32 REFRIGERANT

R32 REFRIGERANT PROPERTIES

Under the conditions shown below, there is a possibility that R32 could ignite.

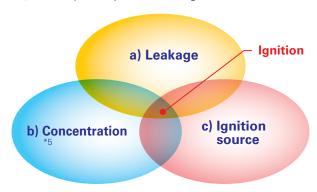

	R32	R410A	R22
Chemical formula	CH ₂ F ₂	CH ₂ F ₂ /CHF ₂ CF ₃	CHCIF2
Composition (blend ratio wt. %)	Single composition	R32/R125 (50/50 wt %)	Single composition
Ozone depletion potential (ODP)	0	0	0.055
Global warming potential (GWP) *1	675	2088	1810
LFL(vol.%) *2	13.3	_	_
UFL(vol.%) *3	29.3	-	_
Flammability *4	Lower flammability (2L)	No flame propagation (1)	No flame propagation (1)

^{*1} IPCC 4th assessment report.

Although R32 is classified as low flammability, the possibility of igniting can be eliminated by ensuring the following three points.



WARNING

a) Do not leak refrigerant.

<Installation> ·Vacuum drying should be done. Air purging is prohibited.

Follow "Piping Installation" on page 245.

 $< \! \mathsf{Repair}/\! \mathsf{Relocation}/\! \mathsf{Removal} \! > \cdot \mathsf{Pump} \ \mathsf{down} \ \mathsf{or} \ \mathsf{recovering} \ \mathsf{refrigerant} \ \mathsf{should} \ \mathsf{be} \ \mathsf{done}.$

b) Prevent concentration.

·Ventilate during installation and servicing, such as open the door or window and use a fan.

·Follow "Installation Restrictions" on page 260.

c) Keep ignition source away from the unit.

·Do not braze pipe and unit which contain refrigerant. Before brazing, refrigerant should be recovered.

Do not install unit while the electricity is turned on. Turn off electricity at the fuse box and check the wiring using a tester.

Do not smoke when working or during transportation of the product.



CAUTION

Both R32 / R410A emit a toxic gas when coming into contact with an open flame.

^{*2} LFL : Lower flammable limit

^{*3} UFL: Upper flammable limit

^{*4} ISO 817:2014

^{*5} R32 consistency is higher than LFL*1 and lower than UFL*2.

INSTALLATION RESTRICTIONS

In order to prevent the refrigerant from igniting, use the following instructions during installation.

1) Indoor Units

Install in a room with a floor area of Amin* or more, corresponding to refrigerant quantity M.


(M = factory-charged refrigerant + locally added refrigerant)

Install the indoor unit so that the height from the floor to the bottom of the indoor unit is hO^{\ast} .

* Refer to table and drawings below.


<m series=""></m>		<p s<="" th=""><th>eri</th><th>es> ①</th><th>)</th><th></th><th>2</th><th><mxz \$<="" th=""><th>Series></th><th><only for<="" th=""><th>r MFZ-KT/KW></th></only></th></mxz></th></p>	eri	es> ①)		2	<mxz \$<="" th=""><th>Series></th><th><only for<="" th=""><th>r MFZ-KT/KW></th></only></th></mxz>	Series>	<only for<="" th=""><th>r MFZ-KT/KW></th></only>	r MFZ-KT/KW>
M[kg]	Amin [m²]	M[k	gl	Amin [m²]		M[kg]	Amin [m²]	M[kg]	Amin [m²]	M[kg]	Amin[m²]
0.7	1.7	1.0)	4		<1.84	.No requirements	1.0	3	1.00	
0.8	2.0	1.5	5	6		1.84	6	1.5	4.5	1.50	No
		2.0)	8		2.0	6	1.5		1.50	requirements
0.9	2.2	2.5	5	10		2.5	7	2.0	6	1.80	
1.0	2.5	3.0)	12		3.0	9	2.5	7.5	1.84	3.63
1.1	2.7	3.5	5	14		3.5	10	3.0	9	1.90	3.75
10	0.0	4.0)	16		4.0	11	0.5	40	0.00	
1.2	3.0	4.5	5	20		4.5	13	3.5	12	2.00	3.95
1.3	3.2	5.0)	24		5.0	14	4.0	15.5	2.10	4.15
1.4	3.4	5.8	5	29		5.5	15	4.5	20	2.20	4.34
1.5	3.7	6.0	_	35		6.0	17	5.0	24	2.30	4.54
		6.5	5	41		6.5	18				-
1.6	3.9	7.0)	47		7.0	20	5.5	29	2.40	4.74
1.7	4.2	7.5	5	54		7.5	21	6.0	35		
1.8	4.4	8.0)	62		8.0	22	6.5	41		
		8.8	5	69		8.5	24				
1.9	4.6	9.0)	78		9.0	25	7.0	47		
2.0	4.9	9.5	5	87		9.5	26	7.5	54		
		①For	wa	II-mount	ec	l, ceiling					

①For wall-mounted, ceiling suspended, cassette and concealed ②For floor-standing (PSA-M)

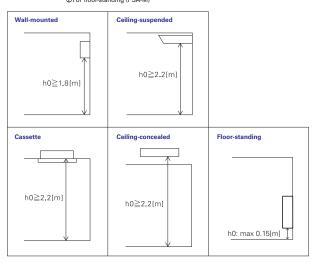

2) Outdoor Units

Install outdoor units in a place where at least one of the four sides is open or in a sufficiently large space without depressions.




If you unavoidably install a unit in a space where all four sides are blocked or there are depressions, confirm that one of these situations (A, B or C) is satisfied.

A Secure sufficient installation space (minimum installation area Amin).


Install in a space with an installation area of Amin* or more, corresponding to refrigerant quantity M. (M = factory-charged refrigerant + locally added refrigerant)

* Refer to table and drawings below

M[kg]	Amin[m²]
1.0	12
1.5	17
2.0	23
2.5	28
3.0	34
3.5	39
4.0	45
4.5	50
5.0	56
5.5	62
6.0	67
6.5	73
7.0	78
7.5	84
8.0	89
8.5	95
9.0	100
9.5	106




B Install in a space with a depression height of ≤ 0.125 [m].

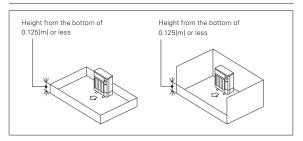

Create an appropriate open ventilation area.

Make sure that the width of the open area is 0.9[m] or more and the height of the open area is 0.15[m] or more.

However, the height from the bottom of the installation space to the bottom edge of the open area should be 0.125[m] or less. More than 75% of the ventilation area should be open to allow air circulation.



Note These countermeasures (A, B or C) are for keeping safety not for specification guarantee.

• Models with R32 Refrigerant: MSZ-L Series (single connection)

IOSSNAY SYSTEM







SELECTION

LOSSNAY lineup consists of two types of ventilation: Energy Recovery Ventilation (ERV) and Heat Recovery Ventilation (HRV). Choose the model that best matches your building layout and indoor environment.

LOSSNAY LINEUP

Туре	Core	Model	Airflow	150 CMH	250 CMH	350 CMH	500 CMH	650 CMH	800 CMH	1000 CMH	1600 CMH	2000 CMH	2500 CMH
	ERV		Single decker	•	•	•	•	•	•	•			
LOSSNAY	ERV	LGH-RVX3 Series	Double decker								•	•	
EGGIVAI	ERV	LGH-RVXT3 Series									•	•	•
	HRV	LGH-RVS Series	1				•		•	•			
LOSSNAY with Dx-Coil Unit	ERV	GUF Series					•			•			


^{*}ERV = Energy recovery ventilator *HRV = Heat recovery ventilator

PRODUCT LINEUP

Comm	ercial	Reside	ential
Ceiling Cond	cealed Type	Vertical Type	Wall mounted Type
LGH-RVX3 Series ERV A commercially oriented system that can be used to deliver high performance and functions virtually anywhere.	LGH-RVXT3 Series ERV Thin, large airflow models of the LGH series that deliver high performance and functions.	VL-CZPVU Series HRV Vertical type for residential use. Centralized ventilation with sensible heat exchange.	VL-50(E)S ₂ -E ERV VL-50SR ₂ -E Wall mounted models for smaller air volumes. They may be installed both horizontally and vertically.
LGH-RVS Series HRV Sensible heat models of the LGH series that can also be installed in sanitary areas.	GUF Series ERV (LOSSNAY with Dx-Coil Unit) Heat recovery units with a heating and cooling system that uses the CITY MULTI outdoor units as a heat source.		

^{*}ERV: Enegy recovery ventilator *HRV: Heat recovery ventilator


Commercial Use LOSSNAY




LGH SERIES

Optimized Indoor Air Quality through Temperature and Humidity Exchange by LOSSNAY


LOSSNAY is a total heat exchange ventilation system that uses paper characteristics to perform temperature (sensible heat) and humidity (latent heat) exchange.

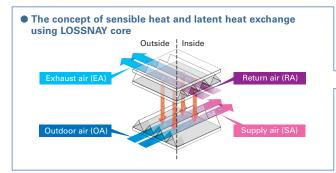


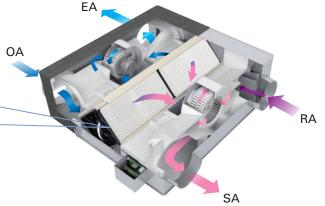

What is Improved by Introducing LOSSNAY?

Ventilation with maximized comfort

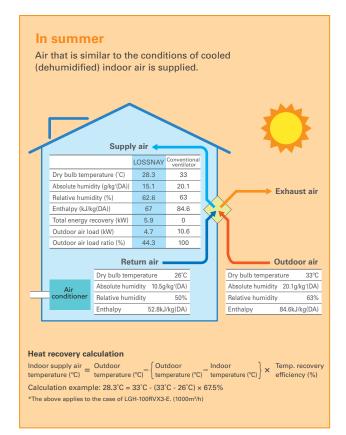

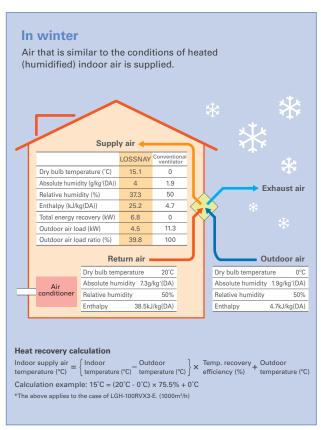


Installation Image

Mitsubishi Electric offers Energy Recovery Ventilation and Heat Recovery Ventilation solutions for optimizing building air quality by using LOSSNAY.


Energy Recovery Ventilation

A total heat exchange ventilation system that uses paper characteristics (LOSSNAY core) to perform temperature (sensible heat) and humidity (latent heat) exchange.

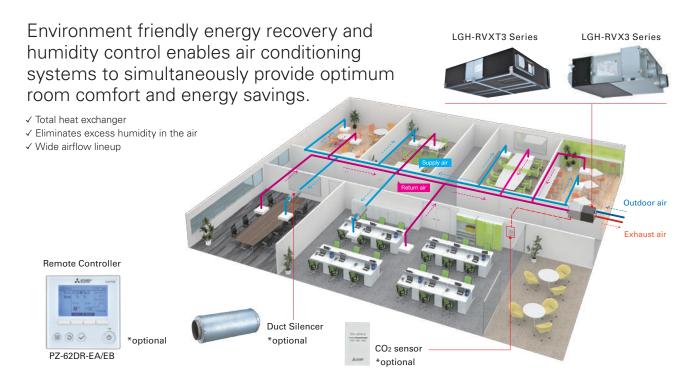

Heat Recovery Ventilation

A heat exchange ventilation system that uses a heat exchanger (LOSSNAY core) to perform temperature (sensible heat) exchange.

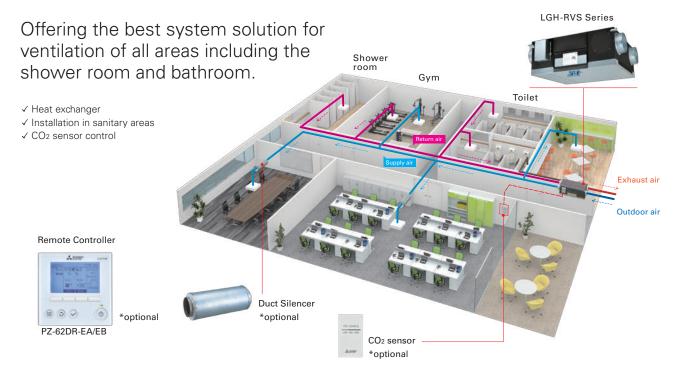



Features of LGH Series

Controllability

Flexible airflow setting

The default fan speed value (Fan speed 1: 25%, Fan speed 2: 50%, Fan speed 3: 75%, and Fan speed 4: 100%) of both supply air and exhaust air can be adjusted flexibly. Within the range between 25% and 100%, airflow can be adjusted by 5% increments to satisfactorily meet the designed airflow rate.



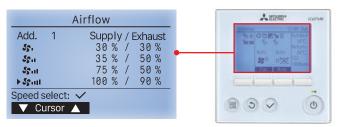

PZ-62DR-EA/EB

CO₂ sensor

A CO₂ sensor connected directly to a LOSSNAY RVX3 unit optimizes the fan speed according to the detected CO₂ level. It improves total heat exchange efficiency and contributes to energy savings.




Wall-mounted CO₂ sensor (PZ-70CSW-E)


Or

Duct-mounted CO₂ sensor (PZ-70CSD-E)

Two types of CO2 sensors are available: wall-mounted and duct-mounted types. Power is supplied to the CO2 sensor from the LOSSNAY board.

Fan speed automatically changes from 25% to 100% (16 steps) depending on the $\rm CO_2$ concentration level.

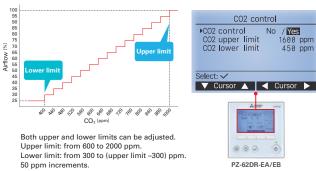

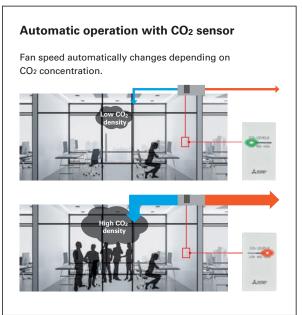


Dual Barrier Coating



A water-repellent effect is achieved by a coating film that has nano-sized concave-convex structures formed by silica nanoparticles made of water-repellent fluororesin, in addition to micron-sized concave-convex structures formed by combining micron-sized special-shaped particles (silicate) with the silica nanoparticles. The uneven structure forms an air layer that suppresses the adhesion of dust and sand that contain a lot of humidity, and reduces the amount of dirt that adheres to the substrate.

■ Conceptual image of dual barrier coating

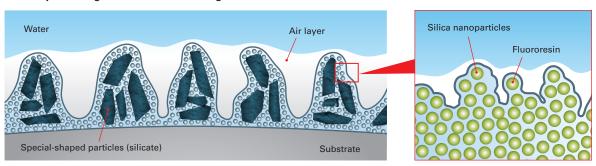


Installation Work

Short Commissioning Time with the New Remote Controller

New Remote Controller PZ-62DR-EA/EB, Supply and Exhaust air volume from FS1 to FS4 directly on one screen. It can also be operated while the fan motor is sensing the air volume.

By using PZ-62DR-EA/EB, the commissioning time for LGH-RVX3 is reduced by 75%*1 compared to the previous RVX series.

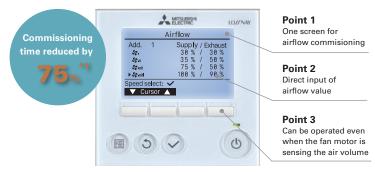

PZ-62DR-EA/EB


^{*1:} The average reduction rate when installing LGH-100RVX-E with PZ-61DR-E and LGH-100RVX3-E with PZ-62DR-EA/EB.

Setting work involves changing the supply/exhaust air volume. The time that can be reduced varies depending on the operator and work conditions.

RVX3 SERIES

High Static Pressure


External static pressure has been improved compared to previous models. Accompanying this increase in external static pressure, the selection range of models and filters has also expanded. Furthermore, flexible duct work has become possible.

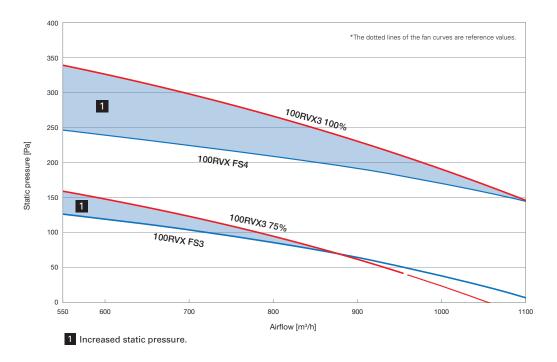

Flexible Vertical and Horizonal Installation

For RVX3 series, vertical installation has become possible for greater flexibility of installation locations. By using optional parts, the unit can be installed in places such as the machine room where only vertical installation is possible.




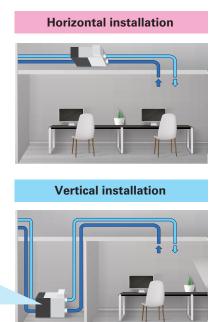

RVXT3 SERIES


Large Airflow as One Unit: Leader-follower Function

- Multiple LOSSNAY units can be operated in synchronization as a single large airflow unit.
- A maximum of four units can be connected.
 In the case of four LGH-250RVXT3-E units, total air volume is approx. 10,000m³/h.*
 - *Actual aiflow depends on system design and site condition.
- Only same model can be in one group.
- PZ-62DR-EA/EB connection is required for this control.
- The maximum number of LOSSNAY units that can be connected in one group is four (one leader unit and three follower units).

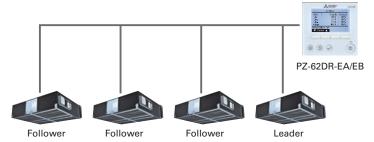

Adaptable Installation: LR Switching

- Airflow direction can be changed using DIP switches.
- The indoor (SA/RA) and outdoor (OA/EA) sides can be switched depending on installation space.
- This facilitates ductwork and allows enough space for maintenance.
 - *The unit cannot be flipped upside down.

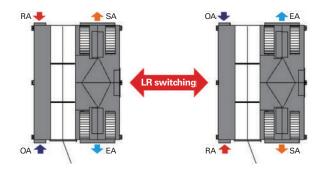

RVS SERIES


Easy Installation

Light frame

Being frame is one of the most important factors for installation. The light frame of the LGH-RVS series provides an advantage in terms of installation cost and safety.


Easy drain piping

- Only one drain piping for both supply air and exhaust air
- 360-degree drain pipe connection
- Trap piping work is NOT required owing to an internal backflow stopper

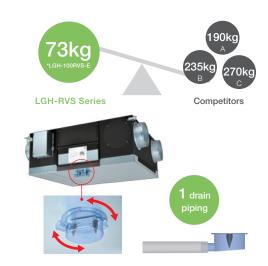

LOSSNAY with Dx-Coil Unit

GUF SERIES



The GUF Series consists of a heat recovery unit (LOSSANY core) and a DX coil. Along with LOSSANY ventilation, it can be used as a main air conditioner when the load is light, and as a supplemental air conditioner in high load.

These units can be used with R410A.

Outdoor units are available for the GUF-RD series (for details, see Mitsubishi Electric's CITY MULTI catalog).


R410A Refrigerant Units

Mod	del Size	P112	P125	P140	P200	P250	P300	P350	P400	P450	P500	P550	P600	P650	P700	P750	P800
Y Series	PUHY-P-YNW-A2				•	•	•	•	•	•	•	•	•	•	•	•	•
R2 Series	PURY-P-YNW-A2				•	•	•	•	•	•	•	•	•	•			
	PUMY-SP	•	•	•													
PUMY Series	PUMY-P	•	•	•	•												

LOSSNAY Ventilation and Air Conditioning

The OA (outdoor air) Processing Unit creates an optimum environment while providing substantial energy savings. It delivers forced air ventilation, heat recovery, heating and cooling, and air purification. This total air conditioning system keeps indoor air fresh and comfortable all year round, and keeps it free of contaminants that could cause ailments such as sick building syndrome. Inside the OA Processing Unit is the LOSSNAY core, a heat exchange unit that transfers heat efficiently, and cuts ventilation load by as much as 70%. A remarkable product found nowhere else, this special combination of functionality and performance contained within a single unit ensures users ample comfort, good health, and energy savings.

GUF-RD type

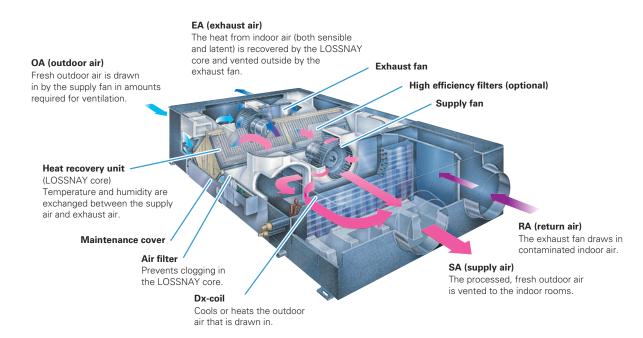


Specifications RVX3 SERIES

Model			LGH-15	RVX3-E			LGH-25	RVX3-E			LGH-35	RVX3-E	
Electrical power sup	ply	220	-240V/50H	lz, 220V/6	0Hz	220	-240V/50H	lz, 220V/6	0Hz	220	-240V/50H	tz, 220V/6	0Hz
Fan speed		4	3	2	1	4	3	2	1	4	3	2	1
Default Airflow setting	ıg	100%	75%	50%	25%	100%	75%	50%	25%	100%	75%	50%	25%
Input power (W)*1		55	30	15	10	75	42	21	11	120	61	29	15
Airflow ^{*1}	(m^3/h)	150	113	75	38	250	188	125	63	350	263	175	88
(L/s)		42	31	21	10	69	52	35	17	97	73	49	24
Specific fan power [W/(L/s)]		1.32	0.96	0.72	0.96	1.08	0.81	0.60	0.63	1.23	0.84	0.60	0.62
External static pressure (Pa)*1		120	68	30	8	120	68	30	8	160	90	40	10
Temperature exchange	Heating	73.5	75.5	78.0	81.5	75.5	78.5	81.0	88.0	75.0	77.0	79.0	82.0
efficiency (%)*1	Cooling	65.5	70.5	73.5	78.0	70.5	76.5	79.0	85.0	66.5	71.0	74.0	79.0
Enthalpy exchange	Heating	70.5	73.5	76.5	80.5	69.0	72.0	75.5	84.0	72.0	74.5	77.5	80.0
efficiency (%)*1	Cooling	58.0	62.0	66.0	73.0	59.0	63.5	68.0	75.0	60.0	64.5	68.5	74.5
Noise (dB)*2		27.0	22.0	18.0	17.0	30.5	25.0	19.5	17.0	30.5	24.5	19.0	17.0
Exhaust air transfer ratio (%)*3				5				5			ţ	5	
Weight (kg)			2	.0			2	2			3	0	
Maximum input power (W)			7	'4			1	19			19	96	


^{*}Input power, efficiency, and noise are based on rated air volume, 230V/50Hz and horizontal installation. *1 : Measured according to ISO 16494-1: 2022

2: A-weighted sound pressure level measured at 1.5m under the center of the unit in an anechoic chamber. *3: Measured according to EN308: 2022 / FS3


Characteristic curve



*The dotted lines of the fan curves are reference values





*The dotted lines of the fan curves are reference values.




*The dotted lines of the fan curves are reference values.

Outline drawings

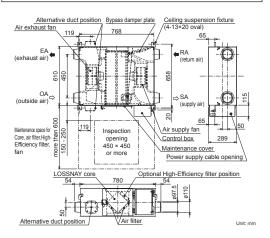



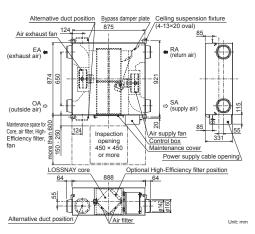


Model		l	LGH-50	RVX3-E		ا	LGH-65	RVX3-E		l	LGH-80	RVX3-E	
Electrical power sup	ply	220	-240V/50H	łz, 220V/6	0Hz	220	-240V/50H	łz, 220V/6	0Hz	220	-240V/50H	łz, 220V/6	0Hz
Fan speed		4	3	2	1	4	3	2	1	4	3	2	1
Default Airflow setting	g	100%	75%	50%	25%	100%	75%	50%	25%	100%	75%	50%	25%
Input power (W)*1		185	81	34	15	245	120	51	20	343	160	64	23
Airflow ^{*1}	(m ³ /h)	500	375	250	125	650	488	325	163	800	600	400	200
All llow	(L/s)	139	104	69	35	181	135	90	45	222	167	111	56
Specific fan power [W/(L/s)]*		1.33	0.78	0.49	0.43	1.36	0.89	0.56	0.44	1.54	0.96	0.58	0.41
External static pressure (Pa)*1		150	85	38	10	150	85	38	10	170	96	43	11
Temperature exchange	Heating	70.5	71.5	73.5	75.0	72.5	75.0	78.5	82.0	75.0	76.5	78.0	80.0
efficiency (%)*2	Cooling	63.5	67.0	71.0	73.0	65.0	70.0	74.5	80.0	65.0	70.0	75.5	78.0
Enthalpy exchange	Heating	68.5	69.5	72.0	73.0	69.5	72.0	76.5	80.0	62.0	65.0	70.5	73.5
efficiency (%)*2	Cooling	53.5	58.0	63.0	68.0	55.5	60.0	66.5	74.0	54.5	58.5	65.0	70.5
Noise (dB) ^{*3}		35.0	27.0	21.0	17.0	37.5	31.5	24.0	17.5	39.0	33.5	25.0	18.0
Exhaust air transfer ratio (%)*4			į	5			Ę	5		5			
Weight (kg)			3	3			4	1			4	7	
Maximum input power (W)			27	77			36	60			50	03	


*Input power, efficiency, and noise are based on rated air volume, 230V/50Hz and horizontal installation.

- *1: Measured according to (LGH-50RVX3-E) ISO 16494-1: 2022, (LGH-65/80RVX3-E) EN13053: 2019
 *2: Measured according to (LGH-50RVX3-E) ISO 16494-1: 2022, (LGH-65/80RVX3-E) EN308: 2022
 *3: A-weighted sound pressure level measured at 1.5m under the center of the unit in an anechoic chamber. *4: Measured according to EN308: 2022 / FS3


Characteristic curve



*The dotted lines of the fan curves are reference values.





*The dotted lines of the fan curves are reference values.




*The dotted lines of the fan curves are reference values

Outline drawings

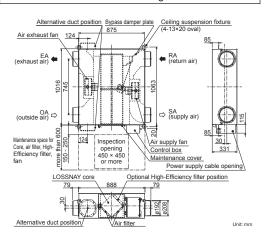

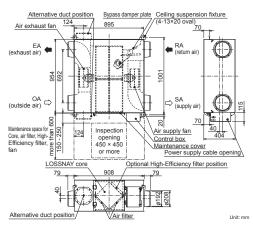

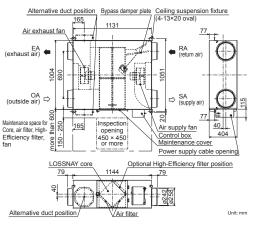

*Specifications may be subject to change without notice.


Model		L	.GH-100	RVX3-I	E	L	.GH-160	RVX3-l		LGH-200RVX3-E			
Electrical power sup	ply	220	-240V/50H	lz, 220V/6	0Hz	220	-240V/50H	lz, 220V/6	0Hz	220	-240V/50H	łz, 220V/6	0Hz
Fan speed		4	3	2	1	4	3	2	1	4	3	2	1
Default Airflow setting	ıg	100%	75%	50%	25%	100%	75%	50%	25%	100%	75%	50%	25%
Input power (W)*1		438	210	83	27	687	324	128	45	855	416	163	57
Airflow ^{*1}	(m ³ /h)	1000	750	500	250	1600	1200	800	400	2000	1500	1000	500
AIIIIOW	(L/s)	278	208	139	69	444	333	222	111	556	417	278	139
Specific fan power [W/(L/s)]*		1.58	1.01	0.60	0.39	1.55	0.97	0.58	0.41	1.54	1.00	0.59	0.41
External static pressure (Pa)*1		190	107	48	12	170	96	43	11	170	96	43	11
Temperature exchange	Heating	75.5	77.0	79.5	83.5	75.0	76.5	78.0	80.0	76.5	77.5	79.5	83.5
efficiency (%)*2	Cooling	67.5	72.0	77.0	82.5	65.0	70.0	75.5	78.0	66.5	71.5	76.0	82.5
Enthalpy exchange efficiency (%) ²	Heating	60.5	63.0	68.5	75.5	62.0	65.0	70.5	73.5	60.5	64.0	67.5	76.0
efficiency (%)*2	Cooling	55.5	61.0	66.0	73.5	54.5	58.5	65.0	70.5	57.0	60.0	65.0	71.0
Noise (dB)*3		40.0	35.0	27.0	18.5	41.0	35.0	26.0	18.0	41.5	36.0	27.5	18.0
Exhaust air transfer ratio (%)*4			ţ	5			ţ	5		5			
Weight (kg)			5	3			9	6			10	08	
Maximum input power (W)			64	16			79	98			417 278 139 1.00 0.59 0.41 96 43 11 77.5 79.5 83.5 71.5 76.0 82.5 64.0 67.5 76.0 60.0 65.0 71.0 36.0 27.5 18.0		

*Input power, efficiency, and noise are based on rated air volume, 230V/50Hz and horizontal installation.

*1: Measured according to EN13053: 2019 *2: Measured according to EN308: 2022


*3: A-weighted sound pressure level measured at 1.5m under the center of the unit in an anechoic chamber. *4: Measured according to EN308: 2022 / FS3

Characteristic curve




*The dotted lines of the fan curves are reference values

LGH-160RVX3-E




*The dotted lines of the fan curves are reference values.


LGH-200RVX3-E





*The dotted lines of the fan curves are reference values

Outline drawings

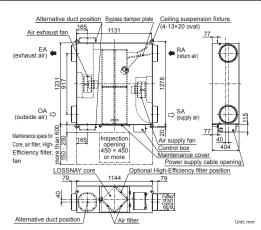





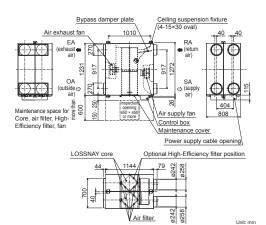



RVXT3 SERIES


Model		ı	LGH-160	RVXT3-E		ı	LGH-200	RVXT3-E		LGH-250RVXT3-E			
Electrical power supp	oly	380-415	V/3N~ 50H	łz, 380V/3	N~ 60Hz	380-415	V/3N~ 50H	łz, 380V/3	N~ 60Hz	380-415	V/3N~ 50H	lz, 380V/3	N~ 60Hz
Fan speed		4	3	2	1	4	3	2	1	4	3	2	1
Default airflow setting	9	100%	75%	50%	25%	100%	75%	50%	25%	100%	75%	50%	25%
	L1-N	0	0	0	0	0	0	0	0	0	0	0	0
Input power (W)*1	L2-N	354	184	72	23	522	249	96	28	724	348	142	43
, , , ,	L3-N	354	184	72	23	522	249	96	28	724	348	142	43
Airflow*1	Total	708	368	144	46	1044	498	192	56	1448	696	284	86
Airflow ^{*1}	(m³/h)	1600	1200	800	400	2000	1500	1000	500	2500	1875	1250	625
All llow	(L/s)	444	333	222	111	556	417	278	139	694	521	347	174
Specific fan power (W/(L/s))*1		1.59	1.10	0.65	0.41	1.88	1.20	0.69	0.40	2.09	1.34	0.82	0.50
External static pressure	(Pa) ^{*1}	190	107	48	12	190	107	48	12	190	107	48	12
Temperature exchange	Heating	82.0	83.0	85.5	88.0	80.0	81.0	83.0	86.0	77.0	78.0	80.0	84.0
efficiency (%) ^{*2}	Cooling	70.0	75.0	79.0	83.0	67.5	73.0	78.0	82.0	65.0	70.5	76.5	81.0
Enthalpy exchange	Heating	80.0	81.0	83.0	85.5	78.5	79.5	81.5	84.5	75.0	76.0	78.0	81.5
efficiency (%)*2	Cooling	61.5	65.5	73.0	78.0	56.5	61.0	67.5	75.0	54.0	59.0	66.0	73.0
Noise (dB)*3		38.0	33.0	26.0	19.5	40.0	35.0	28.0	21.0	44.0	38.0	31.5	23.0
Exhaust air transfer ratio	(%) ^{*4}		5	.0			5	.0			5	.0	
Weight (kg)			17	72		172				172			
Maximum input power (W) (380-415V 3N~ 50Hz/380V 3N~ 60Hz)	Total		740-72	20/740			1060-10	40/1060			1480-14	60/1500	

^{*}Input power, efficiency, and noise are based on rated airflow, 400V/50Hz. ** In bypass mode, the maximum airflow is 70% of heat recovery mode. The same applies to the Night-purge function.
*1: Measured according to EN13053: 2019 *2: Measured according to EN308: 2022
*3: A-weighted sound pressure level measured at 1.5m under the center of the unit in an anechoic chamber. *4: Measured according to EN308: 2022 / 75% fan speed


Characteristic curve







*The dotted lines of the fan curves are reference values. *Leader-follower function is not available when external static pressure is more than 460Pa.



*The dotted lines of the fan curves are reference values. *Leader-follower function is not available when external static pressure is more than 460Pa.

Outline drawings


LGH-160RVXT3-E

LGH-200RVXT3-E

LGH-250RVXT3-E



SA [supply air]
EA [exhaust air outlet]
RA [return air]
OA [outside air intake]
*1: LR switching is OFF (Factory setting)
*2: LR switching is ON

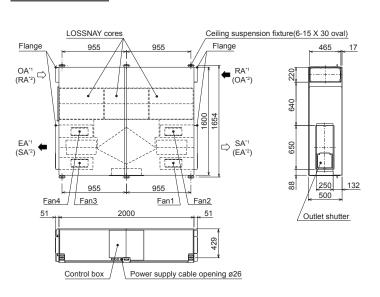

*Specifications may be subject to change without notice

Unit (mm)

RVS SERIES

Model			LGH-50	RVS-E			LGH-80	RVS-E		LGH-100RVS-E			
Electrical power supp	oly	220	-240V/50H	łz, 220V/6	0Hz	220	-240V/50H	łz, 220V/6	0Hz	220	-240V/50H	łz, 220V/6	0Hz
Fan speed		100%	75%	50%	25%	100%	75%	50%	25%	100%	75%	50%	25%
Input power (W)		190	110	60	25	325	175	85	32	445	225	100	35
Airflow	(m ³ /h)	500	375	250	125	800	600	400	200	1000	750	500	250
All llow	(L/s)	139	104	69	35	222	167	111	56	278	208	139	69
Specific fan power (V	V/(L/s))	1.37	1.06	0.86	0.72	1.46	1.05	0.77	0.58	1.60	1.08	0.72	0.50
External static pressure (Pa)		150	84	38	9	170	96	43	11	190	107	48	12
Temp. exchange efficie	ency (%)	87.0	89.0	91.0	93.0	82.0	84.0	86.0	90.0	82.0	84.0	86.0	90.0
Noise (dB)		33.0	27.0	22.0	18.0	36.0	30.0	25.0	18.0	37.0	32.0	24.0	18.0
Exhaust air transfer r	atio (%)		ţ	5			į	5				5	
Weight		55kg (67k	kg with ma	ximum dra	ain water)	63kg (77k	kg with ma	ximum dra	ain water)	73kg (89l	kg with ma	ximum dra	ain water)
Maximum input power (W) (220-240V 50Hz/220V 60Hz) Total 36		361-36	60/359			622-62	21/619		691-782/679				


The input power, the efficiency and the noise are based on the rating air volume, and 230V/50Hz. Temperature exchange efficiency (%) is measured at indoor DB 20°C/ WB 15°C and outdoor DB 5°C/ WB 3°C. It is measured according to ISO16494.


When the indoor humidity is low and condensation in the heat exchanger does not occur, the exchange efficiency may be decreased in winter.


The absolute humidity of RA shall be lower than 0.0139kg/kg(DA) in winter and the relative humidity of RA shall be lower than 90%RH through the year.

Examples of the absolute humidity 0.0139kg/kg(DA) are 20.7°C 90%RH, 25°C 70%, 30°C 50% etc.


Characteristic curve

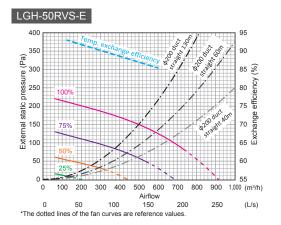


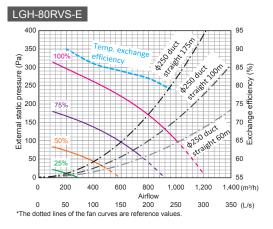


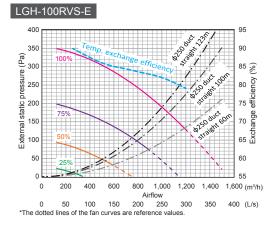

Outline drawings

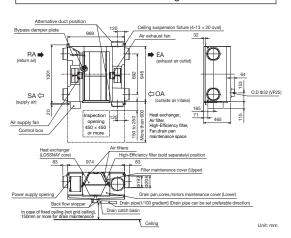

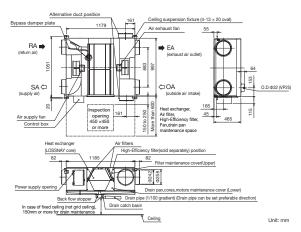

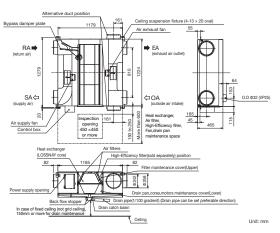

GUF SERIES

Model	Model Electrical power supply			GUF-5	0RD4			GUF-1	00RD4			
Electrical p	ower supply	y		220-240	V/50Hz			220-240	0V/50Hz			
Ventilation	mode		Heat reco	very mode	Bypass	s mode	Heat reco	very mode	Bypas	s mode		
Fan speed			High	Low	High	Low	High	Low	High	Low		
Running cu	urrent (A)		1.15	0.70	1.15	0.70	2.20	1.73	2.25	1.77		
Input powe	er (W)		235-265	150-165	235-265	150-165	480-505	370-395	490-515	385-410		
Airflow		(m³/h)	500	400	500	400	1000	800	1000	800		
All HOW		(L/s)	139	111	139	111	278	222	278	222		
External st	atic pressur	e (Pa)	140	90	140	90	140	90	140	90		
Temperature exchange efficiency (%)			77.5	80	_	_	79.5	81.5	_			
Enthalpy exchange Heating		68	71	-	_	71	74	_	_			
efficiency (%)	Cooling	65	67	_	_	69	71	_	_		
Cooling ca	pacity (kW)			5.57 (1.94)		11.44 (4.12)					
Heating ca	pacity (kW)			6.21 (2.04)		12.56 (4.26)					
Capacity equi	ivalent to the ir	ndoor unit		P	32			P	63			
	Humidifying	9		-	-			-	_			
Humidifier	Humidifying ca	pacity (kg/h)		-	-			-	=			
	Water supply pressure			-	-			-	_			
Noise (dB) (Measured at 1.5m under the center of the unit)		33.5-34.5	29.5-30.5	35-36	29.5-30.5	38-39	34-35	38-39	35-36			
Weight (kg	Weight (kg)			4	8		82					

*Cooling/Heating capacity indicates the maximum value at operation under the following condition.

Cooling: Indoor: 27°C DB/19°C WB Outdoor: 35°C DB/24°C WB


Heating: Indoor: 20°C DB/13.8°C WB Outdoor: 7°C DB/6°C WB

*The figures in () indicates heat recovering capacity of heat exchange core.

*Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.


*When the total capacity of indoor units connected to 1 outdoor unit (PUHY or PURY) exceeds the capacity of the outdoor unit, the total capacity of GUF needs to be 30% and less of the connected outdoor unit capacity.


Characteristic curve



GUF-100RD4 Exchange efficiency (%) 09 06 06 250mm dia straight pipe 400 50 100m 300 (Pa) 80m 20 60m Static pressure 40m 100 20m 400 (m³/h) 150 200 250 300 350 400 (L/s) Airflow 50

Outline drawings

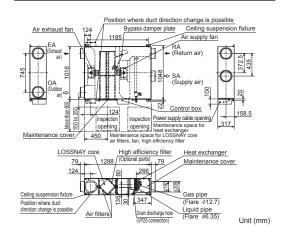


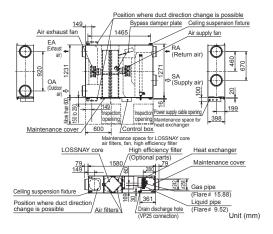

*Specifications may be subject to change without notice.

Mitsubishi Electric Ventilator Selection Tool

Mitsubishi Electric Ventilator Selection Tool is software for selecting optimal ventilation fans. In addition to supporting the selection of a sufficient model, it also provides necessary technical documents.

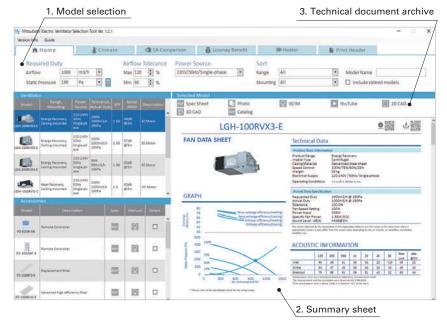

1. Model selection

An appropriate model can be selected simply by inputing the necessary air volume and static pressure. Optional parts that go with the selected model will also be listed.

2. Summary sheet

Data of the selected model can be downloaded by PDF file. SFP at duty, acoustic information, and energy saving calculation can be also download (varies by model).

3. Technical document archive

Other technical data needed for ventilation system design are also available.







Spec sheet

2D CAD

3D CAD
...and more!


LOSSNAY YouTube Channel

LOSSNAY YouTube channel provides you videos on LOSSNAY features, structures, and more! Please check the 2D code below for more details.

■RVX3 Series features



■LOSSNAY structure



■How to select a model





^{*}This image is for illustration purpose and actual data may vary.

^{*}Ratings and specifications may change due to product improvements or modifications.

CONTROL TECHNOLOGIES

Compatibility Table

Image Image
Dimension Remote Controller Compatibility Table
Remote Controller Compatibility Table PZ-43SMF-E
Model name PZ-62DR-EA/EB PZ-43SMF-E Compatible series LGH-RVX3/RVXT3/RVS LGH-RVX3/RVXT3/RVS Fan speed selection 4 fan speeds and Auto (Auto is available when using a CO2 sensor) 2 of 4 fan speeds Control with a CO2 sensor (Mitsubishi Electric and field supply) Yes No Ventilation mode selection Energy recovery/Bypass/Auto Energy recovery/Bypass/Auto Night purge Yes No Function setting with remote controller Yes No Bypass temp. free setting Yes No Flexible airflow setting (Both supply and exhaust fan speeds can be set separately from 25% to 100% in 5% pitches) No ON/OFF timer Yes No Auto-off timer Yes No Weekly timer Yes No Fan speed timer Yes No Operation restrictions Yes No
Compatible series LGH-RVX3/RVXT3/RVS LGH-RVX3/RVXT3/RVS Fan speed selection 4 fan speeds and Auto (Auto is available when using a CO2 sensor) 2 of 4 fan speeds Control with a CO2 sensor (Mitsubishi Electric and field supply) Yes (Fan speed automatically changes from 25% to 100% depending on the CO2 concentration*) No Ventilation mode selection Energy recovery/Bypass/Auto Energy recovery/Bypass/Auto Night purge Yes No Function setting with remote controller Yes No Bypass temp. free setting Yes No Flexible airflow setting (Both supply and exhaust fan speeds can be set separately from 25% to 100% in 5% pitches) No ON/OFF timer Yes No Auto-off timer Yes No Weekly timer Yes No Fan speed timer Yes No Operation restrictions Yes No
Fan speed selection 4 fan speeds and Auto (Auto is available when using a CO2 sensor) Yes (Fan speed automatically changes from 25% to 100% depending on the CO2 concentration*) Ventilation mode selection No Energy recovery/Bypass/Auto Energy recovery/Bypass/Auto Function setting with remote controller Yes Flexible airflow setting ON/OFF timer Yes Auto-off timer Yes No Yes Auto-off timer Yes No No No Yes No No No Yes No No No No No No No No No N
Control with a CO2 sensor (Mitsubishi Electric and field supply) Ventilation mode selection Energy recovery/Bypass/Auto Energy recovery/Bypass/Auto Energy recovery/Bypass/Auto Energy recovery/Bypass/Auto Energy recovery/Bypass/Auto Energy recovery/Bypass/Auto No Function setting with remote controller Energy recovery/Bypass/Auto Yes No Function setting with remote controller Yes No Elexible airflow setting Yes (Both supply and exhaust fan speeds can be set separately from 25% to 100% in 5% pitches) ON/OFF timer Auto-off timer Yes No Weekly timer Yes No Operation restrictions
(Fan speed automatically changes from 25% to 100% depending on the CO2 concentration*) Ventilation mode selection Energy recovery/Bypass/Auto Energy recovery/Bypass/Auto Energy recovery/Bypass/Auto No Function setting with remote controller Yes No Bypass temp. free setting Yes Flexible airflow setting (Both supply and exhaust fan speeds can be set separately from 25% to 100% in 5% pitches) ON/OFF timer Yes Auto-off timer Yes No Weekly timer Yes No Operation restrictions
Night purge Yes No Function setting with remote controller Yes No Bypass temp. free setting Yes No Flexible airflow setting (Both supply and exhaust fan speeds can be set separately from 25% to 100% in 5% pitches) ON/OFF timer Yes Yes Auto-off timer Yes No Weekly timer Yes No Fan speed timer Yes No Operation restrictions
Function setting with remote controller Yes No Bypass temp. free setting Yes Flexible airflow setting (Both supply and exhaust fan speeds can be set separately from 25% to 100% in 5% pitches) ON/OFF timer Yes Auto-off timer Yes No Weekly timer Yes No Operation restrictions
Bypass temp. free setting Yes Yes (Both supply and exhaust fan speeds can be set separately from 25% to 100% in 5% pitches) ON/OFF timer Auto-off timer Yes No Weekly timer Yes No Operation restrictions
Flexible airflow setting (Both supply and exhaust fan speeds can be set separately from 25% to 100% in 5% pitches) ON/OFF timer Yes Auto-off timer Yes No Weekly timer Yes No Fan speed timer Yes No Operation restrictions
Flexible airflow setting (Both supply and exhaust fan speeds can be set separately from 25% to 100% in 5% pitches) ON/OFF timer Yes Auto-off timer Yes No Weekly timer Yes No Operation restrictions Yes No No No No No No No No No N
Auto-off timer Yes No Weekly timer Yes No Fan speed timer Yes No Operation restrictions
Weekly timer Yes No Fan speed timer Yes No Operation restrictions Yes
Fan speed timer Yes No Operation restrictions
Operation restrictions
Voc.
(ON/OFF, ventilation mode, fan speed)
Operation restrictions (fan speed skip setting) Yes
Screen contrast adjustment Yes No
Language selection Yes (17 languages) No (English only)
CO ₂ concentration indication (Mitsubishi Electric and field supply)
Filter cleaning sign Yes (Maintenance interval can be changed) Yes
LOSSNAY core cleaning sign Yes/No (RVS Series) No
Yes (Displays model name, serial number, contact information)
Error history Yes No
OA/RA/SA temp. display Yes No

^{*}When using a CO₂ sensor. Upper and lower limits may differ.

Remote Control Language Table

Language	English	German	Spanish	French	Italian	Russian	Portuguese	Swedish	Dutch	Turkish	Polish	Greek	Czech	Hungarian	Slovenian	Bulgarian	Danish
-EA	•	•	•	•		•			•	•	•		•	•		•	
-EB	•	•	•	•	•		•	•				•			•		•


CO₂ Sensors

 $Connecting \ a \ CO_2 \ sensor \ directly \ to \ the \ LOSSNAY \ unit \ will \ optimize \ fan \ speed \ according \ to \ the \ level \ of \ CO_2 \ detected.$

PZ-70CSD-E (Duct-mounted type)

Mounted in the duct with all the wiring hidden in the ceiling.






PZ-70CSW-E (Wall-mounted type)

Mounted on the wall. CO2 is monitored in 3 levels.





Vertical Installation Plates

PZ-1VS-E, PZ-2VS-E



Parts used to install RVX3 vertically.


EA side plate RA side plate


Change dimension table (Unit: mm)

Model	А	В	Weight (kg)	Applicable model
PZ-1VS-E	280	200	1.2	LGH-15 to 50RVX3-E
PZ-2VS-E	380	300	1.6	LGH-65 to 100RVX3-E

^{*}Not applicable to LGH-160/200RVX3-E

Dimension






Signal Output Terminal

PZ-4GS-E




The PCBs of RVX3, RVXT3, RVS have only one output terminal. By using PZ-4GS-E, four more output terminals can be added to the units.

Dimension



Wiring diagram



(Up to 1.5A for common terminals) *Wiring work must be performed by a qualified

Duct Silencer



The duct silencer connects to the LOSSNAY unit to reduce airflow noise.


Specifications

Model	Airflow	Attenu	uation of s	ound pow	er level [dB] at cen	ter freque	ency (disch	harge)
Model	(m³/h)	62.5Hz	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	8000Hz
PZ-100SS-E	50	0	3	5	7	6	6	6	8
FZ-10033-E	150	0	3	6	7	7	7	7	9
PZ-150SS-E	250	0	1	5	8	15	21	20	14
	350	0	1	4	8	14	21	21	16
DZ 20000 F	500	0	1	4	7	13	18	16	9
PZ-200SS-E	650	0	1	3	8	12	17	14	6
PZ-250SS-E	800	0	2	4	12	22	21	14	13
	1000	0	1	4	12	22	20	14	13

- Figures in the chart above are based on a comparison with a general steel duct of the same length.
 The silencer is placed just before the outlet during the measurement.
 When the airflow rate differs, attenuation will also differ from the chart above.
 Figures in the chart above are flat (not-weighted) values.

- Some ratings and specifications may change due to product improvements or modifications.

Dimension

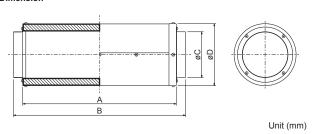

Unit (mm)

Change dimension table (Unit: mm)

. 5			,			
Model	А	В	С	D	Connectable Duct	Weight (kg)
PZ-100SS-E	400	450	99	152	ø100	1.9
PZ-150SS-E	500	560	149	202	ø150	3.5
PZ-200SS-E	600	660	199	252	ø200	5.3
PZ-250SS-E	600	660	249	332	ø250	8.9

Filters

Lineup and Classification

LOSSI	YAY			Filter										
						Classification								
	Fil	ter												
Model	Standard Setting	Optional Setting	Name	Model	Material	ISO 16890: 2016	EN779: 2012							
A	•		Replacement filter (Coarse 60% filter)	PZ-**RF3-E	Non-woven fabric	Coarse 60%	_							
	•		Advanced high-efficiency filter (ePM1 75% filter)	PZ-**RFP3-E	Synthetic fiber	ePM1 75%, ePM2.5 80%, ePM10 95%	_							
		●*1	High-efficiency filter (M6 filter)	PZ-**RFM3-E	Synthetic fiber	-	M6							
LGH-RVX3 Series	LGH-RVX3 Series ●*1		Advanced high-efficiency filter (F8 filter)	PZ-**RFH3-E	Synthetic fiber	-	F8							
-	•		Replacement filter (Coarse 60% filter)	PZ-250TRF-E	Non-woven fabric	Coarse 60%	-							
		•	Advanced high-efficiency filter (ePM1 75%)	PZ-250TPF-E	Synthetic fiber	ePM1 75%, ePM2.5 80%, ePM10 95%	-							
		●*1	High-efficiency filter (M6 filter)	PZ-250TMFR-E	Synthetic fiber	-	M6							
LGH-RVXT3 Series		●*1	Advanced high-efficiency filter (F8 filter)	PZ-250THFR-E	Synthetic fiber	-	F8							
	•		Replacement filter (Coarse 50% filter)	PZ-S**RF-E	Non-woven fabric	Coarse 50%	G3							
		•	High-efficiency filter (ePM10 80% filter)	PZ-S**RFM-E	Synthetic fiber	ePM10 80%	M6							
LGH-RVS Series		•	Advanced high-efficiency filter (ePM1 65% filter)	PZ-S**RFH-E	Synthetic fiber	ePM1 65%, ePM2.5 75%, ePM10 90%	F8							
	•		Replacement filter (Coarse 35% filter)	PZ-**RF8-E	Non-woven fabric	Coarse 35%	G3							
		•	High-efficiency filter (ePM10 75%)	PZ-**RFM-E	Noncombustible fiber	ePM10 75%	_							
GUF Series		•	Advanced high-efficiency filter (ePM1 75%)	PZ-**RFP2-E	Synthetic fiber	ePM1 75%, ePM2.5 80%, ePM10 95%								

^{*1:} Designed for the Spanish market to comply with RITE (Regulation of Thermal Installations of Buildings)

For LGH-RVX3 SERIES

		Filter					Package		stallatio		
Image	Model		Dim	ension (mm)	Pieces per	number for	1	lumbers	of filte	rs
		Applicable model	L	W	Н	package	replacement		OA	RA	Į
Replacement filter	PZ-15RF3-E	LGH-15RVX3-E	549	125	20	2	1	2	1	1	
Coarse 60% filter)	PZ-25RF3-E	LGH-25RVX3-E	654	151	15	2	1	2	1	1	
	PZ-35RF3-E	LGH-35RVX3-E	784	178	15	2	1	2	1	1	
	PZ-50RF3-E	LGH-50RVX3-E	926	178	15	2	1	2	1	1	
	PZ-65RF3-E	LGH-65RVX3-E	852	213	15	2	1	2	1	1	
	PZ-80RF3-E	LGH-80RVX3-E	890	238	15	2	1	2	1	1	I
	PZ-00RF3-E	LGH-160RVX3-E	090	230	15	2	2	4	2	2	T
	D7 100DF2 F	LGH-100RVX3-E	1117	220	15	2	1	2	1	1	Ī
	PZ-100RF3-E	LGH-200RVX3-E	1117	238	15	2	2	4	2	2	Ť
Advanced	PZ-15RFP3-E	LGH-15RVX3-E	542	104.5	25	1	1	1	_	-	Ī
nigh-efficiency filter	PZ-25RFP3-E	LGH-25RVX3-E	322	128.5	25	2	1	2	-	-	Ť
(ePM1 75% filter)	PZ-35RFP3-E	LGH-35RVX3-E	390	158.5	25	2	1	2	-	-	t
	PZ-50RFP3-E	LGH-50RVX3-E	461	158.5	25	2	1	2	_	_	Ť
	PZ-65RFP3-E	LGH-65RVX3-E	423	197.5	25	2	1	2	-	_	Ť
		LGH-80RVX3-E				_	1	2	_	_	t
	PZ-80RFP3-E	LGH-160RVX3-E	442	215.5	25	2	2	4	-	-	İ
		LGH-100RVX3-E				_	1	2	_	_	Ť
	PZ-100RFP3-E	LGH-200RVX3-E	554	215.5	25	2		4	_	_	t
High-efficiency	PZ-15RFM3-E	LGH-15RVX3-E	542	125	13	1	1	1	1	_	t
ilter*2 (M6 filter)	PZ-25RFM3-E	LGH-25RVX3-E	322	151	13	2	1	2	2	_	t
	PZ-35RFM3-E	LGH-35RVX3-E	390	178	13	2	1	2	2	_	t
	PZ-50RFM3-E	LGH-50RVX3-E	461	178	13	2	1	2	2	_	t
	PZ-65RFM3-E	LGH-65RVX3-E	423	213	13	2	1	2	2	_	t
		LGH-80RVX3-E					1	2	2	_	t
	PZ-80RFM3-E	LGH-160RVX3-E	442	238	13	2	2	4	4	_	t
		LGH-100RVX3-E				_	1	2	2	_	t
	PZ-100RFM3-E	LGH-200RVX3-E	554	238	13	2	2	4	4	_	t
\ d. cancad	PZ-15RFH3-E	LGH-15RVX3-E	542	104.5	25	1	1	1	-	_	t
Advanced nigh-efficiency	PZ-25RFH3-E	LGH-25RVX3-E	322	128.5	25	2	1	2	_	_	t
ilter*2	PZ-35RFH3-E	LGH-35RVX3-E	390	158.5	25	2	1		_	_	t
F8 filter)	PZ-50RFH3-E	LGH-50RVX3-E	461	158.5	25	2	1		_	_	t
	PZ-65RFH3-E	LGH-65RVX3-E	423	197.5	25	2	1		_	_	t
		LGH-80RVX3-E					1		_	_	\dagger
	PZ-80RFH3-E	LGH-160RVX3-E	442	215.5	25	2	2	4	_	_	t
		LGH-100RVX3-E					1	2	_	_	t
	PZ-100RFH3-E	LGH-200RVX3-E	554	215.5	25	2	2	4	<u> </u>		+

^{*2:} Designed for the Spanish market to comply with RITE (Regulation of Thermal Installations of Buildings

For LGH-RVXT3 SERIES

	Filter												Installa	ation le	ocatio	n
					Din	nensi	ion (n	nm)		Pieces	Package		Numb	ers of	filters	;
۰	Image	Model	A mustic abla mandat		Short			Long		per	number for replacement		OA	RA	S	Α
۰			Applicable model	L	w	Н	L	w	Н	package	горгазопполе		Long	Long	Short	Long
	Replacement filter (Coarse 60% filter)	PZ-250TRF-E		-	-	-	995	285	15	Long : 4	1	4	2	2	-	-
	Advanced high- efficiency filter (ePM1 75% filter)	PZ-250TPF-E	LGH-160RVXT3-E LGH-200RVXT3-E -	663	286	25	1327	286	25	Short : 1 Long : 1	1	2	-	-	1	1
	High-efficiency filter (M6 filter) ^{3*}	PZ-250TMFR-E	LGH-250RVXT3-E LGH-250RVXT3-E	-	-	-	1003	283	13	Long : 2	1	2	2	-	-	-
	Advanced high- efficiency filter (F8 filter)*3	PZ-250THFR-E		663	286	25	1327	286	25	Short : 1 Long : 1	1	2	-	-	1	1

^{*3:} Designed for the Spanish market to comply with RITE (Regulation of Thermal Installations of Buildings)

For LGH-RVS SERIES

		Filter		Package	ln:	stallatio	n locatio	on			
Image	Model		Dime	ension	(mm)	Pieces per	number for	N	umbers	of filter	's
iiiaye	Model	Applicable model	L	W	Н	package	replacement		OA	RA	SA
Replacement filter (Coarse 50% filter)	PZ-S50RF-E	LGH-50RVS-E	845	195	15	2	1	2	1	1	
	PZ-S80RF-E	LGH-80RVS-E	885	195	15	2	1	2	1	1	
4	PZ-S100RF-E	LGH-100RVS-E	/S-E 1112		15	2	1	2	1	1	-
High-efficiency filter (ePM10 80% filter)	PZ-S50RFM-E	LGH-50RVS-E	422	195	15	2	1	2	2	_	_
	PZ-S80RFM-E	LGH-80RVS-E	442	195	15	2	1	2	2	_	_
	PZ-S100RFM-E	LGH-100RVS-E	556	195	15	2	1	2	2	-	_
Advanced high- efficiency filter	PZ-S50RFH-E	LGH-50RVS-E	412	203	25	2	1	2	2	_	-
(ePM1 65% filter)	PZ-S80RFH-E	LGH-80RVS-E	432	203	25	2	1	2	2	_	_
	PZ-S100RFH-E	LGH-100RVS-E	546	203	25	2	1	2	2	-	_

For GUF SERIES

		Packa	ae	In	stallatio	n locatio	on					
lmana	Model		Dime	ension	(mm)	Pieces per	number		N	lumbers	of filter	s
Image	Model	Applicable model	L	W	Н	package	replacer	nent		OA	RA	SA
Replacement filter (Coarse 35% filter)	PZ-50RF8-E	GUF-50RD4	470	183	15	4	1		4	2	2	-
	PZ-100RF8-E	GUF-100RD4	565	243	15	4	1		4	2	2	-
High-efficiency filter (ePM10 75% filter)	PZ-50RFM-E	GUF-50RD4	464	175	25	2	1 1		2	-	-	2
	PZ-100RFM-E	GUF-100RD4	559	236	25	2			2	-	-	2
Advanced high-efficiency filter (ePM1 75% filter)	PZ-50RFP2-E	GUF-50RD4	464	175	25	2			2	-	-	2
	PZ-100RFP2-E	GUF-100RD4	559	236	25	2	1		2	-	-	2

Residential Use **LOSSNAY**

VL-CZPVU SERIES



Vertical-type centralized ventilation with sensible heat exchange for residential use.

Key Features



Quiet Operation

Noise is one of the most common concerns for residential ventilation. Ultra quiet operation is achieved with the sirocco fan designed by Mitsubishi Electric. The balance between airflow and static pressure is optimized and the fan rotation is minimized, leading to low noise levels.

Air Purification

An optional filter removes NOx and PM2.5 and improves indoor air quality. They can be incorporated inside the unit without any filter box, which saves space.

*NOx: Nitrogen oxide, which includes nitric oxide (NO) and nitrogen dioxide (NO2).
*PM2.5: Airborne particulates that are 2.5µm or smaller in size.

MELCloud is a Cloud-based solution for controlling LOSSNAY units either locally or remotely by computer, tablet or smartphone via the Internet. It allows LOSSNAY operations to be checked and controlled via MELCloud from virtually anywhere and Internet connection is available. With MELCloud, the LOSSNAY system can be used much more easily and conveniently.


Energy Saving

Under regulation (EU) No. 1254/2014, the VL-CZPVU series has the highest energy-saving performance in its class (ErP A+). It saves heating and cooling costs by minimizing the energy loss that occurs during



Variable Airflow Control

The default fan speed value (Fan speed 1: 30%, Fan speed 2: 50%, Fan speed 3: 70%, and Fan speed 4: 100%) of both supply air and exhaust air can be adjusted flexibly. Within the range between 25% and 100%, airflow can be adjusted by 1% increments to satisfactorily meet the designed airflow rate.

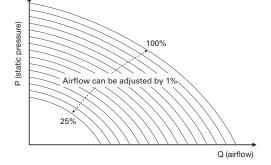


External Airflow Control

The airflow from the LOSSNAY unit can be altered using 0-10V signals from the controllers, such as the humidity stat and CO₂ sensor (field supply). The LOSSNAY unit is also connected to the light switch which can boost operation mode (input 220-240V). These devices are connected directly to the LOSSNAY unit, allowing automatic fan speed control according to bathroom occupation, CO2 level, and humidity level.



Automatic Bypass Mode

It is possible to switch between "LOSSNAY ventilation (with heat exchange)" and "Bypass ventilation (without heat exchange)" either manually or automatically. When outside air is cooler than indoor air in summer, the unit directly draws in outside air, bypassing the heat exchanger.

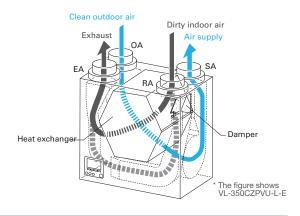

Wide Operating Temperature

The VL-CZPVU series can operate at temperatures down to -15°C. With a pre-heater, it can operate at temperatures down to -25°C.

- * In areas where outdoor air falls below -20°C, an electric shutter (locally supplied) is required in the OA duct in addition to the pre-heater.
- * The OA temperature must be higher than -15°C to use the pre-heater.

MELCloud for LOSSNAY

MELCloud enables fast, easy remote control and monitoring of LOSSNAY units. Wireless computer connectivity and an Internet-connected mobile or fixed terminal are all that are needed. MELCloud can also be used to control room air conditioners and Ecodan heat pumps simultaneously.

Key control and monitoring features

- 1. Turn system on/off
- 2. Switching airflow & operating mode (Heat recovery / Bypass)
- 3. Confirming the status of the filter/core (Maintenance notification)




Isntallation Image

Centralized Ventilation

One LOSSNAY unit provides 24-hour ventilation for the entire house, from living room and bedrooms to the bathroom. The heat recovery system provides fresh air at a comfortable air temperature. A sensible heat exchanger effectively reduces excess humidity in the winter.

- ✓ Heat Exchanger
- √ Whole-house Solution
- ✓ Air Purification
- ✓ Quiet Operation
- ✓ MELCloud Control



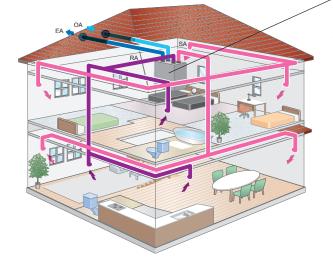



bedroom bedroom SA

EA RA

bedroom

OA SA

Bathroom

Dathroom




Specifications VL-CZPVU SERIES

Model		VL-250CZPVU-R/L-E							
Electrical power supp	ly	22	0-240V/50H	z, 220V-/60	Hz				
Ventilation mode		Heat recovery mode							
Fan speed		FS4 (100%)	FS3 (70%)	FS2 (50%)	FS1 (30%)				
Running current (A)		0.76	0.35	0.20	0.12				
Input power (W)		106	44	23	11				
Airflow	(m^3/h)	250	175	125	75				
All llow	(L/s)	69	49	21					
External static pressu	ıre (Pa)	150	74	38	14				
Temperature exchange effi	ciency (%)	85	87	88	90				
Noise level (dB)		31	22	16	15>				
Energy efficiency class	SS		Α	+					
Weight (kg)		26							
Dimensions (mm)		(H) 565 x (W) 595 x (D) 356							

■ Attention

- Above values are at factory default.
 Running current, the input power, the efficiency and the noise are based on the rating airflow, and 230V/50Hz.
 Sound pressure level at 3 m is pikerical.
 Temperature exchange efficiency (%) is based on winter condition.
 Mitsubishi Electric measures figures in the chart according to EN13141-7: 2010, and the characteristic curves are measured by chamber method.
 Specifications may be subject to change without notice.


Characteristic Curves

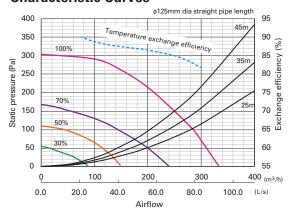


Mitsubishi Electric measures figures in the chart according to EN13141-7: 2010, and the characteristic curves are measured by chamber method.

Dimensions

VL-250CZPVU-R-E

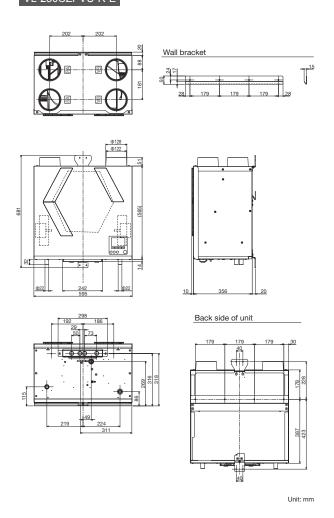

VL-250CZPVU-L-E

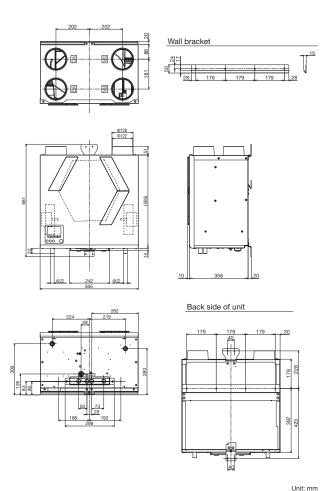


Model		V	L-350CZ	PVU-R/L	-E			
Electrical power supp	oly	22	0-240V/50H	lz, 220V-/60	Hz			
Ventilation mode			Heat reco	very mode				
Fan speed		FS4 (100%)	FS3 (70%)	FS2 (50%)	FS1 (30%)			
Running current (A)		1.08	0.52	0.31	0.18			
Input power (W)		155	71	37	19			
Airflow	(m ³ /h)	320	224	160	96			
AITIOW	(L/s)	89	62	44	27			
External static pressu	ire (Pa)	150	74	38	14			
Temperature exchange effi	ciency (%)	85	87	88	90			
Noise level (dB)		35	26	19	15>			
Energy efficiency class	SS		Α	+				
Weight (kg)		32						
Dimensions (mm) (H) 623 x (W) 658 x (D) 432								

■ Attention

- Above values are at factory default.
 Running current, the input power, the efficiency and the noise are based on the rating airflow, and 230V/50Hz.
 Sound pressure level at 3 m is pikerical.
 Temperature exchange efficiency (%) is based on winter condition.
 Mitsubishi Electric measures figures in the chart according to EN13141-7: 2010, and the characteristic curves are measured by chamber method.
 Specifications may be subject to change without notice.


Characteristic Curves

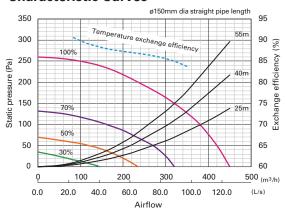


Mitsubishi Electric measures figures in the chart according to EN13141-7: 2010, and the characteristic curves are measured by chamber method.

Dimensions

VL-350CZPVU-R-E

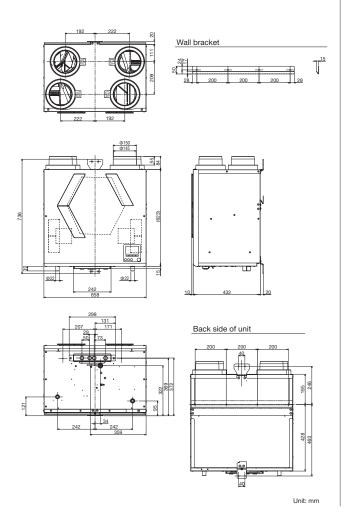

VL-350CZPVU-L-E

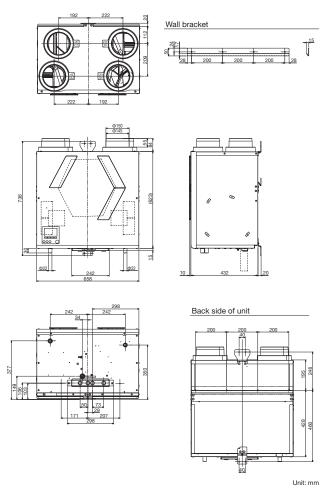


Model		V	L-500CZ	PVU-R/L	-E			
Electrical power supp	oly	22	0-240V/50H	lz, 220V-/60	Hz			
Ventilation mode			Heat reco	very mode				
Fan speed		FS4 (100%)	FS3 (70%)	FS2 (50%)	FS1 (30%)			
Running current (A)		1.73	0.77	0.40	0.19			
Input power (W)		275	104	49	21			
Airflow	(m ³ /h)	500	350	250	150			
AITIOW	(L/s)	139	97	69	42			
External static pressu	ire (Pa)	200	98	50	18			
Temperature exchange effi	ciency (%)	85	87	89	92			
Noise level (dB)		37	29	22	15>			
Energy efficiency class	SS		Α	+				
Weight (kg)		39						
Dimensions (mm)		(H) 632 x (W) 725 x (D) 556						

■ Attention

- Above values are at factory default.
 Running current, the input power, the efficiency and the noise are based on the rating airflow, and 230V/50Hz.
 Sound pressure level at 3 m is pikerical.
 Temperature exchange efficiency (%) is based on winter condition.
 Mitsubishi Electric measures figures in the chart according to EN13141-7: 2010, and the characteristic curves are measured by chamber method.
 Specifications may be subject to change without notice.


Characteristic Curves

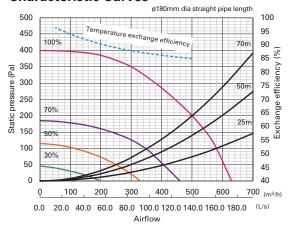


Mitsubishi Electric measures figures in the chart according to EN13141-7: 2010, and the characteristic curves are measured by chamber method.

Dimensions

VL-500CZPVU-R-E

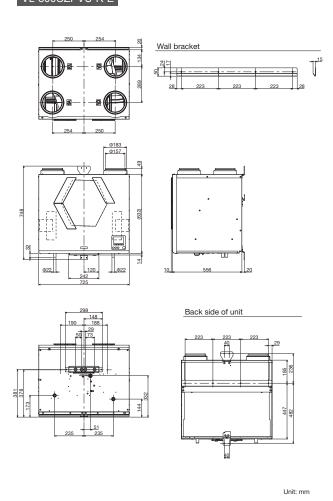

VL-500CZPVU-L-E

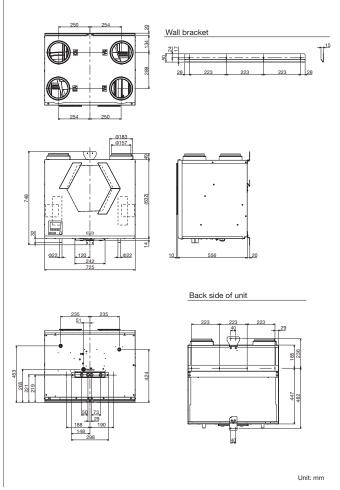

Silencer Box

Noise level can be further decreased by using a silencer box.






P-250SB-E


■ Attenuation of sound power level for center frequency

Airflow (m³/h)	Static pressure	Point	Attenu	Attenuation of sound power level for center frequency Hz (dB)										
(111711)	(Pa)		63	125	250	500	1000	2000	4000	8000				
175	74	Outlet (SA/EA)	9	7	11	19	29	28	21	13				

- 1. Figures in the chart above are measured by Mitsubishi Electric.
- The silencer box is placed just after the outlet of the LOSSNAY unit as specified in the Installation Manual.
- 3. When airflow differs, attenuation may also differ from the chart above.
- Pressure loss curve

The curve on the right shows the total pressure drop of the OA and SA or RA and EA ducts in the silencer box.



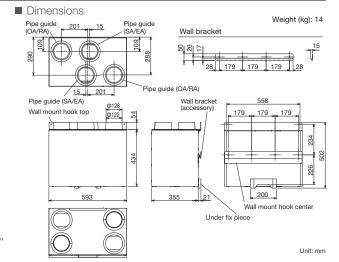


P-350SB-E

■ Attenuation of sound power level for center frequency

Airflow (m³/h)	Static pressure	Point	Attenu	Attenuation of sound power level for center frequency Hz (dB)									
(111711)	(Pa)		63	125	250	500	1000	2000	4000	8000			
224	74	Outlet (SA/EA)	12	8	11	21	32	29	19	12			

- 1. Figures in the chart above are measured by Mitsubishi Electric.
- The silencer box is placed just after the outlet of the LOSSNAY unit as specified in the Installation Manual.
- 3. When airflow differs, attenuation may also differ from the chart above.
- Pressure loss curve

The curve on the right shows the total pressure drop of the OA and SA or RA and EA ducts in the silencer box.



Pipe guide (OA/RA) Pipe guide (SA/EA) Wall bracket (accessory) Wall bracket (accessory) Wall mount hook top Under fix piece Weight (kg): 17


P-500SB-E


■ Attenuation of sound power level for center frequency

Airflow (m³/h)	Static pressure	Point	Attenu	Attenuation of sound power level for center frequency Hz (dB)									
(111711)	(Pa)		63	125	250	500	1000	2000	4000	8000			
350	98	Outlet (SA/EA)	10.5	9.5	13.0	21.0	27.0	29.0	26.0	14.0			

- 1. Figures on the chart above are measured by Mitsubishi Electric.
- 2. The silencer box is placed on the just after the outlet of the LOSSNAY unit as specified in the Installation Manual.
- 3. When the airflow differs, the attenuation may be also different from the chart above $\frac{1}{2}$
- Pressure loss curve

The curve on the right shows the total pressure drop of the OA and SA or RA and EA ducts in the silencer box.




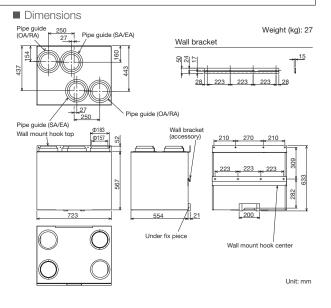

Unit: mm

Remote Controller Cover

By attaching a Remote Controller Cover, the remote controller can be installed at a distance from the unit.

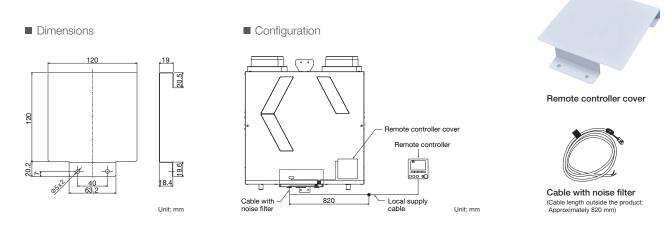

Filters

Тур	oe	Replacement filter	Standard filter	Medium efficiency filter	Advanced efficiency filter	Advanced high efficiency filter	NOx Filter
		P-250F-E	P-250SF-E	P-250MF-E	P-250PF-E	P-250PFH-E	P-250NF-E
Mod	del	P-350F-E	P-350SF-E	P-350MF-E	P-350PF-E	P-350PFH-E	P-350NF-E
		P-500F-E	P-500SF-E	P-500MF-E	P-500PF-E	P-500PFH-E	P-500NF-E
Classification	EN779 (2012)	G3	G4	M6	M6	ePM ₁ 55%	NO ₂ 90%
Olassilleation	ISO 16890 (2016)	Coarse 55%	Coarse 90%	ePM ₁₀ 80%	ePM _{2.5} 50%	6F IVI 1 3370	1402 2070

VL-50

Wall-mounted models particularly suited for houses and small offices.



VL-50(E)S2-E VL-50SR₂-E

Decentralized Ventilation: VL-50(E)S2-E and VL-50SR2-E


Product advantages

Air is supplied and exhausted simultaneously

Air is supplied and exhausted simultaneously while transferring the heat.



Low noise levels are ideal for bedrooms and children's rooms.



*Condition: 230V, 50Hz, low fan speed


Energy efficient

- Total heat exchange minimizes heat loss.
- Achieve over 80%* temperature efficiency.

*VL-50(E)S2-E at low fan speed at 230V 50Hz

Sound insulation

A sound insulation effect reduces the level of noise generated outside.

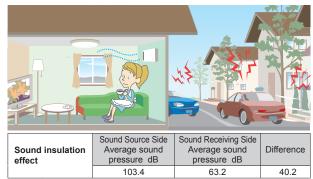


^{*}Tested using VL-08S2-AE

VL-08S₂-AE is a Japanese dedicated model equivalent to VL-50(E)S₂-E

Easy maintenance

The only maintenance required is cleaning the outside air filter and exhaust air. Filters are easily accessible, making quick and thorough cleaning possible.

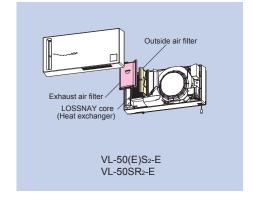

Flexible Installation for Only VL-50(E)S2-E and VL-50SR2-E

VL-50(E)S2-E and VL-50SR2-E may be installed either horizontally or vertically to fit in various types of rooms.




^{*}Measured by average sound pressure level of more than 30dB in 500Hz according to

Specifications

$VL-50(E)S_2-E \ \, \text{(VL-50S}_2-\text{E/Pull-Switch Model)} \ \, \text{VL-50ES}_2-\text{E/Wall-Switch Model)}$

Model	VL-50(E)S₂-E										
Electrical power supply	220V	/50Hz	230V	/50Hz	240V	/50Hz	220V/60Hz				
Fan speed	High	Low	High	Low	High	Low	High	Low			
Airflow (m³/h)	51	15	52.5	16	54	17	54	17			
Power consumption (W)	19	4	20	4.5	21	5	21	5.5			
Temperature exchange efficiency (%)	70	86	69	85	68	84	68	84			
Noise level (dB)	36.5	14	37	15	37.5	15.5	37.5	15.5			
Weight (kg)	6.2										
Specific energy consumption class	С										

^{*}Figures in the chart were measured according to Japan Industrial Standard (JIS B 8628) with the shutter knob in open position. *Specifications may be subject to change without notice.

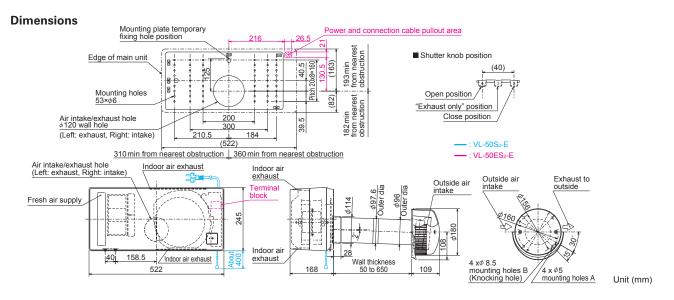


VL-50SR2-E (Remote Controller Model)

Model	VL-50SR₂-E										
Electrical power supply	220V	/50Hz	230V	/50Hz	240V	/50Hz	220V	/60Hz			
Fan speed	High	Low	High	Low	High	Low	High	Low			
Airflow (m³/h)	51	15	52.5	16	54	17	54	17			
Power consumption (W)	19	4.5	20	5	21	5.5	21	6			
Temperature exchange efficiency (%)	70	86	69	85	68	84	68	84			
Noise level (dB)	36.5	14	37	15	37.5	15.5	37.5	15.5			
Weight (kg)	6.2										
Specific energy consumption class	С										

^{*}Figures in the chart were measured according to Japan Industrial Standard (JIS B 8628) with the shutter knob in open position. *Specifications may be subject to change without notice.

Dimensions

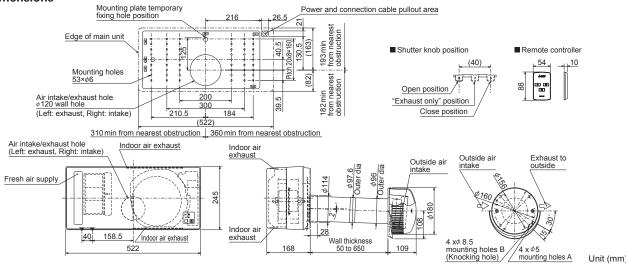

Optional Parts

Optional Parts for VL-50(E)S2-E and VL-50SR2-E

Filter, Extension Pipe and Stainless Hood

Type	Replacement Filter	High Efficiency Filter	Extension Pipe	Joint	Stainless Hood
Design					
Model	P-50F ₂ -E	P-50HF ₂ -E	P-50P-E	P-50PJ-E	P-50VSQ5-E
Feature	-	-	Total length when connected to the joint is 350mm.	Joint for extension pipe	Stylish stainless hood
Classification (EN779:2012)	G3	-	_	_	_
Classification (ISO16890)	Coarse 35%	ePM10 75%		_	_

Compatible table

Commercial

Optional Parts List

													111	111	.111					
				3-E	3-E	3-E	3-E	3-Е	3-E	X3-E	X3-E	LGH-200RVX3-E	LGH-160RVXT3-E	LGH-200RVXT3-E	LGH-250RVXT3-E	ų	ų	S-E		4
Optio	Optional parts		LGH-15RVX3-E	LGH-25RVX3-E	LGH-35RVX3-E	LGH-50RVX3-E	LGH-65RVX3-E	LGH-80RVX3-E	LGH-100RVX3-E	LGH-160RVX3-E	ORV)	ORV)	ORV)	ORV)	LGH-50RVS-E	LGH-80RVS-E	LGH-100RVS-E	GUF-50RD4	GUF-100RD4	
		Me	odel	1-15	1-25	1-35	1-50	1-65	1-80	1-10	1-16	1-20	1-16	1-20	1-25	1-50	1-80	1-10	F-50	F-10
mous:		lo	lo lo	<u>5</u>	19	E E	E E	Ē	E E	E E	EG.	E L	lo lo	lo lo	<u> </u>	E E	ns en	GU		
LOSS		PZ-62D	R-EA/EB	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
remo	te controller	PZ-43	SSMF-E	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
			PZ-15RF3-E	•																
			PZ-25RF3-E		•	_														
		PZ-**RF3-E	PZ-35RF3-E PZ-50RF3-E			•														
		(Coarse 60% filter)	PZ-65RF3-E				•	•												
			PZ-80RF3-E						•		•									
	Replacement		PZ-100RF3-E							•		•								
	filter	PZ-250TRF-E	PZ-250TRF-E										•	•	•					
		(Coarse 60% filter)	PZ-S50RF-E													•				
		PZ-S**RF-E (Coarse 50%	PZ-S80RF-E														•			
		filter)	PZ-S100RF-E															•		
		PZ-**RF8-E	PZ-50RF8-E																•	
		(Coarse 35% filter)	PZ-100RF8-E																	•
			PZ-15RFM3-E	•																\Box
			PZ-25RFM3-E		•															
		D7 **DE 10 E**	PZ-35RFM3-E			•														
		PZ-**RFM3-E*1 (M6 filter)	PZ-50RFM3-E				•													
	High-efficiency	, , ,	PZ-65RFM3-E					•												
			PZ-80RFM3-E						•		•									
	filter	PZ-250TMFR-E	PZ-100RFM3-E							•		•								
	(M6 filter PZ-S**RFM (ePM10 80 filter) PZ-**RFM	(M6 filter)	PZ-250TMFR-E										•	•	•					
		PZ-S**RFM-E	PZ-S50RFM-E													•				
		(ePM10 80%	PZ-S80RFM-E														•			
Filter			PZ-S100RFM-E															•		
		PZ-**RFM-E (ePM10 75% filter)	PZ-50RFM-E PZ-100RFM-E																•	•
		(PZ-15RFP3-E	•																
			PZ-25RFP3-E		•															
		PZ-**RFP3-E	PZ-35RFP3-E			•														
		(ePM1	PZ-50RFP3-E				•													
		75% filter)	PZ-65RFP3-E					•												
			PZ-80RFP3-E						•		•									
			PZ-100RFP3-E							•		•								
			PZ-15RFH3-E	•																
			PZ-25RFH3-E		•															
	Advanced	PZ-**RFH3-E ^{*1}	PZ-35RFH3-E			•														
	high-efficiency	(F8 filter)	PZ-50RFH3-E PZ-65RFH3-E				•	•												
	filter		PZ-80RFH3-E						•		•									
			PZ-100RFH3-E							•		•								
		PZ-250TPF-E	PZ-250TPF-E										•	•	•					
		(ePM1 75% filter) PZ-250THFR-E*1																		
		(F8 filter)	PZ-250THFR-E										•	•	•					
		PZ-S**RFH-E	PZ-S50RFH-E													•				
		(ePM1 65% filter)	PZ-S80RFH-E PZ-S100RFH-E														•	•		
		D7 **DED2 E	PZ-50RFP2-E																•	
		PZ-**RFP2-E (ePM1 75% filter)																		•
		PZ-70	CSD-E	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
	CO ₂ sensor	PZ-70	CSW-E	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
Verti	ical installation		IVS-E	•	•	•	•													
	plates		2VS-E					•	•	•										
Signal	I output terminal		IGS-E	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
		PZ-100SS-E		•																
D	uct silencer	PZ-150SS-E PZ-200SS-E			•	•	•	•								•			•	
		PZ-200SS-E PZ-250SS-E							•	•	•	•					•	•		
*1: Design	aned for the Spanish		h RITE (Regulation of	Thern	nal Ine	lallatio	ns of R	Lilding					each n	roduct	nage f	or requ			of niece	

^{*1:} Designed for the Spanish market to comply with RITE (Regulation of Thermal Installations of Buildings) Note: Please refer to each product page for required number of pieces/sets.

Residential

Optional Parts for VL-CZPVU Series

Optional pa	ırts			VL-250CZPVU-R/L-E	VL-350CZPVU-R/L-E	VL-500CZPVU-R/L-E
		N	Model	VL-250C	VL-350C	VL-500C
			P-250F-E	•		
	Replacement filter (Coarse 55% filter)	P-**F-E	P-350F-E		•	
			P-500F-E			•
			P-250SF-E	•		
	Standard filter (Coarse 90% filter)	P-**SF-E	P-350SF-E		•	
			P-500SF-E			•
	Medium-efficiency filter (ePM10 80% filter)		P-250MF-E	•		
		P-**MF-E	P-350MF-E		•	
Filter —			P-500MF-E			•
Filler	PM2.5 filter (ePM2.5 50% filter)		P-250PF-E	•		
		P-**PF-E	P-350PF-E		•	
			P-500PF-E			•
			P-250PFH-E	•		
	PM1 filter (ePM1 55% filter)	P-**PFH-E	P-350PFH-E		•	
			P-500PFH-E			•
			P-250NF-E	•		
	NOx filter	P-**NF-E	P-350NF-E		•	
			P-500NF-E			•
			P-250SB-E	•		
	Silencer box	P-**SB-E	P-350SB-E		•	
			P-500SB-E			•
RC	cover (remote controller cover)	P-	RCC-E	•	•	•

^{*}These optional parts are only compatible with models that have a serial number of 25010001 or later.

Optional Parts for VL-50

Optional	parts	Model	VL-50S ₂ -E	VL-50ES ₂ -E	VL-50RS ₂ -E
Filter	Replacement filter	P-50F2-E (G3 Filter)	•	•	•
Filler	High efficiency rilter	P-50HF2-E (ePM10 75% Filter)	•	•	•
	Extension pipe	P-50P-E	•	•	•
	Pipe extension joint	P-50PJ-E	•	•	•
	Stainless hood	P-50VSQ5-E	•	•	•



NOTICE

Our air-conditioning equipments and heat pumps contain a fluorinated greenhouse gas, R290 (GWP: <3), R410A (GWP: 2088) or R32 (GWP: 675). *These GWP values are based on Regulation (EU) No.517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R290 (GWP: 0.02), R410A (GWP: 1975), R32 (GWP: 550)



CAUTION

Do not install indoor units in areas (e.g. mobile phone base stations) where the emission of VOCs such as phthalate compounds and formaldehyde is known to be high as this may result in a chemical reaction.



MARNING

When installing or relocating or servicing our air-conditioning equipment, use only the specified refrigerant (R290, R410A or R32) to charge the refrigerant lines.

Do not mix it with any other refrigerant and do not allow air to remain in the lines.

If air is mixed with the refrigerant, then it can be the cause of abnormal high pressure in the refrigerant lines, and may result in an explosion and other hazards.

The use of any refrigerant other than that specified for the system will cause mechanical failure, system malfunction or unit breakdown. In the worst case, this could lead to a serious impediment to securing product safety.

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BUILDING, 2-7-3 MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN https://www.mitsubishielectric.com/

> Full Product Line Catalogue E-2505224 (18977)



