INTERNATIONAL

PRODUCT CATALOGUE

SEPTEMBER **2025**



Autonomous residential
Centralized residential
Service Industry
Industrial Process

A Carrier Company | **www.riello.com**

RIELLO
Energy For Life

1922

2022

2025

RIELLO

RIELLO is an Italian brand, world leader in the combustion technology and a key player in the production of heating and air conditioning systems and technologies for the residential and commercial sectors.



WORLDWIDE LEADER IN THE COMBUSTION TECHNOLOGY AND REFERENCE PLAYER IN THE HVAC SECTOR



+100

YEARS OF HISTORY AND EXPERIENCE IN THE COMBUSTION TECHNOLOGY

+120

SALES COUNTRIES

ENVIRONMENT AND WELL-BEING

INNOVATING FOR A MORE SUSTAINABLE FUTURE

RIELLO EMBRACES THE CONCEPT OF ALL-ROUND WELL-BEING, TRANSLATING IT INTO A BUSINESS MODEL BASED ON SUSTAINABILITY AND INNOVATION AND ON PRODUCTS THAT CONTRIBUTE TO THE ENERGY TRANSITION.



Over a century of energy for life, for people's comfort. Innovation and sustainability are what drive Riello's way of working in the creation of products and state-of-the-art systems.

Riello is aware of the role a brand can and should play in consumer habits. For this very reason, it champions the efficient use of resources in manufacturing.

At its production sites, the company has adopted energy-efficient practices and technologies.

Conscious product design leverages the integration of different energy sources and the reduction of environmental impact also by focusing on alternative sources, such as hydrogen.
This is complemented by the development of high-efficiency technologies and smart control systems, based on the potential of IoT, which enable consumption reduction through intuitive remote control tailored to customers' needs.

This translates into an economic benefit for the consumer, but more significantly for the ecosystem. As Riello is committed to playing an active and responsible role in the decarbonization of buildings.

PROFESSIONAL GROWTH AND DEVELOPMENT

TRAINING

TRAINING IS ONE OF RIELLO'S STRENGTHS: IT HAS ALWAYS BEEN AN ESSENTIAL PART OF ITS BUSINESS AND A DISTINCTIVE COMPONENT RECOGNISED BY THE MARKET FOR ITS CONTINUITY AND CONSISTENCY.



Riello has an ongoing training process to transfer its know-how both to consultants and to market operators. It involves technical update meetings and specific training courses (also via webinar) intended to foster the professional growth of the people Riello works with. **Professionalism, skills and reliability are made available to the supply chain every single day, to promote a comprehensive knowledge of new generation products and system solutions.**
For Riello, training also means being aware of legislative developments and being able to interpret their evolution in advance.

The company's pre-sales and training structure is ready to provide constant support and the best refresher courses to its customers, so they can address a rapidly changing market. The Angiari training centre, located at Legnago-Verona (Northern Italy), is a tangible example of the importance of training for Riello. Consisting of classrooms and fully fitted-out labs, it provides theory and hands-on training, using the very latest learning systems.

NEW



RIELLO ADAPTO
Heat Pump Outdoor Unit

ADAPTO HYBRID

SMART INTEGRATION FOR MODERN COMFORT

ADAPTO HYBRID IS RIELLO'S NEW RESIDENTIAL HYBRID SOLUTION, MARKING A SIGNIFICANT INNOVATION IN THE ENERGY QUALIFICATION OF DOMESTIC HEATING SYSTEMS. AS ITS NAME SUGGESTS, ADAPTO HYBRID IS DESIGNED TO ADAPT TO VARIOUS HEATING SYSTEM CONFIGURATIONS, INTELLIGENTLY COMBINING HEAT PUMP AND CONDENSING BOILER TECHNOLOGIES. IT ACTIVATES EITHER OR BOTH ENERGY SOURCES BASED ON USER PREFERENCES AND CLIMATE CONDITIONS, DELIVERING HEATING, COOLING, AND DOMESTIC HOT WATER – ALL IN ONE INTEGRATED SYSTEM.

With ADAPTO HYBRID, Riello introduces a new generation of residential hybrid systems, enabling the user to optimize energy use and consumption by selecting the preferred operating profile – all without compromising indoor comfort.

ADAPTO HYBRID is Smart Grid Ready: designed to operate in synergy with modern intelligent energy distribution networks.

SG Ready
Smart Heat Pumps



START KIS
Wall-hung condensing combi boiler

Hi, Comfort T300-Hy
Energy Manager

HYBRID HYDRAULIC KIT
Heat Pump Indoor Unit

HIGH EFFICIENCY
Choosing ADAPTO HYBRID means embracing innovation and efficiency for a conscious energy transition.

COMPACT AND FLEXIBLE DESIGN
The system fits easily into any home, even in limited spaces, thanks to reduced footprint and light weight of its components.

AFFORDABLE SOLUTION
Smart energy use, real savings – with accessible pricing and low running costs.

TAILORED INTELLIGENCE
Smart management of the heat pump and boiler adapts to the user's needs, offering two dedicated modes: Economy and Eco.

LOW NOISE OPERATION
The system runs quietly, both indoors and outdoors, for undisturbed comfort.

IDEAL FOR REPLACEMENT AND RENOVATION
Enhances comfort and efficiency, while increasing home value.

HIGHLIGHTS

FAMILY HM – FAMILY HM CONNECT

THE BEST OF RIELLO TECHNOLOGY, IN AN ICONIC DESIGN

FAMILY HM AND **FAMILY HM CONNECT** ARE RIELLO CONDENSING WALL-HUNG BOILERS THAT DELIVER TOP-TIER COMFORT AND EFFICIENCY WITHIN THE RIELLO PRODUCT RANGE. THEY RETAIN THE ICONIC, ELEGANT DESIGN OF THE ORIGINAL **FAMILY** BOILER, INCLUDING THE VERTICALLY ORIENTED CONTROL PANEL – NOW FULLY TOUCH-ENABLED

- There are **numerous technological innovations** compared with the previous **FAMILY** range, developed in the pursuit of **energy saving and respect for the environment**, objectives that are increasingly important to Riello in this crucial time of energy transition.
- **FAMILY HM** and **FAMILY HM CONNECT** stand out for the **wide 1:13 modulation ratio**, the new stainless steel heat exchanger with the **renewed ACC adaptive combustion control**, the silent operation and the **excellent comfort in domestic hot water**, that place them at the top of Riello's range.
- **Very silent operation** on all models.
- **The FAMILY HM CONNECT models come standard with the Hi Comfort T300 advanced control, forming a Class A+(*) system – without the need for additional accessories or upgrades.**
- **Also the FAMILY HM models, in combination with the Hi, Comfort T100 thermostat or with the advanced T300 control (available as accessories), achieve class A+(*).**
- **Ready to operate with blends of natural gas and hydrogen, up to a maximum of 20%.**

HYDROGEN READY 20%



(*) The efficiency class range of this product category in a system is between G and A+++ in heating.

RESIDENCE HM AQUA

UNMATCHED HOT WATER AVAILABILITY FOR EXCELLENT DHW COMFORT

NEW

RIELLO INTRODUCES RESIDENCE HM AQUA, THE NEW CONDENSING BOILER WITH A 30-LITRE DHW BI-TANK, DESIGNED TO OFFER EFFICIENCY AND ENERGY SAVINGS.

- RESIDENCE HM AQUA (25 and 35 BIS) stands out with its greater compactness and efficiency compared to previous Riello boiler ranges with built-in DHW tank. **RESIDENCE HM AQUA contains a 30-litre stainless steel bi-tank which, in addition to saving space if compared with the previous ranges, improves energy efficiency.**
- The range also offers excellent heating comfort thanks to an **efficient stainless steel heat exchanger with pneumatic combustion and a wide 1:10 modulation**.
- Its elegant, **modern design**, **combined with its ease of use**, allows the product to adapt easily into various residential environments, both in new buildings and renovations.
- RESIDENCE HM AQUA, in line with Riello's new generation products, pays particular attention to the environment. It has very **low NOx emissions, classifying it in class 6 according to European standards**. In addition, it is designed with a look towards the future, being **already suitable to operate with blends of natural gas and hydrogen up to 20%**, an important step in the decarbonization process started by the European Union.



HYDROGEN READY 20%



RESIDENCE HM

THE NEW GENERATION OF COMFORT

RESIDENCE HM REPRESENTS A NEW GENERATION OF CONDENSING BOILERS, REAFFIRMING RIELLO'S COMMITMENT TO TECHNOLOGICAL INNOVATION AIMED AT ENERGY SAVING AND SUSTAINABILITY, WHILE DELIVERING COMFORT THAT IS INCREASINGLY ALIGNED WITH MODERN USER NEEDS.

- RESIDENCE, among the most representative wall-hung boilers of Riello's range in terms of reliability and performance, undergoes a **profound renewal in design and technology** to result in RESIDENCE HM.
- There are many improved features in this wall-hung condensing boiler compared to the previous RESIDENCE series: from the **high 1:10 modulation** across the whole range, to the **new stainless steel heat exchanger with renewed adaptive combustion control**, up to the **new touch control panel**, just to mention the major ones.
- The range, characterized by **silent operation**, comes in a completely **new design with a modern and evolved character** that harmonizes easily in different residential contexts, both in retrofitting and new buildings.
- **RESIDENCE HM is IoT ready**, combining with Hi, Comfort platform accessories for remote comfort management via App. **In combination with Hi, Comfort T300, hybrid system management via App is also possible**, even remotely.
- **Ready to operate with blends of natural gas and hydrogen, up to a maximum of 20%.**

HYDROGEN READY 20%

HIGHLIGHTS

DOMUS M

THE NEW RANGE OF AIR-TO-WATER ALL-IN-ONE SPLIT HEAT PUMPS IN R32

NEW


DOMUS M ALL-IN-ONE HEAT PUMPS ARE DESIGNED TO PROVIDE HEATING, COOLING, AND DOMESTIC HOT WATER VIA A BUILT-IN DHW TANK.

Available in 10 different power sizes, they offer a wide choice between single-phase (from 4 to 16 kW) and three-phase (from 12 to 16 kW) models. Thanks to the compressor's DC Inverter technology, they can reach a heating temperature up to 65°C. The various functions are easily managed via the included on-board control. This new range is ideal both for renovation and new housing.

- One of DOMUS M's key features is its **excellent low noise level**, made possible by advanced engineering solutions. For even greater comfort, customers can activate Silent Mode, reducing noise down to 39 dB(A) *, ideal for creating a peaceful environment.
- All DOMUS M power sizes achieve energy class A+++ ** in heating (air 7°C, water 35°C) and class A+ *** for domestic hot water. In addition it can reach heating temperature up to 65°C, thus making them **suitable also for traditional radiators**.
- DOMUS M represents a valid solution both **for the replacement of a heat generator and for new buildings**.
- It is also **possible to combine it with a Riello condensing boiler in the case of a hybrid system**. The condensing boiler can be an auxiliary source of heat in colder climates.




AUXILIARY HEAT SOURCES



WALL-HUNG CONDENSING BOILER

TERMINAL UNITS



FAN COILS



FLOOR HEATING SYSTEM



RADIATORS

* Sound pressure of a 4 kW outdoor unit in silent mode 2, measured at 1m distance in front of the unit (1m + height of the unit) and at 2 m above the floor (with air +7°C, water 35°C).
** The range of energy efficiency class of this product category is between D and A+++
*** The range of energy efficiency class of this product category is between F and A+

TAU N

HIGH POWER,
LOW ENVIRONMENTAL IMPACT

TAU N IS A RANGE OF THREE-PASS GAS CONDENSING STEEL BOILERS, DESIGNED TO MEET ALL MODERN REQUIREMENTS FOR CENTRALIZED HEATING IN LARGE RESIDENTIAL, COMMERCIAL, OR INDUSTRIAL SPACES.

All models of TAU N range, available in power ratings from 115 kW to 3000 kW, represent the **state of the art of RIELLO research**, aimed at supplying a high level of efficiency and reliability with low environmental impact. In addition, they are ready for tomorrow's evolution: today the TAU N range is already tested "HYDROGEN COMBUSTION READY".

- The **heat exchanger flue tube body with high water content, the three-pass layout, the titanium-coated stainless steel internal components, accurate insulation, ease of inspection and maintenance, high efficiency, and the integrated control system** are all quality features that distinguish Riello's latest generation products.
- The TAU N family, with its **compact design and flexible layout**, enables the installation of a centralized heating unit in spaces that were previously considered unsuitable. Its excellent insulation ensures optimal thermal conditions without heat loss, providing a comfortable and consistent environment - a clear expression of Riello's commitment to quality.



1750 ÷ 3000 kW MODELS

115 ÷ 1450 kW MODELS

ICONS

TO MAKE ITS PRODUCT CATALOGUE SIMPLE TO READ AND EASY TO UNDERSTAND, RIELLO USES THE FOLLOWING SELF-EXPLANATORY ICONS.



The product meets the "Energy Related Product" Directive and complies with the relevant requirements.



The energy class of the specific product model.



Low N0x emissions on standard efficiency combustion products.



The performance of this product is Keymark certified (either Solar or Heat pump).

RIELLO

A-Z INDEX

213 7000 ACI PLUS
211 7000 PUFFER
201 7200/2 HV PLUS
201 7200/3F HV PLUS
207 7200 HP
210 7200 KOMBI PLUS
209 7200 KOMBISOLAR2S
377 AARIA MONO PLUS I-AMC
380 AARIA MONO PLUS I-AMD
378 AARIA MONO PLUS I-AMK
376 AARIA MONO PLUS I-AMS
374 AARIA MONO PLUS I-AMW PI
383 AARIA MULTI PLUS I
391 AARIA PRO P-AMD P
389 AARIA PRO P-AMK P
387 AARIA PRO P-AMS P
381 AARIA START N-AMW ST N
164 ACQUAFUN2 LN P
261 ALU PRO POWER
143 BAG3
142 BAG3 HYBRID
435 CHRONORIELLO
228 CONDEXA HPR
234 CONDEXA PRO
188 CSNA-A SYSTEM
403 DESIGN INVERTER
400 DESIGN INVERTER PLUS
406 DESIGN S INVERTER
398 DESIGN WALL
105 DOMUS M
120 FAMILY AQUA CONDENS
116 FAMILY HM
112 FAMILY HM CONNECT
101 FAMILY SPRINT R32
139 FASTECH
422 FCU N
168 FLUE OPTION FOR CONDENSING
360 FLUE OPTION FOR CONDENSING
178 FLUE OPTION FOR STANDARD EFFICIENCY
482 GP CONDENS
433 HI, COMFORT T100 WI-FI
432 HI, COMFORT T300
454 HIU 40 DHW STD
24 HYBRID WALL SYSTEMS
417 IN INVERTER
417 IN INVERTER PLUS
150 INSIEME EVO COND
154 INSIEME EVOE LN
408 INVISIBLE INVERTER
414 INVISIBLE INVERTER CEILING
411 INVISIBLE INVERTER PLUS
160 NEXAQUA
161 NEXPRO ACS
425 NUOVO ACU-NUOVO ACU F
97 NXHM 004-016
99 NXHM 018-030
94 NXHP
52 PRO MONOBLOC FLOOR-STANDING HYBRID SYSTEM
37 PRO MONOBLOC WALL-HUNG HYBRID SYSTEM
203 RBC-HP 1S
199 RBS 2S
125 RESIDENCE HM
122 RESIDENCE HM AQUA
75 RES WALL-HUNG SPLIT HYBRID SYSTEM
353 RIELLO 5000 CL-M
357 RIELLO 5000 TMR2
70 RIELLO ADAPTO HYBRID
437 RIELLO HEATGATE
165 RIELLO MINI LN
219 RIELLO SC ACS
219 RIELLO SC SUN
351 RIELLOTECH CLIMA COMFORT
351 RIELLOTECH CLIMA MIX
355 RIELLOTECH PRIME
355 RIELLOTECH PRIME ACS
420 RK N HYDROLINE
132 RLT
195 RPS 20/4 A
192 RPS 25/4 A
184 RPS 25/4 A SYSTEM
476 RSB-RSI
216 RSS & EVOSOL
324 RTG
340 RTQ 2S
333 RTQ 3S
327 RTQ T
330 RTQ TK
312 RTS 2S
301 RTS 3S
190 SOLAR SYSTEM ACCESSORIES
190 SOLAR THERMAL ACCESSORIES
222 SOLAR THERMAL ACCESSORIES
129 START
137 START
135 START LN
248 STEEL PRO POWER
218 SUN PRO
284 TAU N
294 TAU N OIL
297 TAU N OIL PRO
292 TAU N PREMIX
278 TAU UNIT
456 VEGA RMXA-RMYA
459 VEGA RSHE
469 VEGA RTHE

TABLE OF CONTENTS

HYBRID SYSTEMS

HYBRID SYSTEMS WITH MONOBLOC HEAT PUMP 23

WALL-HUNG SOLUTIONS

24 HYBRID WALL SYSTEMS
37 PRO MONOBLOC WALL-HUNG HYBRID SYSTEM
52 PRO MONOBLOC FLOOR-STANDING HYBRID SYSTEM

HYBRID SYSTEMS WITH SPLIT HEAT PUMP 69

WALL-HUNG SPLIT SOLUTION

70 RIELLO ADAPTO HYBRID
75 RES WALL-HUNG SPLIT HYBRID SYSTEM

HEAT PUMPS

HEAT PUMPS 93

AIR-WATER MONOBLOC

94 NXHP
97 NXHM 004-016
99 NXHM 018-030

AIR-WATER WALL-HUNG SPLIT

101 FAMILY SPRINT R32

AIR-WATER FLOOR-STANDING SPLIT

105 DOMUS M

WALL-HUNG BOILERS

CONDENSING WALL-HUNG BOILERS 110

INDOOR

112 FAMILY HM CONNECT
116 FAMILY HM
120 FAMILY AQUA CONDENS
122 RESIDENCE HM AQUA
125 RESIDENCE HM
129 START
132 RLT

STANDARD-EFFICIENCY WALL-HUNG BOILERS 134

INDOOR

135 START LN
137 START
139 FASTECH

SYSTEM COMPLEMENTARY ITEMS 141

HYDRAULIC DISTRIBUTION MODULES

142 BAG³ HYBRID
143 BAG³

FLOOR-STANDING BOILERS

FLOOR-STANDING CONDENSING BOILERS 149

FLOOR-STANDING OIL BOILERS

150 INSIEME EVO COND

FLOOR-STANDING STANDARD EFFICIENCY BOILERS 153

STEEL FLOOR-STANDING OIL BOILERS

154 INSIEME EVOE LN

WATER-HEATERS

HEAT PUMPS 159

WALL HUNG

160 NEXAQUA

FLOOR STANDING

161 NEXPRO ACS

LOW NOX INSTANTANEOUS - GAS 163

CONVENTIONAL FLUE

164 ACQUAFUN² LN P

ROOM SEALED

165 RIELLO MINI LN

FLUE OPTION SYSTEMS

FOR CONDENSING 168

168 FLUE OPTION FOR CONDENSING

STANDARD EFFICIENCY 178

178 FLUE OPTION FOR STANDARD EFFICIENCY

RIELLO

TABLE OF CONTENTS

SOLAR THERMAL AND CYLINDER

SOLAR SYSTEMS 183

FORCED CIRCULATION

184 RPS 25/4 A SYSTEM

NATURAL CIRCULATION

188 CSNA-A SYSTEM

ACCESSORIES

190 SOLAR SYSTEM ACCESSORIES

190 SOLAR THERMAL ACCESSORIES

SOLAR COLLECTORS 191

FLAT PLATE

192 RPS 25/4 A

195 RPS 20/4 A

SOLAR DHW AND STORAGE CYLINDERS 198

DOUBLE COILS DHW CYLINDERS

199 RBS 2S

FLANGED AND DOUBLE COILS DHW CYLIDERS

201 7200/3F HV PLUS

201 7200/2 HV PLUS

SINGLE COIL DHW CYLINDERS

203 RBC-HP 1S

207 7200 HP

COMBINED STORAGE CYLINDERS

209 7200 KOMBISOLAR^{2S}

210 7200 KOMBI PLUS

STORAGE CYLIDERS

211 7000 PUFFER

213 7000 ACI PLUS

COMPLEMENTARY ITEMS 215

SOLAR CONTROLLERS AND PUMP STATIONS

216 RSS & EVOSOL

218 SUN PRO

HEAT EXCHANGER UNITS

219 RIELLO SC SUN

219 RIELLO SC ACS

ACCESSORIES 221

222 SOLAR THERMAL ACCESSORIES

CENTRALIZED HEATING

WALL-HUNG MODULAR SYSTEM 228

INDOOR/OUTDOOR

228 CONDEXA HPR

234 CONDEXA PRO

FLOOR-STANDING MODULAR SYSTEM 248

INDOOR/OUTDOOR

248 STEEL PRO POWER

INDOOR

261 ALU PRO POWER

FLOOR-STANDING BOILERS 277

GAS CONDENSING

278 TAU UNIT

284 TAU N

292 TAU N PREMIX

OIL CONDENSING

294 TAU N OIL

297 TAU N OIL PRO

STEEL JET BURNER BOILERS GAS/OIL 300

THREE FLUE GAS PASSES

301 RTS 3S

312 RTS 2S

324 RTG

327 RTQ T

330 RTQ TK

REVERSE FLAME

333 RTQ 3S

340 RTQ 2S

CONTROL PANELS AND THERMOREGULATIONS 349

ELECTRONIC AND THERMOSTATIC

351 RIELLOTECH CLIMA COMFORT

351 RIELLOTECH CLIMA MIX

353 RIELLO 5000 CL-M

355 RIELLOTECH PRIME

355 RIELLOTECH PRIME ACS

357 RIELLO 5000 TMR2

TABLE OF CONTENTS

FLUE OPTIONS SYSTEM 359

FOR CONDENSING

360 FLUE OPTION FOR CONDENSING

AIR CONDITIONING

AIR CONDITIONERS 373

MONOSPLIT

374 AARIA MONO PLUS I-AMW PI
376 AARIA MONO PLUS I-AMS
377 AARIA MONO PLUS I-AMC
378 AARIA MONO PLUS I-AMK
380 AARIA MONO PLUS I-AMD
381 AARIA START N-AMW ST N

MULTISPLIT

383 AARIA MULTI PLUS I

PROFESSIONAL AIR CONDITIONERS 386

MONO INVERTER

387 AARIA PRO P-AMS P
389 AARIA PRO P-AMK P
391 AARIA PRO P-AMD P

TERMINAL UNITS

FAN COILS 396

WALL-MOUNTED FAN COIL

398 DESIGN WALL

FAN COILS WITH CABINET

400 DESIGN INVERTER PLUS
403 DESIGN INVERTER
406 DESIGN S INVERTER

FAN COILS FOR RECESSED INSTALLATION IN BOX

408 INVISIBLE INVERTER
411 INVISIBLE INVERTER PLUS
414 INVISIBLE INVERTER CEILING

FAN COILS FOR RECESSED INSTALLATION

417 IN INVERTER
417 IN INVERTER PLUS

"CASSETTE" FAN COILS

420 RK N HYDROLINE

DUCTABLE FAN COILS 422

RECESSED INSTALLATION

422 FCU N

WATER AIR HEATERS 425

WALL-CEILING MOUNTED

425 NUOVO ACU-NUOVO ACU F

SYSTEM COMPLEMENTARY ITEMS

THERMOSTAT AND CHRONOTERMOSTAT 431

THERMOSTAT AND CHRONOTERMOSTAT

432 HI, COMFORT T300
433 HI, COMFORT T100 WI-FI
435 CHRONORIELLO

HEAT-EXCHANGERS 436

PLATE HEAT-EXCHANGERS

437 RIELLO HEATGATE
454 HIU 40 DHW STD

WATER CIRCULATORS 455

HEATING AND COOLING

456 VEGA RMXA-RMYA
459 VEGA RSHE
469 VEGA RTHE

ACQUA SANITARIA

476 RSB-RSI

HOT AIR GENERATORS

GAS HOT AIR GENERATORS 481

GAS CONDENSING HOT AIR GENERATORS

482 GP CONDENS

HYBRID SYSTEMS

HEAT PUMPS & CHILLERS

WALL-HUNG BOILERS

FLOOR-STANDING BOILERS

WATER-HEATERS

FLUE OPTION SYSTEMS

SOLAR THERMAL AND CYLINDERS

CENTRALIZED HEATING

AIR CONDITIONING

TERMINAL UNITS

SYSTEM COMPLEMENTARY ITEMS

HOT AIR GENERATORS



HYBRID SYSTEMS

HYBRID SYSTEMS WITH MONOBLOC HEAT PUMP 21

HYBRID SYSTEMS WITH SPLIT HEAT PUMP 67

Overview of T300 and T200 configurations, T300-Hy and T300-I

		BOILER	HEAT PUMP	
T300		FAMILY HM RESIDENCE HM		NXHP
				NXHM
				FAMILY SPRINT
T300-Hy		START		RIELLO ADAPTO HYBRID(*)
T300-I				DOMUS M
REC10MHC		FAMILY EXT START		NXHP
				NXHM
				FAMILY SPRINT

(*) Available only in the Hybrid Systems section with split heat pump

HYBRID SYSTEMS WITH MONOBLOC HEAT PUMP

	INDOOR	OUTDOOR	BUILT-IN
COMBINED BOILERS	 HYBRID WALL SYSTEMS FAMILY HM 25-30-35 KIS FAMILY HM CONNECT 25-35 KIS RESIDENCE HM 25-30-35 KIS START 25-30 KIS page 24		 HYBRID WALL SYSTEMS FAMILY HM 25-30-35 KIS FAMILY HM CONNECT 25-35 KIS RESIDENCE HM 25-30-35 KIS START 25-30 KIS page 24
HEATING ONLY BOILERS	 HYBRID WALL SYSTEMS FAMILY HM 25-35 IS FAMILY HM CONNECT 35 IS RESIDENCE HM 20-30 IS START 15-25 IS page 24		
	 PRO MONOBLOC WALL-HUNG HYBRID SYSTEM CONDEXA HPR 35-45-55-70 CONDEXA PRO 57P-70P-90-135 page 37	 PRO MONOBLOC WALL-HUNG HYBRID SYSTEM CONDEXA PRO 57P-70P-90-135 page 37	
	 PRO MONOBLOC FLOOR-STANDING HYBRID SYSTEM STEEL PRO POWER 114/2P-270/2P-300/3P-405/3P-460/4P-540/4P ALU PRO POWER 115-600 TAU UNIT 35-190 page 52	 PRO MONOBLOC FLOOR-STANDING HYBRID SYSTEM STEEL PRO POWER 114/2P-270/2P-300/3P-405/3P-460/4P-540/4P page 52	

Please verify with Sales the availability of the product in the destination Country before ordering

Hybrid system-Wall-hung solutions

Hybrid wall systems




ERP

- Heating, cooling and domestic hot water production
- Intelligent management of multiple energy sources: condensing boiler, solar thermal and heat pump
- Large display for setting and monitoring the entire system

A wall-hung hybrid system is a multi-energy hybrid system for heating, summer cooling and domestic hot water production. This system is manufactured by combining three main components together:

- the wall-hung boiler: depending on the installation needs, the choice of the gas generator can be made among boilers from 25 to 35kW, heating only or combined boilers, for wall-hung (indoor or outdoor in partially protected places) or built-in installation. The boilers have a modulation ratio of 1:5 or 1:8, depending on the model, and are all equipped with high-efficiency circulators. The system control panel is able to activate the most energy efficient heat source based on climatic conditions, and to manage the system with up to 2 independent hot/cold temperature zones.
- the heat pump: wall-hung split air-water type, available in versions ranging from 4 to 16 kW, with wall-hung indoor unit for heating and domestic hot water production. The outdoor unit, compact and quiet, includes a Twin Rotary DC inverter compressor, electronic expansion valve, fans with brushless motor and finned pack coil optimized for heat pump operation even with outdoor air temperature of -25°C. The indoor unit houses the main components of the hydronic system, high surface plate exchanger and high-efficiency electronic circulation pump.
- the hydraulic distribution module: the choice can be made between the simple Hbox hydraulic node, and the more flexible BAG³ Hybrid distribution module. Hbox allows you to make a simple hydraulic connection between the two generators, creating a one-way system in which the boiler pumps and the heat pump supply the system. For more complex systems, the BAG³ Hybrid distribution module is available: for indoor recessed or wall-hung installations, or for outdoor recessed installations, in 1-direct, 2-direct or 1-direct and 1-mixed configurations, equipped with low consumption self-modulating circulators (EEI≤0.20). The distribution module also works as hydraulic separator between the generators and the system circuits. The system is set up for connection to a single-coil domestic hot water heater served by heat pump, or to a dual-coil domestic hot water heater served by heat pump and solar thermal system, by installing the diverting valve kit.

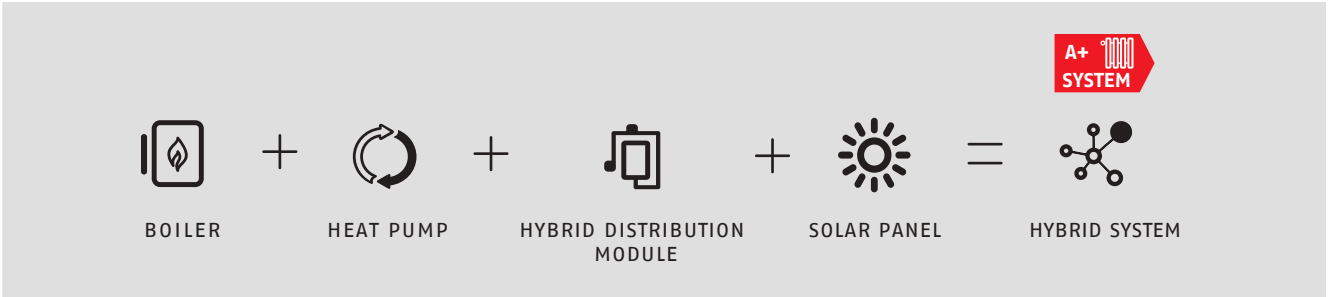


WALL-HUNG BOILERS

TECHNICAL DATA


Description	Heat output Heating/Domestic Water min-max kW	Working efficiency Pn (50°/30°C) %	Working efficiency 30% Pn (rit. 30 °C) %	Domestic water production ΔT 25° l/min	Energy efficiency class * (D → A+++)	Energy efficiency class * (F → A+)	Notes	Code
COMBINED VERSION OF HEATING AND INSTANT SANITARY WATER								
FAMILY HM 25 KIS	1,9÷20,0 / 1,9÷25,0	106,5	109,7	14,3	A	A	(1)(3)	**20206147**
FAMILY HM 30 KIS	2,7÷25,0 / 2,7÷30,0	106,0	109,6	17,2	A	A	(1)(3)	**20206148**
FAMILY HM 35 KIS	2,7÷32,0 / 2,7÷34,9	105,3	109,7	20,0	A	A	(1)(3)	**20206149**
FAMILY HM CONNECT 25 KIS	1,9÷20,0 / 1,9÷25,0	106,5	109,7	14,3	A	A	(1)(4)	**20206152**
FAMILY HM CONNECT 35 KIS	2,7÷32,0 / 2,7÷34,9	105,3	109,7	20,0	A	A	(1)(4)	**20206153**
RESIDENCE HM 25 KIS	2,5÷20,0 / 2,5÷25,0	106,5	108,8	14,3	A	A		**20205317**
RESIDENCE HM 30 KIS	3,0÷25,0 / 3,0÷30,0	106,0	108,8	17,2	A	A		**20205318**
RESIDENCE HM 35 KIS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	20,0	A	A		**20205319**
START 25 KIS	3,1÷20,0 / 3,1÷25,0	104,6-98,0	109,1	14,3	A	A	(1)	**20187404**
START 25 KIS	3,1÷20,0 / 3,1÷25,0	104,6-98,0	109,1	14,3	A	A	(1)	**20187772**
START 30 KIS	3,95÷25,0 / 3,95÷30,0	107,1-103,6	108,8	17,2	A	A	(1)	**20187407**
HEATING ONLY VERSION								
FAMILY HM 25 IS	1,9÷20,0 / 1,9÷25,0	106,5	109,7	-	A	-		**20206150**
FAMILY HM 35 IS	2,7÷32,0 / 2,7÷34,9	105,3	109,7	-	A	-		**20206151**
FAMILY HM CONNECT 35 IS	2,7÷32,0 / 2,70÷34,90	105,3	109,7	-	A	-		**20206154**
RESIDENCE HM 20 IS	2,5÷20,0 / 2,5÷20,0	106,5	108,8		A	-		**20205320**
RESIDENCE HM 30 IS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	-	A	-	(1)(2)	**20205321**
START 15 IS	3,1÷15,0 / 3,1÷25,0	105,7-98,0	109,6	-	A	-	(1)(2)	**20187773**
START 25 IS	3,1÷20,0 / 3,1÷25,0	104,6-98,0	109,1	-	A	-	(1)(2)	**20187774**
BUILT-IN INSTALLATION UNIT								
BUILT-IN INSTALLATION BOX								**20161604**
BUILT-IN UNIT S								**20082309**
BUILT-IN UNIT M								**20082310**

(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+
(1) The external probe is not included in the boiler supply, but is available as an accessory with code 1220559.
(2) To create a wall-mounted hybrid system, it is necessary to replace the boiler display with the code 20207837.
(3) To create a wall-mounted hybrid system, it is necessary to replace the boiler display with the code 20205322.
(4) Boilers already equipped with T300 hybrid system control panel, code 20205322.


OVERALL DIMENSIONS

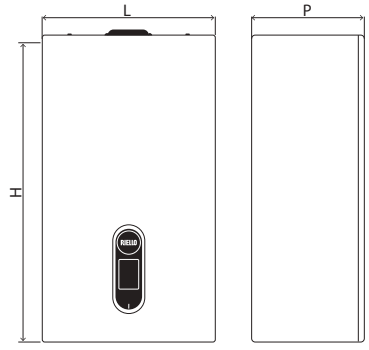

Description	H mm	L mm	P mm	Net weight kg
FAMILY HM 25 KIS / CONNECT	740	420	275	29
FAMILY HM 30 KIS	740	420	275	30
FAMILY HM 35 KIS / CONNECT	740	420	275	30
FAMILY HM 25 IS	740	420	275	28
FAMILY HM 35 IS / CONNECT	740	420	275	29

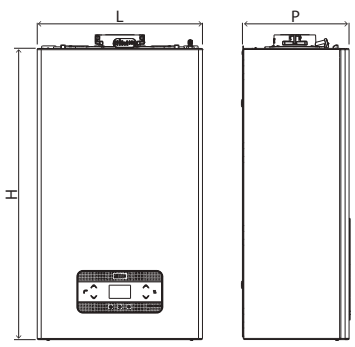

Description	H mm	L mm	P mm	Net weight kg
RESIDENCE HM 25 KIS	740	420	275	29
RESIDENCE HM 30 KIS	740	420	275	30
RESIDENCE HM 35 KIS	740	420	275	30
RESIDENCE HM 20 IS	740	420	275	28
RESIDENCE HM 30 IS	740	420	275	29

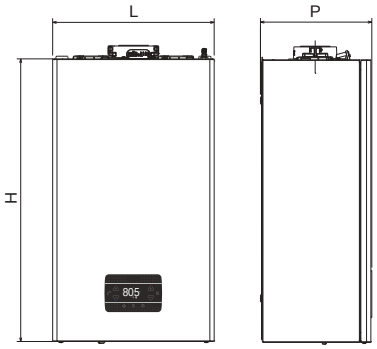

Description	H mm	L mm	P mm	Net weight kg
START 25 KIS	700	400	275	28,5
START 30 KIS	700	400	275	30,0
START 25 IS	700	400	275	27,5
START 15 IS	700	400	275	27,5

MATCHING HEAT PUMPS


TECHNICAL DATA

Description	Heating				Cooling				Electrical supply V/Ph/Hz	Energy efficiency class (5) (D → A+++)*	Code
	Floor (1)		Fan coils (2)		Floor (3)		Fan coils (4)				
	Nominal power kW	COP	Nominal power kW	COP	Nominal power kW	EER	Nominal power kW	EER			
AIR-WATER MONOBLOC SINGLE PHASE											
NXHM 004	4,20	5,10	4,30	3,80	4,50	5,50	4,70	3,45	230/1/50	A++	**20203404**
NXHM 006	6,35	4,95	6,30	3,70	6,50	4,80	7,00	3,00	230/1/50	A++	**20203407**
NXHM 008	8,40	5,15	8,10	3,85	8,30	5,05	7,45	3,35	230/1/50	A++	**20203409**
NXHM 010	10,00	4,95	10,00	3,75	9,90	4,55	8,20	3,25	230/1/50	A++	**20203410**
NXHM 012	12,10	4,95	12,30	3,70	12,00	3,95	11,50	2,75	230/1/50	A++	**20203649**
NXHM 014	14,50	4,60	14,10	3,60	13,50	3,61	12,40	2,50	230/1/50	A++	**20203650**
AIR-WATER MONOBLOC THREE-PHASE											
NXHM 012T	12,10	4,95	12,30	3,70	12,00	3,95	11,50	2,75	400/3/50	A++	**20203652**
NXHM 014T	14,50	4,60	14,10	3,60	13,50	3,61	12,40	2,50	400/3/50	A++	**20203653**


(*) HEATING: the range of energy efficiency class of this products category is between D and A+++
The performance is in accordance with standard EN 14511-3:2013 and refers to the following conditions:
(1) Heating: delivery water temperature 35 °C with thermal gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(2) Heating: delivery water temperature 45 °C with gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(3) Cooling: delivery water temperature 18 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(4) Cooling: delivery water temperature 7 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(5) Seasonal energy efficiency class for average climate zone for 55 °C delivery temperature.

OVERALL DIMENSIONS

NXHM 004-006

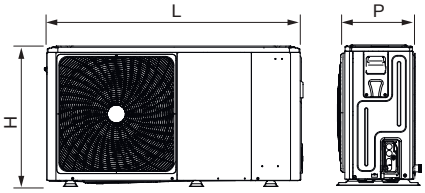

NXHM 008-014

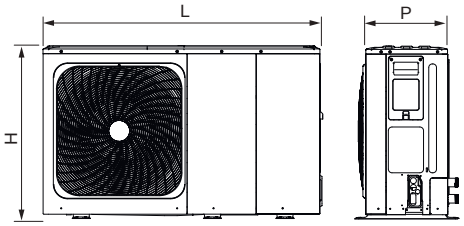

Description	H mm	L mm	P mm	Net weight kg
NXHM 004	718	1295	426	86
NXHM 006	718	1295	426	86
NXHM 008	865	1385	523	105
NXHM 010	865	1385	523	105
NXHM 012/012T	865	1385	523	129/144
NXHM 014/014T	865	1385	523	129/144


MATCHING HYBRID DISTRIBUTION MODULES

TECHNICAL DATA


Description	Zone management	Electrical power supply V/Ph/Hz	Maximum power absorbed W	Notes	Code
DISTRIBUTION MODULES WITHOUT SEPARATOR					
HBOX – 1D HYBRID DISTRIBUTION MODULE	1 direct zone	–	–	(1)	**20165227**
DISTRIBUTION MODULES WITH SEPARATOR					
BAG³ HYBRID 1D	1 direct zone	230/1/50	57	(2)(5)	**20130805**
BAG³ HYBRID 2D	2 direct zone	230/1/50	114	(2)(5)	**20130806**
BAG³ HYBRID 1D+1M	1 direct zone + 1 mixed zone	230/1/50	118	(3)(5)	**20130807**
IN-WALL INSTALLATION BOX	–	–	–	(4)	**20130808**

(1) Can only be combined with NXH 005-007 heat pumps code 20161608 and 20161610.
(2) Equipped as standard with limit thermostat for low temperature systems.
(3) Mixed zone equipped as standard with limit thermostat for low temperature systems.
(4) Galvanised sheet in-wall installation box, possible white painting; the box is mandatory for installation of BAG³ HYBRID.
(5) Supplied without in-wall installation box.

OVERALL DIMENSIONS




Description	H mm	L mm	P mm	Net weight kg
HBOX – 1D HYBRID DISTRIBUTION MODULE	107	187	92	0,9

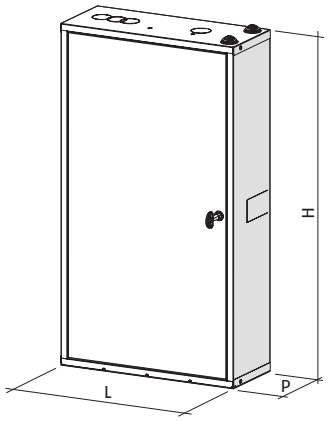


Description	H mm	L mm	P mm	Net weight kg
BAG³ HYBRID 1D	797	400	160	17
BAG³ HYBRID 2D	797	400	160	18
BAG³ HYBRID 1D+1M	797	400	160	18
IN-WALL INSTALLATION BOX	797	400	160	8


BAG³ HYBRID 1D



BAG³ HYBRID 2D

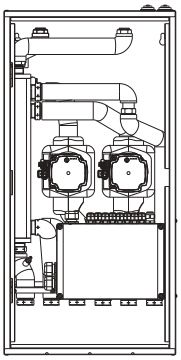

BAG³ HYBRID 1D+1M



ACCESSORIES

Description	Notes	Code
HB0X adjustable bypass valve	(1)	**20182807**


(1) Mandatory accessory when using HB0X – 1D hybrid distribution module code 20165227 with variable flow systems.

REC10MHC MANAGEMENT CONTROL


TECHNICAL DATA

Description	Electrical power supply V/Ph/Hz	Notes	Code
REC10MHC Management control	230/1/50		**20207837**
T300 Hi, Comfort Management control	230/1/50		**20205322**

OVERALL DIMENSIONS

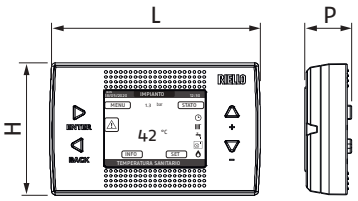

Description	H mm	L mm	P mm	Net weight kg
REC10MHC MANAGEMENT CONTROL	90	146	32	0,15



Description	H mm	L mm	P mm	Net weight kg
T300 Hi, Comfort MANAGEMENT CONTROL	95	132	95	0,15


MATCHING SANITARY TANKS

TECHNICAL DATA

Description	Usable volume l	Lower coil exchange surface (m²)	Upper coil exchange power (kW)*	Maximum temperature °C	Maximum pressure bar	Dispersions W	Energy efficiency class (F→A+)**	Notes	Code
RBC-HP 150 1S	170	0,85	6,3	99	10	55	B	(1)	**20202962**
RBC-HP 200 1S	210	1,38	8,8	99	10	58	B	(1)	**20203095**
RBC-HP 300 1S	305	1,7	12,4	99	10	68	B	(1)	**20201786**
RBS 200 2S	208	0,7	16.1	99	10	62	B	(2)	**20116675**
RBS 300 2S	301	1,0	23	99	10	69	B	(2)	**20116335**
7200 300 HP	263	4.0	-	99	10	85	C	(1)	**4383500**
7200 500 HP	470	6.0	-	99	10	112	C	(1)	**4383501**

(*) With Δt= 20°C and primary temperature of 80°C.
(**) The energy efficiency class of the products ranges from F up to A+
(1) Single-coil heater for heat pump.
(2) Double-coil solar heater.

OVERALL DIMENSIONS

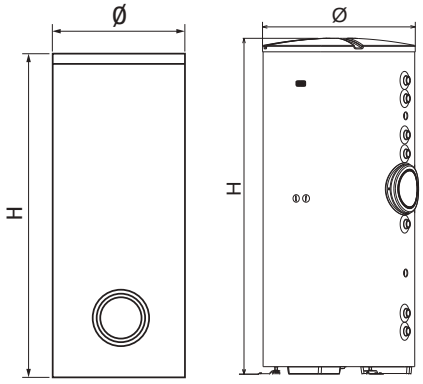

Description	H mm	Ø mm	S (*) mm	Net weight kg
RBC-HP 150 1S	1138	604	52	62
RBC-HP 200 1S	1354	604	52	78
RBC-HP 300 1S	1838	604	52	103
RBS 200 2S	1338	604	50	86
RBS 300 2S	1838	604	50	108
7200 300 HP	1615	600	50	119
7200 500 HP	1690	750	50	166

Dimensions and weight with insulation.
(*) Insulation thickness.


MATCHING SOLAR COLLECTORS

TECHNICAL DATA

Description	Collector surface		Values referred to the opening area			Stagnation temperature °C	Notes	Code
	Gross m^2	Net m^2	ηo	a1 W/m^2K	a2 W/m^2K^2			
RPS 25/4 A	2,49	2,38	0,76	2,990	0,027	180	(1)	**20201316**
RPS 20/4 A	2	1,9	0,76	2,990	0,027	180	(1)	**20201319**

(1) The solar collector brackets kits are available in the section "SOLAR COLLECTORS" on page 181.

OVERALL DIMENSIONS

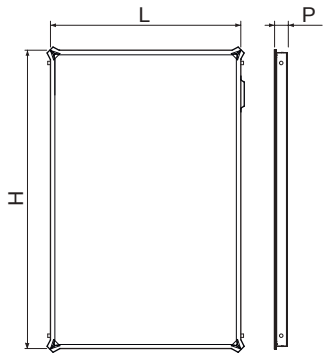

Description	H mm	L mm	P mm	Net weight kg
RPS 25/4 A	2020	1235	85	35
RPS 20/4 A	1625	1235	85	29

WALL-MOUNTED BOILER ACCESSORIES

Description	Notes	Code
FAMILY HM - FAMILY HM CONNECT BOILER		
In-wall installation unit	(1)	**20161604**
Crossbar for in-wall installation		**20191887**
Air Filter	(2)	**20190324**
Hydraulic low fittings cover		**20191519**
Dummy boiler FAMILY HM		**20209809**
Compact polyphosphate doser kit		**20191518**
Compact magnetic filter		**20191517**
Board BE09 with double multi-function relay	(3)	**20192808**
Condensate booster pump kit		**20097192**
High residual pump 7 m		**20210993**
Solar diverter valve kit for instant wall-hung combined boilers		**20035644**
Well probe for remote heater (for heating only version)		**1220599**
Flexible fittings kit for boiler replacement	(4)	**20191890**
Connection kit with heating system, domestic water and gas cocks (for KIS models)		**20133516**
Connection kit with heating system and gas cocks (for IS models)		**20133517**
Connection kit with domestic water and gas cocks (for KIS models)		**20132005**
Connection kit with gas cock (for IS models)		**20133386**
Antifreeze heaters -15 °C	(5)	**20191888**
External probe kit		**1220559**
Limit thermostat for low temperature installations		**1220639**
Split connection system kit Ø80 mm		**20217921**
Ø80 mm clapet kit for pressurized collective flues		**20164664**
Ø80/125 mm concentric clapet kit for pressurized collective flues		**20164662**
Wall-hung collector Ø60/100 mm		**20129175**
Telescopic wall-hung collector Ø60/100 mm		**20129176**
Vertical collector Ø60/100 mm		**20129177**
Vertical connection stub pipe kit Ø60/100 mm	(6)	**20129174**

Description	Notes	Code
90° bend kit Ø60/100 mm for boiler start	(7)	**20129172**
Adjustable splitter kit from Ø60/100 mm to Ø80/80 mm		**20134830**
Adaptor kit B23 Ø80 mm		**20129769**
Splitter device kit B23 Ø80 mm for in-wall installation box		**20129768**
Compact adjustable splitter device kit from 60/100 mm to 80/80 mm		**20190475**
RESIDENCE HM BOILER		
In-wall installation unit	(1)	**20161604**
Crossbar for in-wall installation		**20191887**
Air Filter	(2)	**20190324**
Hydraulic low fittings cover		**20191519**
Dummy boiler RESIDENCE HM		**20209806**
Compact polyphosphate doser kit		**20191518**
Compact magnetic filter		**20191517**
Board BE09 with double multi-function relay	(3)	**20192808**
Condensate booster pump kit		**20097192**
High residual pump 7 m		**20210993**
Solar diverter valve kit for instant wall-hung combined boilers		**20035644**
Well probe for remote heater (for heating only version)		**1220599**
Flexible fittings kit for boiler replacement	(4)	**20191890**
Connection kit with heating system, domestic water and gas cocks (for KIS models)		**20133516**
Connection kit with heating system and gas cocks (for IS models)		**20133517**
Connection kit with domestic water and gas cocks (for KIS models)		**20132005**
Connection kit with gas cock (for IS models)		**20133386**
Split connection system kit Ø80 mm		**20217921**
Ø80 mm clapet kit for pressurized collective flues		**20164664**
Ø80/125 mm concentric clapet kit for pressurized collective flues		**20164662**
Wall-hung collector Ø60/100 mm		**20129175**
Telescopic wall-hung collector Ø60/100 mm		**20129176**
Vertical collector Ø60/100 mm		**20129177**
Vertical connection stub pipe kit Ø60/100 mm	(6)	**20129174**
90° bend kit Ø60/100 mm for boiler start	(7)	**20129172**
Adjustable splitter kit from Ø60/100 mm to Ø80/80 mm		**20134830**
Adaptor kit B23 Ø80 mm		**20129769**
Splitter device kit B23 Ø80 mm for in-wall installation box		**20129768**
Compact adjustable splitter device kit from 60/100 mm to 80/80 mm		**20190475**
Antifreeze heaters -15 °C	(5)	**20191888**
External probe kit		**1220559**
Limit thermostat for low temperature installations		**1220639**
START HM BOILER		
In-wall installation unit	(1)	**20161604**
Crossbar for in-wall installation		**20191887**
Air filter	(2)	**20190324**
Hydraulic low fittings cover		**20191519**
Dummy boiler Start 25 KIS		**20191885**
Wall mounting frame 1 pc.		**20191891**
Wall mounting frame 5 pcs.		**20191892**
Compact polyphosphate doser kit		**20191518**
Compact magnetic filter		**20191517**
High residual pump 7 m		**20189142**
Crossover kit (DIN vs Riello)	(4)	**20191890**
Connection kit with heating system, domestic water and gas cocks (for KIS models)		**20133516**
Connection kit with heating system and gas cocks (for IS models)		**20133517**
Connection kit with domestic water and gas cocks (for KIS models)		**20132005**
Connection kit with gas cock (for IS models)		**20133386**
Condensate booster pump kit		**20097192**
Well probe for remote heater (for heating only version)		**1220599**

Description	Notes	Code
Solar diverter valve kit for instant wall-hung combined boilers		20035644
Board BE09 with double multi-function relay	(3)	20192808
Antifreeze heaters -15 °C	(5)	20191888
External probe		1220559
Building site kit with analogue hydrometer		20191520
Limit thermostat for low temperature installations		1220639
Fixed split system kit Ø80 mm		20129765
Ø80 mm clapet with condensate trap		20164664
Ø80/125 mm clapet with condensate trap		20164662
Wall-hung collector Ø60/100 mm		20129175
Telescopic wall-hung collector Ø60/100 mm		20129176
Vertical collector Ø60/100 mm		20129177
Vertical connection stub pipe kit Ø60/100 mm	(6)	20129174
90° bend kit Ø60/100 mm for boiler start	(7)	20129172
Adjustable splitter kit from Ø60/100 mm to Ø80/80 mm		20134830
Adapter kit B23 Ø80 mm		20129769
Split kit B23 Ø80 mm for in-wall installation box		20129768
Compact swelling kit Ø60/100 - Ø80/80		20190475
Propane air conversion kit (25 KIS - IS)		20192718
Propane air conversion kit (30 KIS)		20192719
LPG conversion kit (25 KIS - IS)		20192715
LPG conversion kit (30 KIS)		20192717

(1) Unit supplied with door.
(2) Ideal to avoid introducing impurities from the intake air into the exchanger and burner.
(3) Ideal board for managing additional circulator or zone valve and alarm remote kit.
(4) Flexible connections (sanitary, gas and heating) kit required to facilitate the replacement of boilers with previous boilers with Riello standard hydraulic connection sequence.
(5) The antifreeze heater kit allows to protect the sanitary circuit from the risk of freezing in case of temperatures below 0°C (down to -15°C), using the copper fitting
(6) Code necessary for vertical exhaust with flue system. Accessory already included in kit 20129177
(7) Code necessary for horizontal exhaust with flue system 60/100. Accessory already included in kit 20129175 and 20129176.

HEAT PUMP ACCESSORIES

Description	Notes	Code
NXHM HEAT PUMPS		
7000 ACI 60 PLUS		20090056
7000 ACI 120 PLUS		20082450
50 litre inertial buffer tank	(1)	20171999
100 litre inertial buffer tank	(1)	20142300
1" Y water filter	(2)	20175281

(1) The inertial tank cannot be installed horizontally below the heat pump.
(2) The water filter is included with the NXHM heat pump. If necessary, it should only be used for NXHM 004 and 006 models.

ACCESSORIES HYBRID DISTRIBUTION MODULES

Description	Notes	Code
HYBRID DISTRIBUTION MODULES		
Cock kit on system and heat pump side		20131752
Photovoltaic system input card	(1)	20132409
Diverting valve kit for BAG^3 HYBRID		20131755
Diverting valve kit for HBOX		20168920
Solar interface kit		20168672

(1) To be used only if the diverting valve (code 20131755) is not present in BAG3 HYBRID configuration.

SECONDARY CIRCUIT MANAGEMENT

Description	Notes	Code
1st direct/mixed area control		20132795
Control of 2nd and 3rd direct/mixed zone		20132796

Mandatory accessory when using REC10MHC or T300 for zone management

DOMESTIC TANKS MODULES

Description	Notes	Code
DOMESTIC TANKS MODULES		
Solar heat exchanger 0.8 m² (7200 300 HP)		**4383504**
Solar heat exchanger 1,2 m² (7200 500-800 HP)		**4383505**
Solar heat exchanger 0,8 m² (RBC-HP 150-300)		**20203248**
Solar mixing diverting valve kit	(1)	**20025113**

(1) Mandatory in case of domestic water heater installation and KIS model boiler.

SOLAR COLLECTOR MODULES ACCESSORIES

Description	Notes	Code
SOLAR COLLECTORS		
RSS R solar hydraulic unit	(1)	**20116168**

(1) The RSS R return-only solar hydraulic unit and the solar interface kit (code 20168672) must always be ordered together.

SOLAR THERMAL ACCESSORIES

Description	Notes	Code
SOLAR THERMAL		
Solar collector probe kit	(1)	**20008787**
Manual solar degasser kit	(2)	**20026577**
Weld-in connection kit (includes: 2 weld-in connectors for connection to collectors and 2 connectors for connection to RSS hydraulic unit or directly to the solar heater)		**20132142**
Connection kit for stainless steel tube (includes: 2 connectors for connection to collectors and 2 connectors for connection to RSS hydraulic unit or directly to the solar heater)		**20132143**
15 m flexible DN16 stainless steel tube kit (includes: double corrugated stainless steel pipe for delivery and return, cable for solar probe and suitable insulation for solar applications)		**4383254**
20 m flexible DN16 stainless steel tube kit (includes: double corrugated stainless steel pipe for delivery and return, cable for solar probe and suitable insulation for solar applications)		**4383255**
5 kg propylene glycol kit (concentrated heat transfer fluid, with corrosion inhibitors, for flat collectors)		**4383085**
10 kg propylene glycol kit (concentrated heat transfer fluid, with corrosion inhibitors, for flat collectors)		**4383059**
18-Litre SUN expansion reservoir (specific for solar applications, complete with bracket, ¾" connection)		**4383052**
24-Litre SUN expansion reservoir (specific for solar applications, complete with bracket, ¾" connection)		**4383053**

(1) The solar interface kit code 20168672 already contains the solar probe.
(2) Use one for each set of manifolds fitted in the highest position.

Hi, COMFORT CONTROLS

Room controls with capability of management through APP

Drawing	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**
	Hi, Comfort T200		**20211852**

(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For cable connection to the boiler. Compatible for radio frequency connection with Hi, Comfort G100-W code 20193355 (accessory not included and necessary for internet connection via home ADSL modem).


SYSTEM CONFIGURABILITY

Description	Code	Built-in unit			Management control		Heat pumps possible combinations								Hydraulic distribution			
		Built-in unit M	Built-in unit	Built-in unit S	Hi, Comfort T300	REC10MHC management control	NXHM 004	NXHM 006	NXHM 008	NXHM 010	NXHM 012	NXHM 014	NXHM 012T	NXHM 014T	HBOX - 1D hybrid distribution module (1)	BAG³ HYBRID 1D (2)	BAG³ HYBRID 2D (2)	BAG³ HYBRID 1D+1M (2)
		20082310	20161604	20082309	20205322	20207837	20203404	20203407	20203409	20203410	20203649	20203650	20203652	20203653	20165227	20130805	20130806	20130807
COMBINED VERSION OF HEATING AND INSTANT SANITARY WATER (*)																		
FAMILY HM 25 KIS	**20206147**		●		●		●	●	●						●	●	●	●
FAMILY HM 30 KIS	**20206148**		●		●		●	●	●	●	●		●		●	●	●	●
FAMILY HM 35 KIS	**20206149**		●		●		●	●	●	●	●	●	●	●	●	●	●	●
FAMILY HM CONNECT 25 KIS	**20206152**		●		(3)		●	●	●						●	●	●	●
FAMILY HM CONNECT 35 KIS	**20206153**		●		(3)		●	●	●	●	●	●	●	●	●	●	●	●
RESIDENCE HM 25 KIS	**20205317**		●		●		●	●	●						●	●	●	●
RESIDENCE HM 30 KIS	**20205318**		●		●		●	●	●	●	●		●		●	●	●	●
RESIDENCE HM 35 KIS	**20205319**		●		●		●	●	●	●	●	●	●	●	●	●	●	●
START 25 KIS	**20187404**		●			●	●	●	●						●	●	●	●
START 25 KIS	**20187772**		●			●	●	●	●						●	●	●	●
START 30 KIS (4)	**20187407**		●			●	●	●	●	●	●		●		●	●	●	●
HEATING ONLY VERSION (*)																		
FAMILY HM 25 IS	**20206150**		●		●		●	●	●						●	●	●	●
FAMILY HM 35 IS	**20206151**		●		●		●	●	●	●	●	●	●	●	●	●	●	●
FAMILY HM CONNECT 35 IS	**20206154**		●		(3)		●	●	●	●	●	●	●	●	●	●	●	●
RESIDENCE HM 20 IS	**20205320**		●		●	●	●	●	●						●	●	●	●
RESIDENCE HM 30 IS	**20205321**		●		●	●	●	●	●						●	●	●	●
START 15 IS	**20187773**		●			●	●	●	●						●	●	●	●
START 25 IS	**20187774**		●			●	●	●	●						●	●	●	●

(1) Can only be combined with NXHM 004-006-008 heat pumps.
(2) Combine the flush-mounted box code 20130808 only with BAG³ HYBRID code 20130805, 20130806 and 20130807.
(3) Boiler already equipped with a T300 Hi, Comfort Management control.
(4) For configurations of hybrid systems composed of START 25-30 KIS MTN, NXHM 004-006-008, and H BOX module 1 DIR, see Riello Hybrid Start page.
(*) Check when ordering which BUILT-IN RIGID RAMPS the boiler needs to be installed in the BUILT-IN UNITS.


EXAMPLES OF PLANT WITH HYBRID WALL SYSTEM

BIVALENT HEATING, COOLING AND DHW PRODUCTION SYSTEM COMBINED WITH HEAT PUMP AND BOILER

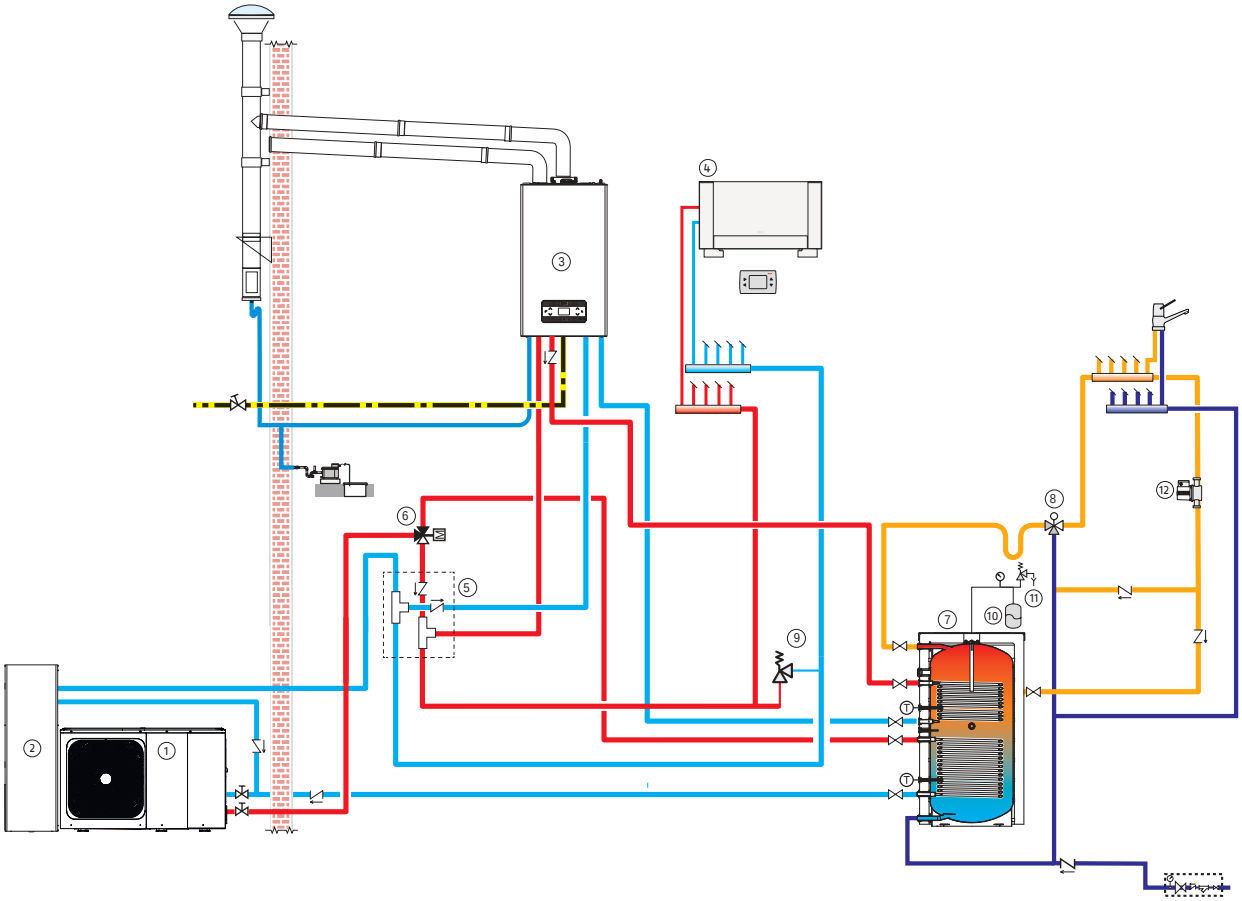


1. Heat pump
2. Hot/cold inertial storage kit
3. Wall-hung boiler
4. Fan coil
5. HBOX - 1D Hybrid distribution module
6. DHW diverter valve kit for heat pump
7. Heater
8. ¾ "thermostatic mixer
9. Adjustable by-pass valve
10. Expansion vessel
11. Safety valve
12. DHW recirculation pump

BIVALENT HEATING, COOLING AND DHW PRODUCTION SYSTEM COMBINED WITH HEAT PUMP AND MULTI-ZONE BOILER

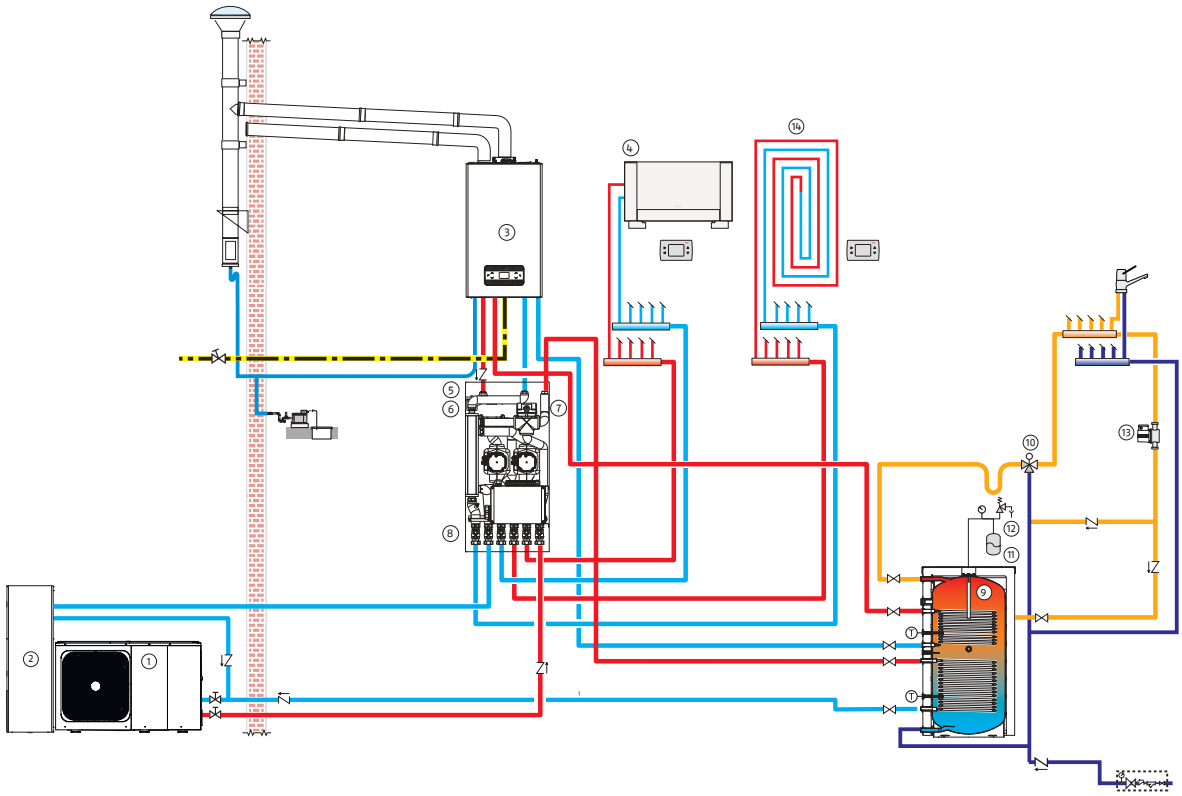

1. Heat pump
2. Hot/cold inertial storage kit
3. Wall-hung boiler
4. Fan coil
5. BAG³ HYBRID
6. In-wall installation box
7. BAG³ HYBRID Diverting valve kit
8. Tap kit for BAG3 HYBRID system and heat pump side
9. Heater
10. ¾ "thermostatic mixer
11. Expansion vessel
12. Safety valve
13. DHW recirculation pump
14. Underfloor heating system

BIVALENT HEATING, COOLING AND DHW PRODUCTION SYSTEM COMBINED WITH SOLAR THERMAL, HEAT PUMP AND BOILER

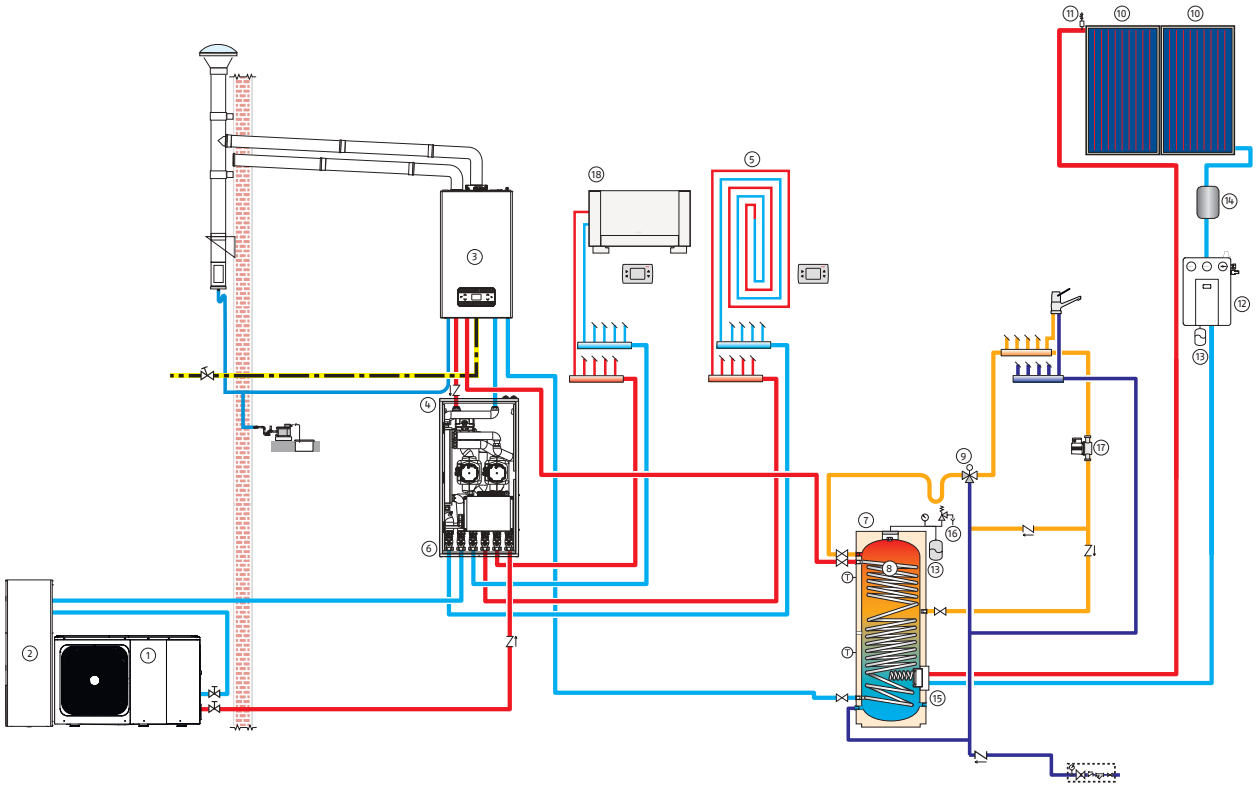

1. Heat pump
2. Hot/cold inertial storage kit
3. Wall-hung boiler
4. BAG³ HYBRID
5. Underfloor heating system
6. Tap kit for BAG3 HYBRID system and heat pump side
7. DHW heater
8. DHW boiler coil
9. ¾ "thermostatic mixer
10. Solar collector
11. Manual solar degasser kit
12. Solar hydraulic unit
13. Expansion vessel
14. Intermediate solar tank
15. Solar exchanger
16. Safety valve
17. DHW recirculation pump
18. Fan coil

Air-water split floor-standing heat pump

PRO Monobloc wall-hung hybrid system



ERP

- Heating/cooling and production of DHW
- Smart management of multiple energy sources: condensing boiler, solar thermal and heat pump.
- Possibility of managing up to 2 independent zones

The PRO monobloc wall-hung hybrid system is a multi-energy hybrid system suitable for heating, summer cooling and the production of DHW. This system combines two main components:

- the wall-hung boiler: depending on the power required by the system, the gas boiler can be chosen from the CONDEXA HPR or CONDEXA PRO ranges, in stand-alone or cascade versions. Power can vary from a minimum of 35 kW to a maximum of 645 kW, depending on the range and configuration chosen. The boilers in the CONDEXA HPR range are equipped with a horizontal stainless steel primary heat exchanger; the range consists of 4 models in heat only version, with thermal modules from 34.9 up to 70 kW. Condexa HPR can be installed individually indoors or in a partially protected location, while up to four modules can be installed internally in cascade, either in an in-line or back-to-back configuration. It can operate with a mixture of natural gas and hydrogen, up to a maximum of 20%. It has a modulation ratio of 1:8 in a single installation, up to 1:32 in coil installation. It is also equipped with a modulating pump with high head and low consumption. The maximum operating pressure is 5 bar. The boilers in the CONDEXA PRO range are equipped with a vertical stainless steel primary exchanger. The range consists of 6 models with thermal modules from 57 up to 131 kW. The power modulation ratio is 1:5 in single boiler installations and up to 1:25 in cascades of up to 5 boilers as required for use with this hybrid system. It can be installed indoors or alternatively, in a single boiler configuration, outdoors, with the use of a special optional kit. It is also equipped with a modulating pump with high head and low consumption. The maximum operating pressure is 6 bar.
- the external monobloc heat pump which operates with environmentally friendly refrigerant R32, for heating, cooling and DHW pre-heating for domestic use. Depending on the chosen overall capacity of the boiler system, a split heat pump from the NXHM 010-030 series in a stand-alone version or NXHM 018-030 in a stand-alone and cascade version. The NXHM 004-016 series heat pump is available in the 10, 12, 14 and 16 kW versions. There are 4 models (18 and 30 kW) of the NXHM 018-030 series heat pump available. The system can interface with a photovoltaic system to change its energy strategy, favouring the use of the electrical source when self-producing.

To complete the system, a wide range of accessories is available to ensure simple, fast installation and to meet different installation requirements.
Available accessories can be found in the specific sections of the boilers and heat pumps used by the system.


WALL-HUNG BOILERS

TECHNICAL DATA

Description	OUTPUT KW			EFFICIENCY - %			Energy efficiency class (D→A+++)*	Code
	Useful 80°/60° max	Useful 50°/30° max	Furnace min-max	Useful Pn (80°/60°)	Useful Pn (50°/30°)	Useful 30% Pn (50°/30°)		
WALL-HUNG CONDENSING GAS-FIRED MODULES FOR INTERNAL ENVIRONMENTS								
CONDEXA HPR 35	33,99	37,31	5,2-34,9	97,4	106,9	108,2	A	**20190064**
CONDEXA HPR 45	43,88	47,30	5,2-45,0	97,5	105,1	107,9	A	**20190066**
CONDEXA HPR 55	53,60	58,25	8,2-55,0	97,5	105,9	107,6	A	**20190067**
CONDEXA HPR 70	68,22	74,19	8,2-70,0	97,5	106,0	107,5	A	**20190068**
WALL-HUNG CONDENSING GAS-FIRED MODULES FOR INTERNAL/ EXTERNAL ENVIRONMENTS								
CONDEXA PRO 57 P	55,7	61,6	14,0-57,0	98,3	108,6	109,2	A	**20115223**
CONDEXA PRO 70 P	67,1	73,9	14,0-68,0	98,1	108,1	109,0	A	**20115224**
CONDEXA PRO 90	88,3	97,4	19,4-90,0	98,2	108,3	109,1	-	**20115225**
CONDEXA PRO 100	95,3	105,1	19,4-97,0	98,1	108,2	109,0	-	**20115226**
CONDEXA PRO 115	109,9	121,2	22,4-112,0	98,5	108,6	108,8	-	**20115228**
CONDEXA PRO 135	129,2	142,3	26,2-131,0	98,3	108,3	109,1		**20115229**


(*) HEATING: the energy efficiency class of the products ranges from D up to A+++

OVERALL DIMENSIONS




Description	H mm	L mm	P mm	Ø mm	Net weight kg
CONDEXA HPR 35	740	470	350	60/100	39
CONDEXA HPR 45	740	470	350	60/100	39
CONDEXA HPR 55	740	470	453	80/125	53
CONDEXA HPR 70	740	470	453	80/125	53


CONDEXA HPR 35-45



CONDEXA HPR 55-70



MI - SYSTEM DELIVERY Ø G 1" ½ M
RI - SYSTEM RETURN Ø G 1" ½ M
SC - CONDENSATE OUTLET Ø 25 mm
G - GAS INLET Ø G 1" M

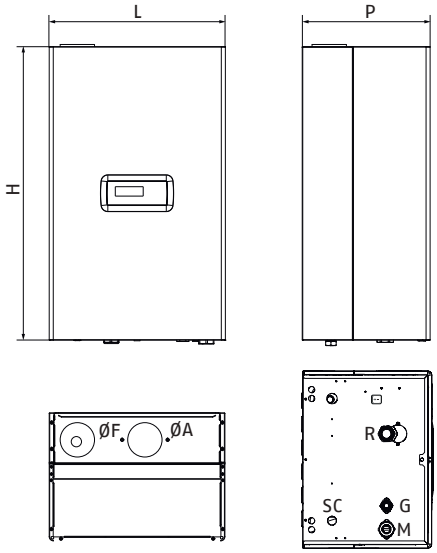

Description	H mm	L mm	P mm	Ø mm	Net weight kg
CONDEXA PRO 57 P	1000	600	435	80	64
CONDEXA PRO 70 P	1000	600	435	80	64
CONDEXA PRO 90	1000	600	435	110	69
CONDEXA PRO 100	1000	600	435	110	69
CONDEXA PRO 115	1170	600	435	110	84
CONDEXA PRO 135	1170	600	435	110	90

M-DELIVERY G 1"½
G-GAS G 1"
R-RETURN 1"½
SC-CONDENSATE OUTLET Ø24 mm
ØF-FLUE GAS
ØA-AIR (optional)


MATCHING HEAT PUMPS


TECHNICAL DATA

Description	HEATING				COOLING				Electrical supply V/Ph/Hz	Energy efficiency class (5) (D → A+++)*	Code
	Floor (1)		Fan coils (2)		Floor (3)		Fan coils (4)				
	Nominal power kW	COP	Nominal power kW	COP	Nominal power kW	EER	Nominal power kW	EER			
AIR-WATER MONOBLOC SINGLE PHASE											
NXHM 010	10,00	4,95	10,00	3,75	9,90	4,55	8,20	3,25	230/1/50	A+++	**20203410**
NXHM 012	12,10	4,95	12,30	3,70	12,00	3,95	11,50	2,75	230/1/50	A+++	**20203649**
NXHM 014	14,50	4,60	14,10	3,60	13,50	3,61	12,40	2,50	230/1/50	A+++	**20203650**
NXHM 016	15,90	4,50	16,00	3,50	14,20	3,61	14,00	2,50	230/1/50	A+++	**20203651**
AIR-WATER MONOBLOC THREE-PHASE											
NXHM 012T	12,10	4,95	12,30	3,70	12,00	3,95	11,50	2,75	400/3/50	A+++	**20203652**
NXHM 014T	14,50	4,60	14,10	3,60	13,50	3,61	12,40	2,50	400/3/50	A+++	**20203653**
NXHM 016T	15,90	4,50	16,00	3,50	14,20	3,61	14,00	2,50	400/3/50	A+++	**20203655**
NXHM 018T	18,00	4,70	18,00	3,50	18,50	4,75	17,00	3,05	400/3/50	A+++	**20194140**
NXHM 022T	22,00	4,40	22,00	3,40	23,00	4,60	21,00	2,95	400/3/50	A+++	**20194141**
NXHM 026T	26,00	4,08	26,00	3,10	27,00	4,30	26,00	2,70	400/3/50	A+++	**20194142**
NXHM 030T	30,10	3,91	30,00	2,90	31,00	4,00	29,50	2,55	400/3/50	A++	**20194143**

(*) HEATING: the range of energy efficiency class of this products category is between D and A+++
The performance is in accordance with standard EN 14511-3:2013 and refers to the following conditions:
(1) Heating: delivery water temperature 35 °C with thermal gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(2) Heating: delivery water temperature 45 °C with gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(3) Cooling: delivery water temperature 18 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(4) Cooling: delivery water temperature 7 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(5) Seasonal energy efficiency class for average climate zone for 55 °C delivery temperature.

OVERALL DIMENSIONS





Description	H mm	L mm	P mm	Net weight kg
NXHM 010	865	1385	523	105
NXHM 012-016	865	1385	523	129
NXHM 012T-016T	865	1385	523	144

Description	H mm	L mm	P mm	Net weight kg
NXHM 018-030T	1558	1129	528	177

MATCHING INERTIAL STORAGE

TECHNICAL DATA

Description	Volume output power l	Maximum temperature °C	Maximum pressure bar	Dispersion W	Energy efficiency class (F→A+)*	Notes	Code
7000 ACI 200 PLUS	203	99	6	68	C	(1)	**20028093**
7000 ACI 300 PLUS	277	99	6	82	C	(1)	**20028094**
7000 ACI 500 PLUS	473	99	6	114	C	(2)	**20028096**
7000 ACI 800 PLUS	732	99	6	131	C	(2)	**20137619**
7000 ACI 1000 PLUS	855	99	6	139	C	(2)	**20137620**

(*) The energy efficiency class of the products ranges from F up to A+
(1) Tank with 4 fittings for use in series on boiler return in combination with hydraulic separator.
(2) Tank with 6 connections to be used as shown in the diagrams at the end of this section.


MATCHING SOLAR HYDRAULIC UNITS

TECHNICAL DATA

Description	Connection and ball valve	Net area connectable collectors m²	Notes	Code
RSS MRS	Flow/Return	55	(1)	**20116166**

(1) Equipped with differential controller EVOSOL.

OVERALL DIMENSIONS



Description	H mm	L mm	P mm	Net weight kg
RSS MRS	418	313	185	5,0


MATCHING SOLAR COLLECTORS

TECHNICAL DATA

Description	Collector surface		Values referred to the opening area			Stagnation temperature °C	Notes	Code
	Gross m²	Net m²	ηo	a1 W/m²K	a2 W/m²K²			
RPS 25/4 A	2,49	2,38	0,76	2,990	0,027	180	(1)	**20201316**
RPS 20/4 A	2	1,9	0,76	2,990	0,027	180	(1)	**20201319**

(1) The solar collector brackets kits are available in the section "SOLAR COLLECTORS" on page 181.

OVERALL DIMENSIONS

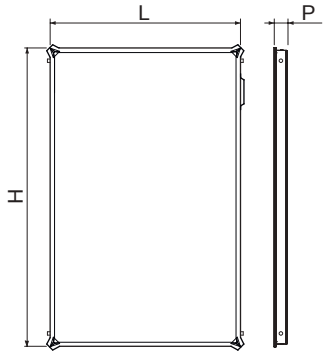

Description	H mm	L mm	P mm	Net weight kg
RPS 25/4 A	2020	1235	85	35
RPS 20/4 A	1625	1235	85	29


MATCHING DHW HEATERS

TECHNICAL DATA

Description	Usable volume l	Coil surface heat pump m²	Lower coil exchange surface (m²)	Upper coil exchange power (kW)	Maximum temperature °C	Maximum pressure bar	Dispersions W	Energy efficiency class (F→A+)*	Code
SINGLE COIL DOMESTIC HOT WATER TANKS									
7200 300 HP	263	4,0	-	-	99	10	85	C	**4383500**
7200 500 HP	470	6,0	-	-	99	10	112	C	**4383501**
7200 800 HP	702	7,0	-	-	99	10	130	C	**20136293**
RBC-HP 500 1S	500	2,2	-	-	99	10	84	B	**20201984**
RBC-HP 800 1S	735	2,5	-	-	99	7	94	B	**20202273**
RBC-HP 1000 1S	890	2,9	-	-	99	7	101	B	**20202861**
DOUBLE COIL DOMESTIC HOT WATER TANKS									
RBS 430 2S	430	-	1,4	31,4	99	10	75	B	**20117339**
RBS 550 2S	551	-	1,8	31,4	99	10	85	B	**20116587**
RBS 800 2S	731	-	2,3	50	99	7	94	B	**20132268**
RBS 1000 2S	883	-	2,7	50	99	7	101	B	**20132269**
7200/2-1500 HV PLUS	1390	-	3,4	47	99	8	162	C	**20136237**
7200/2-2000 HV PLUS	1950	-	4,6	73	99	8	186	C	**20136239**
FLANGED DOMESTIC HOT WATER TANKS									
7200/3F-1000 HV PLUS	955	-	-	-	99	10	142	C	**20136274**
7200/3F-1500 HV PLUS	1430	-	-	-	99	8	162	C	**20136275**
7200/3F-2000 HV PLUS	1990	-	-	-	99	8	186	C	**20136277**
7200/3F-3000 HV PLUS	2959	-	-	-	99	8	344	-	**20052788**

(*) The energy efficiency class of the products ranges from F up to A+


OVERALL DIMENSIONS




Description	H mm	Ø mm	S (*) mm	Net weight kg
7200 300 HP	1615	600	50	119
7200 500 HP	1690	750	50	166
7200 800 HP	1875	990	100	220

(*) Insulation thickness.
Dimensions and weight with insulation.

RBC-HP 1S 150÷500




RBC-HP 1S 800/1000

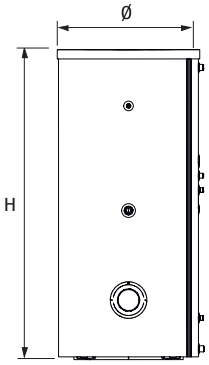

Description	H mm	Ø mm	S (*) mm	Net weight kg
RBC-HP 500 1S	1793	755	52	150
RBC-HP 800 1S	1831	970	92	203
RBC-HP 1000 1S	2156	973	92	225


(*) Insulation thickness.
Dimensions and weight with insulation.

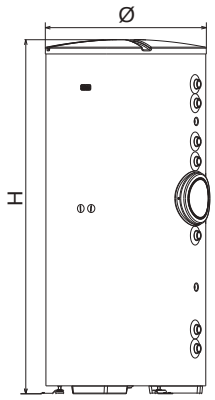


Description	H mm	Ø mm	S (*) mm	Net weight kg
RBS 430 2S	1644	755	50	146
RBS 550 2S	1988	755	50	171
RBS 800 2S	1846	1000	100	222
RBS 1000 2S	2171	1000	100	245

(*) Insulation thickness.
Dimensions and weight with insulation.

7200/2-1500/2000 HV PLUS



7200/3F-1000÷3000 HV PLUS



Description	H mm	Ø mm	S (*) mm	Net weight kg
7200/2-1500 HV PLUS	2185	1200	100	325
7200/2-2000 HV PLUS	2470	1300	100	540
7200/3F-1000 HV PLUS	2205	990	100	190
7200/3F-1500 HV PLUS	2185	1200	100	305
7200/3F-2000 HV PLUS	2470	1300	100	325
7200/3F-3000 HV PLUS	2680	1450	100	543

(*) Insulation thickness.
Dimensions and weight with insulation.

GUIDE TO SYSTEM CONFIGURATION





1. SELECTION OF WALL-HUNG BOILER RANGE
1.1 CONDEXA HPR boiler-Heat pump combinations
1.2 CONDEXA PRO boiler-Heat pump combinations

2. WALL-HUNG BOILER ACCESSORIES
2.1 Accessories for CONDEXA HPR boilers
2.2 Accessories for CONDEXA PRO boilers

3. ACCESSORIES TO COMPLETE THE SYSTEM
3.1 Hydraulic accessories
3.2 Domestic hot water tank accessories

4. HI, COMFORT CONTROLS

1. SELECTION OF WALL-HUNG BOILER RANGE

Boiler output power (80°/60°) [kW]		Stand alone	Number of cascading boilers			
Boiler range	Boiler description	1	2	3	4	5
CONDEXA HPR	CONDEXA HPR 35	34	68			
	CONDEXA HPR 45	44	88			
	CONDEXA HPR 55	54	107			
	CONDEXA HPR 70	68	136			
CONDEXA PRO	CONDEXA PRO 57 P	56	111			
	CONDEXA PRO 70 P	67	134			
	CONDEXA PRO 90	88	177	265	353	
	CONDEXA PRO 100	95	191	286	381	
	CONDEXA PRO 115	110	220	329	439	549
	CONDEXA PRO 135	129	258	387	516	645

1.1 CONDEXA HPR BOILER-HEAT PUMP COMBINATIONS

The following combinations are those that guarantee the best energy performance. For the complete list of certified hybrid systems please refer to the company statement.



Combinations with stand-alone boilers

Description	Code		1x NXHM 010 (20203410)	1x NXHM 012 (20203649)	1x NXHM 014 (20203650)	1x NXHM 016 (20203651)	1x NXHM 012T (20203652)	1x NXHM 014T (20203653)	1x NXHM 016T (20203655)	1x NXHM 18T (20194140)	1x NXHM 22T (20194141)	1x NXHM 26T (20194142)	1x NXHM 30T (20194143)
		Nominal power (kW)	10	12,1	14,5	15,9	12,1	14,5	15,9	18	22	26	30,1
CONDEXA HPR 35	**20190064**	34	•	•	•	•	•	•	•				
CONDEXA HPR 45	**20190066**	43,9		•	•	•	•	•	•	•			
CONDEXA HPR 55	**20190067**	53,6			•	•		•	•	•	•	•	
CONDEXA HPR 70	**20190068**	68,2								•	•	•	•

Combinations with cascading boilers

Description	Code		1x NXHM 18T (20194140)	1x NXHM 22T (20194141)	1x NXHM 26T (20194142)	1x NXHM 30T (20194143)	2x NXHM 18T (20194140)	2x NXHM 22T (20194141)	2x NXHM 26T (20194142)	2x NXHM 30T (20194143)	3x NXHM 18T (20194140)	3x NXHM 22T (20194141)
		Nominal power (kW)	18	22	26	30,1	36	44	52	60,2	54	66
2x CONDEXA HPR 35	**20190064**	68	•	•	•	•						
2x CONDEXA HPR 45	**20190066**	87,7		•	•	•	•					
2x CONDEXA HPR 55	**20190067**	107,2				•	•	•	•			
2x CONDEXA HPR 70	**20190068**	136,4					•	•	•	•	•	•

1.2 CONDEXA PRO BOILER-HEAT PUMP COMBINATIONS

The following combinations are those that guarantee the best energy performance. For the complete list of certified hybrid systems please refer to the company statement.



Combinations with stand-alone boilers

Description	Code		1x NXHM 014 (20203650)	1x NXHM 016 (20203651)	1x NXHM 014T (20203653)	1x NXHM 016T (20203655)	1x NXHM 18T (20194140)	1x NXHM 22T (20194141)	1x NXHM 26T (20194142)	1x NXHM 30T (20194143)	2x NXHM 18T (20194140)	2x NXHM 22T (20194141)	2x NXHM 26T (20194142)	2x NXHM 30T (20194143)	3x NXHM 18T (20194140)
		Nominal power (kW)	14,5	15,9	14,5	15,9	18	22	26	30,1	36	44	52	60,2	54
CONDEXA PRO 57 P	**20115223**	55,7	•	•	•	•	•	•	•						
CONDEXA PRO 70 P	**20115224**	67					•	•	•	•					
CONDEXA PRO 90	**20115225**	88,3							•	•	•	•			
CONDEXA PRO 100	**20115226**	95,3							•	•	•	•			
CONDEXA PRO 115	**20115228**	109,8								•	•	•	•		•
CONDEXA PRO 135	**20115229**	129									•	•	•	•	•

Combinations with cascading boilers

Description	Code		1x NXHM 30T (20194143)	2x NXHM 18T (20194140)	2x NXHM 22T (20194141)	2x NXHM 26T (20194142)	2x NXHM 30T (20194143)	3x NXHM 18T (20194140)	3x NXHM 22T (20194141)	3x NXHM 26T (20194142)	3x NXHM 30T (20194143)	4x NXHM 30T (20194143)	5x NXHM 30T (20194143)	6x NXHM 30T (20194143)
		Nominal power (kW)	30,1	36	44	52	60,2	54	66	78	90,3	120,4	150,5	180,6
2x CONDEXA PRO 57 P	**20115223**	111,4	•	•	•	•		•						
2x CONDEXA PRO 70 P	**20115224**	134		•	•	•	•	•	•					
2x CONDEXA PRO 90	**20115225**	176,6				•	•	•	•	•				
2x CONDEXA PRO 100	**20115226**	190,6				•	•	•	•	•	•			
2x CONDEXA PRO 115	**20115228**	219,6					•		•	•	•			
2x CONDEXA PRO 135	**20115229**	258							•	•	•	•		
3x CONDEXA PRO 90	**20115225**	264,9								•	•	•		

Description	Code		1x NXHM 30T (20194143)	2x NXHM 18T (20194140)	2x NXHM 22T (20194141)	2x NXHM 26T (20194142)	2x NXHM 30T (20194143)	3x NXHM 18T (20194140)	3x NXHM 22T (20194141)	3x NXHM 26T (20194142)	3x NXHM 30T (20194143)	4x NXHM 30T (20194143)	5x NXHM 30T (20194143)	6x NXHM 30T (20194143)
		Nominal power (kW)	30,1	36	44	52	60,2	54	66	78	90,3	120,4	150,5	180,6
3x CONDEXA PRO 100	**20115226**	285,9								•	•	•		
3x CONDEXA PRO 115	**20115228**	329,4									•	•	•	
3x CONDEXA PRO 135	**20115229**	387										•	•	•
4x CONDEXA PRO 90	**20115225**	353,2									•	•	•	
4x CONDEXA PRO 100	**20115226**	381,2										•	•	•
4x CONDEXA PRO 115	**20115228**	439,2										•	•	•
4x CONDEXA PRO 135	**20115229**	516											•	•
5x CONDEXA PRO 115	**20115228**	549											•	•
5x CONDEXA PRO 135	**20115229**	645												•

2. WALL-HUNG BOILER ACCESSORIES

When choosing the boiler accessories refer to the accessories sections of the selected range in relation to the type of installation selected, either STAND ALONE or cascade (IN LINE or BACK TO BACK).

2.1 Accessories for CONDEXA HPR boilers

Description	Notes	Code
BOILER ACCESSORIES		
Outdoor temperature sensor		**1220559**
LPG conversion kit (35/45 kW)		**20195886**
LPG conversion kit (55/70 kW)		**20201489**
Supporting frames	(1)	**20196701**
System shut-off cocks		**20190221**
N2 neutraliser kit (up to 450 kW)		**4031810**
HN2 neutraliser kit (up to 280 kW)	(2)	**4031811**
ACCESSORIES - STAND ALONE INSTALLATION		
Connection pipe to hydraulic separator/plate heat exchanger	(3)	**20195886**
Horizontal hydraulic separator		**20195884**
Internal 3-way valve kit	(4)	**20195889**
External 3-way valve kit	(5)	**20195890**
Delivery/return connection for direct installation		**20195891**
Stub kit with safety devices	(6)	**20195883**
Relief valve 4.5 bar FF 3/4"x1"	(7)	**20199254**
Cover for group/hydraulic separator		**20195885**
Spacer kit for wall mounting	(8)	**20200070**
ACCESSORIES - CASCADE INSTALLATION		
Trains with isolation	(9)(10)	**20197000**
Trains with isolation - B2B	(9)(10)	**20197001**
Trains without isolation	(9)(10)	**20197005**
Trains without isolation - B2B	(9)(10)	**20197006**
Gas train kit for cascade installation 35-45 kW	(9)	**20197634**
Gas train kit for cascade installation 55-70 kW	(9)	**20197635**
Gas train kit for cascade installation 35-45 kW - B2B	(9)	**20197639**
Gas train kit for cascade installation 55-70 kW - B2B	(9)	**20197640**
2'' 1/2 manifolds for cascade of 2 boilers		**20197007**
2'' 1/2 manifolds for cascade of 1 boiler		**20197362**
2"1/2 PN6 through flange kit		**20197366**
2''1/2 PN6 blind flange kit		**20197367**

Description	Notes	Code
Condensate outlet kit for cascade boiler		20197364
Stub kit for safety device housing 2" 1/2		20196449
2"1/2 hydraulic separator kit		20197642
Safety kit	(11)	20071190
Relief valve up to 400 kW (4.5 bar)		20197368
Fuel shut-off valve (VIC) - ØG.1"	(12)(14)	20009486
Fuel shut-off valve (VIC) - ØG.1" ½	(13)(14)	20009482
Cover for manifolds and trains for cascade configuration		20197363
Ø80 mm fixed split system kit		20129765
Adapter for Ø80 to Ø110 mm		20197070
Ø80/110 mm rainproof vertical fitting		20196319
90° elbow Ø80 mm		20137506
Air intake kit B23		20137538
Cascade terminal Ø160 mm with condensate outlet		20062338
Collector array Ø160 mm for 1 boiler		20197583
Y fitting Ø160/160 mm		20197582
Remote cascade and zone controller	(15)	20200265

(1) Frame is required in the case of coil installation and in the case of single installation with plate heat exchanger
(2) Equipped with extraction pumps.
(3) Prearranged for coupling with relief valve code 20199254.
(4) Can be combined with models 35-45 kW.
(5) Can be combined with plate heat exchanger kit for single boiler for DHW production.
(6) It contains a thermometer, pressure gauge, relief valve, safety pressure switch and VIC valve.
(7) Can be used in Italy in combination with the 35kW model only.
(8) Kit required for concentric rear wall outlet for 55-70 kW models.
(9) To be ordered for each storage tank in the cascade system (qty = no. boilers).
(10) Does not include the gas train
(11) Does not include the relief valve and VIC.
(12) Recommended up to maximum output of 131 kW, calculated considering gas supply pressure = 20 mbar.
(13) Recommended up to maximum output of 230 kW, calculated considering gas supply pressure = 20 mbar.
(14) Intervention temperature 97 °C - Capillary length 5 m.
(15) Allows management of: cascade system, solar thermal and up to 6 independent direct/mixed zones.
NOTE: for the calculation of maximum permissible VIC power, with supply pressures other than 20 mbar, please contact the pre-sales service.
For the flue gas outlet system, please refer to the current price list.

2.2 Accessories for CONDEXA PRO boilers

Description	Notes	Code
BOILER ACCESSORIES		
External sensor		20132778
Condensate outlet kit for stand alone boiler	(1)	20133102
Injection pump kit (90-115 kW)	(1)(2)	20125034
High head (115 kW) and low head (135 kW) injection pump kit	(1)(3)	20125035
High head injection pump kit (135 kW)	(1)(4)	20125040
Stub kit with safety devices for stand alone boiler	(5)	20131898
Shut-off cock 1" ½		20190221
Frame kit for FRONT/B2B cascade		20131663
Frame conversion kit for B2B cascade		20131664
HN2 neutraliser kit (up to 280 kW)		4031811
N2 neutraliser kit (up to 450 kW)		4031810
N3 neutraliser kit (450-1500 kW)		4031812
HN3 neutraliser kit (280-750 kW)		4031813
ACCESSORIES - STAND ALONE INSTALLATION		
Horizontal hydraulic separator kit for stand alone boiler	(6)	20131897
Delivery/return fitting kit for direct installation (57-135 kW)		20136823
Kit IPX5D for outdoor installation (57-70 kW)		20132365
Kit IPX5D for outdoor installation (90-135 kW)		20128135
Type C conversion kit (57-70 kW)		20131665
Type C conversion kit (90-135 kW)		20131668
Spacer kit for wall mounting		20131270
ACCESSORIES - CASCADE INSTALLATION		
Primary sensor	(7)	20175714
Condensate outlet kit for cascade boiler	(8)	20131267

Description	Notes	Code
Trains without isolation (57-135 kW)	(9)(11)	**20130658**
Trains with isolation (57-135 kW)	(9)(11)	**20131122**
Trains without isolation (135 kW) (external pump)	(10)(12)	**20131121**
Trains with isolation (135 kW) (external pump)	(10)(12)	**20131123**
Trains without isolation B2B (57-135 kW)	(13)	**20131787**
Trains with isolation B2B (57-135 kW)	(13)	**20131789**
Trains without isolation B2B (135 kW) (external pump)	(14)	**20131788**
Train with isolation B2B (135 kW) (external pump)	(14)	**20131790**
3'' cascade manifolds kit for 1 boiler	(15)	**20133220**
3'' cascade manifolds kit for 2 boilers	(16)	**20130220**
3'' cascade manifolds kit for 3 boilers	(16)	**20130221**
5'' cascade manifolds kit for 2 boilers	(17)	**20130222**
5'' cascade manifolds kit for 3 boilers	(17)	**20130223**
3" closing plug kit		**20070903**
3" through flange kit		**20082190**
5" closing plug kit		**20070907**
5" through flange kit		**20082191**
Covering with insulation for manifolds/cascade trains		**20132377**
Stub kit for housing 3" safety device		**20070910**
Stub kit for housing 5" safety device		**20070912**
Safety kit	(18)	**20071190**
Relief valve 5.4 bar ØG.¾" F (up to 460 kW)		**20023104**
Relief valve 5.4 bar ØG.1" F (up to 580 kW)		**20023106**
Fuel shut-off valve (VIC) - ØG.1"	(19)(23)	**20009486**
Fuel shut-off valve (VIC) - ØG.1" ½	(20)(23)	**20009482**
Fuel shut-off valve (VIC) - ØG.2"	(21)(23)	**20009483**
Fuel shut-off valve (VIC) - ØG.3" (flanged)	(22)(23)	**20061640**
Flange kit - 3" DN80 PN6 - 3" DN80 PN16	(24)	**20161191**
Adapter Ø80/110 mm	(25)	**20131238**
Cascade terminal Ø160 mm with condensate outlet		**20062338**
Collector array Ø160 mm for 1 boiler		**20131266**
Eccentric adapter Ø160/200 mm		**20132391**
Y fitting Ø160/160 mm		**20132381**
Y fitting Ø160/200 mm		**20132384**

(1) Mandatory on all models.
(2) The pump, which can be housed in the boiler, offers a high residual head on Condexa Pro 90-100 and with these boilers is also suitable in combination with the plate heat exchanger. If the pump is used with Condexa Pro 115, it can be combined with the hydraulic separator but not with the plate heat exchanger.
(3) When combined with Condexa Pro 135, this circulation pump can be mounted inside the boiler and offers a very low residual head (10 mbar). It must ONLY be used in combination with the horizontal hydraulic separator code: 20131897.
(4) This circulation pump cannot be mounted inside the boiler, it must be installed beneath the boiler.
(5) Includes all safety devices, including relief valves and VIC. To be used in combination with a tank with 4 fittings.
(6) The frame is required in the case of installation with a plate heat exchanger.
(7) No. 1 sensor for each cascade system, to be connected to the master boiler.
(8) To be ordered for each storage tank in the cascade system (qty = no. boilers)
(9) To be ordered for each storage tank in the cascade system (qty = no. boilers) with pump or valve installed inside
(10) To be ordered for each storage tank in the cascade system (qty = no. boilers) with pump installed outside the boiler.
(11) To be ordered for each manifold-side boiler with pump or valve installed inside the boiler.
(12) To be ordered for each manifold-side boiler with pump or valve installed outside the boiler.
(13) To be ordered for each boiler opposite the manifolds with pump or valve installed inside the boiler.
(14) To be ordered for each boiler opposite the manifolds with pump or valve installed outside the boiler.
(15) To be used for the BACK TO BACK configuration with no. 2 BOILERS; includes 3" flanged DN80 delivery/return manifolds, 2" threaded gas manifold, condensate outlet manifold.
(16) For use with maximum power up to 485 kW; includes 3" flanged DN80 delivery/return manifolds, 2" threaded gas manifold, condensate outlet manifold.
(17) For use with maximum power exceeding 485 kW; includes 5" flanged DN125 delivery/return manifolds, 3" flanged DN80 gas manifold, condensate outlet manifold.
(18) Does not include the relief valve and VIC.
(19) Recommended up to maximum output of 131 kW, calculated considering gas supply pressure = 20 mbar.
(20) Recommended up to maximum output of 230 kW, calculated considering gas supply pressure = 20 mbar.
(21) Recommended up to maximum output of 580 kW, calculated considering gas supply pressure = 20 mbar.
(22) Recommended up to maximum output of 1150 kW, calculated considering gas supply pressure = 20 mbar.
(23) Intervention temperature 97 °C - Capillary length 5 m.
(24) To be used in conjunction with fuel shut-off valve (VIC) - ØG.3" (flanged DN80) code 20061640.
(25) Only required for 57-70 kW.

3. ACCESSORIES TO COMPLETE THE SYSTEM

3.1 Heat pump accessories

Description	Code
ELECTRIC ACCESSORIES	
Temperature probe for balancing tanks or zone 2 flow temperature or solar temperature	**20194933**
1" & 1 ¼" DHW diverting valve without temperature probe	**20203742**

3.2 DHW heater accessories

Description	Notes	Code
Electronic anode equipped with plug	(1)	**20055206**
Thermometer kit	(1)	**20123850**
Curve kit for electronic anode	(1)	**20123851**
Solar heat exchanger 0.8 m2 for HP 300	(2)	**4383504**
Solar heat exchanger 1.2 m2 for 500 HP and 800 HP	(3)	**4383505**
Tin coated copper coil kit 2.63 m2 - 1.74 l - 10 bar	(4)	**20055205**
Tin coated copper coil kit 4.54 m2 - 3.56 l - 10 bar	(4)	**4383089**
Tin coated copper coil kit 6.34 m2 - 5.10 l - 10 bar	(4)(5)	**4383087**
2.2 kW single-phase electric heater kit (300-500 lt) on 1"1/2 hole	(6)	**4383271**
3.0 kW single-phase electric heater kit (500 lt) on 1"1/2 hole	(6)	**4383272**
3.8 kW three-phase electric heater kit (500-800-1000 lt) on 1"1/2 hole	(6)	**20020707**
6.0 kW single-phase electric heater kit (1000 lt) on 1"1/2 hole	(6)	**20079908**
Solar exchanger 1,2 m^2 for RBC-HP 500	(6)	**20203246**
Solar exchanger 1,9 m^2 for RBC-HP 800-1000	(6)	**20203245**

(1) Accessories for storage tanks of the RBC 1S and RBS 2S series.
(2) Accessories for storage tanks 7200 HP 300.
(3) Accessories for storage tanks 7200 HP 500 and 7200 HP 800.
(4) To be ordered together with the storage tank model 7200/3F.
(5) From 1500 litres (incl.)
(6) Accessories for storage tanks RBC-HP 1S.

4. Hi, COMFORT CONTROLS


Room controls with capability of management through APP

Drawing	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**

(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For cable connection to the boiler. Compatible for radio frequency connection with Hi, Comfort G100-W code 20193355 (accessory not included and necessary for internet connection via home ADSL modem).

EXAMPLES OF A SYSTEM WITH MONOBLOC PRO WALL-HUNG HYBRID SYSTEM


BIVALENT HEATING SYSTEM WITH HEAT PUMP AND BOILER

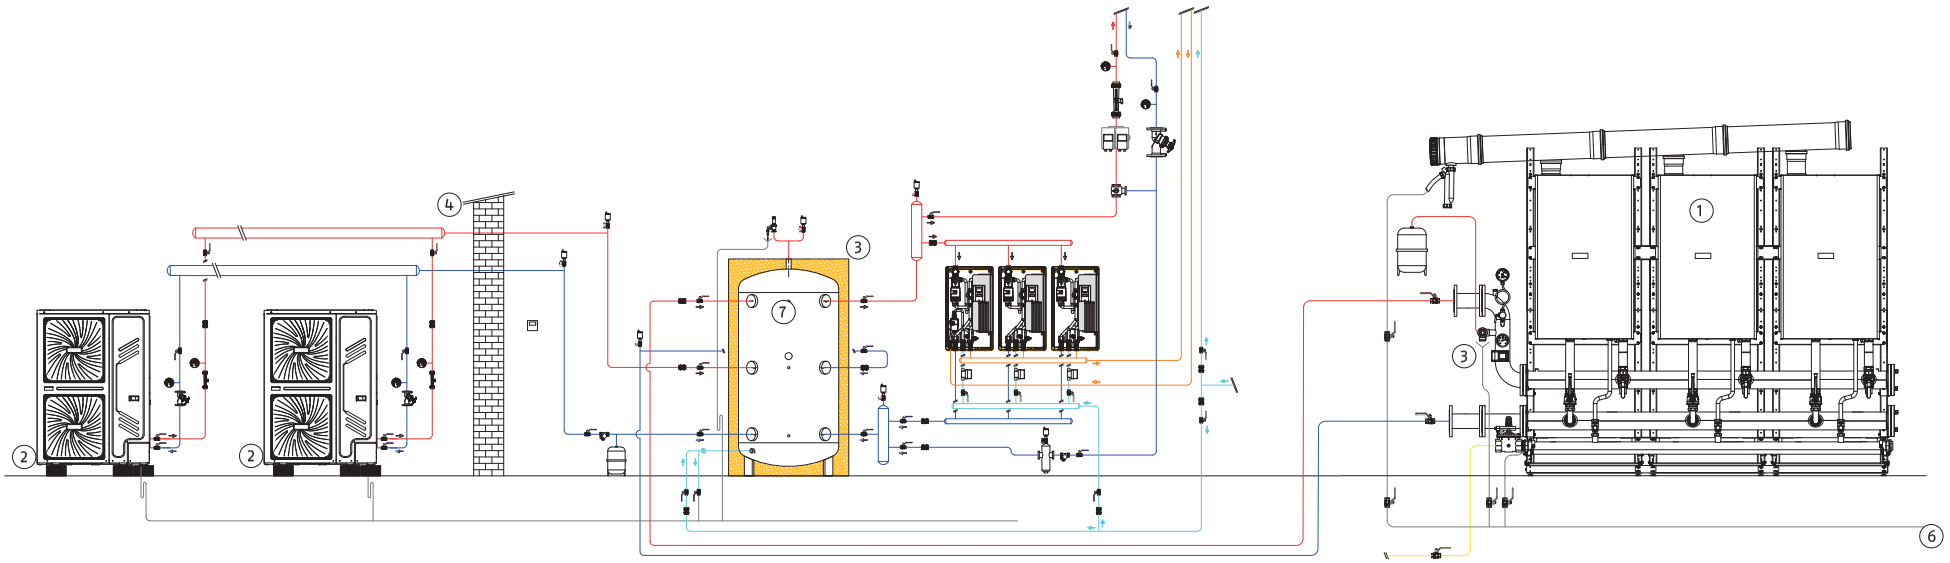

LEGEND:

1. Condensing boiler CONDEXA HPR / CONDEXA PRO
2. Heat pump NXHM 010-16 or NXHM 018-030
3. Storage tank
4. External sensor for boiler thermoregulation
5. Safety stub
6. Condensate outlet
7. System sensor + cascade sensor + storage tank sensor

BIVALENT HEATING AND DHW PRODUCTION SYSTEM COMBINED WITH HEAT PUMP, BOILER AND SINGLE COIL STORAGE TANK

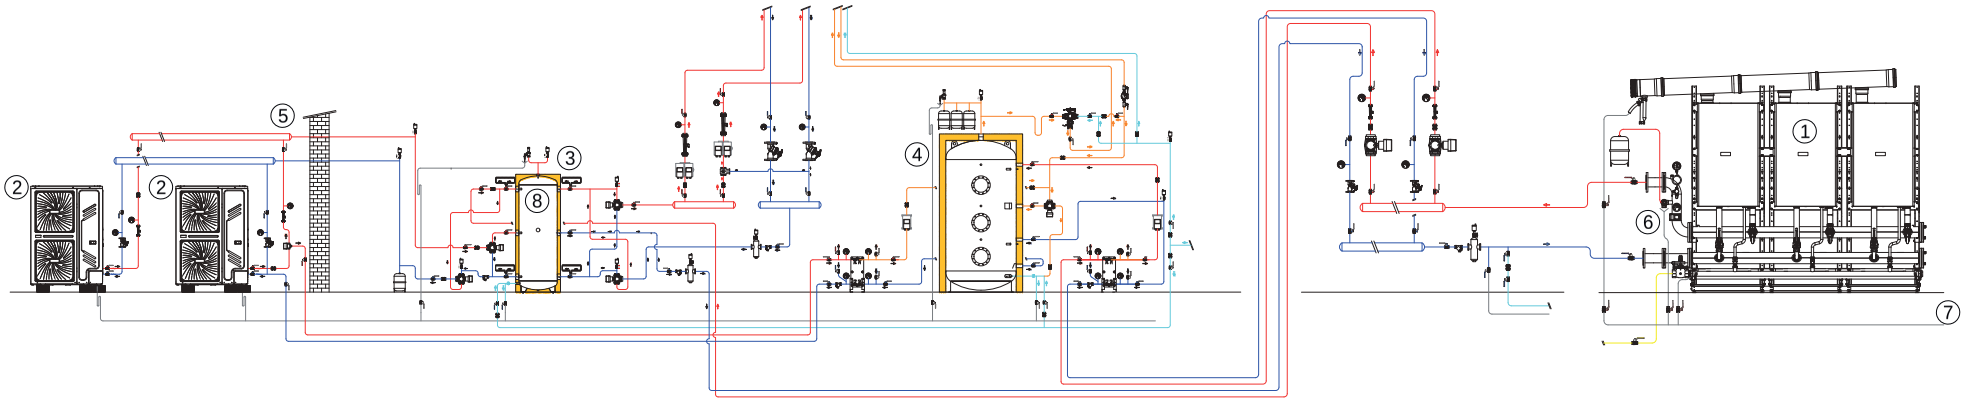

LEGEND:

1. Condensing boiler CONDEXA HPR / CONDEXA PRO
2. Heat pump NXHM 010-16 or NXHM 018-030
3. Storage tank
4. DHW storage tank
5. External sensor for thermoregulation (supplied with the PdC)
6. Safety stub
7. Condensate outlet
8. System sensor

Hybrid systems-Floor-standing solution

PRO monobloc floor-standing hybrid system



ERP

- Heating, cooling and production of DHW
- Smart management of multiple energy sources: condensing boiler, solar thermal and heat pump.
- Possibility of managing up to 2 independent zones

The PRO monobloc floor-standing hybrid system is a multi-energy hybrid system suitable for heating, summer cooling and the production of DHW. This system combines two main components:

- the professional floor-standing boiler. Depending on the power required by the system and the type, the gas generator can be using boilers in the STEEL PRO POWER, ALU PRO POWER or TAU UNIT ranges, in stand-alone or cascade versions, based on requirements. Output power can vary from a minimum of 34 kW to a maximum of 645 kW. Boilers in the STEEL PRO POWER range are modular heat generators housed in cabinets. The cabinet houses 2 to 4 condensing combustion units, with stainless steel heat exchanger and premix burner with low pollutant emissions. The power modulation ratio ranges from 1:10 up to 1:20. STEEL PRO POWER cabinets can be installed individually or can be coupled laterally to form a cascade. The boilers in the ALU PRO POWER range: 75 kW furnace independent element generators. The cabinet houses 2 to 8 condensing combustion units, with aluminium heat exchanger and premix burner with low pollutant emissions. The power modulation ratio ranges from 1:10 up to 1:40. ALU PRO POWER boilers can be installed individually or in a cascade configuration. TAU UNIT boilers are vertical single-heat exchanger thermal units, with high water content, with a premix burner with low pollutant emissions. The power modulation ratio is 1:10 for all models They can be installed either stand-alone or in a cascade configuration;
- the external monobloc heat pump which operates with environmentally friendly refrigerant R32, for heating, cooling and DHW pre-heating for domestic use. Depending on the total output selected for the boiler system, a heat pump can be selected from the NXHM 004-016 series in the stand-alone version or for a NXHM 018-030 in the stand-alone or cascade version. The NXHM 004-016 series heat pump is available in the 10, 12, 14 and 16 kW versions. There are 4 models (18 and 30 kW) of the NXHM 018-030 series heat pump available. The system can interface with a photovoltaic system to change its energy strategy, favouring the use of the electrical source when self-producing.


To complete the system, a wide range of accessories is available to ensure simple, fast installation and to meet different installation requirements.
Available accessories can be found in the specific sections of the boilers and heat pumps used by the system.

FLOOR-STANDING BOILERS

TECHNICAL DATA


Description	Power kW			Efficiency - %			Energy class	Code
	Output useful 80°/60° max	Output useful 50°/30° max	Furnace input min-max	Useful Pn (80°/60°)	Useful Pn (50°/30°)	Useful 30% Pn (50°/30°)		
MULTI-MOTOR THERMAL UNIT WITH STAINLESS STEEL HEAT EXCHANGER								
STEEL PRO POWER 114-2 P	111,4	123,8	13,7-114	97,7	108,6	109,4	-	**20138572**
STEEL PRO POWER 140-2 P	134	147,8	13,7-136	98,5	108,1	109,3	-	**20138573**
STEEL PRO POWER 180-2 P	176,6	194,8	19,4-180	98,1	108,3	108,9	-	**20138574**
STEEL PRO POWER 230-2 P	219,6	242,2	22,4-223,2	98,4	108,6	108,9	-	**20138575**
STEEL PRO POWER 270-2 P	258	284,2	26,3-262	98,5	108,3	109,4	-	**20138576**
STEEL PRO POWER 300-3 P	285,9	315,3	19,4-291	98,2	108,2	108,9	-	**20138577**
STEEL PRO POWER 345-3 P	329,4	363,6	22,4-334,8	98,4	108,6	108,9	-	**20138578**
STEEL PRO POWER 405-3 P	387	426,3	26,3-393	98,5	108,3	109,4	-	**20138579**
STEEL PRO POWER 460-4 P	439,2	484,4	22,4-446,4	98,4	108,6	108,9	-	**20138580**
STEEL PRO POWER 540-4 P	516	568,4	26,3-524	98,5	108,3	109,4	-	**20138581**
MULTI-MOTOR THERMAL UNIT WITH ALUMINIUM HEAT EXCHANGER								
ALU 115 PRO POWER	112,2	119,6	15,0-115,0	97,6	104	108	-	**20021781**
ALU 150 PRO POWER	146,6	156	15,0-150,0	97,7	104	108	-	**20020843**
ALU 225 PRO POWER	220,1	234	15,0-225,0	97,8	104	108	-	**20020844**
ALU 300 PRO POWER	294	312	15,0-300,0	98	104	108	-	**20020845**
ALU 349 PRO POWER	342,4	363	15,0-349,0	98,1	104	108	-	**20029287**
ALU 375 PRO POWER	368,3	390	15,0-375,0	98,2	104	108	-	**20020846**
ALU 450 PRO POWER	442,4	468	15,0-450,0	98,3	104	108	-	**20020847**
ALU 525 PRO POWER	517,1	546	15,0-525,0	98,5	104	108	-	**20020848**
ALU 600 PRO POWER	591,6	624	15,0-600,0	98,6	104	108	-	**20020849**
SINGLE-MOTOR THERMAL UNIT WITH HIGH WATER CONTENT HEAT EXCHANGER IN STAINLESS STEEL								
TAU UNIT 35	33,8	37	3,5-34,8	97,2	106,3	107,8	A	**20145133**
TAU UNIT 50	48,4	54,5	4,9-49,9	97,1	109,2	109,7	A	**20144105**
TAU UNIT 70	68	76,5	6,9-69,9	97,3	109,4	108,5	A	**20144106**
TAU UNIT 100	97,5	109,2	9,9-99,9	97,5	109,2	108,6	-	**20144107**
TAU UNIT 115	112	125,4	11,5-115,0	97,4	109	108,7	-	**20144108**
TAU UNIT 140	136,8	152,3	14,0-140,0	97,8	108,6	108,8	-	**20145135**
TAU UNIT 190	185,8	205,2	19,0-190,0	97,8	108	108,8	-	**20145136**

OVERALL DIMENSIONS

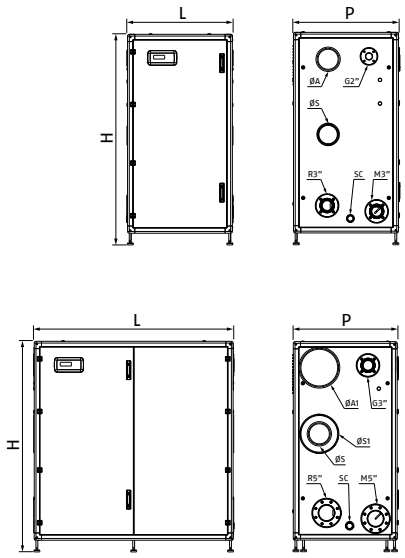


Description	H mm	L mm	P mm	ØA mm	ØA1 mm	ØS mm	ØS1 mm	Net weight kg
STEEL PRO POWER 114-2 P	1800	900	890	160	-	160	-	270
STEEL PRO POWER 140-2 P	1800	900	890	160	-	160	-	270
STEEL PRO POWER 180-2 P	1800	900	890	160	-	160	-	280
STEEL PRO POWER 230-2 P	1800	900	890	160	-	160	-	300
STEEL PRO POWER 270-2 P	1800	900	890	-	300	160	300	350
STEEL PRO POWER 300-3 P	1800	1700	890	160	-	160	-	450
STEEL PRO POWER 345-3 P	1800	1700	890	160	-	160	-	490
STEEL PRO POWER 405-3 P	1800	1700	890	-	300	160	300	540
STEEL PRO POWER 460-4 P	1800	1700	890	160	-	160	-	560
STEEL PRO POWER 540-4 P	1800	1700	890	-	300	160	300	600

G = GAS
M = DELIVERY
R = RETURN
SC = CONDENSATE OUTLET

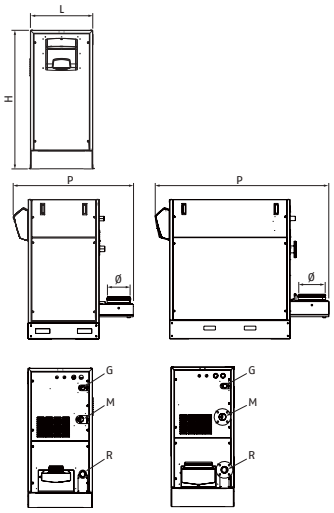


Description	H mm	L mm	P mm	Ø mm	Net weight kg
ALU 115 PRO POWER	1534,5	690	1264	150	270
ALU 150 PRO POWER	1534,5	690	1264	150	270
ALU 225 PRO POWER	1534,5	690	1264	200	280
ALU 300 PRO POWER	1534,5	690	1654	250	300
ALU 349 PRO POWER	1534,5	690	1654	250	350
ALU 375 PRO POWER	1534,5	690	1654	250	450
ALU 450 PRO POWER	1534,5	690	2103	300	490
ALU 525 PRO POWER	1534,5	690	2103	300	540
ALU 600 PRO POWER	1534,5	690	2298	300	560

TAU UNIT 35-140



TAU UNIT 190

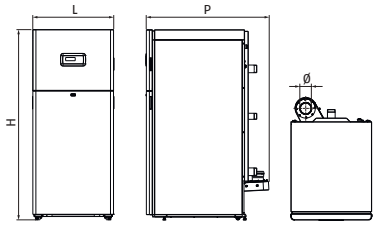

Description	H mm	L mm	P mm	Ø mm	Net weight kg
TAU UNIT 35	1365	600	760	80	135
TAU UNIT 50	1550	600	890	80	155
TAU UNIT 70	1550	600	890	80	165
TAU UNIT 100	1810	600	870	110	245
TAU UNIT 115	1810	600	870	110	245
TAU UNIT 140	1885	800	973	110	400
TAU UNIT 190	1880	800	1250	160	450


HEAT PUMPS

TECHNICAL DATA


Description	HEATING				COOLING				Electrical supply V/Ph/Hz	Energy efficiency class [5] (D → A+++)*	Code
	Floor [1]		Fan coils [2]		Floor [3]		Fan coils [4]				
	Nominal power kW	COP	Nominal power kW	COP	Nominal power kW	EER	Nominal power kW	EER			
AIR-WATER MONOBLOC SINGLE PHASE											
NXHM 010	10,00	4,95	10,00	3,75	9,90	4,55	8,20	3,25	230/1/50	A++	**20203410**
NXHM 012	12,10	4,95	12,30	3,70	12,00	3,95	11,50	2,75	230/1/50	A++	**20203649**
NXHM 014	14,50	4,60	14,10	3,60	13,50	3,61	12,40	2,50	230/1/50	A++	**20203650**
NXHM 016	15,90	4,50	16,00	3,50	14,20	3,61	14,00	2,50	230/1/50	A++	**20203651**
AIR-WATER MONOBLOC THREE-PHASE											
NXHM 012T	12,10	4,95	12,30	3,70	12,00	3,95	11,50	2,75	400/3/50	A+++	**20203652**
NXHM 014T	14,50	4,60	14,10	3,60	13,50	3,61	12,40	2,50	400/3/50	A++	**20203653**
NXHM 016T	15,90	4,50	16,00	3,50	14,20	3,61	14,00	2,50	400/3/50	A++	**20203655**
NXHM 018T	18,00	4,70	18,00	3,50	18,50	4,75	17,00	3,05	400/3/50	A+++	**20194140**
NXHM 022T	22,00	4,40	22,00	3,40	23,00	4,60	21,00	2,95	400/3/50	A+++	**20194141**
NXHM 026T	26,00	4,08	26,00	3,10	27,00	4,30	26,00	2,70	400/3/50	A+++	**20194142**
NXHM 030T	30,10	3,91	30,00	2,90	31,00	4,00	29,50	2,55	400/3/50	A++	**20194143**

(*) HEATING: the range of energy efficiency class of this products category is between D and A+++
The performance is in accordance with standard EN 14511-3:2013 and refers to the following conditions:
(1) Heating: delivery water temperature 35 °C with thermal gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(2) Heating: delivery water temperature 45 °C with gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(3) Cooling: delivery water temperature 18 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(4) Cooling: delivery water temperature 7 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(5) Seasonal energy efficiency class for average climate zone for 55 °C delivery temperature.

OVERALL DIMENSIONS



Description	H mm	L mm	P mm	Net weight kg
NXHM 010	865	1385	523	105
NXHM 012-016	865	1385	523	129
NXHM 012T-016T	865	1385	523	144



Description	H mm	L mm	P mm	Net weight kg
NXHM 018-030T	1558	1129	528	177


MATCHING INERTIAL STORAGE

TECHNICAL DATA

Description	Cylinder capacity l	Maximum temperature °C	Maximum pressure bar	Thermal losses W	Energy efficiency class (F→A+)*	Notes	Code
7000 ACI 200 PLUS	203	99	6	68	C	(1)	**20028093**
7000 ACI 300 PLUS	277	99	6	82	C	(1)	**20028094**
7000 ACI 500 PLUS	473	99	6	114	C	(2)	**20028096**
7000 ACI 800 PLUS	732	99	6	131	C	(2)	**20137619**
7000 ACI 1000 PLUS	855	99	6	139	C	(2)	**20137620**

(*) The energy efficiency class of the products ranges from F up to A+
(1) Tank with 4 fittings for use in series on boiler return in combination with hydraulic separator.
(2) Tank with 6 connections to be used as shown in the diagrams at the end of this section.

OVERALL DIMENSIONS



Description	H mm	Ø mm	Net weight kg
7000 ACI 200 PLUS	1395	550	45
7000 ACI 300 PLUS	1560	600	55
7000 ACI 500 PLUS	1840	700	100
7000 ACI 800 PLUS	1800	990	115
7000 ACI 1000 PLUS	2050	990	170


GRUPPI IDRAULICI SOLARI ABBINABILI

TECHNICAL DATA

Description	Connection and ball valve	Net area connectable collectors m²	Notes	Code
RSS MRS	Flow/Return	55	(1)	**20116166**

(1) Equipped with differential controller EVOSOL.

OVERALL DIMENSIONS



Description	H mm	L mm	P mm	Net weight kg
RSS MRS	418	313	185	5,0


MATCHING SOLAR COLLECTORS

TECHNICAL DATA

Description	Collector surface		Values referred to the opening area			Stagnation temperature °C	Notes	Code
	Gross m²	Net m²	ηo	a1 W/m²K	a2 W/m²K²			
RPS 25/4 A	2,49	2,38	0,76	2,990	0,027	180	(1)	**20201316**
RPS 20/4 A	2	1,9	0,76	2,990	0,027	180	(1)	**20201319**

(1) The solar collector brackets kits are available in the section "SOLAR COLLECTORS" on page 181.

OVERALL DIMENSIONS

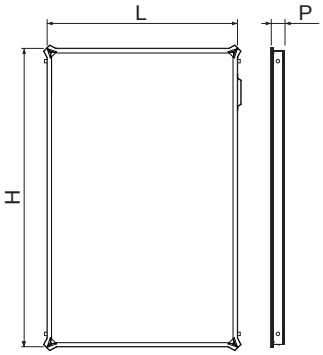

Description	H mm	L mm	P mm	Net weight kg
RPS 25/4 A	2020	1235	85	35
RPS 20/4 A	1625	1235	85	29


MATCHING DHW HEATERS

TECHNICAL DATA

Description	Usable volume l	Coil surface heat pump m²	Lower coil exchange surface (m²)	Upper coil exchange power (kW)	Maximum temperature °C	Maximum pressure bar	Dispersions W	Energy efficiency class (F→A+)*	Code
SINGLE COIL DOMESTIC HOT WATER TANKS									
7200 300 HP	263	4,0	-	-	99	10	85	C	**4383500**
7200 500 HP	470	6,0	-	-	99	10	112	C	**4383501**
7200 800 HP	702	7,0	-	-	99	10	130	C	**20136293**
RBC-HP 500 1S	500	2,2	-	-	99	10	84	B	**20201984**
RBC-HP 800 1S	735	2,5	-	-	99	7	94	B	**20202273**
RBC-HP 1000 1S	890	2,9	-	-	99	7	101	B	**20202861**
DOUBLE COIL DOMESTIC HOT WATER TANKS									
RBS 430 2S	430	-	1,4	31,4	99	10	75	B	**20117339**
RBS 550 2S	551	-	1,8	31,4	99	10	85	B	**20116587**
RBS 800 2S	731	-	2,3	50	99	7	94	B	**20132268**
RBS 1000 2S	883	-	2,7	50	99	7	101	B	**20132269**
7200/2-1500 HV PLUS	1390	-	3,4	47	99	8	162	C	**20136237**
7200/2-2000 HV PLUS	1950	-	4,6	73	99	8	186	C	**20136239**
FLANGED DOMESTIC HOT WATER TANKS									
7200/3F-1000 HV PLUS	955	-	-	-	99	10	142	C	**20136274**
7200/3F-1500 HV PLUS	1430	-	-	-	99	8	162	C	**20136275**
7200/3F-2000 HV PLUS	1990	-	-	-	99	8	186	C	**20136277**
7200/3F-3000 HV PLUS	2959	-	-	-	99	8	344	-	**20052788**

(*) The energy efficiency class of the products ranges from F up to A+


OVERALL DIMENSIONS




Description	H mm	Ø mm	S (*) mm	Net weight kg
7200 300 HP	1615	600	50	119
7200 500 HP	1690	750	50	166
7200 800 HP	1875	990	100	220

(*) Insulation thickness.
Dimensions and weight with insulation.

RBC-HP 1S 150÷500




RBC-HP 1S 800/1000

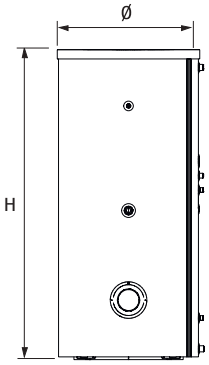

Description	H mm	Ø mm	S (*) mm	Net weight kg
RBC-HP 500 1S	1793	755	52	150
RBC-HP 800 1S	1831	970	92	203
RBC-HP 1000 1S	2156	973	92	225


(*) Insulation thickness.
Dimensions and weight with insulation.

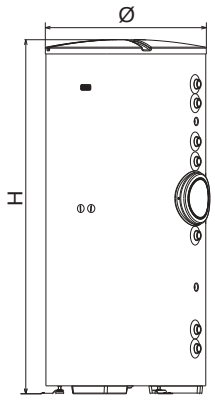


Description	H mm	Ø mm	S (*) mm	Net weight kg
RBS 430 2S	1644	755	50	146
RBS 550 2S	1988	755	50	171
RBS 800 2S	1846	1000	100	222
RBS 1000 2S	2171	1000	100	245

(*) Insulation thickness.
Dimensions and weight with insulation.

7200/2-1500/2000 HV PLUS



7200/3F-1000÷3000 HV PLUS



Description	H mm	Ø mm	S (*) mm	Net weight kg
7200/2-1500 HV PLUS	2185	1200	100	325
7200/2-2000 HV PLUS	2470	1300	100	540
7200/3F-1000 HV PLUS	2205	990	100	190
7200/3F-1500 HV PLUS	2185	1200	100	305
7200/3F-2000 HV PLUS	2470	1300	100	325
7200/3F-3000 HV PLUS	2680	1450	100	543

(*) Insulation thickness.
Dimensions and weight with insulation.

GUIDE TO SYSTEM CONFIGURATION





1. SELECTION OF FLOOR-STANDING RANGE

1.1 STEEL PRO POWER boiler-Heat pump combinations

1.2 ALU PRO POWER boiler-Heat pump combinations

1.3 TAU UNIT boiler-Heat pump combinations

2. FLOOR-STANDING BOILER ACCESSORIES

2.1 Accessories for STEEL PRO POWER boilers

2.2 Accessories for ALU PRO POWER boilers

2.2 Accessories for TAU UNIT boilers

3. ACCESSORIES TO COMPLETE THE SYSTEM

3.1 Hydraulic accessories

3.2 Domestic hot water tank accessories

4. HI, COMFORT CONTROLS

1. SELECTION OF FLOOR-STANDING BOILER RANGE

Boiler output power (80°/60°) [kW]		Stand alone	Number of cascading boilers	
Boiler range	Boiler description	1	2	3
STEEL PRO POWER	STEEL PRO POWER 114-2 P	111		
	STEEL PRO POWER 140-2 P	134		
	STEEL PRO POWER 180-2 P	177		
	STEEL PRO POWER 230-2 P	220		
	STEEL PRO POWER 270-2 P	258		
	STEEL PRO POWER 300-3 P	286		
	STEEL PRO POWER 345-3 P	329		
	STEEL PRO POWER 405-3 P	387		
	STEEL PRO POWER 460-4 P	439		
	STEEL PRO POWER 540-4 P	516		
	STEEL PRO POWER SYSTEM 675		645	
ALU PRO POWER	ALU 115 PRO POWER	112		
	ALU 150 PRO POWER	147		
	ALU 225 PRO POWER	220		
	ALU 300 PRO POWER	294		
	ALU 349 PRO POWER	342		
	ALU 375 PRO POWER	368		
	ALU 450 PRO POWER	442		
	ALU 525 PRO POWER	517		
	ALU 600 PRO POWER	592		
TAU UNIT	TAU UNIT 35	34	68	
	TAU UNIT 50	48	97	
	TAU UNIT 70	68	136	
	TAU UNIT 100	98	195	293
	TAU UNIT 115	112	224	336
	TAU UNIT 140	137	274	410
	TAU UNIT 190	186	372	557

1.1 STEEL PRO BOILER-HEAT PUMP COMBINATIONS

The following combinations are those that guarantee the best energy performance. For the complete list of certified hybrid systems please refer to the company statement.



Combinations with stand-alone boilers

Description	Code		1x NXHM 30T (20194143)	2x NXHM 18T (20194140)	2x NXHM 22T (20194141)	2x NXHM 26T (20194142)	2x NXHM 30T (20194143)	3x NXHM 18T (20194140)	3x NXHM 22T (20194141)	3x NXHM 26T (20194142)	3x NXHM 30T (20194143)	4x NXHM 30T (20194143)	5x NXHM 30T (20194143)	6x NXHM 30T (20194143)
		Nominal power (kW)	30,1	36	44	52	60,2	54	66	78	90,3	120,4	150,5	180,6
STEEL PRO POWER 114-2 P	**20138572**	111,4	•	•	•	•		•						
STEEL PRO POWER 140-2 P	**20138573**	134		•	•	•	•	•	•					
STEEL PRO POWER 180-2 P	**20138574**	176,6				•	•	•	•	•				
STEEL PRO POWER 230-2 P	**20138575**	219,6					•		•	•	•			
STEEL PRO POWER 270-2 P	**20138576**	258							•	•	•	•		
STEEL PRO POWER 300-3 P	**20138577**	285,9								•	•	•		
STEEL PRO POWER 345-3 P	**20138578**	329,4									•	•	•	
STEEL PRO POWER 405-3 P	**20138579**	387										•	•	•
STEEL PRO POWER 460-4 P	**20138580**	439,2											•	•
STEEL PRO POWER 540-4 P	**20138581**	516											•	•

Combinations with cascading boilers

Description	Code		6x NXHM 30T (20194143)
		Nominal power (kW)	180,6
STEEL PRO POWER SYSTEM 675	**20138576 + 20138579**	645	•

1.2 ALU PRO POWER BOILER-HEAT PUMP COMBINATIONS

The following combinations are those that guarantee the best energy performance. For the complete list of certified hybrid systems please refer to the company statement.



Combinations with stand-alone boilers

Description	Code		1x NXHM 30T (20194143)	2x NXHM 18T (20194140)	2x NXHM 22T (20194141)	2x NXHM 26T (20194142)	2x NXHM 30T (20194143)	3x NXHM 18T (20194140)	3x NXHM 22T (20194141)	3x NXHM 26T (20194142)	3x NXHM 30T (20194143)	4x NXHM 30T (20194143)	5x NXHM 30T (20194143)	6x NXHM 30T (20194143)
		Nominal power (kW)	30,1	36	44	52	60,2	54	66	78	90,3	120,4	150,5	180,6
ALU 115 PRO POWER	**20021781**	112,2	•	•	•	•		•						
ALU 150 PRO POWER	**20020843**	146,6			•	•	•	•	•					
ALU 225 PRO POWER	**20020844**	220,1					•		•	•	•			
ALU 300 PRO POWER	**20020845**	294								•	•	•		
ALU 349 PRO POWER	**20029287**	342,4									•	•	•	
ALU 375 PRO POWER	**20020846**	368,3										•	•	•
ALU 450 PRO POWER	**20020847**	442,4										•	•	•
ALU 525 PRO POWER	**20020848**	517,1											•	•
ALU 600 PRO POWER	**20020849**	591,6											•	•

1.3 TAU UNIT BOILER-HEAT PUMP COMBINATIONS

The following combinations are those that guarantee the best energy performance. For the complete list of certified hybrid systems please refer to the company statement.



Combinations with stand-alone boilers

Description	Code		1x NXHM 010 (20203410)	1x NXHM 012 (20203649)	1x NXHM 014 (20203650)	1x NXHM 016 (20203651)	1x NXHM 012T (20203652)	1x NXHM 014T (20203653)	1x NXHM 016T (20203655)	1x NXHM 18T (20194140)	1x NXHM 22T (20194141)	1x NXHM 26T (20194142)	1x NXHM 30T (20194143)	2x NXHM 18T (20194140)	2x NXHM 22T (20194141)	2x NXHM 26T (20194142)	2x NXHM 30T (20194143)	3x NXHM 18T (20194140)	3x NXHM 22T (20194141)	3x NXHM 26T (20194142)	3x NXHM 30T (20194143)
		Nominal power (kW)	10	12,1	14,5	15,9	12,1	14,5	15,9	18	22	26	30,1	36	44	52	60,2	54	66	78	90,3
TAU UNIT 35	**20021781**	112,2	•	•	•	•	•	•	•												
TAU UNIT 50	**20020843**	146,6		•	•	•	•	•	•	•	•										
TAU UNIT 70	**20020844**	220,1								•	•	•	•								
TAU UNIT 100	**20020845**	294										•	•	•	•						
TAU UNIT 115	**20029287**	342,4											•	•	•	•		•			
TAU UNIT 140	**20020848**	517,1												•	•	•	•	•	•		
TAU UNIT 190	**20020849**	591,6														•	•	•	•	•	•

Combinations with cascading boilers

Description	Code		1x NXHM 18T (20194140)	1x NXHM 22T (20194141)	1x NXHM 26T (20194142)	1x NXHM 30T (20194143)	2x NXHM 18T (20194140)	2x NXHM 22T (20194141)	2x NXHM 26T (20194142)	2x NXHM 30T (20194143)	3x NXHM 18T (20194140)	3x NXHM 22T (20194141)	3x NXHM 26T (20194142)	3x NXHM 30T (20194143)	4x NXHM 30T (20194143)	5x NXHM 30T (20194143)	6x NXHM 30T (20194143)
		Nominal power (kW)	18	22	26	30,1	36	44	52	60,2	54	66	78	90,3	120,4	150,5	180,6
2x TAU UNIT 35	**20145133**	68	•	•	•	•											
2x TAU UNIT 50	**20144105**	96,8			•	•	•	•									
2x TAU UNIT 70	**20144106**	136					•	•	•	•	•	•					
2x TAU UNIT 100	**20144107**	195							•	•	•	•	•	•			
2x TAU UNIT 115	**20144108**	224								•		•	•	•			
2x TAU UNIT 140	**20145135**	273,6											•	•	•		
2x TAU UNIT 190	**20145136**	371,6														•	•
3x TAU UNIT 100	**20144107**	292,5											•	•	•		
3x TAU UNIT 115	**20144108**	336												•	•	•	
3x TAU UNIT 140	**20145135**	410,4													•	•	•
3x TAU UNIT 190	**20145136**	557,4														•	•

2. ACCESSORIES FOR FLOOR-STANDING BOILERS

When choosing the boiler accessories refer to the accessories sections of the selected range in relation to the type of installation selected, either STAND ALONE or cascade (IN LINE or BACK TO BACK).

2.1 Accessories for STEEL PRO POWER boilers

Description	Notes	Code
BOILER ACCESSORIES		
Adapter Ø50/80 mm		**20145144**
Air duct kit for fan/manifold connection Ø160 mm		**20145141**
Air duct kit for fan/manifold connection Ø300 mm		**20145137**
Air manifold for models Ø160 mm - for models with 2 thermal modules		**20145185**
Air manifold for models Ø160 mm - for models with 3/4 thermal modules		**20145186**
Air manifold for models Ø300 mm - for models with 2 thermal modules		**20145187**
Air manifold for models Ø300 mm - for models with 3/4 thermal modules		**20145189**
Hydraulic shut-off kit for single unit with 3-way valve with outlet to atmosphere	(1)	**20145170**
Safety kit	(2)	**20071190**
Relief valve 5.4 bar ØG.¾" F (up to 460 kW)		**20023104**
Relief valve 5.4 bar ØG.1" F (up to 580 kW)		**20023106**
Fuel shut-off valve (VIC) - ØG.1"	(3)(4)	**20009486**
Fuel shut-off valve (VIC) - ØG.1"½	(4)(5)	**20009482**
Fuel shut-off valve (VIC) - ØG.2"	(4)(6)	**20009483**
Fuel shut-off valve (VIC) - ØG.3"	(4)(7)	**20061640**
3"/2" flanged reduction kit (DN80/DN50)		**20145184**
Flange kit - 2" DN50 PN6 - Gas 2" F		**20094187**
Flange kit - 3" DN80 PN6 - 3" DN80 PN16		**20161191**
Gas adapter 2" - 1" for VIC valve		**20147994**
Adapter gas 2" - 1" ½ for VIC valve		**20147990**
Adapter kit for flanged VIC valve from DN80 to thread ØG.2"		**20146852**
Flanged reduction kit DN125/DN80		**20145183**
3" closing plug kit	(8)	**20070903**
5" closing plug kit	(8)	**20070907**
3" flange kit (to be welded)		**20082190**
5" flange kit (to be welded)		**20082191**
3'' straight extensions kit with sumps	(9)(11)	**20167872**
5'' straight extensions kit with sumps	(10)(11)	**20167873**
3" delivery stub kit		**20145172**
5" delivery stub kit		**20145177**
3" return stub kit		**20145181**
5" return stub kit		**20145182**
3" hydraulic separator fittings (up to 485 kW)		**20145255**
5" hydraulic separator fittings (up to 1310 kW)	(12)	**20145260**
LH technical cabinet with hydraulic separator (up to 485 kW)	(D)(12)	**20145252**
LH technical cabinet with hydraulic separator (up to 1310 kW)	(12)	**20145254**
RH technical cabinet with hydraulic separator (up to 485 kW)	(D)(12)	**20145247**
RH technical cabinet with hydraulic separator (up to 1310 kW)		**20145250**
RH/LH technical cabinet for housing 3" extension kit (270/485 kW)	(D)(13)(14)	**20158562**
RH/LH technical cabinet for housing 5" extension kit (580/1310 kW)	(D)(13)(14)	**20158564**
Technical cabinet air/flue gas manifold L = 900 mm Ø160 mm	(15)	**20147030**
Technical cabinet air/flue gas manifold L = 900 mm Ø300 mm	(15)	**20147028**
Technical cabinet air/flue gas manifold L = 1800 mm Ø160 mm	(15)	**20157595**
Technical cabinet air/flue gas manifold L = 1800 mm Ø300 mm	(15)	**20157598**
Lifting kit from above		**20146844**
Wheel kit	(16)	**20146845**
Internal light kit for emergency and service conditions		**20146846**
Canopy kit for outdoor cabinet installation L = 900 mm		**20146841**
Canopy kit for outdoor cabinet installation L = 1800 mm		**20146842**
Kit IPX5D for display cover		**20146843**
Outdoor insulation kit for 3" blind flanges		**20146953**

Description	Notes	Code
Outdoor insulation kit for 5" blind flanges		**20146954**
External sensor		**20132778**
N2 neutraliser kit (up to 450 kW)		**4031810**
HN2 neutraliser kit (up to 280 kW)	(D1)	**4031811**
N3 neutraliser kit (450-1500 kW)		**4031812**
HN3 neutraliser kit (280-750 kW)	(D1)(17)	**4031813**
ACCESSORIES - CASCADE INSTALLATION		
Kit for cabinet connection in cascade configuration (Flue gas Ø300 - Air Ø300 - Condensate Ø50)		**20157593**
Spacer kit (150 mm) for cabinet connection in cascade configuration	(18)	**20145237**
Immersion sensor	(19)	**1220599**

(1) To be ordered in numbers equal to the number of units in the system.
(2) Does not include the relief valve and VIC.
(3) Recommended up to maximum output of 131 kW, calculated considering gas supply pressure = 20 mbar.
(4) Intervention temperature 97 °C - Capillary length 5 m.
(5) Recommended up to maximum output of 230 kW, calculated considering gas supply pressure = 20 mbar.
(6) Recommended up to maximum output of 580 kW, calculated considering gas supply pressure = 20 mbar.
(7) Recommended up to maximum output of 1310 kW, calculated considering gas supply pressure = 20 mbar.
(8) Kit for closing the unused side.
(9) To be installed in the case of remote primary/secondary circuit interface with or without technical cabinet up to 485 kW.
(10) To be installed in the case of remote primary/secondary circuit interface with or without technical cabinet up to 1310 kW.
(11) Specific manifolds are provided on the outlet hose to house devices.
(12) They contain the hydraulic separator inside.
(13) Single or twin pump
(14) They do not contain the pump.
(15) To be used as indicated in the tables below.
(16) To be used during installation.
(17) Equipped with extraction pumps.
(18) Includes 5" water connections - Gas 3" - Flue gas Ø300 - Condensate Ø50.
(19) Used for secondary and storage tank management.
(D) Availability of material at our warehouse: 25 business days from the date of validation of the order.
(D1) Availability of material at our warehouse: 30 business days from the date of validation of the order.
NOTE: for the calculation of maximum permissible VIC power, with supply pressures other than 20 mbar, please contact the pre-sales service.

2.2 Accessories for ALU PRO POWER boilers

Description	Notes	Code
BOILER ACCESSORIES		
Interface kit up to 375 kW	(1)	**20021753**
Interface kit up to 600 kW	(1)	**20021752**
Primary circuit kit up to 300 kW	(2)	**20021751**
Primary circuit kit up to 600 kW	(2)	**20021750**
Safety kit	(3)	**4030091**
Relief valve 5.4 bar ØG.¾" F (up to 460 kW)	(4)	**20023104**
Relief valve 5.4 bar ØG.1" F (up to 580 kW)	(4)	**20023106**
Fuel shut-off valve (VIC) - ØG.1"	(5)(8)	**20009486**
Fuel shut-off valve (VIC) - ØG.1" ½	(5)(9)	**20009482**
Fuel shut-off valve (VIC) - ØG.2"	(5)(10)	**20009483**
Fuel shut-off valve (VIC) - ØG.3"	(5)(11)	**20061640**
DHW connection kit	(6)	**20022521**
Primary circuit pump MAGNA3 40-120 F	(7)	**20183650**
Primary circuit pump MAGNA3 65-120 F	(7)	**20183652**
Hydraulic separator up to 300 kW	(12)	**20009385**
Hydraulic separator up to 600 kW	(12)	**20009431**
N2 neutraliser kit (up to 450 kW)		**4031810**
HN2 neutraliser kit (up to 280 kW)	(D)	**4031811**
N3 neutraliser kit (450-1500 kW)		**4031812**
HN3 neutraliser kit (280-750 kW)	(D)(13)	**4031813**

(1) Type A accessory.
(2) Type B accessory.
(3) Type F1 accessory. To be completed with relief valve (F2) and VIC fuel shut-off valve (F3).
(4) Type F2 accessory.
(5) Type F3 accessory. Operating temperature at 97 °C - Capillary length 5 m.
(6) Type C accessory.
(7) Type G accessory.
(8) Recommended up to maximum output of 131 kW, calculated considering gas supply pressure = 20 mbar.
(9) Recommended up to maximum output of 230 kW, calculated considering gas supply pressure = 20 mbar.
(10) Recommended up to maximum output of 580 kW, calculated considering gas supply pressure = 20 mbar.
(11) Recommended up to maximum output of 1310 kW, calculated considering gas supply pressure = 20 mbar.
(12) Type D accessory.
(13) Equipped with extraction pumps.
(D) Availability of material at our warehouse: 30 business days from the date of validation of the order.
NOTE: for the calculation of maximum permissible VIC power, with supply pressures other than 20 mbar, please contact the pre-sales service.

2.3 Accessories for TAU UNIT boilers

Description	Notes	Code
BOILER ACCESSORIES		
Safety kit	(1)	20180519
4.5 bar pressure gauge and relief valve set	(2)	20181867
4 bar pressure gauge and relief valve set	(3)	20181010
Thread reducer kit 2"F to 1"½ M	(4)	20182680
Thread reducer kit 2"F to 1"½ M	(5)	20154992
Fuel shut-off valve kit (VIC) - ØG.1" - TS=97 °C - Capillary L = 5 m	(6)	20009486
Fuel shut-off valve kit (VIC) - ØG.1"½ - TS=97 °C - Capillary L = 5 m	(7)	20009482
Flow meter DN15		20149998
Flow meter DN20		20149996
Flow meter DN25		20146343
Flow meter DN32		20146345
Expansion tank (only for TAU UNIT 35)		20154816
Circulation pump (only for TAU UNIT 35)		20154812
LPG conversion kit (TAU UNIT 35)		20145150
LPG conversion kit (TAU UNIT 50)		20144699
LPG conversion kit (TAU UNIT 70)		20144700
LPG conversion kit (TAU UNIT 100)		20144703
LPG conversion kit (TAU UNIT 115)		20144704
LPG conversion kit (TAU UNIT 140)		20206822
LPG conversion kit (TAU UNIT 190)		20194063
External sensor		20132778
Immersion sensor	(8)	1220599
Type C conversion kit (TAU UNIT 35-50)	(9)	20144759
Type C conversion kit (TAU UNIT 70)	(9)	20144760
Type C conversion kit (TAU UNIT 100-115)	(9)	20144761
Type C conversion kit (TAU UNIT 140)	(9)	20206220
Type C conversion kit (TAU UNIT 190)	(9)	20145154
Rear flue gas outlet conversion kit (TAU UNIT 35)	(10)	20160064
Rear flue gas outlet conversion kit (TAU UNIT 50-70)	(10)	20147234
Rear flue gas outlet conversion kit (TAU UNIT 100-115)	(10)	20147235
HN2 neutraliser kit (up to 280 kW)	(11)	4031811
N2 neutraliser kit (up to 450 kW)		4031810
N3 neutraliser kit (450-1500 kW)		4031812
HN3 neutraliser kit (280-750 kW)	(D)(11)	4031813

(1) Includes stub with safety devices, excluding: relief valve set + pressure gauge, fuel shut-off valves and flow meter (to be ordered separately).
(2) Requited for Tau Unit 50-70
(3) Required for Tau Unit 100-190
(4) Required when installing the kit for models Tau Unit 100 and 115.
(5) Required when installing the kit for models Tau Unit 140 and 190.
(6) Recommended up to maximum output of 131 kW, calculated considering gas supply pressure = 20 mbar.
(7) Recommended up to maximum output of 230 kW, calculated considering gas supply pressure = 20 mbar.
(8) Used as primary sensor for cascade system management.
(9) Accessories for split outlet, for concentric outlet, to complete the installation, please refer to the section "Flue gas outlet Systems" on page 411.
(10) For each type, check the maximum equivalent lengths by consulting the data sheet and/or contacting the pre-sales service. For the flue gas outlet system, please refer to page 411.
(11) Equipped with extraction pumps.
(D) Availability of material at our warehouse: 30 business days from the date of validation of the order.
NOTE: Tau Unit 140 and 190 do not require an accessory kit for LPG conversion.

3. OTHER ACCESSORIES TO COMPLETE THE SYSTEM

3.1 Heat pump accessories

Description	Code
ELECTRIC ACCESSORIES	
Temperature sensor for balancing tanks or delivery temperature zone 2 or solar temperature	**20194933**
DHW Diverter valve 1" 1/4 1" without temperature sensor	**20203742**

3.2 DHW heater accessories

Denominazione commerciale	Notes	Codice n.
Electronic anode equipped with plug	(1)	**20055206**
Thermometer kit	(1)	**20123850**
Curve kit for electronic anode	(1)	**20123851**
Solar heat exchanger 0.8 m2 for HP 300	(2)	**4383504**
Solar heat exchanger 1.2 m2 for 500 HP and 800 HP	(3)	**4383505**
Tin coated copper coil kit 2.63 m2 - 1.74 l - 10 bar	(4)	**20055205**
Tin coated copper coil kit 4.54 m2 - 3.56 l - 10 bar	(4)	**4383089**
Tin coated copper coil kit 6.34 m2 - 5.10 l - 10 bar	(4)(5)	**4383087**

(1) Accessories for storage tanks of the RBC 1S and RBS 2S series.
(2) Accessories for storage tanks 7200 HP 300.
(3) Accessories for storage tanks 7200 HP 500 and 7200 HP 800.
(4) To be ordered together with the storage tank model 7200/3F.
(5) From 1500 litres (incl.)

4. Hi, COMFORT CONTROLS


Room controls with capability of management through APP

Drawing	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**

(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For cable connection to the boiler. Compatible for radio frequency connection with Hi, Comfort G100-W code 20193355 (accessory not included and necessary for internet connection via home ADSL modem).

EXAMPLES OF A SYSTEM WITH MONOBLOC PRO FLOOR-STANDING HYBRID SYSTEM


BIVALENT HEATING SYSTEM WITH HEAT PUMP AND BOILER

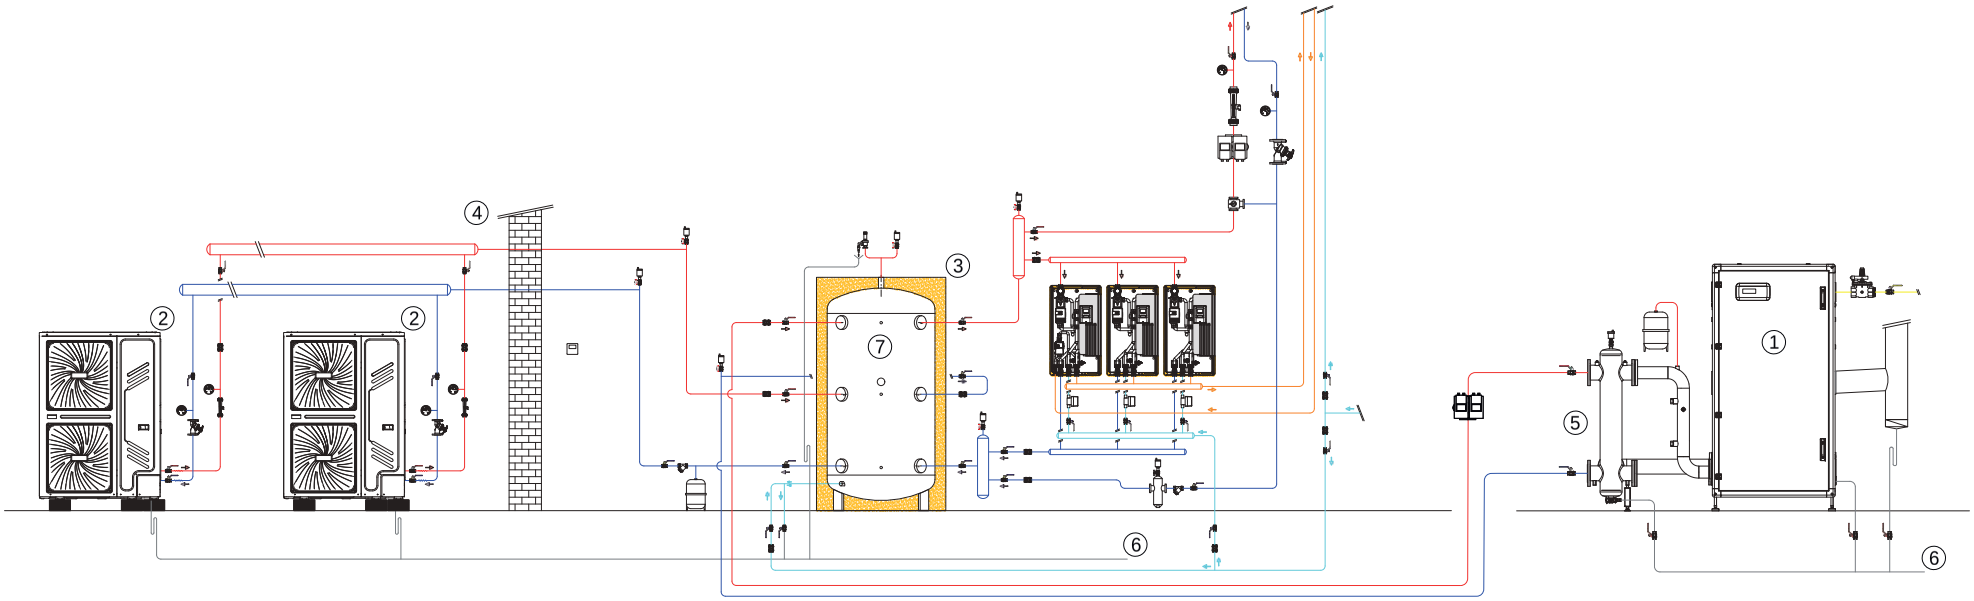

LEGEND:

1. Condensing boiler STEEL PRO POWER / ALU PRO POWER / TAU UNIT
2. Heat pump NXHM 010-16 or NXHM 018-030
3. Storage tank
4. External sensor for thermoregulation (supplied with the PdC)
5. Safety stub
6. Condensate outlet
7. System sensor

BIVALENT HEATING AND DHW PRODUCTION SYSTEM COMBINED WITH HEAT PUMP, BOILER AND SINGLE COIL STORAGE TANK

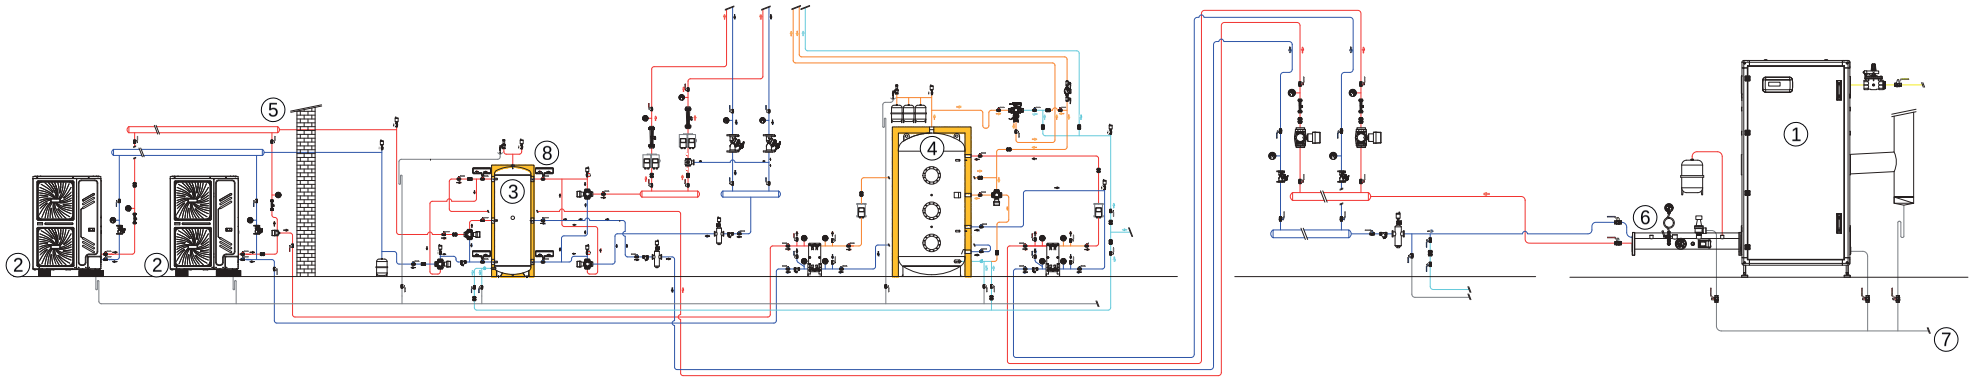

LEGEND:

1. Condensing boiler STEEL PRO POWER / ALU PRO POWER / TAU UNIT
2. Heat pump NXHM 010-16 or NXHM 018-030
3. Storage tank
4. DHW storage tank
5. External sensor for thermoregulation (supplied with the PdC)
6. Safety stub
7. Condensate outlet
8. System sensor

HYBRID SYSTEMS WITH SPLIT HEAT PUMP

WALL-HUNG BOILERS

COMBINED AND HEATING ONLY BOILERS

WALL-HUNG SPLIT HEAT PUMPS



RIELLO ADAPTO HYBRID

page 70



RES WALL-HUNG SPLIT HYBRID SYSTEM

page 75

Please verify with Sales the availability of the product in the destination Country before ordering

Hybrid wall systems

Riello Adapto Hybrid




ERP

- Compact and versatile multi-energy system designed to adapt to multiple plant requirements while minimizing space requirements
- Flexibility and ease of installation
- Meeting heating, cooling, and domestic hot water needs in a single system for year-round home comfort.
- Proprietary intelligence stored in the system interface and also manageable via app
- Attention to user needs and choice between economic optimization mode, for savings on energy bills, or eco mode, to help reduce C02 emissions.
- Smart Grid Ready system, designed to work in synergy with modern smart energy distribution grids, and integrable with photovoltaic panels.

RIELLO ADAPTO HYBRID is the factory-made residential hybrid solution, ideal for replacing existing systems, which is part of the energy transition process in which Riello is actively involved. It is a compact and versatile multi-energy system consisting of a 3.5 or 5.0(*) kW RIELLO ADAPTO heat pump in R32, the HYBRID HYDRAULIC KIT, the START condensing boiler in a combined 25 or 30 kW version, and the advanced HI, COMFORT T300-HY system manager.
Riello Adapto Hybrid has been designed to adapt to multiple system requirements, offering simplicity and flexibility of installation and minimizing space requirements both inside and outside the home. The compact hydronic kit can be easily positioned either below or to the side of the boiler, up to a maximum distance of 15m; outside, the heat pump, synonymous with compactness, can be installed either on the floor or mounted on the wall with suitable support brackets, up to a maximum distance of 25m in length and 10 m in height from the indoor unit. These features, together with plug&play technology, make the system quick and easy to install, ideal for both installers and end users.
In a single solution, Riello Adapto Hybrid meets heating, cooling, and domestic hot water production needs, ensuring the best comfort throughout the year. It allows combined operation of the heat pump and boiler in heating mode. The combined boiler also provides instant domestic hot water production and, if the system is equipped with fan coils, the heat pump can provide hydronic cooling during the hottest periods.
The smart and intuitive digital user interface orchestrates the system's operation and allows advanced control of the home environment, optimizing consumption and adapting to the needs of users, both those who want to save on their bills (economic optimization) and those who are more environmentally conscious (ecological optimization). The operation of Riello Adapto Hybrid can also be managed remotely, thanks to a specific section of the Hi, Comfort app.

(*) Available from 2026.

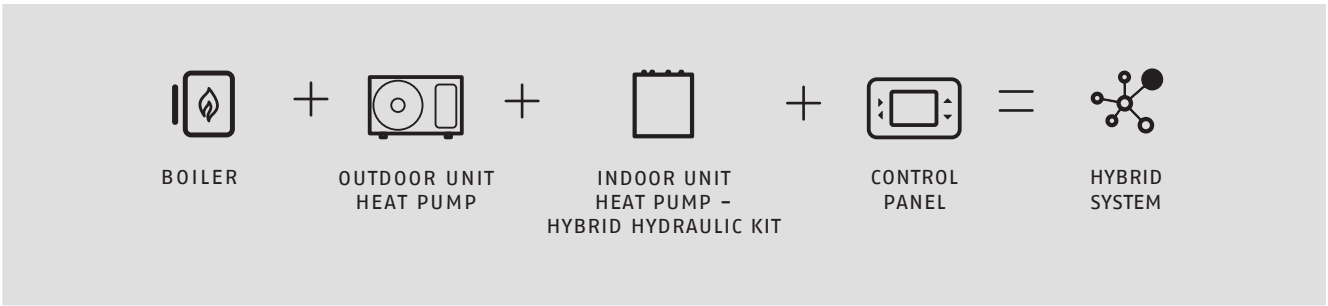

COMMERCIAL SETS

Description	Notes	Code n.
RIELLO ADAPTO HYBRID START 3.5 - 25		
It consists of:		
RIELLO ADAPTO 3.5		**20225095**
START 25 KIS		**20197878**
HYBRID HYDRAULIC KIT		**20225097**
HI, COMFORT T300-HY		**20225099**
RIELLO ADAPTO HYBRID START 3.5 - 30		
It consists of:		
RIELLO ADAPTO 3.5		**20225095**
START 30 KIS		**20197879**
HYBRID HYDRAULIC KIT		**20225097**
HI, COMFORT T300-HY		**20225099**
RIELLO ADAPTO HYBRID START 5.0 - 25		
It consists of:		
RIELLO ADAPTO 5.0 (*)		**20225100**
START 25 KIS		**20197878**
HYBRID HYDRAULIC KIT		**20225097**
HI, COMFORT T300-HY		**20225099**
RIELLO ADAPTO HYBRID START 5.0 - 30		
It consists of:		
RIELLO ADAPTO 5.0 (*)		**20225100**
START 30 KIS		**20197879**
HYBRID HYDRAULIC KIT		**20225097**
HI, COMFORT T300-HY		**20225099**

(*) Available from 2026.

HEAT PUMPS

TECHNICAL DATA

Description	Heating				Cooling				Electrical power supply V/Ph/Hz	Energy efficiency class (5) (D → A+++)*	Notes	Code n.
	Floor (1)		Fancoils (2)		Floor (3)		Fancoils (4)					
	Output kW	COP	Output kW	COP	Output kW	EER	Output kW	EER				
RIELLO ADAPTO 3.5	3,53	4,4	3,59	3,7	3,6	4,6	3,5	3,0	220-240/1/50	A+ / A++		**20225095**
RIELLO ADAPTO 5.0	(*) Available from 2026.											**20225100**

(*) HEATING: the range of energy efficiency class of this products category is between D and A+++
(1) Heating: delivery water temperature 45 °C with gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(2) Heating: delivery water temperature 35 °C with thermal gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(3) Cooling: delivery water temperature 7 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(4) Cooling: delivery water temperature 18 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(5) Seasonal energy efficiency class for average climate zone for flow temperature at 55 °C / Seasonal energy efficiency class for average climate zone for flow temperature at 35 °C

CONDENSING BOILERS


TECHNICAL DATA

Description	Output - Thermal power Heating/DHW Min - Max kW	Useful efficiency Pn (50°/30°C) %	Useful efficiency 30% Pn (rit. 30 °C) %	DHW PRODUCTION (l/min-Δt 25°C)	Energy efficiency class * (D → A+++)	Energy efficiency class * (F → A+)	Notes	Code n.
INSTANTANEOUS COMBINED HEATING AND DOMESTIC WATER VERSION								
START 25 KIS	3,1÷20,0 / 3,1÷25,0	104,6-98,0	109,1	14,3	A	A		**20197878**
START 30 KIS	3,95÷25,0 / 3,95÷30,0	107,1-103,6	108,8	17,2	A	A		**20197879**
START 25 KIS (GPL)	3,1÷20,0 / 3,1÷25,0	104,6-98,0	109,1	14,3	A	A		**20197880**

(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+

HEAT PUMP OUTDOOR UNIT


OVERALL DIMENSIONS

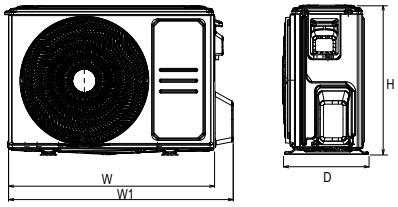

Description	H mm	W mm	W1 mm	D mm	Net weight kg
RIELLO ADAPTO 3.5	557	771	839	304	26,6
RIELLO ADAPTO 5.0	(*) Available from 2026.				

HEAT PUMP INDOOR UNIT – HYBRID HYDRAULIC KIT

OVERALL DIMENSIONS

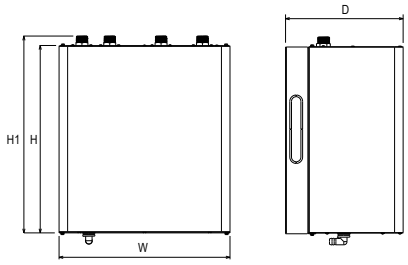


Description	H mm	H1 mm	W mm	D mm	Net weight kg
HYBRID HYDRAULIC KIT	436	460	400	275	19,7

The connecting ramps between the hydraulic kit and the boiler are not supplied as standard.

COMBI WALL-HUNG BOILERS CONDENSING BOILERS

OVERALL DIMENSIONS

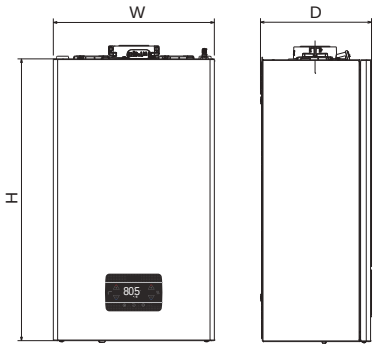


Description	H mm	W mm	D mm	Net weight kg
START 25 KIS	700	400	275	28,5
START 30 KIS	700	400	275	30,0

The connecting ramps between the hydraulic kit and the boiler are not supplied as standard.

T300-HY CONTROL UNIT

OVERALL DIMENSIONS

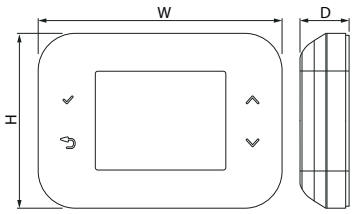

Description	H mm	W mm	D mm	Net weight kg
HI, COMFORT T300-HY	95	132	95	0,15

COMBINABLE FAN COIL UNITS

Please refer to the "Fan Coils" section in the Product Catalog.

SYSTEM ACCESSORIES

Description	Notes	Code no.
External probe kit	(1)	**1220559**
25-litre inertial storage kit	(2)	**20104496**
Hi, Comfort T200	(3)	**20212852**


(1) Installation is always recommended.
(2) For systems with a volume of less than 20 liters, installation on the heating system return is recommended.
(3) Room thermostat which, when combined in RF to Hi, Comfort T300-Hy, allows zone management.

WALL-HUNG BOILERS ACCESSORIES

Please refer to the section dedicated to accessories for START 25 and 30 KIS boilers in the Product Catalog.

EXAMPLE OF A SYSTEM

HEATING, COOLING, AND DHW SYSTEM WITH HEAT PUMP, HYDRAULIC KIT, AND COMBINED BOILER

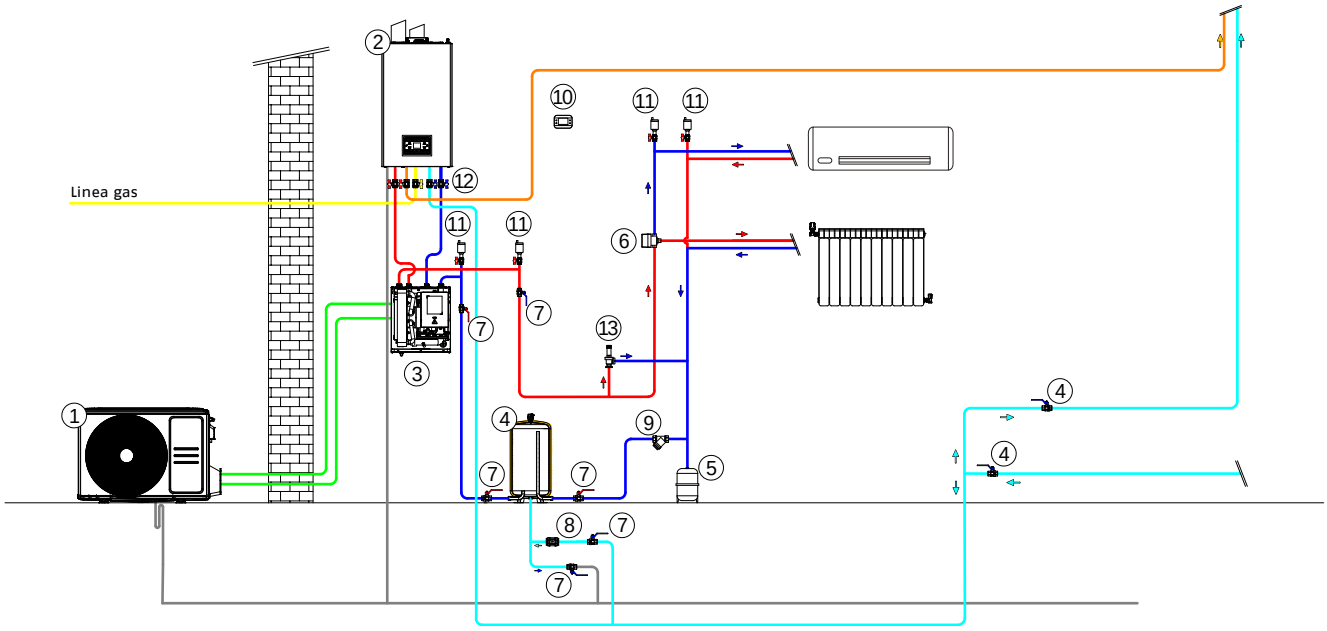

19. Heat pump outdoor unit
20. Boiler with circulator and vessel
21. Heat pump indoor unit
22. Inertial storage
23. Expansion vessel
24. Summer-winter diverter valve(*)
25. Globe valve
26. Non-return valve
27. Filter
28. T300-Hy control panel
29. Deaerator
30. Under-boiler tap kit
31. Adjustable bypass valve

(*) Management is handled by the installer.

Hybrid systems-Wall-hung solution

RES wall-hung split hybrid system



ERP

- Heating, cooling and domestic hot water production
- Intelligent management of multiple energy sources: condensing boiler, solar thermal and heat pump
- Large display for setting and monitoring the entire system

A wall-hung hybrid system is a multi-energy hybrid system for heating, summer cooling and domestic hot water production. This system is manufactured by combining three main components together:

- the wall-hung boiler: depending on the installation needs, the choice of the gas generator can be made among boilers from 25 to 35kW, heating only or combined boilers, for wall-hung (indoor or outdoor in partially protected places) or built-in installation. The boilers have a modulation ratio of 1:5 or 1:8, depending on the model, and are all equipped with high-efficiency circulators. The system control panel is able to activate the most energy efficient heat source based on climatic conditions, and to manage the system with up to 2 independent hot/cold temperature zones.
- the heat pump: wall-hung split air-water type, available in versions ranging from 4 to 16 kW, with wall-hung indoor unit for heating and domestic hot water production. The outdoor unit, compact and quiet, includes a Twin Rotary DC inverter compressor, electronic expansion valve, fans with brushless motor and finned pack coil optimized for heat pump operation even with outdoor air temperature of -25°C.
- The indoor unit houses the main components of the hydronic system, high surface plate exchanger and high-efficiency electronic circulation pump.
- the hydraulic distribution module: the choice can be made between the simple Hbox hydraulic node, and the more flexible BAG³ Hybrid distribution module. Hbox allows you to make a simple hydraulic connection between the two generators, creating a one-way system in which the boiler pumps and the heat pump supply the system. For more complex systems, the BAG³ Hybrid distribution module is available: for indoor recessed or wall-hung installations, or for outdoor recessed installations, in 1-direct, 2-direct or 1-direct and 1-mixed configurations, equipped with low consumption self-modulating circulators (EEI≤0.20). The distribution module also works as hydraulic separator between the generators and the system circuits. The system is set up for connection to a single-coil domestic hot water heater served by heat pump, or to a dual-coil domestic hot water heater served by heat pump and solar thermal system, by installing the diverting valve kit.


WALL-HUNG BOILERS

TECHNICAL DATA


Description	Heat output Heating/Domestic Water min-max kW	Working efficiency		Domestic water production ΔT 25° l/min	Energy efficiency class *		Notes	Code
		Nominal output (50°/30°C) %	30% of nominal output (ret. 30 °C) %		(D → A+++)	(F → A+)		
INSTANTANEOUS COMBINED HEATING AND DOMESTIC WATER VERSION								
FAMILY HM 25 KIS	1,9÷20,0 / 1,9÷25,0	106,5	109,7	14,3	A	A	(1)(3)	**20206147**
FAMILY HM 30 KIS	2,7÷25,0 / 2,7÷30,0	106,0	109,6	17,2	A	A	(1)(3)	**20206148**
FAMILY HM 35 KIS	2,7÷32,0 / 2,7÷34,9	105,3	109,7	20,0	A	A	(1)(3)	**20206149**
FAMILY HM CONNECT 25 KIS	1,9÷20,0 / 1,9÷25,0	106,5	109,7	14,3	A	A	(1)(4)	**20206152**
FAMILY HM CONNECT 35 KIS	2,7÷32,0 / 2,7÷34,9	105,3	109,7	20,0	A	A	(1)(4)	**20206153**
RESIDENCE HM 25 KIS	2,5÷20,0 / 2,5÷25,0	106,5	108,8	14,3	A	A		**20205317**
RESIDENCE HM 30 KIS	3,0÷25,0 / 3,0÷30,0	106,0	108,8	17,2	A	A		**20205318**
RESIDENCE HM 35 KIS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	20,0	A	A		**20205319**
HEATING-ONLY VERSION								
FAMILY HM 25 IS	1,9÷20,0 / 1,9÷25,0	106,5	109,7	-	A	-		**20206150**
FAMILY HM 35 IS	2,7÷32,0 / 2,7÷34,9	105,3	109,7	-	A	-		**20206151**
FAMILY HM CONNECT 35 IS	2,7÷32,0 / 2,70÷34,90	105,3	109,7	-	A	-		**20206154**
RESIDENCE HM 20 IS	2,5÷20,0 / 2,5÷20,0	106,5	108,8		A	-		**20205320**
RESIDENCE HM 30 IS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	-	A	-	(1)(2)	**20205321**
BUILT-IN UNIT								
IN-WALL INSTALLATION BOX M							(2)	**20082310**
IN-WALL INSTALLATION BOX S							(3)	**20161604**

(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+
(1) The external probe is not included in the boiler supply, but is available as an accessory with code 1220559.
(2) To create a wall-mounted hybrid system, it is necessary to replace the boiler display with the code 20207837.
(3) To create a wall-mounted hybrid system, it is necessary to replace the boiler display with the code 20205322.
(4) Boilers already equipped with T300 hybrid system control panel, code 20205322.


OVERALL DIMENSIONS

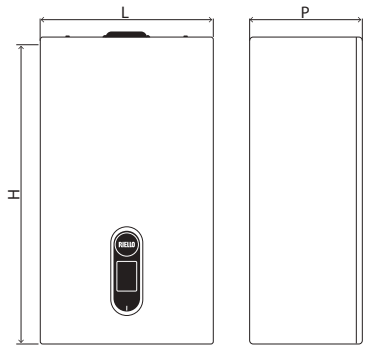

Description	H mm	L mm	P mm	Net weight kg
FAMILY HM 25 KIS / CONNECT	740	420	275	29
FAMILY HM 30 KIS	740	420	275	30
FAMILY HM 35 KIS / CONNECT	740	420	275	30
FAMILY HM 25 IS	740	420	275	28
FAMILY HM 35 IS / CONNECT	740	420	275	29

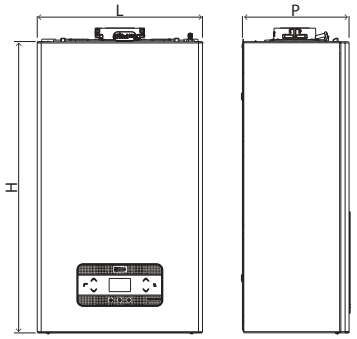

Description	H mm	L mm	P mm	Net weight kg
RESIDENCE HM 25 KIS	740	420	275	29
RESIDENCE HM 30 KIS	740	420	275	30
RESIDENCE HM 35 KIS	740	420	275	30
RESIDENCE HM 20 IS	740	420	275	28
RESIDENCE HM 30 IS	740	420	275	29

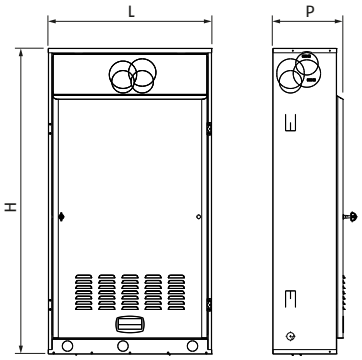

Description	H mm	L mm	P mm	Net weight kg
IN-WALL INSTALLATION BOX M	1223	654	281	21
IN-WALL INSTALLATION BOX S	1223	654	255	18

HEAT PUMPS


TECHNICAL DATA

Description	HEATING				COOLING				Electrical power supply V/Ph/Hz	Energy efficiency class		Code
	Floor (1)		Fan coils (2)		Floor (3)		Fan coils (4)					
	Nominal power kW	COP	Nominal power kW	COP	Nominal power kW	EER	Nominal power kW	EER		(5)	(6)	
THE CODES BELOW ALWAYS REFER TO THE COMBINATION OF INDOOR AND OUTDOOR UNITS												
SET FAMILY SPRINT 4 KW M	4,25	5,20	4,35	3,80	4,50	5,55	4,70	3,45	220-240/1/50	A+++	A++	**20205753**
SET FAMILY SPRINT 6 KW M	6,20	5,00	6,35	3,75	6,55	4,90	7,00	3,00	220-240/1/50	A+++	A++	**20205755**
SET FAMILY SPRINT 8 KW M	8,30	5,20	8,20	3,95	8,40	5,05	7,40	3,38	220-240/1/50	A+++	A++	**20205757**
SET FAMILY SPRINT 10 KW M	10,00	5,00	10,00	3,80	10,00	4,80	8,20	3,30	220-240/1/50	A+++	A++	**20205760**
SET FAMILY SPRINT 12 KW M	12,10	4,95	12,30	3,80	12,00	4,00	11,60	2,75	220-240/1/50	A+++	A++	**20205766**
SET FAMILY SPRINT 14 KW M	14,50	4,70	14,20	3,65	13,50	3,61	12,70	2,55	220-240/1/50	A+++	A++	**20205769**
SET FAMILY SPRINT 12 KW T	12,10	4,95	12,30	3,80	12,00	4,00	11,60	2,75	380-415/3/50	A+++	A++	**20205778**
SET FAMILY SPRINT 14 KW T	14,50	4,70	14,20	3,65	13,50	3,61	12,70	2,55	380-415/3/50	A+++	A++	**20205780**

The performance is in accordance with standards EN 14511:2013 and EN 14825:2016.
(1) External air temperature 7°C D.B., 6°C W.B.; water inlet/outlet 30/35°C.
(2) External air temperature 7°C D.B., 6°C W.B.; water inlet/outlet 40/45°C.
(3) External air temperature 35°C; water inlet/outlet 23/18°C.
(4) External air temperature 35°C; water inlet/outlet 12/7°C.
(5) Value referred to the Average climate profile for delivery temperature of 35 °C. Values in accordance with Regulation 811/2013.
(6) Value referred to the Average climate profile for delivery temperature of 55 °C. Values in accordance with Regulation 811/2013.

OVERALL DIMENSIONS


INDOOR UNIT

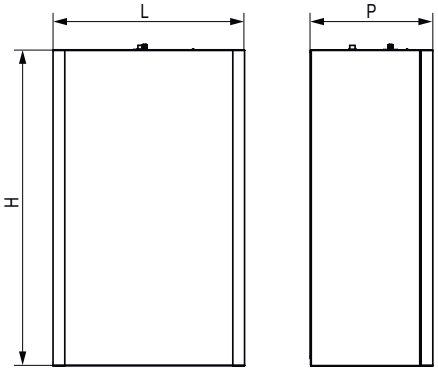


Description	H mm	L mm	P mm	Net weight kg
INDOOR UNIT				
SPRINT WH S	790	421	270	37
SPRINT WH M	790	421	270	37
SPRINT WH L	790	421	270	39
OUTDOOR UNIT				
HP EXTERNAL UNIT 004	712	1008	426	58
HP EXTERNAL UNIT 006	712	1008	426	58
HP EXTERNAL UNIT 008	865	1118	523	75
HP EXTERNAL UNIT 010	865	1118	523	75
HP EXTERNAL UNIT 012	865	1118	523	97
HP EXTERNAL UNIT 014	865	1118	523	97
HP EXTERNAL UNIT 012T	865	1118	523	112
HP EXTERNAL UNIT 014T	865	1118	523	112

OUTDOOR UNIT

MODELS 004-006

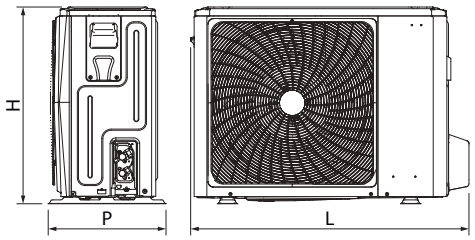

MODELS 008-010-012-014

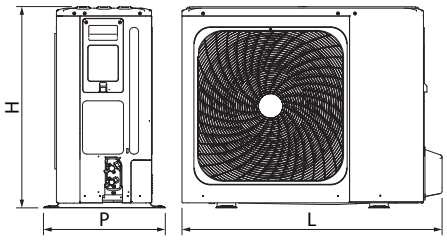


REC10MHC MANAGEMENT CONTROL


TECHNICAL DATA

Description	Electrical power supply V/Ph/Hz	Notes	Code
REC10MHC Management control	230/1/50		**20207837**
T300 Hi, Comfort Management control	230/1/50		**20205322**

OVERALL DIMENSIONS

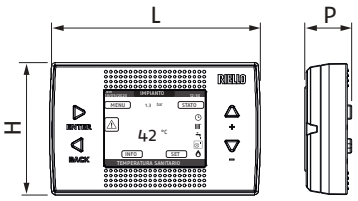

Description	H mm	L mm	P mm	Net weight kg
REC10MHC MANAGEMENT CONTROL	90	146	32	0,15



Description	H mm	L mm	P mm	Net weight kg
T300 Hi, Comfort MANAGEMENT CONTROL	95	132	95	0,15


COMBINABLE HYBRID DISTRIBUTION MODULES

TECHNICAL DATA


Description	Zone management	Electrical power supply V/Ph/Hz	Maximum power absorbed W	Notes	Code
DISTRIBUTION MODULES WITH SEPARATOR					
BAG³ HYBRID 1D	1 direct zone	230/1/50	57	(1)(4)	**20130805**
BAG³ HYBRID 2D	2 direct zone	230/1/50	114	(1)(4)	**20130806**
BAG³ HYBRID 1D+1M	1 direct zone + 1 mixed zone	230/1/50	118	(2)(4)	**20130807**
IN-WALL INSTALLATION BOX	-	-	-	(3)	**20130808**

(1) Equipped as standard with limit thermostat for low temperature systems.
(2) Mixed zone equipped as standard with limit thermostat for low temperature systems.
(3) Galvanised sheet in-wall installation box, possible white painting; the box is mandatory for installation of BAG³ HYBRID.
(4) Supplied without in-wall installation box.

OVERALL DIMENSIONS




Description	H mm	L mm	P mm	Net weight kg
HBOX - 1D HYBRID DISTRIBUTION MODULE	107	187	92	0.9

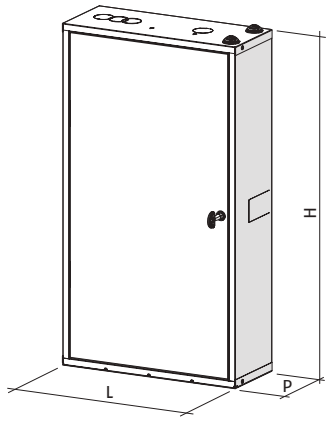


Description	H mm	L mm	P mm	Net weight kg
BAG³ HYBRID 1D	797	400	160	17
BAG³ HYBRID 2D	797	400	160	18
BAG³ HYBRID 1D+1M	797	400	160	18
IN-WALL INSTALLATION BOX	797	400	160	8


BAG³ HYBRID 1D



BAG³ HYBRID 2D



BAG³ HYBRID 1D+1M



ACCESSORIES

Description	Notes	Code
HBOX adjustable bypass valve	(1)	**20182807**

(1) Mandatory accessory when using HBOX - 1D hybrid distribution module code 20165227 with variable flow systems.


INERTIAL STORAGE TANKS TO BE MATCHED

TECHNICAL DATA

Description	Volume delivered l	Maximum temperature °C	Maximum pressure bar	Dispersions W	Energy efficiency class (F→A+)*	Code no.
7000 ACI 60 PLUS	57	99	6	34	B	**20090056**
7000 ACI 120 PLUS	123	99	6	50	B	**20082450**

(*) The energy efficiency class of the products ranges from F up to A+

OVERALL DIMENSIONS

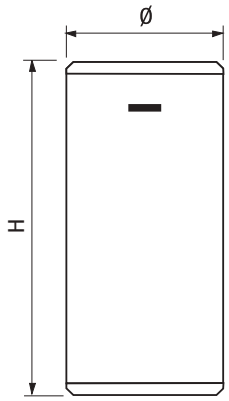

Description	H mm	Ø mm	Net weight kg
7000 ACI 60 PLUS	935	400	25
7000 ACI 120 PLUS	1095	500	35

Dimensions and weight with insulation.


SOLAR HYDRAULIC UNITS TO BE MATCHED

TECHNICAL DATA

Description	Connections and ball valves	Net surface connectable collectors* m²	Notes	Code
RSS R	Return-only	20	(1)	**20116168**

(1) Compatible with PWM and ON/OFF control.

OVERALL DIMENSIONS



Description	H mm	L mm	P mm	Net weight kg
RSS R	364	228	183	4.1


MATCHING SOLAR COLLECTORS

TECHNICAL DATA

Description	Collector surface		Values referred to the opening area			Stagnation temperature °C	Notes	Code
	Gross m²	Net m²	ηo	a1 W/m²K	a2 W/m²K²			
RPS 25/4 A	2,49	2,38	0,76	2,990	0,027	180	(1)	**20201316**
RPS 20/4 A	2	1,9	0,76	2,990	0,027	180	(1)	**20201319**

(1) The solar collector brackets kits are available in the section "SOLAR COLLECTORS" on page 181.

OVERALL DIMENSIONS

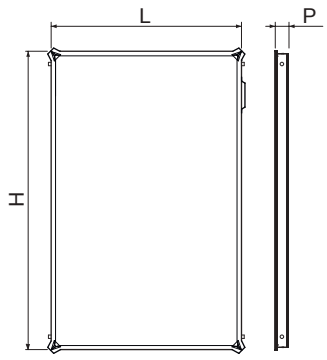

Description	H mm	L mm	P mm	Net weight kg
RPS 25/4 A	2020	1235	85	35
RPS 20/4 A	1625	1235	85	29


DHW HEATERS TO BE MATCHED

TECHNICAL DATA

Description	Volume delivered (l)	Lower coil exchange surface (m²)	Upper coil exchange surface (m²)	Upper coil exchange power (kW)*	Single coil exchange surface (kW)*	Maximum temperature °C	Maximum pressure bar	Dispersions W	Energy efficiency class (F→A+)**	Code
7200 300 HP	263	4.0	-	-	96	99	10	85	C	**4383500**
7200 500 HP	470	6.0	-	-	156	99	10	112	C	**4383501**
RBC-HP 150 1S	170	0,85	-	-	6,3	99	10	55	B	**20202962**
RBC-HP 200 1S	210	1,38	-	-	8,8	99	10	58	B	**20203095**
RBC-HP 300 1S	305	1,7	-	-	12,4	99	10	68	B	**20201786**
RBC-HP 500 1S	500	2,2			15,8	99	10	84	B	**20201984**
RBS 200 2S	208	0.7	0.7	16.1	-	99	10	62	B	**20116675**
RBS 300 2S	301	1.0	0.8	23.0	-	99	10	69	B	**20116335**
RBS 430 2S	430	1.4	1.0	31.4	-	99	10	75	B	**20117339**

(*) With Δt = 20°C and primary temperature of 80 °C.
(**) The energy efficiency class of the products ranges from F up to A+


OVERALL DIMENSIONS

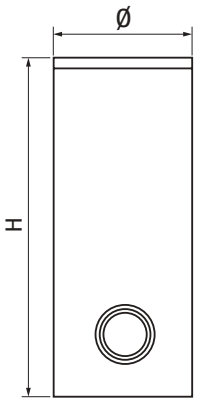


Description	H mm	Ø mm	S (*) mm	Net weight kg
7200 300 HP	1615	600	50	119
7200 500 HP	1690	750	50	166

(*) Insulation thickness.
Dimensions and weight with insulation.

RBC-HP 1S 150÷500




RBC-HP 1S 800/1000

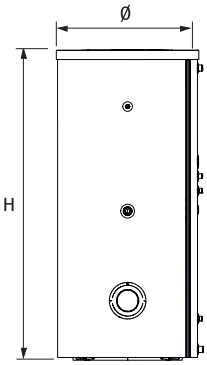

Description	H mm	Ø mm	S (*) mm	Net weight kg
RBC-HP 150 1S	1138	604	52	62
RBC-HP 200 1S	1354	604	52	78
RBC-HP 300 1S	1838	604	52	103
RBC-HP 500 1S	1793	755	52	150

(*) Insulation thickness.
Dimensions and weight with insulation.

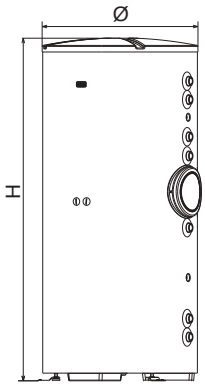

Description	H mm	Ø mm	S (*) mm	Net weight kg
RBS 200 2S	1338	604	50	86
RBS 300 2S	1838	604	50	108
RBS 430 2S	1644	755	50	146

(*) Insulation thickness.
Dimensions and weight with insulation.

GUIDE TO SYSTEM CONFIGURATION



1. BOILER-HEAT PUMP COMBINATIONS

2. WALL-HUNG BOILER ACCESSORIES

3. ACCESSORIES TO COMPLETE THE SYSTEM

3.1 Hydraulic accessories

3.2 Secondary circuit management

3.3 Hybrid distribution module accessories

3.4 DHW heater accessories

3.5 Solar circuit management

4. HI, COMFORT CONTROLS

1. BOILER-HEAT PUMP COMBINATIONS (RECOMMENDED)*

Description	Code	Built-in unit			Management control		Possible heat pump combinations								Hydraulic distribution (1)			
		Built-in unit M	Built-in unit	Built-in unit S	Hi, Comfort T300	RECIOMHC management control	SET FAMILY SPRINT 4 KW M	SET FAMILY SPRINT 6 KW M	SET FAMILY SPRINT 8 KW M	SET FAMILY SPRINT 10 KW M	SET FAMILY SPRINT 12 KW M	SET FAMILY SPRINT 14 KW M	SET FAMILY SPRINT 12 KW T	SET FAMILY SPRINT 14 KW T	HBOX - 1D MODULE	BAG³ HYBRID 1D	BAG³ HYBRID 2D	BAG³ HYBRID 1D+1M
		20082310	20161604	20082309	20205322	20207837	20205753	20205755	20205757	20205760	20205766	20205769	20205778	20205780	20165227	20130805	20130806	20130807
INSTANTANEOUS COMBINED HEATING AND DOMESTIC WATER VERSION																		
FAMILY HM 25 KIS	**20206147**		●		●		●	●	●						●	●	●	●
FAMILY HM 30 KIS	**20206148**		●		●		●	●	●	●	●		●		●	●	●	●
FAMILY HM 35 KIS	**20206149**		●		●		●	●	●	●	●	●	●	●	●	●	●	●
FAMILY HM CONNECT 25 KIS	**20206152**		●		(1)		●	●	●						●	●	●	●
FAMILY HM CONNECT 35 KIS	**20206153**		●		(1)		●	●	●	●	●	●	●	●	●	●	●	●
RESIDENCE HM 25 KIS	**20205317**		●		●		●	●	●						●	●	●	●
RESIDENCE HM 30 KIS	**20205318**		●		●		●	●	●						●	●	●	●
RESIDENCE HM 35 KIS	**20205319**		●		●		●	●	●						●	●	●	●
HEATING-ONLY VERSION																		
FAMILY HM 25 IS	**20206150**		●		●		●	●	●						●	●	●	●
FAMILY HM 35 IS	**20206151**		●		●		●	●	●	●	●	●	●	●	●	●	●	●
FAMILY HM CONNECT 35 IS	**20206154**		●		(1)		●	●	●	●	●	●	●	●	●	●	●	●
RESIDENCE HM 20 IS	**20205320**		●		●		●	●	●						●	●	●	●
RESIDENCE HM 30 IS	**20205321**		●		●		●	●	●	●	●		●		●	●	●	●

(*) The following combinations ensure the best energy performance; for the complete list of certified hybrid systems, refer to the company declaration.
(1) Boiler already equipped with T300 control.

2. WALL-HUNG BOILER ACCESSORIES

Description	Notes	Code
FAMILY HM - FAMILY HM CONNECT BOILER		
In-wall installation unit	(1)	**20161604**
Crossbar for in-wall installation		**20191887**
Air Filter	(2)	**20190324**
Hydraulic low fittings cover		**20191519**
Dummy boiler FAMILY HM		**20209809**
Compact polyphosphate doser kit		**20191518**
Compact magnetic filter		**20191517**
Board BE09 with double multi-function relay	(3)	**20192808**
Condensate booster pump kit		**20097192**
High residual pump 7 m		**20210993**
Solar diverter valve kit for instant wall-hung combined boilers		**20035644**
Well probe for remote heater (for heating only version)		**1220599**
Flexible fittings kit for boiler replacement	(4)	**20191890**
Connection kit with heating system, domestic water and gas cocks (for KIS models)		**20133516**
Connection kit with heating system and gas cocks (for IS models)		**20133517**
Connection kit with domestic water and gas cocks (for KIS models)		**20132005**
Connection kit with gas cock (for IS models)		**20133386**
Antifreeze heaters -15 °C	(5)	**20191888**
External probe kit		**1220559**
Limit thermostat for low temperature installations		**1220639**
Split connection system kit Ø80 mm		**20217921**
Ø80 mm clapet kit for pressurized collective flues		**20164664**
Ø80/125 mm concentric clapet kit for pressurized collective flues		**20164662**
Wall-hung collector Ø60/100 mm		**20129175**
Telescopic wall-hung collector Ø60/100 mm		**20129176**
Vertical collector Ø60/100 mm		**20129177**
Vertical connection stub pipe kit Ø60/100 mm	(6)	**20129174**
90° bend kit Ø60/100 mm for boiler start	(7)	**20129172**
Adjustable splitter kit from Ø60/100 mm to Ø80/80 mm		**20134830**
Adaptor kit B23 Ø80 mm		**20129769**
Splitter device kit B23 Ø80 mm for in-wall installation box		**20129768**
Compact adjustable splitter device kit from 60/100 mm to 80/80 mm		**20190475**
RESIDENCE HM BOILER		
In-wall installation unit	(1)	**20161604**
Crossbar for in-wall installation		**20191887**
Air Filter	(2)	**20190324**
Hydraulic low fittings cover		**20191519**
Dummy boiler RESIDENCE HM		**20209806**
Compact polyphosphate doser kit		**20191518**
Compact magnetic filter		**20191517**
Board BE09 with double multi-function relay	(3)	**20192808**
Condensate booster pump kit		**20097192**
High residual pump 7 m		**20210993**
Solar diverter valve kit for instant wall-hung combined boilers		**20035644**
Well probe for remote heater (for heating only version)		**1220599**
Flexible fittings kit for boiler replacement	(4)	**20191890**
Connection kit with heating system, domestic water and gas cocks (for KIS models)		**20133516**
Connection kit with heating system and gas cocks (for IS models)		**20133517**
Connection kit with domestic water and gas cocks (for KIS models)		**20132005**
Connection kit with gas cock (for IS models)		**20133386**
Split connection system kit Ø80 mm		**20217921**
Ø80 mm clapet kit for pressurized collective flues		**20164664**
Ø80/125 mm concentric clapet kit for pressurized collective flues		**20164662**
Wall-hung collector Ø60/100 mm		**20129175**

Description	Notes	Code
Telescopic wall-hung collector Ø60/100 mm		**20129176**
Vertical collector Ø60/100 mm		**20129177**
Vertical connection stub pipe kit Ø60/100 mm	(6)	**20129174**
90° bend kit Ø60/100 mm for boiler start	(7)	**20129172**
Adjustable splitter kit from Ø60/100 mm to Ø80/80 mm		**20134830**
Adaptor kit B23 Ø80 mm		**20129769**
Splitter device kit B23 Ø80 mm for in-wall installation box		**20129768**
Compact adjustable splitter device kit from 60/100 mm to 80/80 mm		**20190475**
Antifreeze heaters -15 °C	(5)	**20191888**
External probe kit		**1220559**
Limit thermostat for low temperature installations		**1220639**

(1) Unit supplied with door.
(2) Ideal to avoid introducing impurities from the intake air into the exchanger and burner.
(3) Ideal board for managing additional circulator or zone valve and alarm remote kit.
(4) Flexible connections (sanitary, gas and heating) kit required to facilitate the replacement of boilers with previous boilers with Riello standard hydraulic connection sequence.
(5) The antifreeze heater kit allows to protect the sanitary circuit from the risk of freezing in case of temperatures below 0°C (down to -15°C), using the copper fitting
(6) Code necessary for vertical exhaust with flue system. Accessory already included in kit 20129177
(7) Code necessary for horizontal exhaust with flue system 60/100. Accessory already included in kit 20129175 and 20129176.

3. ACCESSORIES TO COMPLETE THE SYSTEM

3.1 Hydraulic accessories

Description	Notes	Code
1" Y water filter		**20175281**
50 litre inertial buffer tank	(1)	**20171999**

(1) Inertial storage cannot be installed horizontally below the heat pump.

3.2 Secondary circuit management

Description	Notes	Code
1" DHW diverting valve with heater probe		**20175064**
Immersion probe	(1)	**1220599**
1st direct/mixed area control		**20132795**
Control of 2nd and 3rd direct/mixed zone		**20132796**

(1) Used for secondary circuit and heater management.
Note: for ambient temperature adjustment, refer to section SYSTEM ACCESSORIES - THERMOSTATS AND PROGRAMMABLE THERMOSTATS

3.3 Hybrid distribution module accessories

Description	Notes	Code
Cock kit on system and heat pump side		**20131752**
Photovoltaic system input card	(1)	**20165741**
Diverting valve kit for BAG³ HYBRID		**20131755**
Diverting valve kit for HBOX		**20168920**
Solar interface kit		**20168672**

(1) To be used only if the diverting valve (code 20131755) is not present in BAG³ HYBRID configuration.

3.4 DHW heater accessories

Description	Notes	Code
Electronic anode equipped with plug	(1)	**20055206**
Thermometer kit	(1)	**20123850**
Curve kit for electronic anode	(1)	**20123851**
Solar heat exchanger 0.8 m² for HP 300	(2)	**4383504**
Solar heat exchanger 1.2 m² for 500 HP and 800 HP	(3)	**4383505**
Solar mixing diverting valve kit	(4)	**20025113**

(1) RBC 1S and RBS 2S series heater accessories.
(2) 7200 300 HP heater accessories.
(3) 7200 500 HP and 7200 800 HP heater accessories.
(4) Mandatory in case of domestic water heater installation and KIS model boiler.

3.5 Solar circuit management

Description	Notes	Code
RSS R solar hydraulic unit	(1)(2)(3)	**20116168**
Solar interface kit	(4)	**20168672**

(1) The RSS R return-only solar hydraulic unit and the solar interface kit (code 20168672) must always be ordered together.
(2) Net surface area of collectors to be connected 20 m².
(3) Connections and ball valves on the return line.
(4) It allows viewing the operating status of the solar system on the REC10MHC I system interface.
Note: if collectors with net surface >20 m² are installed, refer to section SOLAR THERMAL SYSTEM AND HEATERS - ACCESSORIES - HYDRAULIC UNITS AND SOLAR ADJUSTMENTS.
Note: for selection of accessories for solar panels, refer to section SOLAR THERMAL SYSTEM AND HEATERS - SOLAR PANELS.

4. Hi, COMFORT CONTROLS


Room controls with capability of management through APP

Drawing	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**

(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For cable connection to the boiler. Compatible for radio frequency connection with Hi, Comfort G100-W code 20193355 (accessory not included and necessary for internet connection via home ADSL modem).


EXAMPLES OF SYSTEM WITH SPLIT HYBRID SYSTEM

ONE-ZONE HEATING, COOLING AND DHW PRODUCTION SYSTEM COMBINED WITH SPLIT HEAT PUMP AND BOILER

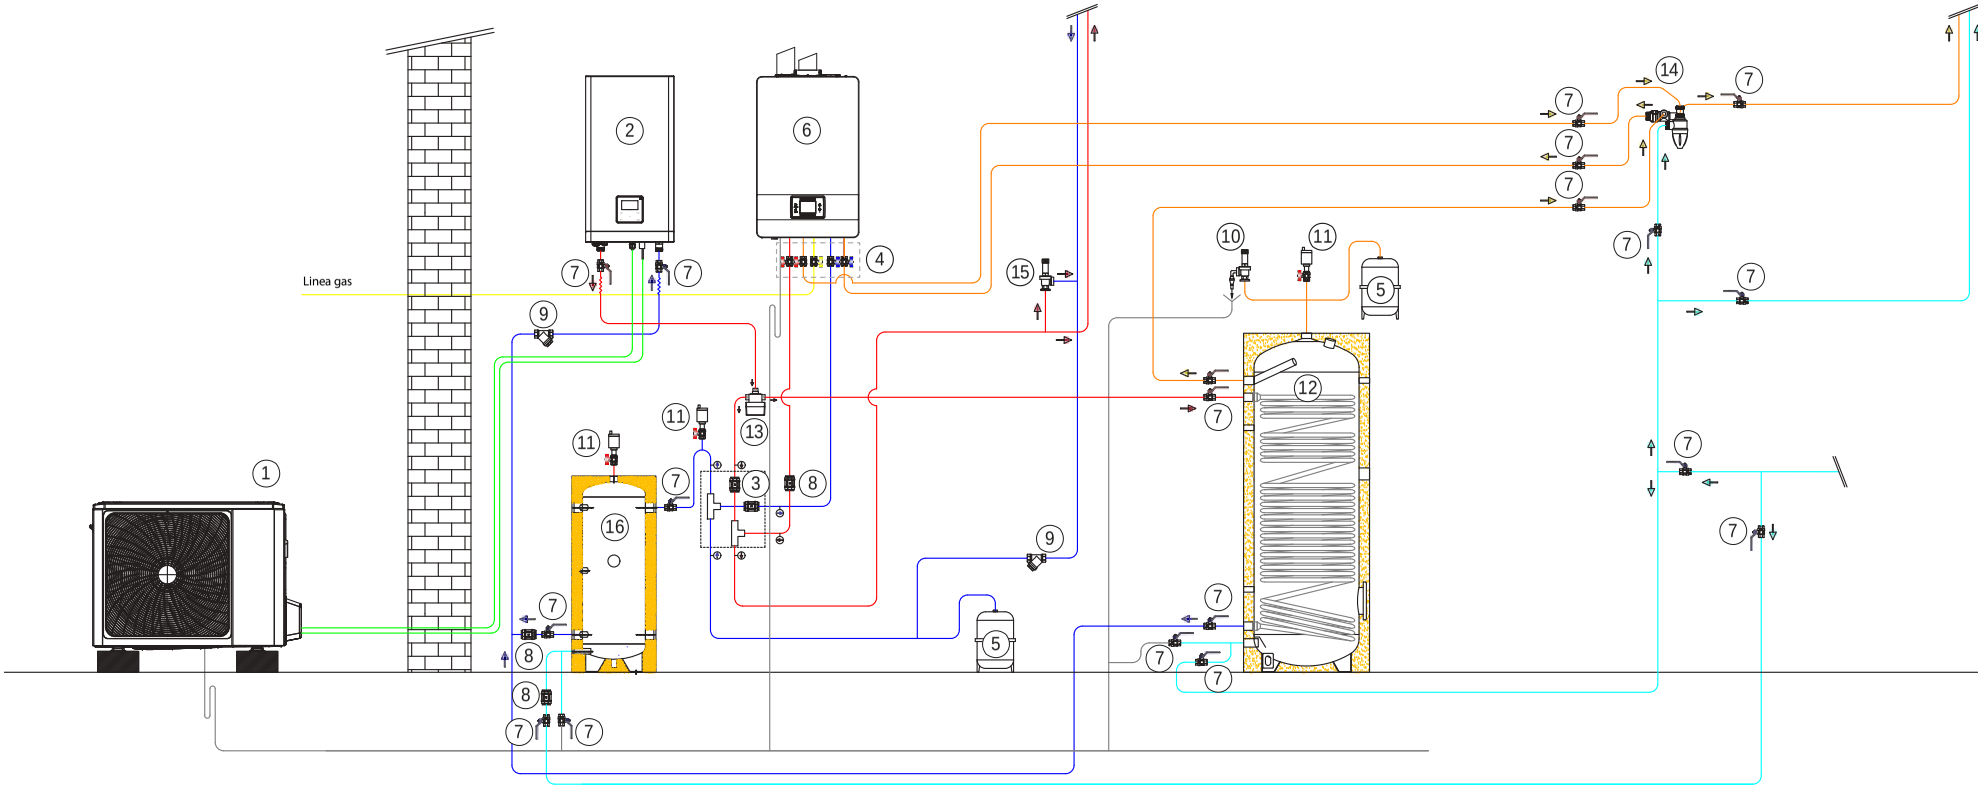


1. Heat pump (HP) external unit
2. Indoor HP unit with circulator and expansion vessel
3. Hydraulic module with non-return valves
4. Shut-off boiler valves kit
5. Expansion vessel
6. Boiler with circulator and expansion vessel
7. Shut-off valve
8. Non-return valve
9. Filter
10. Safety Valve
11. Degasser
12. DHW tank
13. DHW dmixing -diverting valve
14. DHW divertig valve
15. By-pass adjustable valve
16. Intertial storage tank

MONOVALENT TWO-ZONE HEATING AND DHW PRODUCTION SYSTEM COMBINED WITH SPLIT HEAT PUMP, BOILER AND SOLAR SYSTEM

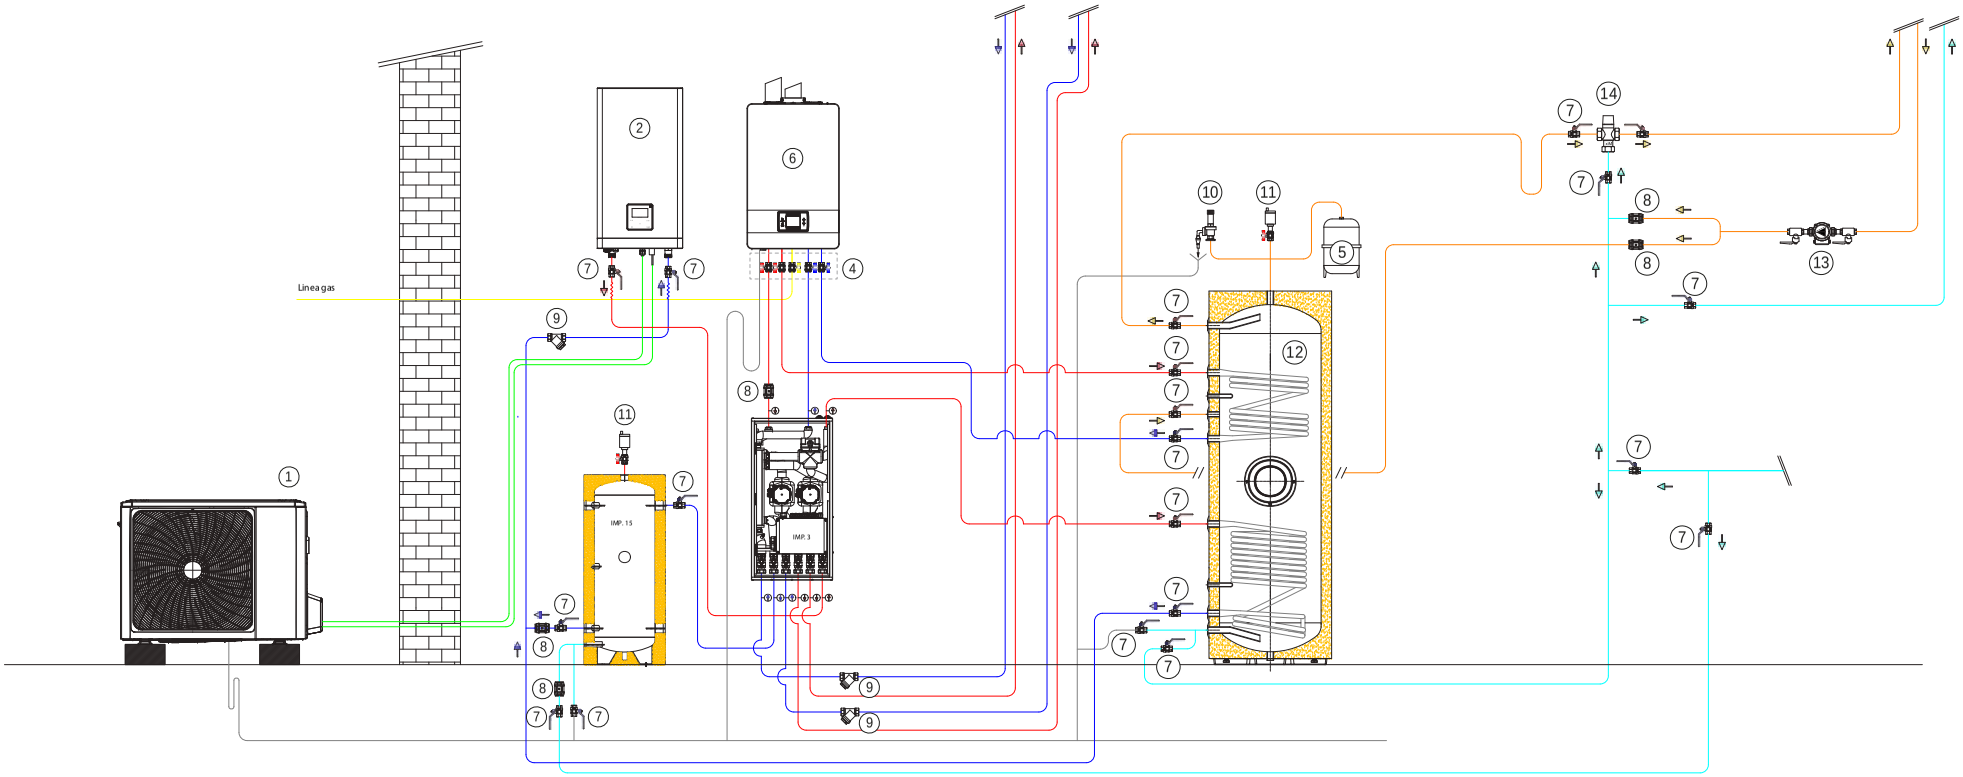

1. Heat pump (HP) external unit
2. Indoor HP unit with circulator and expansion vessel
3. Hydraulic module with circulators and hydraulic compensator
4. Shut-off boiler valves kit
5. Expansion vessel
6. Boiler with circulator and expansion vessel
7. Shut-off valve
8. Non-return valve
9. Filter
10. Safety Valve
11. Degasser
12. DHW tank
13. DHW recirculation pump
14. DHW mixing valve
15. Intertial storage tank

MONOVALENT THREE-ZONE HEATING AND DHW PRODUCTION SYSTEM COMBINED WITH SPLIT HEAT PUMP, BOILER AND SOLAR SYSTEM

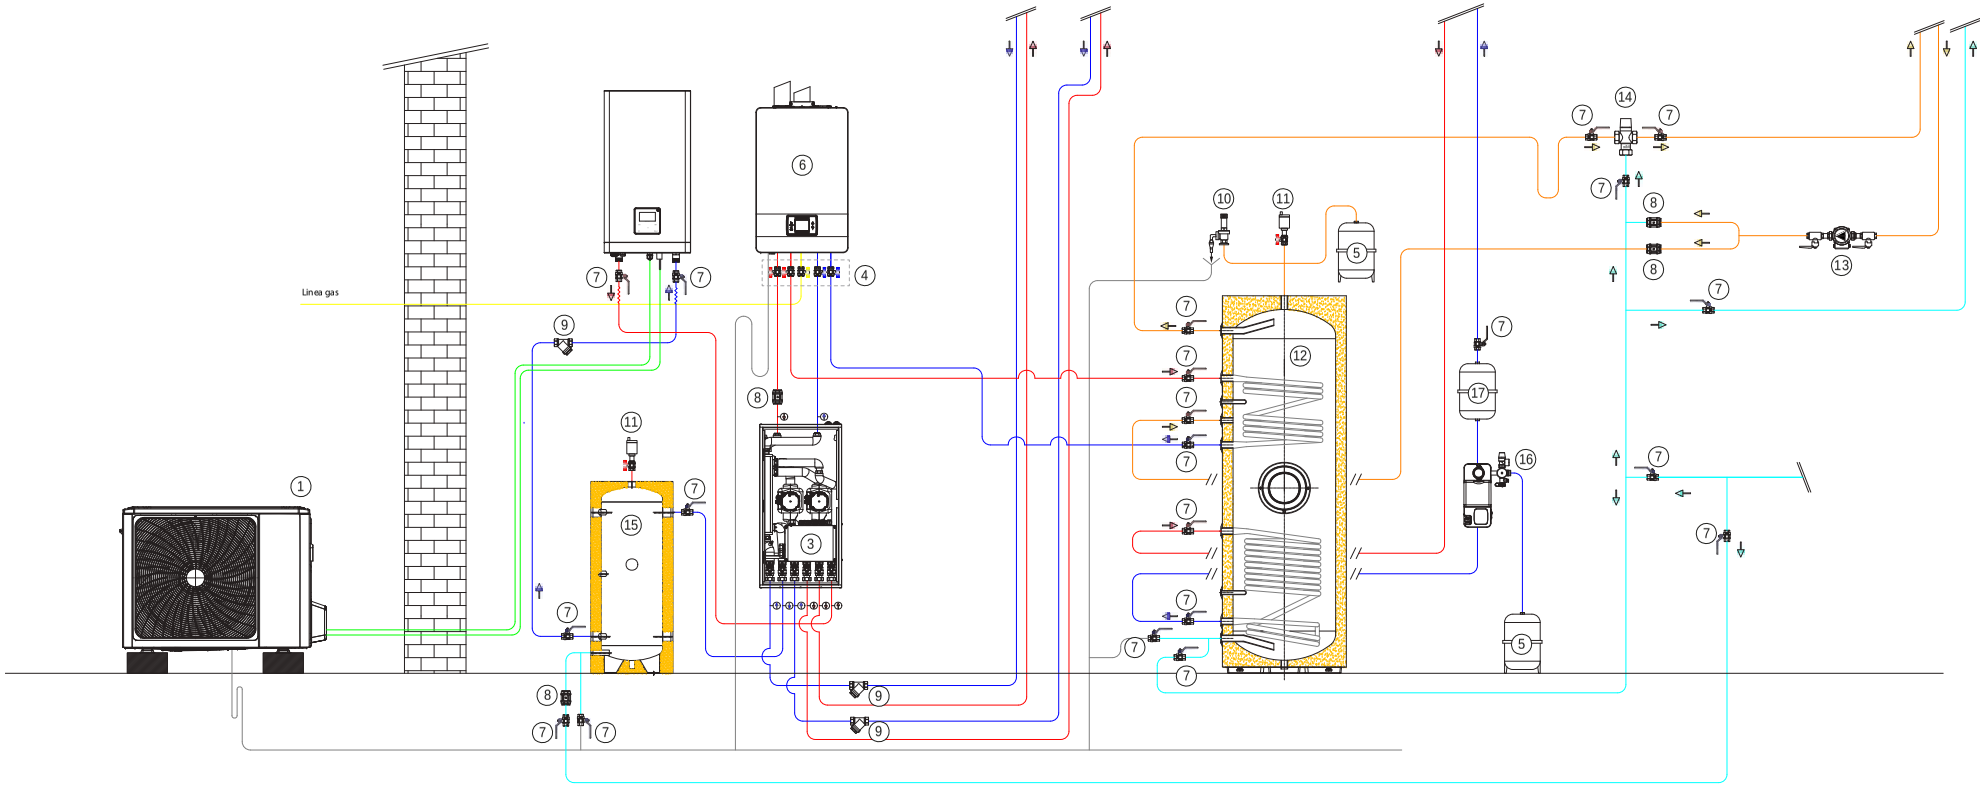

1. Heat pump (HP) external unit
2. Indoor HP unit with circulator and expansion vessel
3. Hydraulic module with circulators and hydraulic compensator
4. Shut-off boiler valves kit
5. Expansion vessel
6. Boiler with circulator and expansion vessel
7. Shut-off valve
8. Non-return valve
9. Filter
10. Safety Valve
11. Degasser
12. DHW tank
13. DHW recirculation pump
14. DHW mixing valve
15. Intertial storage tank
16. Solar station with pump and electronic control
17. Intermediate solar tank



HEAT PUMPS

HEAT PUMPS 91

HEAT PUMPS

FOR CENTRAL HEATING AND DHW PRODUCTION FROM LOW TO MEDIUM POWER

HEATING AND COOLING AIR CONDITIONING

HIGH TEMPERATURE

AIR-WATER MONOBLOC



NXHP 004-014

NXHP 004-014
NXHP 012-014 T

page 94



NXHM 004-016

NXHM 004-016
NXHM 012-016 T

page 97



NXHM 018-030

NXHM 018-030T

page 99

AIR-WATER SPLIT

WALL-HUNG



FAMILY SPRINT R32

Family Sprint R32 004-016
Family Sprint R32 012-016T

page 101

FLOOR STANDING



DOMUS M 004-016

DOMUS M 004-016
DOMUS M 012-016 T

page 105


Please verify with Sales the availability of the product in the destination Country before ordering

Monobloc air-water heat pumps


NXHP



NXHP 004-010

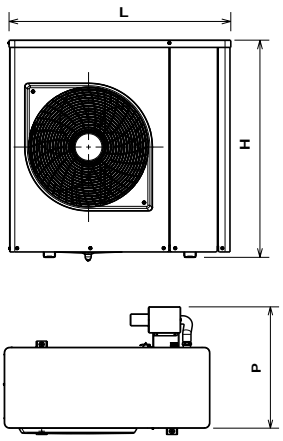

NXHP 012-014

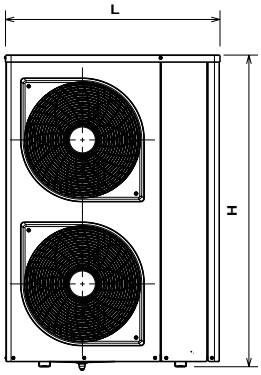

- High efficiency inverter heat pump in R290

Description	H mm	W mm	D mm	Net weight kg
NXHP 004	927	946	560	78
NXHP 006	927	946	560	84
NXHP 008	927	946	560	91
NXHP 010	927	946	560	93
NXHP 012	1375	946	560	126
NXHP 014	1375	946	560	126
NXHP 012T	1375	946	560	128
NXHP 014T	1375	946	560	128

NXHP is a high energy efficient residential hydronic heat pump for heating, cooling and possible production of domestic hot water for domestic use.
The unit is suitable for low to medium temperature applications, and up to high temperature applications.
The unit operates on natural refrigerant R290 ensuring not only low Global Warming Potential (GWP100 = 0.02) and C02 emission, but also powerful performance with high energy efficiency at all times.
NXHP is also equipped with new Blue-Fin exchange coils, a special hydrophilic and anti-corrosion treatment, which improves the flow of condensation on the fins thus reducing the risk of freezing on the coil.
NXHP is available in 8 different models with heating capacity from 4.0 to 13.8 kW.

- High water heating temperature up to +75°C, ensure more usable hot water and helps to avoid the need for direct electric immersion to sterlize the water protecing from legionella.
- HP Keymark certified performance.
- High COP and EER.
- Low noise operation.
- DC-Inverter technology with Twin-Rotary compressor which modulates the power necessary to perfectly match the real needed load.
- They can be connected to low-temperature radiators, underfloor radiant elements and fan coil type units.
- Easy and quick installation.
- Controller WUI is included which is able to manage completely heating/ cooling/ domestic hot water system.
- The controller WUI can manage up to 4 units in cascade system (1 primary & 3 secondary).
- Anti-freeze program protects the entire system especially the hydraulic parts from damage in very cold ambient air temperature.

TECHNICAL DATA

Description	Heating				Cooling				Electrical supply V/Ph/Hz	Energy class [5] (D → A+++)*	CODE
	Floor [1]		Fancoils [2]		Floor [3]		Fan coils [4]				
	Nominal Power kW	COP	Nominal Power kW	COP	Nominal Power kW	EER	Nominal Power kW	EER			
AIR-WATER MONOBLOC SINGLE PHASE											
NXHP 004	3,95	4,90	3,85	3,65	4,00	4,15	3,35	3,15	230/1/50	A++	**20197104**
NXHP 006	5,80	4,80	5,50	3,65	6,15	3,90	4,60	3,15	230/1/50	A++	**20197105**
NXHP 008	7,60	4,80	7,80	3,75	8,00	4,00	6,50	3,05	230/1/50	A++	**20197106**
NXHP 010	9,60	4,35	9,50	3,55	8,90	3,70	7,40	2,90	230/1/50	A++	**20197107**
NXHP 012	11,40	4,55	10,80	3,65	12,00	4,30	9,70	3,05	230/1/50	A++	**20197108**
NXHP 014	13,80	4,30	13,60	3,40	14,50	3,70	10,70	2,95	230/1/50	A++	**20197109**
AIR-WATER MONOBLOC THREE-PHASE											
NXHP 012T	11,40	4,65	10,80	3,75	12,00	4,35	9,70	3,10	400/3/50	A++	**20197111**
NXHP 014T	13,80	4,40	13,60	3,50	14,50	3,75	10,70	3,00	400/3/50	A++	**20197112**

The performances comply with the EN 14511-3: 2013 standard and refer to the following conditions:
(1) Heating: delivery water temperature 35 °C with thermal gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(2) Heating: delivery water temperature 45 °C with gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(3) Cooling: delivery water temperature 18 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(4) Cooling: delivery water temperature 7 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(5) Seasonal energy efficiency class for average climate zone for flow temperature at 55°C.
(*) HEATING: the range of energy efficiency class of this products category is between D and A+++

ACCESSORIES

Description	Notes	CODE
CYLINDERS(*)		
7200 300 HP		**4383500**
7200 500 HP		**4383501**
RBC-HP 300 1S		**20201786**
RBC-HP 500 1S		**20201984**
RBC-HP 150 1S		**20202962**
RBC-HP 200 1S		**20203095**
INERTIAL BUFFER TANK		
7000 ACI 120 PLUS		**20082450**
7000 ACI 60 PLUS		**20090056**
50 litres inertial buffer tank		**20171999**
100 litres inertial buffer tank		**20142300**
Connection kit between heat pump and inertial buffer		**20224494**
HYDRAULIC SYSTEM ACCESSORIES		
1" DHW diverting valve with heater	(1)(3)(6)	**20168920**
Y water filter 1"		**20175281**
1" & 1 1/4" DHW diverting valve without heater probe	(2)(3)(5)	**20203742**
MECHANICAL ACCESSORIES		
Vibration dampers kit for heat pumps		**20217198**
ELECTRICAL ACCESSORIES		
1.5 kW single-phase electric heater kit	(2)(7)	**4383270**
2.2 kW single-phase electric heater kit	(1)(4)(6)	**20182272**
3.8 kW three-phase electric heater kit	(2)(7)	**20020707**
1st direct/mixed zone control	(1)	**20132795**
Control of 2nd and 3rd direct/mixed zone	(1)(10)	**20132796**
Integrative electrical resistance 1PH-3PH 2-6 kW		**20182292**
Hi, Comfort T300		**20205322**
Kit power supply	(1)	**20134478**
Service key for A2W R290		**20209737**
Primary/ Secondary sensor (for cascade system)	(2)	**20210825**
Temperature sensor for DHW tank		**20010068**
Anti-freeze relief valve 1"		**20210831**
Outside air temperature probe		**20213763**

Description	Notes	CODE
Deareator 1 1/4" with relief valve 3 bar	(7)	**20214128**
Drain pan heater (4-10kW)		**20221678**
Drain pan heater (12-14kW)		**20221679**
External expansion vessel		**20019654**
DISTRIBUTION MODULES		
BAG3 2D – 2 direct zone management	(1)(8)	**20130806**
BAG3 1D+1M – 1 direct zone & 1 mixed zone management	(1)(8)	**20130807**
In-wall installation box	(9)	**20130808**


(*) For the complete accessories please refer to the cylinder section.
(1) Only in combination with T300 remote control.
(2) Accessory managed by the machine interface.
(3) Mandatory in case of domestic hot water cylinder installation.
(4) Included electrical power box and activation relay
(5) The accessory must be used in combination with the temperature probe (code accessory 20010068).
(6) The kit includes the three-way diverting valve for DHW with heater probe.
(7) Accessory included in the heat pump and mandatory for installation.
(8) Supplied without installation box.
(9) Built-in box in galvanized sheet metal; the box is mandatory for the installation of the BAG3 HYBRID.
(10) The first zone management kit (20132795) must always be present.

Monobloc air-water heat pumps


NXHM 004-016



NXHM 004-006

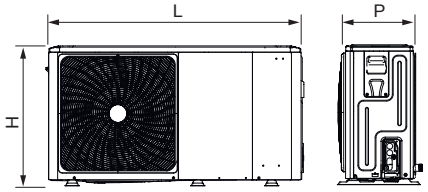

NXHM 008-016

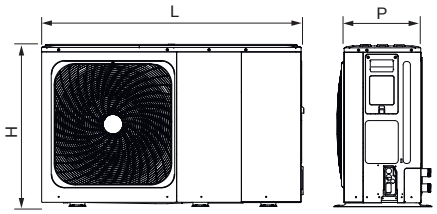

ERP R32

- High efficiency inverter heat pump in R32

Description	H mm	L mm	P mm	Net weight kg
NXHM 004	718	1295	426	86
NXHM 006	718	1295	426	86
NXHM 008	865	1385	523	105
NXHM 010	865	1385	523	105
NXHM 012/012T	865	1385	523	129/144
NXHM 014/014T	865	1385	523	129/144
NXHM 016/016T	865	1385	523	129/144

NXHM is a high energy efficient residential hydronic heat pump for heating, cooling and possible production of domestic hot water for domestic use.
The unit operates on ecological R32 refrigerant ensuring not only low Global Warming Potential (GWP) and CO_2 emission, but also powerful performance with high energy efficiency at all times.
NXHM is also equipped with new Blue-Fin exchange coils, a special hydrophilic and anti-corrosion treatment, which improves the flow of condensation on the fins thus reducing the risk of freezing on the coil (maximum efficiency even in humid climates).
NXHM is available in 10 different models with heating capacity from 4.2 to 15.9 kW.

- DC-Inverter technology with Twin-Rotary compressor which modulates the power necessary to perfectly match the real needed load
- High COP and EER (all NXHM heat pumps is compliant with the highest standards in term of energy efficiency)
- HP Keymark certified performance
- They can be connected to low-temperature radiators, underfloor radiant elements and fan coil type units
- Water heating temperature up to +65 °C
- Easy and quick installation
- Silent operation
- Wired controller is included which is able to manage completely heating/ cooling/ domestic hot water system
- The control can manage up to 6 units in cascade system (1 master & 5 slaves) even with different power input
- Anti-freeze program protects the entire system especially the hydraulic parts from damage in very cold ambient air temperature.

TECHNICAL DATA

Description	Heating				Cooling				Electrical supply V/Ph/Hz	Energy class [5] (D → A+++)*	Code
	Floor [1]		Fan coils [2]		Floor [3]		Fan coils [4]				
	Nominal power kW	COP	Nominal power kW	COP	Nominal power kW	EER	Nominal power kW	EER			
AIR-WATER MONOBLOC SINGLE PHASE											
NXHM 004	4.20	5.10	4.30	3.80	4.50	5.50	4.70	3.45	230/1/50	A++	**20203404**
NXHM 006	6.35	4.95	6.30	3.70	6.50	4.80	7.00	3.00	230/1/50	A++	**20203407**
NXHM 008	8.40	5.15	8.10	3.85	8.30	5.05	7.45	3.35	230/1/50	A++	**20203409**
NXHM 010	10.00	4.95	10.00	3.75	9.90	4.55	8.20	3.25	230/1/50	A++	**20203410**
NXHM 012	12.10	4.95	12.30	3.70	12.00	3.95	11.50	2.75	230/1/50	A++	**20203649**
NXHM 014	14.50	4.60	14.10	3.60	13.50	3.61	12.40	2.50	230/1/50	A++	**20203650**
NXHM 016	15.90	4.50	16.00	3.50	14.20	3.61	14.00	2.50	230/1/50	A++	**20203651**
AIR-WATER MONOBLOC THREE-PHASE											
NXHM 012T	12.10	4.95	12.30	3.70	12.00	3.95	11.50	2.75	400/3/50	A++	**20203652**
NXHM 014T	14.50	4.60	14.10	3.60	13.50	3.61	12.40	2.50	400/3/50	A++	**20203653**
NXHM 016T	15.90	4.50	16.00	3.50	14.20	3.61	14.00	2.50	400/3/50	A++	**20203655**

The performance is in accordance with standard EN 14511-3:2013 and refers to the following conditions:
(1) Heating: delivery water temperature 35 °C with thermal gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(2) Heating: delivery water temperature 45 °C with gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(3) Cooling: delivery water temperature 18 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(4) Cooling: delivery water temperature 7 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(5) Seasonal energy efficiency class for average climate zone for 55 °C delivery temperature.
(*) HEATING: the range of energy efficiency class of this products category is between D and A+++

ACCESSORIES


Description	Notes	Code
CYLINDER		
7200 300 HP (NXHM 004-008)		**4383500**
7200 500 HP (NXHM 010-016)		**4383501**
RBC-HP 150 1S		**20202962**
RBC-HP 200 1S		**20203095**
RBC-HP 300 1S		**20201786**
RBC-HP 500 1S		**20201984**
PUFFER		
7000 ACI 120 PLUS		**20082450**
7000 ACI 60 PLUS		**20090056**
Inertial storage of 50 liters	(8)	**20171999**
HYDRAULIC SYSTEM ACCESSORY		
1" DHW diverting valve with heater probe	(3)	**20168920**
1" - 1 ¼" DHW diverting valve	(2)(4)(9)	**20203742**
Y water filter 1"	(7)	**20175281**
ELECTRICAL ACCESSORY		
REC10MHC remote control		**20207837**
Hi, Comfort T300		**20205322**
Kit power supply	(10)	**20134478**
Temperature probe for balancing tanks or zone 2 flow temperature or solar temperature		**20194933**
1.5 kW single-phase electric heater kit	(1)	**4383270**
3.0 kW single-phase electric heater kit	(3)(5)(6)	**20182272**
3.8 kW three-phase electric heater kit	(1)	**20020707**
Integrative electrical resistance 1PH-3PH 2-6 kW	(6)	**20182292**
1st direct/mixed zone control	(10)(11)	**20132795**
Control of 2nd and 3rd direct/mixed zone	(10)(11)	**20132796**

(1) The accessory must be ordered together with the base unit and is supplied not installed with finished product availability.
(2) The accessory must be used in combination with the temperature probe included in the heat pump, or accessory 20194933.
(3) Only in combination with REC10MHC remote control.
(4) Mandatory in case of domestic water heater installation.
(5) The kit includes the three-way diverting valve for DHW with heater probe.
(6) Includes electrical power box and activation relay.
(7) The water filter is included with the NXHM heat pump. If necessary, it should only be used for NXHM 004 and 006 models.
(8) The buffer tank cannot be installed horizontally below the heat pump.
(9) Accessory managed by the machine interface.
(10) Only in combination with REC10MHC or T300 remote control.
(11) The first zone management kit (20132795) must always be present.

Monobloc air-water heat pumps

NXHM 018-030



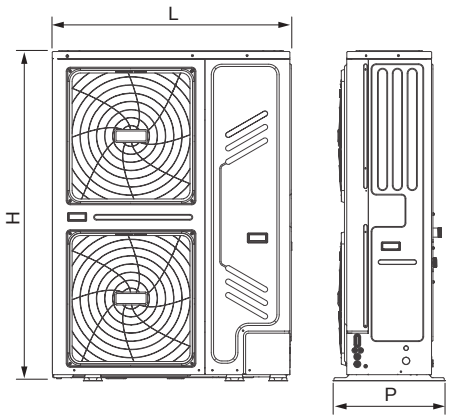

- High efficiency inverter heat pump in R32

Description	H mm	L mm	P mm	Net weight kg
NXHM 018T-030T	1558	1129	528	177

NXHM 018-030 is the ideal solution for any type of residential and commercial applications for heating and cooling, with the possibility of producing domestic hot water at high energy efficiency.
The unit operates on ecological R32 refrigerant ensuring not only low Global Warming Potential (GWP) and CO_2 emission, but also powerful performance with high energy efficiency at wide operating range. NXHM 018-030 is also equipped with new Blue-Fin exchange coils, a special hydrophilic and anti-corrosion treatment, which improves the flow of condensation on the fins thus reducing the risk of freezing on the coil (maximum efficiency even in humid climates). The unit is monobloc so all components are included inside to facilitate installation and operation.
NXHM 018-030 is supplied with the control, and is available in 4 different models with heating capacity from 18 to 30 kW.

- DC-Inverter technology with Twin-Rotary compressor which modulates the power necessary to perfectly match the real needed load
- High COP and EER (all NXHM heat pumps is compliant with the highest standards in term of energy efficiency)
- HP Keymark certified performance
- They can be connected to low-temperature radiators, underfloor radiant elements and fan coil type units
- Water heating temperature up to +60 °C
- Easy and quick installation
- Silent operation
- Wired controller is included which is able to manage completely heating/ cooling/ domestic hot water system
- The control can manage up to 6 units in cascade system (1 master & 5 slaves) even with different power input
- Anti-freeze program protects the entire system especially the hydraulic parts from damage in very cold ambient air temperature.

TECHNICAL DATA

Description	Heating				Cooling				Electrical supply V/Ph/Hz	Energy class (5) (D → A+++)*	Code
	Floor (1)		Fan coils (2)		Floor (3)		Fan coils (4)				
	Nominal power kW	COP	Nominal power kW	COP	Nominal power kW	EER	Nominal power kW	EER			
THREE PHASE MONOBLOC AIR - WATER											
NXHM 018T	18.00	4.70	18.00	3.50	18.50	4.75	17.00	3.05	400/3/50	A++	**20194140**
NXHM 022T	22.00	4.40	22.00	3.40	23.00	4.60	21.00	2.95	400/3/50	A++	**20194141**
NXHM 026T	26.00	4.08	26.00	3.10	27.00	4.30	26.00	2.70	400/3/50	A+	**20194142**
NXHM 030T	30.10	3.91	30.00	2.90	31.00	4.00	29.50	2.55	400/3/50	A+	**20194143**

The performance is in accordance with standard EN 14511-3:2013 and refers to the following conditions:
(1) Heating: delivery water temperature 35 °C with thermal gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(2) Heating: delivery water temperature 45 °C with gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(3) Cooling: delivery water temperature 18 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(4) Cooling: delivery water temperature 7 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(5) Seasonal energy efficiency class for average climate zone for 55 °C delivery temperature.
(*) HEATING: the range of energy efficiency class of this products category is between D and A+++

ACCESSORIES


Description	Notes	Code
CYLINDER		
RBC-HP 800 1S		**20202273**
RBC-HP 1000 1S		**20202861**
7200 HP 500		**4383501**
7200 HP 800		**20136293**
PUFFER		
7000 ACI 60 PLUS		**20090056**
7000 ACI 120 PLUS		**20082450**
Inertial storage of 100 liters		**20142300**
MECHANICAL ACCESSORY		
Solar heat exchanger 1,2 m² (7200 500-800 HP)		**4383505**
Solar heat exchanger 1,9 m² for RBC-HP 1S 800 - 1000		**20203245**
Support bracket kit		**20175145**
ELECTRICAL ACCESSORY		
Temperature probe for balancing tanks or zone 2 flow temperature or solar temperature		**20194933**
1" & 1 ¼" DHW diverting valve without temperature probe	(3)	**20203742**
1.5 kW single-phase electric heater kit	(1)(2)	**4383270**
2.2 kW single-phase electric heater kit	(1)(2)	**4383271**
3.0 kW single-phase electric heater kit	(1)(2)	**4383272**
3.8 kW three-phase electric heater kit	(1)(2)	**20020707**
Integrative electrical resistance 1PH-3PH 2-6 kW		**20182292**

(1) The accessory must be ordered together with the base unit and is supplied not installed with the availability of the finished product.
(2) Not for 7000 ACI 60 PLUS.
(3) The accessory must be used in combination with the temperature probe included in the heat pump, or accessory 20194933.


Wall-hung split air-water heat pumps

Family Sprint R32






FAMILY SPRINT 004-006



FAMILY SPRINT 008-016



- Split type heat pump with wall-hung indoor unit for heating, cooling and DHW production
- Wide range of powers available, from 4 to 16kW single phase and from 12 to 16kW three phase
- Compact indoor unit: only 270 mm of depth
- High efficiency up to A+++ class (A7°C; W35°C)
- Leaving water temperature in heating: 65°C

Description	H mm	W mm	P mm	Net weight kg
INDOOR UNIT				
SPRINT WH S	790	421	270	37
SPRINT WH M	790	421	270	37
SPRINT WH L	790	421	270	39
OUTDOOR UNIT				
HP EXTERNAL UNIT 004	712	1008	426	58
HP EXTERNAL UNIT 006	712	1008	426	58
HP EXTERNAL UNIT 008	865	1118	523	75
HP EXTERNAL UNIT 010	865	1118	523	75
HP EXTERNAL UNIT 012	865	1118	523	97
HP EXTERNAL UNIT 014	865	1118	523	97
HP EXTERNAL UNIT 016	865	1118	523	97
HP EXTERNAL UNIT 012T	865	1118	523	112
HP EXTERNAL UNIT 014T	865	1118	523	112
HP EXTERNAL UNIT 016T	865	1118	523	112

Family Sprint is a split system heat pump, with wall hung indoor unit, for heating, cooling and domestic hot water production.
The system consists of an outdoor unit, with R32 gas, connected through refrigerant pipes to an indoor wall hung unit.
The outdoor unit is compact and quite, includes a Twin Rotary DC inverter compressor and works even with an outdoor air temperature of -25°C.
The indoor unit, with a depth of only 270 mm, is available in two versions: with and without back up heater on board. The back up heater on mono phase internal units has a power of 3 kW, while on tri phase internal units of 9 kW.
The control panel, provided on the internal unit, has a wide backlit display, with intuitive icons and a multilingual menu.
On Family Sprint you can activate Silent Mode function, in two different levels, who can reduce sound pressure down to 39 db(A) (sound pressure of 4 kW size, on Silent Mode level 2).

TECHNICAL DATA

Description	HEATING				COOLING				Electrical supply V/Ph/Hz	Energy efficiency class (D → A+++)*		Code
	Floor (1)		Fan coils (2)		Floor (3)		Fan coils (4)					
	Nominal power kW	COP	Nominal power kW	COP	Nominal power kW	EER	Nominal power kW	EER		(5)	(6)	
WITHOUT ON BOARD BACK UP HEATER												
SET FAMILY SPRINT 4 KW M	4,25	5,20	4,35	3,80	4,50	5,55	4,70	3,45	220-240/1/50	A+++	A++	**20205753**
SET FAMILY SPRINT 6 KW M	6,20	5,00	6,35	3,75	6,55	4,90	7,00	3,00	220-240/1/50	A+++	A++	**20205755**
SET FAMILY SPRINT 8 KW M	8,30	5,20	8,20	3,95	8,40	5,05	7,40	3,38	220-240/1/50	A+++	A++	**20205757**
SET FAMILY SPRINT 10 KW M	10,00	5,00	10,00	3,80	10,00	4,80	8,20	3,30	220-240/1/50	A+++	A++	**20205760**
SET FAMILY SPRINT 12 KW M	12,10	4,95	12,30	3,80	12,00	4,00	11,60	2,75	220-240/1/50	A+++	A++	**20205766**
SET FAMILY SPRINT 14 KW M	14,50	4,70	14,20	3,65	13,50	3,61	12,70	2,55	220-240/1/50	A+++	A++	**20205769**
SET FAMILY SPRINT 16 KW M	16,00	4,50	16,00	3,60	14,20	3,61	14,00	2,45	220-240/1/50	A+++	A++	**20205773**
SET FAMILY SPRINT 12 KW T	12,10	4,95	12,30	3,80	12,00	4,00	11,60	2,75	380-415/3/50	A+++	A++	**20205778**
SET FAMILY SPRINT 14 KW T	14,50	4,70	14,20	3,65	13,50	3,61	12,70	2,55	380-415/3/50	A+++	A++	**20205780**
SET FAMILY SPRINT 16 KW T	16,00	4,50	16,00	3,60	14,20	3,61	14,00	2,45	380-415/3/50	A+++	A++	**20205782**
WITH ON BOARD BACK UP HEATER												
SET FAMILY SPRINT 4 KW M BH	4,25	5,20	4,35	3,80	4,50	5,55	4,70	3,45	220-240/1/50	A+++	A++	**20205754**
SET FAMILY SPRINT 6 KW M BH	6,20	5,00	6,35	3,75	6,55	4,90	7,00	3,00	220-240/1/50	A+++	A++	**20205756**
SET FAMILY SPRINT 8 KW M BH	8,30	5,20	8,20	3,95	8,40	5,05	7,40	3,38	220-240/1/50	A+++	A++	**20205759**
SET FAMILY SPRINT 10 KW M BH	10,00	5,00	10,00	3,80	10,00	4,80	8,20	3,30	220-240/1/50	A+++	A++	**20205764**
SET FAMILY SPRINT 12 KW M BH	12,10	4,95	12,30	3,80	12,00	4,00	11,60	2,75	220-240/1/50	A+++	A++	**20205767**
SET FAMILY SPRINT 14 KW M BH	14,50	4,70	14,20	3,65	13,50	3,61	12,70	2,55	220-240/1/50	A+++	A++	**20205770**
SET FAMILY SPRINT 16 KW M BH	16,00	4,50	16,00	3,60	14,20	3,61	14,00	2,45	220-240/1/50	A+++	A++	**20205776**
SET FAMILY SPRINT 12 KW T BH	12,10	4,95	12,30	3,80	12,00	4,00	11,60	2,75	380-415/3/50	A+++	A++	**20205779**
SET FAMILY SPRINT 14 KW T BH	14,50	4,70	14,20	3,65	13,50	3,61	12,70	2,55	380-415/3/50	A+++	A++	**20205781**
SET FAMILY SPRINT 16 KW T BH	16,00	4,50	16,00	3,60	14,20	3,61	14,00	2,45	380-415/3/50	A+++	A++	**20205783**

The performance is in accordance with standards EN 14511 and EN 14825.
(1) External air temperature 7°C D.B., 6°C W.B.; water inlet/outlet 30/35°C.
(2) External air temperature 7°C D.B., 6°C W.B.; water inlet/outlet 40/45°C.
(3) External air temperature 35°C; water inlet/outlet 23/18°C.
(4) External air temperature 35°C; water inlet/outlet 12/7°C.
(5) Value referred to the Average climate profile for delivery temperature of 35 °C. Values in accordance with Regulation 811/2013.
(6) Value referred to the Average climate profile for delivery temperature of 55 °C. Values in accordance with Regulation 811/2013.
(*) HEATING: the range of energy efficiency class of this products category is between D and A+++
Note: "BH" sets are provided with an on board back up heater of 3 kW, in mono phase units, and 9 kW, in tri phase units.

SET CODES MATCHING TABLE

Description	Set code	Internal unit code	External unit code
WITHOUT ON BOARD BACK UP HEATER			
SET FAMILY SPRINT 4 KW M	**20205753**	**20199004**	**20198970**
SET FAMILY SPRINT 6 KW M	**20205755**	**20199004**	**20198971**
SET FAMILY SPRINT 8 KW M	**20205757**	**20199005**	**20198972**
SET FAMILY SPRINT 10 KW M	**20205760**	**20199005**	**20198973**
SET FAMILY SPRINT 12 KW M	**20205766**	**20199006**	**20198974**
SET FAMILY SPRINT 14 KW M	**20205769**	**20199006**	**20198975**
SET FAMILY SPRINT 16 KW M	**20205773**	**20199006**	**20198976**
SET FAMILY SPRINT 12 KW T	**20205778**	**20199006**	**20198977**
SET FAMILY SPRINT 14 KW T	**20205780**	**20199006**	**20198978**
SET FAMILY SPRINT 16 KW T	**20205782**	**20199006**	**20198979**
WITH ON BOARD BACK UP HEATER			
SET FAMILY SPRINT 4 KW M BH	**20205754**	**20198799**	**20198970**
SET FAMILY SPRINT 6 KW M BH	**20205756**	**20198799**	**20198971**
SET FAMILY SPRINT 8 KW M BH	**20205759**	**20198963**	**20198972**
SET FAMILY SPRINT 10 KW M BH	**20205764**	**20198963**	**20198973**
SET FAMILY SPRINT 12 KW M BH	**20205767**	**20198967**	**20198974**
SET FAMILY SPRINT 14 KW M BH	**20205770**	**20198967**	**20198975**
SET FAMILY SPRINT 16 KW M BH	**20205776**	**20198967**	**20198976**
SET FAMILY SPRINT 12 KW T BH	**20205779**	**20198969**	**20198977**
SET FAMILY SPRINT 14 KW T BH	**20205781**	**20198969**	**20198978**
SET FAMILY SPRINT 16 KW T BH	**20205783**	**20198969**	**20198979**

SUGGESTED CYLINDER AND HEAT PUMP MATCHING

Cylinder		Heat pumps Family Sprint									
Description	Code	4 M	6 M	8 M	10 M	12 M	14 M	16 M	12 T	14 T	16 T
		20205753	20205755	20205757	20205760	20205766	20205769	20205773	20205778	20205780	20205782
RBC-HP 150 1S	**20202962**	●	●								
RBC-HP 200 1S	**20203095**	●	●	●							
RBC-HP 300 1S	**20201786**	●	●	●	●	●			●		
RBC-HP 500 1S	**20201984**			●	●	●	●	●	●	●	●
RBC-HP 800 1S	**20202273**					●	●	●	●	●	●
RBC-HP 1000 1S	**20202861**							●			●

To select the correct size of the cylinder, please refer to the data in the technical sheet of the product and to the specific requirement of the system.


ACCESSORIES

Description	Notes	Code
CYLINDER		
7200 300 HP		**4383500**
7200 500 HP		**4383501**
RBC-HP 150 1S		**20202962**
RBC-HP 200 1S		**20203095**
RBC-HP 300 1S		**20201786**
RBC-HP 500 1S		**20201984**
PUFFER		
7000 ACI 120 PLUS		**20082450**
7000 ACI 60 PLUS		**20090056**
Inertial storage of 50 liters	(8)	**20171999**
HYDRAULIC SYSTEM ACCESSORY		
1" DHW diverting valve with heater probe	(3)	**20168920**
1" - 1 ¼" DHW diverting valve	(2)(4)(9)	**20203742**
Y water filter 1"	(7)	**20175281**
MECHANICAL ACCESSORY		
Solar heat exchanger 0.8 m² for RBC-HP 1S 150-300		**20203248**
Solar heat exchanger 1.2 m² for RBC-HP 1S 500		**20203246**
Solar heat exchanger 0.8 m² for 300 HP		**4383504**
Solar heat exchanger 1.2 m² for 500 HP		**4383505**
ELECTRICAL ACCESSORY		
REC10MHC remote control		**20207837**
Hi, Comfort T300		**20205322**
Kit power supply	(10)	**20134478**
Temperature probe for balancing tanks or zone 2 flow temperature or solar temperature		**20194933**
1.5 kW single-phase electric heater kit	(1)	**4383270**
3.0 kW single-phase electric heater kit	(3)(5)(6)	**20182272**
3.8 kW three-phase electric heater kit	(1)	**20020707**
Integrative electrical resistance 1PH-3PH 2-6 kW	(6)	**20182292**
1st direct/mixed zone control	(10)(11)	**20132795**
Control of 2nd and 3rd direct/mixed zone	(10)(11)	**20132796**

(1) The accessory must be ordered together with the base unit and is supplied not installed with finished product availability.
(2) The accessory must be used in combination with the temperature probe included in the heat pump, or accessory 20194933.
(3) Only in combination with REC10MHC remote control.
(4) Mandatory in case of domestic water heater installation.
(5) The kit includes the three-way diverting valve for DHW with heater probe.
(6) Includes electrical power box and activation relay.
(7) The water filter is included with the NXHM heat pump. If necessary, it should only be used for NXHM 004 and 006 models.
(8) The buffer tank cannot be installed horizontally below the heat pump.
(9) Accessory managed by the machine interface.
(10) Only in combination with T300 remote control.
(11) The first zone management kit (20132795) must always be present.

SYSTEM DIAGRAMS

Bivalent heating, cooling and dhw production system

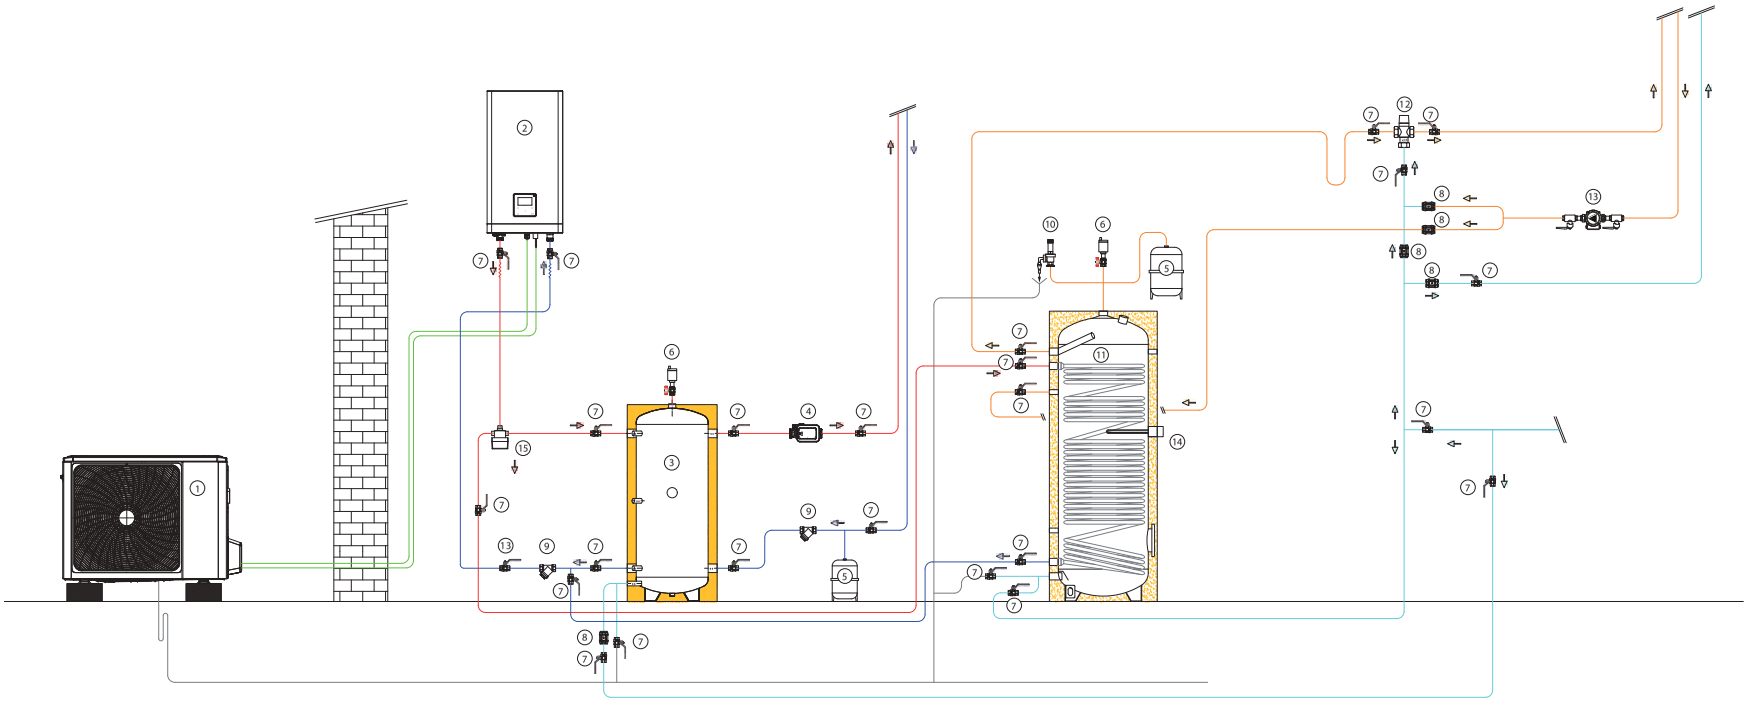


1. Heat pump (HP) external unit
2. Heat pump indoor unit with circulator and reservoir
3. Storage tank
4. Zone pump
5. Expansion reservoir
6. Deaerator
7. Shut-off valve
8. Non-return valve
9. Filter
10. Adjustable bypass valve
11. DHW heater
12. DHW mixer
13. DHW recirculation pump
14. Electric heater
15. DHW diverting valve

Relax PRO



Wall-hung split air-water heat pumps

Domus M

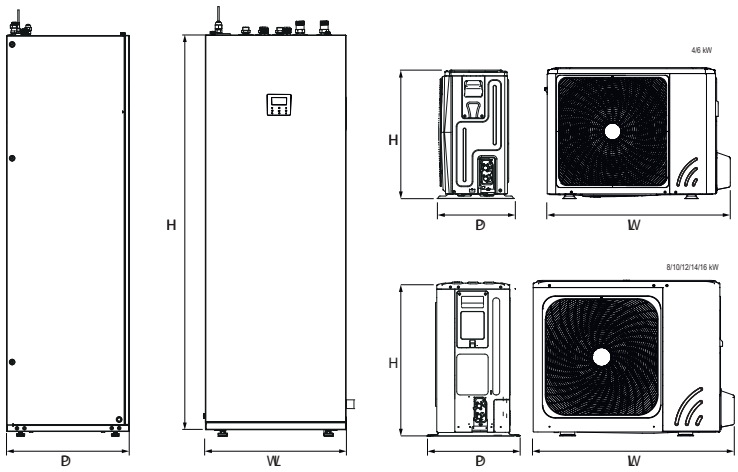

ERP R32

- All-in-One floor-standing indoor unit for clean and tidy installation
- 190l or 240l cylinder for production of DHW.
- Compact indoor unit, only 600x600mm footprint dimensions
- Hydraulic, electrical and refrigeration connections from the top
- Front access to all components for easy installation and service.
- Equipped with 3kW or 2/4/6kW or 3/6/9 kW back-up heater, depending on the models, offering stable performance
- Simple and intuitive control panel with large display and available in multi-languages

Description	H mm	W mm	D mm	Net weight kg
INDOOR UNIT				
HP IDU DOMUS M31/ 04-10	1683	600	600	140
HP IDU DOMUS M61/ 04-10	1683	600	600	140
HP IDU DOMUS L31/ 04-10	1943	600	600	157
HP IDU DOMUS L61/ 04-10	1943	600	600	157
HP IDU DOMUS L61/ 12-16	1943	600	600	159
HP IDU DOMUS L93/ 12-16	1943	600	600	159
UNITÀ ESTERNA				
HP EXTERNAL UNIT 004	712	1008	426	58
HP EXTERNAL UNIT 006	712	1008	426	58
HP EXTERNAL UNIT 008	865	1118	523	75
HP EXTERNAL UNIT 010	865	1118	523	75
HP EXTERNAL UNIT 012	865	1118	523	97
HP EXTERNAL UNIT 014	865	1118	523	97
HP EXTERNAL UNIT 016	865	1118	523	97
HP EXTERNAL UNIT 012T	865	1118	523	112
HP EXTERNAL UNIT 014T	865	1118	523	112
HP EXTERNAL UNIT 016T	865	1118	523	112

Domus M is a floor-standing split heat pump system for heating, cooling and domestic water production.
The system consists of an outdoor unit with R32 refrigerant connected through refrigerant pipes to the indoor floor-standing unit.
The outdoor unit, compact and quiet, includes a Twin Rotary DC inverter compressor, electronic expansion valve, fans with brushless motor and finned pack coil optimized for heat pump operation even with outdoor air temperature of -25°C.
The main components of the hydronic system are located in the indoor unit, including a cylinder of 190l or 240l with high-surface for domestic hot water (DHW) production.

TECHNICAL DATA

Description	HEATING				COOLING				Electrical supply V/Ph/Hz	Energy efficiency class (*)		CODE
	Floor (1)		Fan coils (2)		Floor (3)		Fan coils (4)			(D → A+++)(5)	(F → A+)(6)	
	Nominal Power kW	COP	Nominal Power kW	COP	Nominal Power kW	EER	Nominal Power kW	EER				
VERSION WITH 190L CYLINDER												
SET DOMUS M 4M DHW M31	4,25	5,20	4,35	3,80	4,50	5,55	4,70	3,45	220-240/1/50	A+++	A+	**20220903**
SET DOMUS M 6M DHW M31	6,20	5,00	6,35	3,75	6,55	4,90	7,00	3,00	220-240/1/50	A+++	A+	**20220910**
SET DOMUS M 8M DHW M31	8,30	5,20	8,20	3,95	8,40	5,05	7,40	3,38	220-240/1/50	A+++	A+	**20220911**
SET DOMUS M 10M DHW M31	10,00	5,00	10,00	3,80	10,00	4,80	8,20	3,30	220-240/1/50	A+++	A+	**20220912**
SET DOMUS M 4M DHW M61	4,25	5,20	4,35	3,80	4,50	5,55	4,70	3,45	220-240/1/50	A+++	A+	**20220913**
SET DOMUS M 6M DHW M61	6,20	5,00	6,35	3,75	6,55	4,90	7,00	3,00	220-240/1/50	A+++	A+	**20220917**
SET DOMUS M 8M DHW M61	8,30	5,20	8,20	3,95	8,40	5,05	7,40	3,38	220-240/1/50	A+++	A+	**20220939**
SET DOMUS M 10M DHW M61	10,00	5,00	10,00	3,80	10,00	4,80	8,20	3,30	220-240/1/50	A+++	A+	**20220942**
VERSION WITH 240L CYLINDER												
SET DOMUS M 4M DHW L31	4,25	5,20	4,35	3,80	4,50	5,55	4,70	3,45	220-240/1/50	A+++	A+	**20220944**
SET DOMUS M 6M DHW L31	6,20	5,00	6,35	3,75	6,55	4,90	7,00	3,00	220-240/1/50	A+++	A+	**20220945**
SET DOMUS M 8M DHW L31	8,30	5,20	8,20	3,95	8,40	5,05	7,40	3,38	220-240/1/50	A+++	A+	**20220946**
SET DOMUS M 10M DHW L31	10,00	5,00	10,00	3,80	10,00	4,80	8,20	3,30	220-240/1/50	A+++	A+	**20220947**
SET DOMUS M 4M DHW L61	4,25	5,20	4,35	3,80	4,50	5,55	4,70	3,45	220-240/1/50	A+++	A+	**20220948**
SET DOMUS M 6M DHW L61	6,20	5,00	6,35	3,75	6,55	4,90	7,00	3,00	220-240/1/50	A+++	A+	**20220949**
SET DOMUS M 8M DHW L61	8,30	5,20	8,20	3,95	8,40	5,05	7,40	3,38	220-240/1/50	A+++	A+	**20220950**
SET DOMUS M 10M DHW L61	10,00	5,00	10,00	3,80	10,00	4,80	8,20	3,30	220-240/1/50	A+++	A+	**20220951**
SET DOMUS M 12M DHW L61	12,10	4,95	12,30	3,80	12,00	4,00	11,60	2,75	220-240/1/50	A+++	A+	**20220952**
SET DOMUS M 14M DHW L61	14,50	4,70	14,20	3,65	13,50	3,61	12,70	2,55	220-240/1/50	A+++	A+	**20220953**
SET DOMUS M 16M DHW L61	16,00	4,50	16,00	3,60	14,20	3,61	14,00	2,45	220-240/1/50	A+++	A+	**20220954**
SET DOMUS M 12T DHW L93	12,10	4,95	12,30	3,80	12,00	4,00	11,60	2,75	380-415/3/50	A+++	A+	**20220956**
SET DOMUS M 14T DHW L93	14,50	4,70	14,20	3,65	13,50	3,61	12,70	2,55	380-415/3/50	A+++	A+	**20220961**
SET DOMUS M 16T DHW L93	16,00	4,50	16,00	3,60	14,20	3,61	14,00	2,45	380-415/3/50	A+++	A+	**20220962**

The performance is in accordance with standard EN 14511
(1) Heating: delivery water temperature 45 °C with gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(2) Heating: delivery water temperature 35 °C with thermal gradient 5K; outdoor air temperature 7 °C Tb.s and 6 °C Tb.u.
(3) Cooling: delivery water temperature 7 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(4) Cooling: delivery water temperature 18 °C with water thermal gradient 5 °C; inlet air temp. 35 °C.
(5) Value referred to the average climate profile for a flow temperature of 35°C, in compliant with Regulation 811/2013.
(6) Value referred to the average climate for tank temperature setpoint of 53°C, in compliant with the EN 16147 standard
(*) HEATING: the energy class of the products ranges from D up to A+++ / DHW: the energy class of the products ranges from F up to A+

CODE MATCHING TABLE

Description	SET Code	Indoor unit Code	Outdoor unit Code
VERSION WITH 240L CYLINDER			
SET DOMUS M 4M DHW M31	**20220903**	**20220691** (1)	**20198970**
SET DOMUS M 6M DHW M31	**20220910**	**20220691** (1)	**20198971**
SET DOMUS M 8M DHW M31	**20220911**	**20220691** (1)	**20198972**
SET DOMUS M 10M DHW M31	**20220912**	**20220691** (1)	**20198973**
SET DOMUS M 4M DHW M61	**20220913**	**20220750** (2)	**20198970**
SET DOMUS M 6M DHW M61	**20220917**	**20220750** (2)	**20198971**
SET DOMUS M 8M DHW M61	**20220939**	**20220750** (2)	**20198972**
SET DOMUS M 10M DHW M61	**20220942**	**20220750** (2)	**20198973**
VERSION WITH 240L CYLINDER			
SET DOMUS M 4M DHW L31	**20220944**	**20220767** (1)	**20198970**
SET DOMUS M 6M DHW L31	**20220945**	**20220767** (1)	**20198971**
SET DOMUS M 8M DHW L31	**20220946**	**20220767** (1)	**20198972**
SET DOMUS M 10M DHW L31	**20220947**	**20220767** (1)	**20198973**
SET DOMUS M 4M DHW L61	**20220948**	**20220772** (2)	**20198970**
SET DOMUS M 6M DHW L61	**20220949**	**20220772** (2)	**20198971**
SET DOMUS M 8M DHW L61	**20220950**	**20220772** (2)	**20198972**
SET DOMUS M 10M DHW L61	**20220951**	**20220772** (2)	**20198973**
SET DOMUS M 12M DHW L61	**20220952**	**20220776** (2)	**20198974**
SET DOMUS M 14M DHW L61	**20220953**	**20220776** (2)	**20198975**
SET DOMUS M 16M DHW L61	**20220954**	**20220776** (2)	**20198976**
SET DOMUS M 12T DHW L93	**20220956**	**20220780** (3)	**20198977**
SET DOMUS M 14T DHW L93	**20220961**	**20220780** (3)	**20198978**
SET DOMUS M 16T DHW L93	**20220962**	**20220780** (3)	**20198979**

(1) Including back-up heater of 3kW/ 1-phase
(2) Including back-up heater of 4kW/ 1-phase as default, and configurable on-site to either 2kW/ 1-phase or 6kW/ 1-phase.
(3) Including back-up heater of 9kW/ 3-phase. and configurable on-site to either 3kW/ 3-phase or 6kW/ 3-phase.

ACCESSORIES

Description	Notes	CODE
7000 ACI 60 - 60 litre inertial buffer tank		**20082450**
7000 ACI 120 - 120 litre inertial buffer tank		**20090056**
50 litre inertial buffer tank		**20171999**
Hi, Comfort T300-I	(1)	**20222905**
Hi, Comfort T200	(2)	**20211852**
Temperature probe for balancing tanks or zone 2 flow temperature or solar temperature		**20194933**
Expansion Vessel Kit DHW		**20223850**
25 DIR Module		**20065681**
25 MIX Module		**20065683**
32 DIR Module		**20065684**
32 MIX Module		**20065685**
Bypass valve		**20182807**

(1) Included power supply kit
(2) The accessory must be used in combination with T300



WALL-HUNG BOILERS

CONDENSING WALL-HUNG BOILERS 108

STANDARD-EFFICIENCY WALL-HUNG BOILERS 132

SYSTEM COMPLEMENTARY ITEMS 139

CONDENSING WALL-HUNG BOILERS

INDOOR

COMBINED, HEATING AND INSTANT DHW PRODUCTION



FAMILY HM CONNECT

FAMILY HM CONNECT 25 KIS (2,5÷20,0/2,5÷25,0 kW)
FAMILY HO CONNECT 35 KIS (3,5÷32,0/3,5÷34,9 kW)

page 112

NEW



FAMILY HM

FAMILY HM 25 KIS (2,5÷20,0/2,5÷25,0 kW)
FAMILY HM 30 KIS (3,0÷25,0/3,0÷30,0 kW)
FAMILY HM 35 KIS (3,5÷32,0/3,5÷34,9 kW)

page 116

NEW



RESIDENCE HM AQUA

RESIDENCE HM AQUA 25 BIS (2,5÷20,0/2,5÷25,0)
RESIDENCE HM AQUA 35 BIS (3,5÷30,0/3,5÷34,9)

page 122

NEW



RESIDENCE HM

RESIDENCE HM 25 KIS (2,5÷20,0/2,5÷25,0)
RESIDENCE HM 30 KIS (3,0÷25,0/3,0÷30,0)
RESIDENCE HM 35 KIS (3,5÷30,0/3,5÷34,9)

page 125



START

START 25 KIS (3,1-20,0/3,1-25,0 kW)
START 25 KIS (3,1-20,0/3,1-25,0 kW)
START 30 KIS (3,95-25,0/3,95-30,0 kW)

page 129



RLT

RLT 25 KIS (3,1-20,0/3,1-25,0 kW)
RLT 30 KIS (3,95-25,0/3,95-30,0 kW)

page 132

HEATING ONLY



FAMILY HM CONNECT

FAMILY HO CONNECT 35 IS (3,5÷32,0/3,5÷34,9 kW)

page 112

NEW



FAMILY HM

FAMILY HM 25 IS (2,5÷20,0/2,5÷25,0 kW)
FAMILY HM 35 IS (3,5÷32,0/3,5÷34,9 kW)

page 116

NEW



RESIDENCE HM

RESIDENCE HM 20 IS (2,5÷20,0/2,5÷20,0)
RESIDENCE HM 30 IS (3,5÷30,0/3,5÷34,9)

page 125

NEW



START

START 15 IS (3,1-20,0/3,1-25,0 kW)
START 25 IS (3,1-20,0/3,1-25,0 kW)

page 129

(*) Availability until stocks last.

Please verify with Sales the availability of the product in the destination Country before ordering

CONDENSING WALL-HUNG BOILERS

INDOOR

BIS



FAMILY AQUA CONDENS

FAMILY AQUA CONDENS 3.5 BIS (3,5~35,0 kW)

page 120

Heating/Domestic Water heat output
BIS Combined, Heating and DHW production with boiler


Please verify with Sales the availability of the product in the destination Country before ordering

BLUEDGE


Wall-hung condensing boilers

Family HM Connect NEW



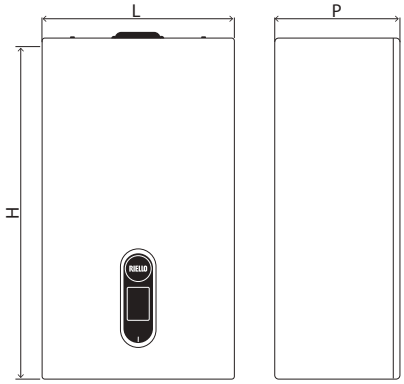

M-FLOW
U-DHW OUTLET
G-GAS
R-RETURN
E-DHW INLET



ERP

- Wide modulation ratio 1:13 high efficiency and reduced consumptions
- High efficiency thanks to the new adaptive combustion, the wide modulation ratio and the renewed exchangers
- New advanced interface fully touch, full-color, advanced interface with guided user tour
- Excellent dhw comfort quick set-point attainment and temperature stability
- Very silent operation down to 45 db
- Elegant and compact design for easy integrability in home interiors
- IoT READY

Description	H mm	L mm	P mm	Net weight kg
FAMILY HM CONNECT 25 KIS	740	420	275	29
FAMILY HM CONNECT 35 KIS	740	420	275	30
FAMILY HM CONNECT 35 IS	740	420	275	29

The new FAMILY HM CONNECT range of condensing boilers offers users a combination of comfort and savings. Riello proposes a multi energy boiler designed for current and future needs, guaranteeing a reduction in electrical consumption, gas consumption and emissions, with the possibility of remote control.

–
– Increased sanitary heat exchanger with high performance produced by Riello.
– Self-adaptive electronic combustion control ACC (Active Combustion Control).
– Modern and linear design with under-boiler lower connection cover available as an accessory for optimal aesthetic integration.
– Sanitary specific electronic functions: sanitary delay, anti-pendulum function and smart fan.
– Digital modulating circulator 6m low consumption (IEE 0,20). High head circulator 7 m available as an accessory.
– Hydraulic group with DIN standard sequence.
– Low noise up to 45 dB.
– 93% seasonal efficiency.
– Modern and intuitive touchscreen HMI with representative icons and capacitive buttons with acoustic "buzzer" confirmation.
– 2.8'' display with multilingual icons and texts.
– 9 litre expansion tank.
– Easy to install and a wide range of accessories available as options.
– IPX5D electrical protection.
– Gas transformation (Propane Air, LPG) selectable with electronic parameter.
– Fixing template and power supply cable provided.
– Thermoregulation as standard in combination with the outdoor temperature sensor, available as an accessory.
– Flue gases flange with dedicated flue system.

TECHNICAL DATA

Description	Heat input Heating/DHW	Useful efficiency		DHW production	Energy efficiency class *		Notes	Code
	min-max kW	Pn (50°/30 °C) %	30% Pn (return 30 °C) %	ΔT 25° l/min	(D → A+++)	(F → A+)		
COMBI HEATING AND INSTANTANEOUS DOMESTIC HOT WATER VERSION								
FAMILY HM CONNECT 25 KIS	2,5÷20,0 / 2,5÷25,0	106,5	108,8	14,3	A	A	(1)	**20206152**
FAMILY HM CONNECT 35 KIS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	20,0	A	A	(1)	**20206153**
ONLY HEATING VERSION								
FAMILY HM CONNECT 35 IS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	-	A	-	(1)	**20206154**

(1) The outdoor temperature sensor is not supplied as standard (code 1220559 available as an accessory).
(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Notes	Code
IN-WALL INSTALLATION		
In-wall installation unit	(1)	**20161604**
Crossbar for in-wall installation		**20191887**
MECHANICAL ACCESSORIES		
Air Filter	(2)	**20190324**
Hydraulic low fittings cover		**20191519**
Dummy boiler FAMILY HM		**20209809**
HYDRAULIC ACCESSORIES		
Compact polyphosphate doser kit		**20191518**
Compact magnetic filter		**20191517**
Board BE09 with double multi-function relay	(3)	**20192808**
Condensate booster pump kit		**20097192**
High residual pump 7 m		**20210993**
Solar diverter valve kit for instant wall-hung combined boilers		**20035644**
Well probe for remote heater (for heating only version)		**1220599**
Flexible fittings kit for boiler replacement	(4)	**20191890**
Connection kit with heating system, domestic water and gas cocks (for KIS models)		**20133516**
Connection kit with heating system and gas cocks (for IS models)		**20133517**
Connection kit with domestic water and gas cocks (for KIS models)		**20132005**
Connection kit with gas cock (for IS models)		**20133386**
COMPLEMENTARY ACCESSORIES		
Antifreeze heaters -15 °C	(5)	**20191888**
External probe kit		**1220559**
Limit thermostat for low temperature installations		**1220639**
SPECIFIC FLUES (*)		
Split connection system kit Ø80 mm		**20217921**
Ø80 mm clapet kit for pressurized collective flues		**20164664**
Ø80/125 mm concentric clapet kit for pressurized collective flues		**20164662**
Wall-hung collector Ø60/100 mm		**20129175**
Telescopic wall-hung collector Ø60/100 mm		**20129176**
Vertical collector Ø60/100 mm		**20129177**
Vertical connection stub pipe kit Ø60/100 mm	(6)	**20129174**
90° bend kit Ø60/100 mm for boiler start	(7)	**20129172**
Adjustable splitter kit from Ø60/100 mm to Ø80/80 mm		**20134830**
Adaptor kit B23 Ø80 mm		**20129769**
Splitter device kit B23 Ø80 mm for in-wall installation box		**20129768**
Compact adjustable splitter device kit from 60/100 mm to 80/80 mm		**20190475**


(1) Unit supplied with door.
(2) Ideal to avoid introducing impurities from the intake air into the exchanger and burner.
(3) Ideal board for managing additional circulator or zone valve and alarm remote kit.
(4) Flexible connections (sanitary, gas and heating) kit required to facilitate the replacement of FAMILY HM CONNECT boilers with previous boilers with Riello standard hydraulic connection sequence.
(5) The antifreeze heater kit allows to protect the sanitary circuit from the risk of freezing in case of temperatures below 0°C (down to -15°C), using the copper fitting accessory kits (not flexible) included in the offer.
(6) Code necessary for vertical exhaust with flue system. Accessory already included in kit 20129177.
(7) Code necessary for horizontal exhaust with flue system 60/100. Accessory already included in kit 20129175 and 20129176.
(*) Dedicated flue gases accessories, compatible with the FAMILY HM CONNECT flange. For further accessories for the flue gas exhaust system, see the section "Flue gas exhaust systems" in the Catalogue.

HYDRAULIC DISTRIBUTION MODULES

Description	Zone management	Notes	Code
BAG³ HYBRID 1D	1 direct zone	(1)(2)	**20130805**
BAG³ HYBRID 2D	2 direct zone	(1)(2)	**20130806**
BAG³ HYBRID 1D+1M	1 direct zone + 1 mixed zone	(1)(3)	**20130807**
IN-WALL INSTALLATION BOX		(4)	**20130808**

(1) Supplied without in-wall installation box
(2) Equipped as standard with limit thermostat for low temperature systems
(3) Mixed zone equipped as standard with limit thermostat for low temperature systems
(4) In-wall installation box made of galvanised sheet metal that can be painted white; the box is compulsory for the installation of the BAG³ HYBRID

OVERALL DIMENSION

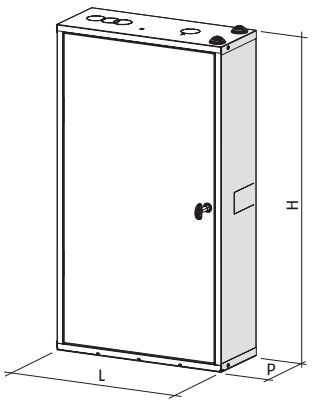

Description	H mm	L mm	P mm	Net weight kg
BAG3 HYBRID 1D	797	400	160	17
BAG3 HYBRID 2D	797	400	160	18
BAG3 HYBRID 1D+1M	797	400	160	18
IN-WALL INSTALLATION BOX	797	400	160	8

ACCESSORIES FOR BAG³ HYBRID

Description	Code
Taps kit for BAG³ HYBRID system side and heat pump	**20131752**
Diverting valve kit for BAG3 HYBRID	**20131755**

HI, COMFORT ADVANCED ENVIRONMENT CONTROL

Multi-zone room control and System Manager with remote management capability via APP Hi, Comfort.

Image	Description	Note	Code
	Power supply		**20134478**

(1) Wi-fi as standard
(2) Compatible with NXHP and NXHM heat pumps
(3) For lengths longer than 30m, add code 20134478
(4) Device provided with gateway

ADVANCED ENVIRONMENT CONTROL EXPANSION BOARDS

Description	Note	Code
Solar interface kit	(1)	**20168672**
First zone management kit (MIX or DIR zone)	(1)(2)	**20132795**
Additional zone management kit (MIX or DIR zone)	(1)(2)(3)	**20132796**

(1) To be provided in combination with Hi, Comfort T300.
(2) Allows you to manage a MIX zone (pump + 3-point mixer valve) or DIR zone (only pump). Not necessary for BAG3 Hybrid.
(3) The first zone management kit must always be present. The boiler can manage up to 3 zones in total.

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface (*) and management through APP

Image	Description	Note	Code
	Hi, Comfort T200	(1)(2)	**20211852**
	Hi, Comfort T100 Wi-Fi	(3)	**20193354**
	Hi, Comfort T100	(4)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**


(*) Only ON/OFF connection with BAG3 HYBRID.
(1) Room thermostat for multi-room applications, to be provided in combination with Hi, Comfort T300.
(2) Hi, Comfort T200 combined in RF. to Hi, Comfort T300 allows zone management.
(3) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(4) For wired connection with boiler, compatible in radio-frequency connection with Hi, Comfort G100-W, code 20193355 (accessory not included and necessary fo internet connection by means of ADSL Wi-Fi router) and compatible i with Hi, Comfort G100-R, code 20193356.

BLUEDGE


Wall-hung condensing boilers

Family HM NEW



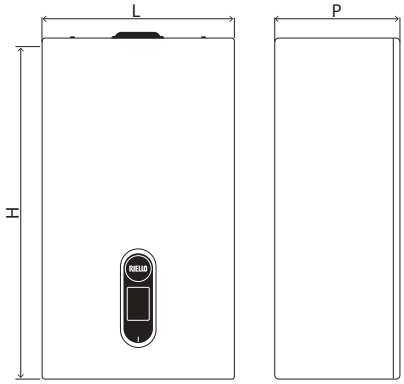

M-FLOW
U-DHW OUTLET
G-GAS
R-RETURN
E-DHW INLET



ERP

- Wide modulation ratio 1:13 high efficiency and reduced consumptions
- High efficiency thanks to the new adaptive combustion, the wide modulation ratio and the renewed exchangers
- New advanced interface fully touch, full-color, advanced interface with guided user tour
- Excellent dhw comfort quick set-point attainment and temperature stability
- Very silent operation down to 45 db
- Elegant and compact design for easy integrability in home interiors
- IoT READY

Description	H mm	L mm	P mm	Net weight kg
FAMILY HM 25 KIS	740	420	275	29
FAMILY HM 30 KIS	740	420	275	30
FAMILY HM 35 KIS	740	420	275	30
FAMILY HM 25 IS	740	420	275	28
FAMILY HM 35 IS	740	420	275	29

The new FAMILY HM CONNECT range of condensing boilers offers users a combination of comfort and savings. Riello proposes a multi energy boiler designed for current and future needs, guaranteeing a reduction in electrical consumption, gas consumption and emissions, with the possibility of remote control.

–
– Increased sanitary heat exchanger with high performance produced by Riello.
– Self-adaptive electronic combustion control ACC (Active Combustion Control).
– Modern and linear design with under-boiler lower connection cover available as an accessory for optimal aesthetic integration.
– Sanitary specific electronic functions: sanitary delay, anti-pendulum function and smart fan.
– Digital modulating circulator 6m low consumption (IEE 0,20). High head circulator 7 m available as an accessory.
– Hydraulic group with DIN standard sequence.
– Low noise up to 45 dB.
– 93% seasonal efficiency.
– Modern and intuitive touchscreen HMI with representative icons and capacitive buttons with acoustic "buzzer" confirmation.
– 2.8'' display with multilingual icons and texts.
– 9 litre expansion tank.
– Easy to install and a wide range of accessories available as options.
– IPX5D electrical protection.
– Gas transformation (Propane Air, LPG) selectable with electronic parameter.
– Fixing template and power supply cable provided.
– Thermoregulation as standard in combination with the outdoor temperature sensor, available as an accessory.
– Flue gases flange with dedicated flue system.

TECHNICAL DATA

Description	Heat input Heating/DHW	Useful efficiency		DHW production	Energy efficiency class *		Notes	Code
	min-max kW	Pn (50°/30 °C) %	30% Pn (return 30 °C) %	ΔT 25° l/min	(D → A+++)	(F → A+)		
COMBI HEATING AND INSTANTANEOUS DOMESTIC HOT WATER VERSION								
FAMILY 25 KIS	2,5÷20,0 / 2,5÷25,0	106,5	108,8	14,3	A	A	(1)	**20206147**
FAMILY 30 KIS	3,0÷25,0 / 3,0÷30,0	106,0	108,8	17,2	A	A	(1)	**20206148**
FAMILY 35 KIS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	20,0	A	A	(1)	**20206149**
ONLY HEATING VERSION								
FAMILY HM 25 IS	2,5÷20,0 / 2,5÷20,0	106,5	108,8	-	A	-	(1)	**20206150**
FAMILY HM 35 IS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	-	A	-	(1)	**20206151**

(1) The outdoor temperature sensor is not supplied as standard (code 1220559 available as an accessory).
(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Notes	Code
IN-WALL INSTALLATION		
In-wall installation unit	(1)	**20161604**
Crossbar for in-wall installation		**20191887**
MECHANICAL ACCESSORIES		
Air Filter	(2)	**20190324**
Hydraulic low fittings cover		**20191519**
Dummy boiler FAMILY HM		**20209809**
HYDRAULIC ACCESSORIES		
Compact polyphosphate doser kit		**20191518**
Compact magnetic filter		**20191517**
Board BE09 with double multi-function relay	(3)	**20192808**
Condensate booster pump kit		**20097192**
High residual pump 7 m		**20210993**
Solar diverter valve kit for instant wall-hung combined boilers		**20035644**
Well probe for remote heater (for heating only version)		**1220599**
Flexible fittings kit for boiler replacement	(4)	**20191890**
Connection kit with heating system, domestic water and gas cocks (for KIS models)		**20133516**
Connection kit with heating system and gas cocks (for IS models)		**20133517**
Connection kit with domestic water and gas cocks (for KIS models)		**20132005**
Connection kit with gas cock (for IS models)		**20133386**
COMPLEMENTARY ACCESSORIES		
Antifreeze heaters -15 °C	(5)	**20191888**
External probe kit		**1220559**
Limit thermostat for low temperature installations		**1220639**
SPECIFIC FLUES (*)		
Split connection system kit Ø80 mm		**20217921**
Ø80 mm clapet kit for pressurized collective flues		**20164664**
Ø80/125 mm concentric clapet kit for pressurized collective flues		**20164662**
Wall-hung collector Ø60/100 mm		**20129175**
Telescopic wall-hung collector Ø60/100 mm		**20129176**
Vertical collector Ø60/100 mm		**20129177**
Vertical connection stub pipe kit Ø60/100 mm	(6)	**20129174**
90° bend kit Ø60/100 mm for boiler start	(7)	**20129172**
Adjustable splitter kit from Ø60/100 mm to Ø80/80 mm		**20134830**
Adaptor kit B23 Ø80 mm		**20129769**
Splitter device kit B23 Ø80 mm for in-wall installation box		**20129768**
Compact adjustable splitter device kit from 60/100 mm to 80/80 mm		**20190475**


(1) Unit supplied with door.
(2) Ideal to avoid introducing impurities from the intake air into the exchanger and burner.
(3) Ideal board for managing additional circulator or zone valve and alarm remote kit.
(4) Flexible connections (sanitary, gas and heating) kit required to facilitate the replacement of FAMILY HM boilers with previous boilers with Riello standard hydraulic connection sequence.
(5) The antifreeze heater kit allows to protect the sanitary circuit from the risk of freezing in case of temperatures below 0°C (down to -15°C), using the copper fitting accessory kits (not flexible) included in the offer.
(6) Code necessary for vertical exhaust with flue system. Accessory already included in kit 20129177.
(7) Code necessary for horizontal exhaust with flue system 60/100. Accessory already included in kit 20129175 and 20129176.
(*) Dedicated flue gases accessories, compatible with the FAMILY HM flange. For further accessories for the flue gas exhaust system, see the section "Flue gas exhaust systems" in the Catalogue.

HYDRAULIC DISTRIBUTION MODULES

Description	Zone management	Notes	Code
BAG³ HYBRID 1D	1 direct zone	(1)(2)	**20130805**
BAG³ HYBRID 2D	2 direct zone	(1)(2)	**20130806**
BAG³ HYBRID 1D+1M	1 direct zone + 1 mixed zone	(1)(3)	**20130807**
IN-WALL INSTALLATION BOX		(4)	**20130808**

(1) Supplied without in-wall installation box
(2) Equipped as standard with limit thermostat for low temperature systems
(3) Mixed zone equipped as standard with limit thermostat for low temperature systems
(4) In-wall installation box made of galvanised sheet metal that can be painted white; the box is compulsory for the installation of the BAG³ HYBRID

OVERALL DIMENSION

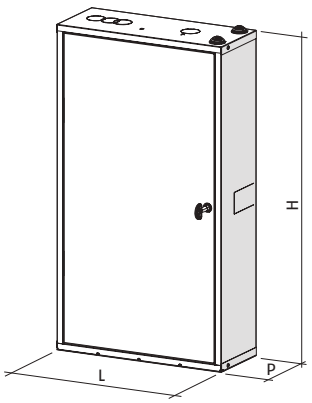


Description	H mm	L mm	P mm	Net weight kg
BAG3 HYBRID 1D	797	400	160	17
BAG3 HYBRID 2D	797	400	160	18
BAG3 HYBRID 1D+1M	797	400	160	18
IN-WALL INSTALLATION BOX	797	400	160	8

ACCESSORIES FOR BAG³ HYBRID

Description	Code
Taps kit for BAG³ HYBRID system side and heat pump	**20131752**
Diverting valve kit for BAG3 HYBRID	**20131755**

HI, COMFORT ADVANCED ENVIRONMENT CONTROL

Multi-zone room control and System Manager with remote management capability via APP Hi, Comfort.

Image	Description	Note	Code
	Hi, Comfort T300	(1)(2)(3)(4)	**20205322**
	Power supply		**20134478**

(1) Wi-fi as standard
(2) Compatible with NXHP and NXHM heat pumps
(3) For lengths longer than 30m, add code 20134478
(4) Device provided with gateway

ADVANCED ENVIRONMENT CONTROL EXPANSION BOARDS

Description	Note	Code
Solar interface kit	(1)	**20168672**
First zone management kit (MIX or DIR zone)	(1)(2)	**20132795**
Additional zone management kit (MIX or DIR zone)	(1)(2)(3)	**20132796**

(1) To be provided in combination with Hi, Comfort T300.
(2) Allows you to manage a MIX zone (pump + 3-point mixer valve) or DIR zone (only pump). Not necessary for BAG3 Hybrid.
(3) The first zone management kit must always be present. The boiler can manage up to 3 zones in total.

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface (*) and management through APP


Image	Description	Note	Code
	Hi, Comfort T200	(1)(2)	**20211852**
	Hi, Comfort T100 Wi-Fi	(3)	**20193354**
	Hi, Comfort T100	(4)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**

(*) Only ON/OFF connection with BAG3 HYBRID.
(1) Room thermostat for multi-room applications, to be provided in combination with Hi, Comfort T300.
(2) Hi, Comfort T200 combined in RF. to Hi, Comfort T300 allows zone management.
(3) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(4) For wired connection with boiler, compatible in radio-frequency connection with Hi, Comfort G100-W, code 20193355 (accessory not included and necessary fo internet connection by means of ADSL Wi-Fi router) and compatible i with Hi, Comfort G100-R, code 20193356.




Condensing wall-hung boilers

Family Aqua Condens

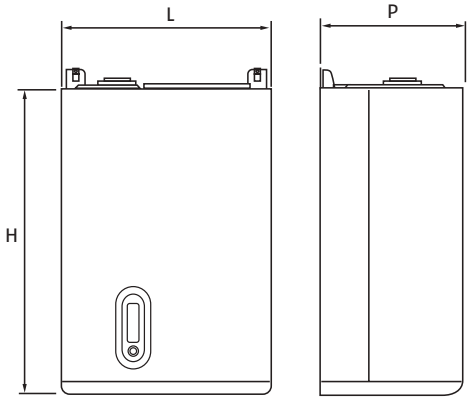

M-FLOW
U-DHW OUTLET
G-GAS
R-RETURN
E-DHW INLET
RC-RECIRCULATION



ERP

- In conformity with Directive 2009/125/EC
- Low polluting emissions
- Condensing heat exchanger in aluminium, with premix burner
- Combi model with built-in 60-liters DHW tank in stainless steel

Description	H mm	L mm	P mm	Net weight kg
FAMILY AQUA CONDENS 3.5 BIS	1015	600	450	72

Family Aqua Condens is a wall-hung boiler that guarantees an excellent comfort in the DHW production thanks to a built-in 60-liters DHW storage tank in stainless steel. The Riello heat exchanger, manufactured 100% aluminium, ensures high efficiency and long life, while reducing polluting emissions to a minimum.
Family Aqua Condens is available with outputs from 3.5 to 35 kW.

- Modulating ratio 1:10 (minimum output of 3.5 kW) which allows the boiler to meet all heating requirements
- "Range Rated" certification which allows adapting the rated output of the boiler to the thermal requirements of the installation
- High efficiency circulator (EEI ≤ 0,20)
- Remote alarm which allows the reporting of the boiler lockout status
- Special Family functions: Comfort Button, Memory Button, Touch&Go Function, Smart semi-automatic Filling System
- Boilers are equipped with: mounting template, hydraulic connections, wiring and LPG conversion kit.
- External probe supplied as standard.

TECHNICAL DATA

Description	Heat input Heating/DHW min - max kW	Useful efficiency Pn (50°/30 °C) %	Useful efficiency 30% Pn (return 30 °C) %	Tank capacity l	Fuel	Energy efficiency class * (D → A+++)	Energy efficiency class * (F → A+)	Code
ROOM-SEALED - HEATING AND DHW PRODUCTION								
FAMILY AQUA CONDENS 3.5 BIS	3.5-35.0	105.5	108.0	60.0	NG	A	A	**20021509**

(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Code
CONTROL DEVICES	
CHRONORIELLO 7D (7-day digital room thermostat)	**20063873**
CHRONORIELLO 7D WIRELESS (7-day digital room thermostat wireless)	**20101747**
ELECTRICAL ACCESSORIES	
Family Remote Control (REC06) (with electronic interface board)	**20165771**
Interface board ITRF11	**20164477**
Remote alarm kit	**20165627**
Room sensor kit	**20163783**
Zone valves management kit	**20165142**
HYDRAULIC ACCESSORIES	
Central heating taps	**4047476**
Central heating taps with filter	**4047475**
Condensate evacuation pump	**20097192**
DHW recirculation kit (Aqua model)	**4047994**
MECHANICAL ACCESSORIES	
Hydraulic connection cover	**4047505**
Mounting template kit	**4047440**

Hi, COMFORT CONTROLS


Room controls with capability of remote boiler interface (*) and management through APP

Image	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**

(*) Possibility of connection via OTBus or in ON/OFF mode.
(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For cable OTBus connection to the boiler. Compatible for radio frequency connection with Hi, Comfort G100-W code 20193355 (accessory not included and necessary for internet connection via home ADSL modem) and compatible with Hi, Comfort G100-R code 20193356. For operation via OTBus, the code 20164477 "ITRF11 interface card" is required.

Residence HM aqua



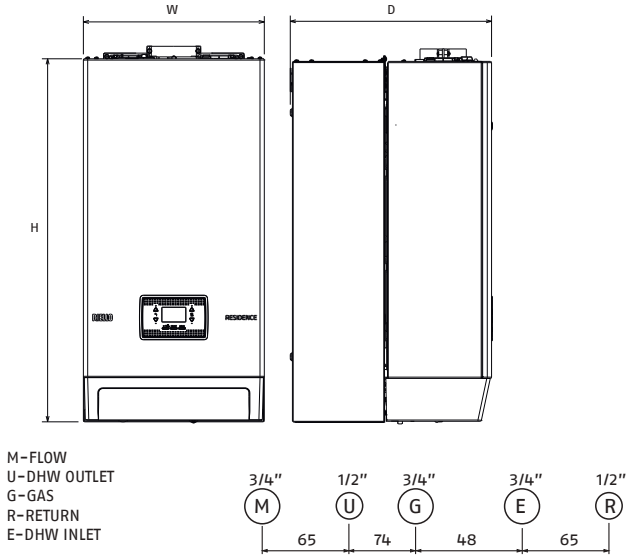

ERP

- Combined boiler with 30-liter stainless steel bi-tank
- Robust, high-efficiency stainless steel primary heat exchanger
- High 1:10 modulation
- New-generation self-adaptive combustion control
- Modern, intuitive digital user interface
- Designed to operate with mixtures of natural gas and hydrogen, up to a maximum of 20%
- Low pollutant emissions CLASS 6 (UNI EN 15502)

Description		H mm	W mm	D mm	Net weight kg
RESIDENCE HM AQUA 25 BIS	BOILER ONLY	740	420	275	29
	WITH BI-TANK STORAGE *	843	420	495	54
RESIDENCE HM AQUA 35 BIS	BOILER ONLY	740	420	275	30
	WITH BI-TANK STORAGE *	843	420	495	55

*Height including fittings cover

Residence HM Aqua is the condensing boiler with 30 litre stainless steel bi-tank storage tank, designed by Riello in the name of energy saving and efficiency.
Residence HM Aqua consists of a system composed of a combined 25 or 35kW boiler and a compact bi-tank that is distinguished by the simplicity of installation in just two steps: installation of the storage tank on the wall and the boiler on it.
The primary heat exchanger, entirely made of stainless steel, together with the optimised plate heat exchanger, for instantaneous DHW production when the storage tank is not needed, ensure maximum efficiency, reliability over time and high comfort. Compact dimensions and an intuitive user interface complete the Residence HM Aqua profile.

- 25 or 35 kW combi boiler with 30-liter stainless steel bi-tank, available with dedicated code.
- Ability to enable and disable boiler operation in conjunction with the DHW storage tank thanks to advanced machine electronics.
- Two-step installation simplicity: 1. installation of the bi-tank; 2. installation of the boiler on the storage tank.
- Robust, high-efficiency stainless steel primary condensing heat exchanger.
- Possibility of enabling and disabling boiler operation in conjunction with domestic hot water storage tank thanks to advanced machine electronics.
- Modern and intuitive 2.8'' touchscreen user interface with representative icons, multilingual texts and capacitive keys with acoustic "buzzer" confirmation.
- Wide 1:10 modulation range.
- Electrical protection degree IPX5D.
- Hydraulic unit with DIN standard sequence connections.
- Prepared for connection with Hi, Comfort T100 control.
- Designed to operate with mixtures of natural gas and hydrogen, up to a maximum of 20%.
- Gas conversion (Propane Air, LPG) selectable by electronic parameter.

TECHNICAL DATA

Description	Heat input Heating/DHW min - max kW	Useful efficiency Pn (50°/30°C) %	Useful efficiency 30% Pn (return 30°C) %	Tank capacity l	Fuel	Energy efficiency class * (D → A+++)	Energy efficiency class * (F → A+)	Notes	Code
INSTANTANEOUS COMBINED HEATING AND DOMESTIC WATER VERSION									
RESIDENCE HM AQUA 25 BIS	2,5÷20,0 / 2,5÷25,0	106,5	108,8	14,3		A	A	(1)	**20222591**
RESIDENCE HM AQUA 35 BIS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	20,0		A	A	(1)	**20222593**

(1) External probe is not supplied (CODE 1220559 available as an accessory).
(*) HEATING: The energy class of the products ranges from D up to A+++ / DHW: The energy class of the products ranges from F up to A+

COMMERCIAL SETS

Description	Notes	Code
RESIDENCE HM AQUA 25 BIS WITH DOSER KIT AS STANDARD	(1)	**20225070**
RESIDENCE HM AQUA 25 BIS		**20222591**
DOSSERET BI-TANK 25 kW		**20213360**
FITTINGS FOR BI-TANK- 30 kW		**20214145**
FLOW SWITCH KIT AND FITTINGS - 25KW (for composition WITH doser kit)		**20213415**
COMPACT POLYPHOSPHATE DOSER KIT		**20191518**
LOW FITTING COVER		**20216906**
RESIDENCE HM AQUA 25 BIS WITHOUT DOSER KIT AS STANDARD	(1)	**20225073**
RESIDENCE HM AQUA 25 BIS		**20222591**
DOSSERET BI-TANK 25 kW		**20213360**
FITTINGS FOR BI-TANK- 30 kW		**20214145**
FLOW SWITCH KIT AND FITTINGS - 25 kW (for composition WITHOUT doser kit)		**20213431**
LOW FITTING COVER		**20216906**
RESIDENCE HM AQUA 35 BIS WITH DOSER KIT AS STANDARD	(1)	**20225077**
RESIDENCE HM AQUA 35 BIS		**20222593**
DOSSERET BI-TANK 25 kW		**20213360**
FITTINGS FOR BI-TANK- 30 kW		**20214145**
FLOW SWITCH KIT AND FITTINGS - 25KW (for composition WITH doser kit)		**20213415**
COMPACT POLYPHOSPHATE DOSER KIT		**20191518**
LOW FITTING COVER		**20216906**
RESIDENCE HM AQUA 35 BIS WITHOUT DOSER KIT AS STANDARD	(1)	**20225079**
RESIDENCE HM AQUA 35 BIS		**20222593**
DOSSERET BI-TANK 25 kW		**20213360**
FITTINGS FOR BI-TANK- 30 kW		**20214145**
FLOW SWITCH KIT AND FITTINGS - 25 kW (for composition WITHOUT doser kit)		**20213431**
LOW FITTING COVER		**20216906**

COMMERCIAL SETS

Description	Notes	Code
MECHANICAL ACCESSORIES		
AIR FILTER	(1)	**20190324**
HYDRAULIC ACCESSORIES		
COMPACT POLYPHOSPHATE DOSER KIT		**20191518**
ERP HIGH HEAD CIRCULATOR		**20158902**
SOLAR DIVERTER MIXING VALVE KIT		**20035644**
COMPLEMENTARY ACCESSORIES		
LIMIT THERMOSTAT FOR LOW TEMPERATURE SYSTEMS		**1220639**
EXTERNAL PROBE		**1220559**
ANTIFREEZE HEATER KITS COMBINED VERSIONS		**20193278**
BOARD BE09 WITH DOUBLE MULTI-FUNCTION RELAY	(2)	**20192808**
CONDENSATE BOOSTER PUMP KIT		**20097192**
IMMERSION PROBE		**1220599**
SPECIFIC FLUE SYSTEM		
FIXED SPLIT SYSTEM KIT Ø80 mm		**20129765**
Ø80 MM CLAPET KIT FOR PRESSURIZED COLLECTIVE FLUES		**20164664**
Ø80/125 MM CONCENTRIC CLAPET KIT FOR PRESSURIZED COLLECTIVE FLUES		**20164662**
WALL-HUNG COLLECTOR Ø60/100 MM		**20129175**
TELESCOPIC WALL-HUNG COLLECTOR Ø60/100 mm		**20129176**
VERTICAL COLLECTOR Ø60/100 mm		**20129177**
VERTICAL CONNECTION STUB PIPE KIT Ø60/100 mm	(3)	**20129174**
90° BEND KIT Ø60-100 MM FOR BOILER START	(4)	**20129172**
SPLIT SYSTEM KIT WITH VARIABLE POSITION AIR INLET		**20134830**
B23 FLUE GAS EXHAUST ADAPTER SPLIT Ø80 WITH AIR INTAKE		**20129768**
ADAPTOR KIT B23 FROM DA Ø60/100 UP TO Ø80 MM WITH AIR INTAKE		**20129769**
COMPACT ADJUSTABLE SPLITTER DEVICE KIT FROM 60/100 MM TO 80/80 mm		**20190475**
CONVERSION GAS		
PROPANE AIR CONVERSION KIT		**20192718**
CONVERSION KIT		**20192715**

(1) Ideal to avoid introducing impurities from the intake air into the exchanger and burner.
(2) Ideal board for managing additional circulator, alarm remote kit and zone valve.
(3) Code necessary for vertical exhaust with flue system Ø60/100 mm. Accessory already included in kit 20129177.
(4) Code necessary for horizontal exhaust with flue system Ø60/100 mm. Accessory already included in kits 20129175 and 20129176.

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface and management through APP


Image	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**

(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For cable connection to the boiler. Compatible for radio-frequency connection with Hi, Comfort G100-W CODE 20193355 (accessory not included and required for Internet connection via home ADSL modem) and compatible with Hi, Comfort G100-R CODE 20193356.


Wall-hung condensing boilers

Residence HM



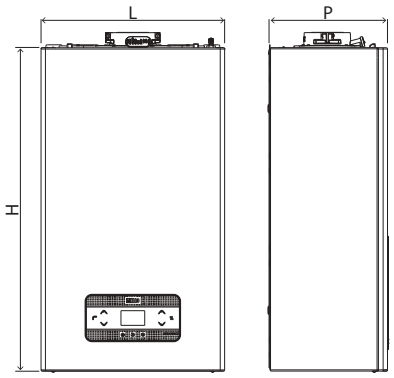

M-FLOW
U-DHW OUTLET
G-GAS
R-RETURN
E-DHW INLET



ERP

- Stainless steel primary heat exchanger, robust and high efficiency
- Combined and heating-only models, indoor, built-in and in partially protected locations
- Increased sanitary heat exchanger with high performance
- Next-generation self-adaptive combustion control
- It has been designed to work with mixtures of NATURAL GAS and HYDROGEN, up to a maximum of 20%
- Low polluting emissions CLASS 6 (UNI EN 15502)
- High modulation 1:10
- IOT Ready

Description	H mm	L mm	P mm	Net weight kg
RESIDENCE HM 25 KIS	740	420	275	29
RESIDENCE HM 30 KIS	740	420	275	30
RESIDENCE HM 35 KIS	740	420	275	30
RESIDENCE HM 20 IS	740	420	275	28
RESIDENCE HM 30 IS	740	420	275	29

The new RESIDENCE HM range of condensing boilers offers users a combination of comfort and savings. Riello proposes a multi energy boiler designed for current and future needs, guaranteeing a reduction in electrical consumption, gas consumption and emissions, with the possibility of remote control.

- Increased sanitary heat exchanger with high performance produced by Riello.
- Self-adaptive electronic combustion control ACC (Active Combustion Control).
- Modern and linear design with under-boiler lower connection cover available as an accessory for optimal aesthetic integration.
- Sanitary specific electronic functions: sanitary delay, anti-pendulum function and smart fan.
- Digital modulating circulator 6m low consumption (IEE 0,20). High head circulator 7 m available as an accessory.
- Hydraulic group with DIN standard sequence.
- Low noise up to 45 dB.
- 93% seasonal efficiency.
- Modern and intuitive touchscreen HMI with representative icons and capacitive buttons with acoustic "buzzer" confirmation.
- 2.8'' display with multilingual icons and texts.
- 9 litre expansion tank.
- Easy to install and a wide range of accessories available as options.
- IPX5D electrical protection.
- Gas transformation (Propane Air, LPG) selectable with electronic parameter.
- Fixing template and power supply cable provided.
- Thermoregulation as standard in combination with the outdoor temperature sensor, available as an accessory.
- Flue gases flange with dedicated flue system.

TECHNICAL DATA

Description	Heat input Heating/DHW min-max kW	Useful efficiency Pn (50°/30 °C) %	Useful efficiency 30% Pn (return 30 °C) %	DHW production ΔT 25° l/min	Energy efficiency class * (D → A+++)	Energy efficiency class * (F → A+)	Notes	Code
COMBI HEATING AND INSTANTANEOUS DOMESTIC HOT WATER VERSION								
RESIDENCE HM 25 KIS	2,5÷20,0 / 2,5÷25,0	106,5	108,8	14,3	A	A	(1)	**20205317**
RESIDENCE HM 30 KIS	3,0÷25,0 / 3,0÷30,0	106,0	108,8	17,2	A	A	(1)	**20205318**
RESIDENCE HM 35 KIS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	20,0	A	A	(1)	**20205319**
ONLY HEATING VERSION								
RESIDENCE HM 20 IS	2,5÷20,0 / 2,5÷20,0	106,5	108,8	/	A	-	(1)	**20205320**
RESIDENCE HM 30 IS	3,5÷30,0 / 3,5÷34,9	105,8	108,7	/	A	-	(1)	**20205321**

(1) The outdoor temperature sensor is not supplied as standard (code 1220559 available as an accessory).
(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+


ACCESSORIES

Description	Notes	Code
IN-WALL INSTALLATION		
In-wall installation unit	(1)	**20161604**
Crossbar for in-wall installation		**20191887**
MECHANICAL ACCESSORIES		
Air Filter	(2)	**20190324**
Hydraulic low fittings cover		**20191519**
Dummy boiler RESIDENCE HM		**20209806**
HYDRAULIC ACCESSORIES		
Compact polyphosphate doser kit		**20191518**
Compact magnetic filter		**20191517**
Board BE09 with double multi-function relay	(3)	**20192808**
Condensate booster pump kit		**20097192**
High residual pump 7 m		**20210993**
Solar diverter valve kit for instant wall-hung combined boilers		**20035644**
Well probe for remote heater (for heating only version)		**1220599**
Flexible fittings kit for boiler replacement	(4)	**20191890**
Connection kit with heating system, domestic water and gas cocks (for KIS models)		**20133516**
Connection kit with heating system and gas cocks (for IS models)		**20133517**
Connection kit with domestic water and gas cocks (for KIS models)		**20132005**
Connection kit with gas cock (for IS models)		**20133386**
COMPLEMENTARY ACCESSORIES		
Antifreeze heaters -15 °C	(5)	**20191888**
External probe kit		**1220559**
Limit thermostat for low temperature installations		**1220639**
SPECIFIC FLUES (*)		
Split connection system kit Ø80 mm		**20217921**
Ø80 mm clapet kit for pressurized collective flues		**20164664**
Ø80/125 mm concentric clapet kit for pressurized collective flues		**20164662**
Wall-hung collector Ø60/100 mm		**20129175**
Telescopic wall-hung collector Ø60/100 mm		**20129176**
Vertical collector Ø60/100 mm		**20129177**
Vertical connection stub pipe kit Ø60/100 mm	(6)	**20129174**
90° bend kit Ø60/100 mm for boiler start	(7)	**20129172**
Adjustable splitter kit from Ø60/100 mm to Ø80/80 mm		**20134830**
Adaptor kit B23 Ø80 mm		**20129769**
Splitter device kit B23 Ø80 mm for in-wall installation box		**20129768**
Compact adjustable splitter device kit from 60/100 mm to 80/80 mm		**20190475**

(1) Unit supplied with door.
(2) Ideal to avoid introducing impurities from the intake air into the exchanger and burner.
(3) Ideal board for managing additional circulator or zone valve and alarm remote kit.
(4) Flexible connections (sanitary, gas and heating) kit required to facilitate the replacement of Residence HM boilers with previous boilers with Riello standard hydraulic connection sequence.
(5) The antifreeze heater kit allows to protect the sanitary circuit from the risk of freezing in case of temperatures below 0°C (down to -15°C), using the copper fitting accessory kits (not flexible) included in the offer.
(6) Code necessary for vertical exhaust with flue system. Accessory already included in kit 20129177.
(7) Code necessary for horizontal exhaust with flue system 60/100. Accessory already included in kit 20129175 and 20129176.
(*) Dedicated flue gases accessories, compatible with the Residence HM flange. For further accessories for the flue gas exhaust system, see the section "Flue gas exhaust systems" in the Catalogue.

Hi, COMFORT ADVANCED ENVIRONMENT CONTROL

Multi-zone room control and System Manager with remote management capability via APP Hi, Comfort.

Image	Description	Notes	Code
	Hi, Comfort T300	(1)(2)(3)(4)	**20205322**
	Hi, Comfort T300 TE	(4)	**20210659**
	Power supply		**20134478**

(1) Wi-fi as standard.
(2) Compatible with NXHP and NXHM heat pumps.
(3) For lengths longer than 30m, add code 20134478.
(4) Device provided with gateway.

ADVANCED ENVIRONMENT CONTROL EXPANSION BOARDS

Description	Notes	Code
Solar interface kit	(1)	**20168672**
First zone management kit (MIX or DIR zone)	(1)(2)	**20132795**
Additional zone management kit (MIX or DIR zone)	(1)(2)(3)	**20132796**

(1) Wi-fi as standard
(2) Compatible with NXHP and NXHM heat pumps
(3) For lengths longer than 30m, add code 20134478
(4) Device provided with gateway

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface (*) and management through APP.


Image	Description	Notes	Code
	Hi, Comfort T200	(1)(2)	**20211852**
	Hi, Comfort T100 Wi-Fi	(3)	**20193354**
	Hi, Comfort T100	(4)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**

(*) Only ON/OFF connection with BAG3 HYBRID.
(1) Room thermostat for multi-room applications, to be provided in combination with Hi, Comfort T300.
(2) Hi, Comfort T200 combined in RF. to Hi, Comfort T300 allows zone management.
(3) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(4) For wired connection with boiler, compatible in radio-frequency connection with Hi, Comfort G100-W, code 20193355 (accessory not included and necessary for internet connection by means of ADSL Wi-Fi router) and compatible i with Hi, Comfort G100-R, code 20193356.

HYDRAULIC DISTRIBUTION MODULES

Description	Zone management	Notes	Code
BAG³ HYBRID 1D	1 direct zone	(1)(2)	**20130805**
BAG³ HYBRID 2D	2 direct zone	(1)(2)	**20130806**
BAG³ HYBRID 1D+1M	1 direct zone + 1 mixed zone	(1)(3)	**20130807**
IN-WALL INSTALLATION BOX		(4)	**20130808**

(1) Supplied without in-wall installation box
(2) Equipped as standard with limit thermostat for low temperature systems
(3) Mixed zone equipped as standard with limit thermostat for low temperature systems
(4) In-wall installation box made of galvanised sheet metal that can be painted white; the box is compulsory for the installation of the BAG³ HYBRID

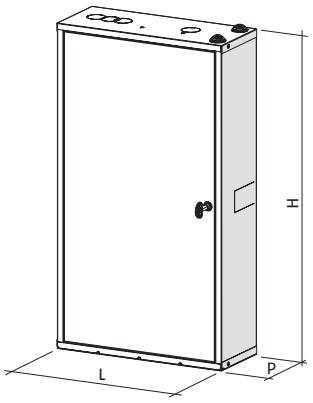

Description	H mm	L mm	P mm	Net weight kg
BAG³ HYBRID 1D	797	400	160	17
BAG³ HYBRID 2D	797	400	160	18
BAG³ HYBRID 1D+1M	797	400	160	18
IN-WALL INSTALLATION BOX	797	400	160	8


ACCESSORIES FOR BAG³ HYBRID

Description	Code
Taps kit for BAG³ HYBRID system side and heat pump	**20131752**


Wall-hung condensing boiler

Start



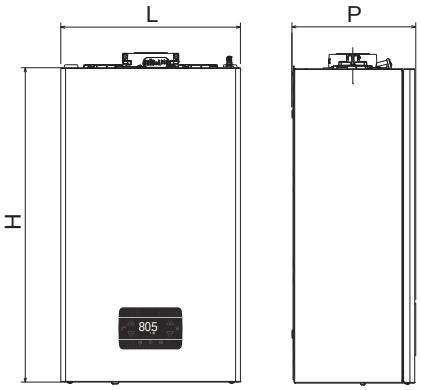

M-FLOW
U-DHW OUTLET
G-GAS
R-RETURN
E-DHW INLET



ERP

- New stainless steel primary heat exchanger, compact and robust
- Combined and heating-only models, indoor, built-in and outdoor in partially protected locations
- Dimensions among the most compact in the segment (width of only 400 mm), also ideal for small wall units
- Hydraulic unit with sequence standard DIN connections
- Designed to operate with mixtures of natural gas and hydrogen, up to a maximum of 20%
- Class 6 NOx

Description	H mm	L mm	P mm	Net weight kg
START 25 KIS	700	400	275	28.5
START 30 KIS	700	400	275	30.0
START 25 IS	700	400	275	27.5
START 15 IS	700	400	275	27.5

START is the new proposal of Riello condensing boilers for small and medium sized households. It has been completely renewed from a technological and functional point of view.
START is available in 3 sizes of power 15, 25, 30 kW, in combined (KIS) and heating-only (IS) versions.
One of the distinguishing features of the new START is the innovative digital control panel with touch buttons designed with an emphasis on ease of use.

- High-efficiency sanitary exchanger developed by Riello
- Modern and intuitive touchscreen HMI, with representative icons and capacitive buttons with acoustic ""buzzer"" to confirm
- Modern and linear design with under-boiler lower connection cover available as an accessory for optimal aesthetic integration
- Sanitary specific electronic functions: sanitary delay, anti-pendulum function and smart fan
- Hydraulic group with DIN standard sequence
- Low-consumption circulator (IEE≤0.20) 7 m high head available as an accessory
- Easy installation, easy integration even in small spaces and easy replacement, thanks to a wide range of accessories optionally available
- Modulation ratio 1:8
- Easy maintenance and cleaning of the combustion chamber thanks to frontal access to the exchanger
- 93% seasonal efficiency
- 8 litre lateral expansion tank
- Standard flue gas flange with dedicated flue system
- Temperature control as standard in combination with the external probe, available as an accessory
- Possibility of built-in installation (model 25 KIS and 30 KIS) and outside in partially protected places (IPX5D)
- Mounting crossbar already integrated in the boiler and power supply cable included
- Natural gas operation as standard with possibility of conversion to LPG (G31) and propane air through accessories. This modification must be carried out by the installer or by the technical assistance service.
- IPX5D electrical protection

TECHNICAL DATA

Description	Heat input Heating/DHW min-max kW	Useful efficiency Pn (50°/30 °C) %	Useful efficiency 30% Pn (return 30 °C) %	DHW production ΔT 25° l/min	Fuel	Energy efficiency class * (D → A+++)	Energy efficiency class * (F → A+)	Note	Code
COMBI HEATING AND ISTANTANEOUS DOMESTIC HOT WATER VERSION									
START 25 KIS	3.1÷20.0/3.1÷25.0	104.6-98.0	109.1	14.3	NG	A	A	(1)	**20197878**
START 25 KIS	3.1÷20.0/3.1÷25.0	104.6-98.0	109.1	14.3	LPG	A	A	(1)	**20197880**
START 30 KIS	3.95÷25.0/3.95÷30.0	107.1-103.6	108.8	17.2	NG	A	A	(1)	**20197879**
HEATING ONLY VERSION									
START 15 IS	3.1÷15.0/3.1÷25.0	105.7-98.0	109.6	-	NG	A	-	(1)	**20187773**
START 25 IS	3.1÷20.0/3.1÷25.0	104.6-98.0	109.1	-	NG	A	-	(1)	**20187774**

(1) Outdoor temperature sensor is not supplied as standard (code 1220559 available as an accessory).
(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Notes	Code
IN-WALL INSTALLATION		
In-wall installation unit	(1)	**20161604**
Crossbar for in-wall installation		**20191887**
MECHANICAL ACCESSORIES		
Air filter	(2)	**20190324**
Hydraulic low fittings cover		**20191519**
Dummy boiler Start 25 KIS		**20191885**
Wall mounting frame 1 pc.		**20191891**
Wall mounting frame 5 pcs.		**20191892**
HYDRAULIC ACCESSORIES		
Compact polyphosphate doser kit		**20191518**
Compact magnetic filter		**20191517**
High residual pump 7 m		**20189142**
Crossover kit (DIN vs Riello)	(3)	**20191890**
Connection kit with heating system, domestic water and gas cocks (for KIS models)		**20133516**
Connection kit with heating system and gas cocks (for IS models)		**20133517**
Connection kit with domestic water and gas cocks (for KIS models)		**20132005**
Connection kit with gas cock (for IS models)		**20133386**
Condensate booster pump kit		**20097192**
Well probe for remote heater (for heating only version)		**1220599**
Solar diverter valve kit for instant wall-hung combined boilers		**20035644**
COMPLEMENTARY ACCESSORIES		
Board BE09 with double multi-function relay	(6)	**20192808**
Antifreeze heaters -15 °C	(7)	**20191888**
External probe		**1220559**
Building site kit with analogue hydrometer		**20191520**
Limit thermostat for low temperature installations		**1220639**
SPECIFIC FLUES		
Fixed split system kit Ø80 mm		**20129765**
Ø80 mm clapet with condensate trap		**20164664**
Ø80/125 mm clapet with condensate trap		**20164662**
Wall-hung collector Ø60/100 mm		**20129175**
Telescopic wall-hung collector Ø60/100 mm		**20129176**
Vertical collector Ø60/100 mm		**20129177**
Vertical connection stub pipe kit Ø60/100 mm	(4)	**20129174**
90° bend kit Ø60/100 mm for boiler start	(5)	**20129172**
Adjustable splitter kit from Ø60/100 mm to Ø80/80 mm		**20134830**
Adapter kit B23 Ø80 mm		**20129769**
Split kit B23 Ø80 mm for in-wall installation box		**20129768**
Compact swelling kit Ø60/100 - Ø80/80		**20190475**

Description	Notes	Code
GAS TRANSFORMATION		
Propane air conversion kit (25 KIS - IS)		**20192718**
Propane air conversion kit (30 KIS)		**20192719**
LPG conversion kit (25 KIS - IS)		**20192715**
LPG conversion kit (30 KIS)		**20192717**

(1) Unit supplied with door.
(2) Ideal to avoid introducing impurities from the intake air into the exchanger and burner.
(3) Flexible connections (sanitary, gas and heating) kit required to facilitate the replacement of Start boilers with previous boilers with Riello standard hydraulic connection sequence.
(4) Code necessary for vertical exhaust with flue system. Accessory already included in kit 20129177.
(5) Code necessary for horizontal exhaust with flue system 60/100. Accessory already included in kit 20129175 and 20129176.
(6) Ideal board for managing additional circulator or zone valve and alarm remote kit.
(7) The antifreeze heater kit allows to protect the sanitary circuit from the risk of freezing in case of temperatures below 0°C (down to -15°C), using the copper fitting accessory kits (not flexible) included in the offer.

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface (*) and management through APP


Image	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**

(*) Only ON/OFF connection with BAG³ HYBRID.
(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For wired connection with boiler, compatible in radio-frequency connection with Hi, Comfort G100-W, code 20193355 (accessory not included and necessary for internet connection by means of ADSL Wi-Fi router) and compatible i with Hi, Comfort G100-R, code 20193356.


Wall-hung condensing boiler

RLT



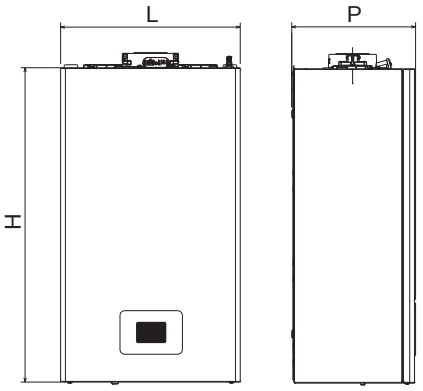

M-FLOW
U-DHW OUTLET
G-GAS
R-RETURN
E-DHW INLET



ERP

- New stainless steel primary heat exchanger, compact and robust
- Combined models, indoor, built-in and outdoor in partially protected locations
- Dimensions among the most compact in the segment (width of only 400 mm), also ideal for small wall units
- Hydraulic unit with sequence standard DIN connections
- Designed to operate with mixtures of natural gas and hydrogen, up to a maximum of 20%

Description	H mm	L mm	P mm	Net weight kg
RLT 25 KIS (NG)	700	400	275	25
RLT 25 KIS (LPG)	700	400	275	25
RLT 30 KIS (NG)	700	400	275	30

The RLT range is the entry-level offer of Riello condensing boilers for small and medium-sized domestic users

- High-efficiency DHW exchanger
- Pneumatic combustion control
- Modern and linear design with lower boiler connection cover available as an accessory for excellent aesthetic integration
- Specific sanitary electronic functions: sanitary delay, anti-pendulum functions, and smart fan
- Low-consumption modulating pump with 6m head (IEE ≤ 0.20). High-head 7m pump available as an accessory
- Hydraulic group with standard DIN sequence
- Seasonal efficiency 93%
- Modern and intuitive HMI touchscreen, with representative icons and capacitive buttons with acoustic confirmation "buzzer"
- 2'' display with icons
- 8-liter expansion vessel
- Ease of installation and wide choice of accessories available as options
- Electrical protection rating IPX5D

TECHNICAL DATA

Description	Heat input Heating/DHW min-max kW	Useful efficiency Pn (50°/30 °C) %	Useful efficiency 30% Pn (return 30 °C) %	DHW production ΔT 25° l/min	Fuel	Energy efficiency class * (D → A+++)	Energy efficiency class * (F → A+)	Note	Code
COMBI HEATING AND ISTANTANEOUS DOMESTIC HOT WATER VERSION									
RLT 25 KIS	3.1÷20.0/3.1÷25.0	104.6-98.0	109.1	14.3	NG	A	A	(1)	**20213292**
RLT 25 KIS	3.1÷20.0/3.1÷25.0	104.6-98.0	109.1	14.3	LPG	A	A	(1)	**20213293**
RLT 30 KIS	3.95÷25.0/3.95÷30.0	107.1-103.6	108.8	17.2	NG	A	A	(1)	**20216033**

(1) Outdoor temperature sensor is not supplied as standard (code 1220559 available as an accessory).
(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Notes	Code
IN-WALL INSTALLATION		
In-wall installation unit	(1)	20161604
Crossbar for in-wall installation		20191887
MECHANICAL ACCESSORIES		
Hydraulic low fittings cover		20191519
HYDRAULIC ACCESSORIES		
Compact polyphosphate doser kit		20191518
Compact magnetic filter		20191517
Crossover kit (DIN vs Riello)	(2)	20191890
Connection kit with heating system, domestic water and gas cocks (for KIS models)		20133516
Connection kit with heating system and gas cocks (for IS models)		20133517
Connection kit with domestic water and gas cocks (for KIS models)		20132005
Connection kit with gas cock (for IS models)		20133386
Condensate booster pump kit		20097192
Well probe for remote heater (for heating only version)		1220599
Solar diverter valve kit for instant wall-hung combined boilers		20035644
COMPLEMENTARY ACCESSORIES		
Board BE09 with double multi-function relay	(3)	20192808
Antifreeze heaters -15 °C	(4)	20191888
External probe		1220559
Limit thermostat for low temperature installations		1220639
SPECIFIC FLUES		
Fixed split system kit Ø80 mm		20129765
Ø80 mm clapet with condensate trap		20164664
Ø80/125 mm clapet with condensate trap		20164662
Wall-hung collector Ø60/100 mm		20129175
Telescopic wall-hung collector Ø60/100 mm		20129176
Vertical collector Ø60/100 mm		20129177
Vertical connection stub pipe kit Ø60/100 mm	(5)	20129174
90° bend kit Ø60/100 mm for boiler start	(6)	20129172
Adjustable splitter kit from Ø60/100 mm to Ø80/80 mm		20134830
Adapter kit B23 Ø80 mm		20129769
Split kit B23 Ø80 mm for in-wall installation box		20129768
Compact swelling kit Ø60/100 - Ø80/80		20190475

(1) Unit supplied with door.
(2) Flexible connections (sanitary, gas and heating) kit required to facilitate the replacement of Start boilers with previous boilers with Riello standard hydraulic connection sequence.
(3) Ideal board for managing additional circulator or zone valve and alarm remote kit.
(4) The antifreeze heater kit allows to protect the sanitary circuit from the risk of freezing in case of temperatures below 0°C (down to -15°C), using the copper fitting accessory kits (not flexible) included in the offer.
(5) Code necessary for vertical exhaust with flue system. Accessory already included in kit 20129177.
(6) Code necessary for horizontal exhaust with flue system 60/100. Accessory already included in kit 20129175 and 20129176.

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface (*) and management through APP

Image	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	20193354
	Hi, Comfort T100	(2)	20193352
	Hi, Comfort G100-W		20193355
	Hi, Comfort G100-R		20193356

(*) Only ON/OFF connection with BAG³ HYBRID.
(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For wired connection with boiler, compatible in radio-frequency connection with Hi, Comfort G100-W, code 20193355 (accessory not included and necessary for internet connection by means of ADSL Wi-Fi router) and compatible i with Hi, Comfort G100-R, code 20193356.

STANDARD-EFFICIENCY WALL-HUNG BOILERS

INDOOR

KI

MONOTHERMIC



START LN

START 24 KI LN (10,7-26,7/9,0-26,7 kW)
START 28 KI LN (14,0-31,9/9,0-31,9 kW)

page 135



START

START 28 KI (8,7-28,6 kW)

page 137

BITHERMIC



FASTECH

FASTECH 24 KI (8,0-24,6 kW)

page 139

KIS

MONOTHERMIC



START

START 24 KIS (7,5-24,0 kW)
START 28 KIS (11,0-27,9 kW)
START 35 KIS (10,8-34,9 kW)

page 137

BITHERMIC



FASTECH

FASTECH 24 KIS (7,5-23,9 kW)

page 139

KI Combi: Heating and DHW Production – conventional flue
KIS Combi: Heating and DHW Production – room sealed


* The distinguish between EU and Extra EU Countries is based only on the enforcement of the Ecodesign Regulation. The conformity to any other national Regulation must be confirmed.

Please verify with Sales the availability of the product in the destination Country before ordering


Standard wall-hung boilers

Start LN



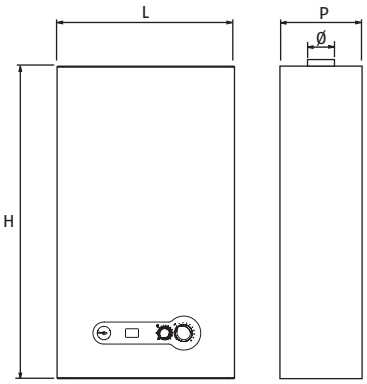

M-FLOW
U-DHW OUTLET
G-GAS
R-RETURN
E-DHW INLET



ERP LOW NOx

- Open chamber
- Combi model
- Only for replacement on CCR
- Low NOx emissions

Description	H mm	L mm	P mm	ø mm	Net weight kg
START 24 KI LN	740	400	332	130	30
START 28 KI LN	740	450	332	140	32

Start LN has a simple modern that is ideal for heating and the production of domestic hot water in small and medium size households. Start LN is available with 24 and 28 kW outputs with low NOx emissions <56 mg/kWh.

- Double heat exchanger: domestic hot water production with plate heat exchanger to minimise the formation of limescale
- CTR system for a rapid attainment of the desired comfort and a reduction in consumption, and temperature changes in the heating bodies
- 8 litre expansion tank
- Low consumption circulator (IEE≤0.20)
- Anti-freeze function that protects the heating and domestic hot water circuits down to 0 °C
- Thermoregulation as standard in boiler board in combination with the outdoor temperature sensor (optional)
- Can interface with the Remote Control Panel
- Hydraulic connections available as an accessory kit
- Operation with methane as standard with the possibility of conversion to LPG (G31), this modification is done by the installer or the technical assistance centre
- Electric protection level IPX5D

TECHNICAL DATA

Description	Heat input Heating/DHW min-max kW	Useful efficiency Pn (80°/60 °C) %	Useful efficiency 30% Pn (rit. 50 °C) %	DHW production ΔT 25° l/min	Fuel	Energy efficiency class * (D → A+++)	Energy efficiency class * (F → A+)	Code
VERSION WITH OPEN CHAMBER-HEATING AND PRODUCTION OF BOILER DOMESTIC HOT WATER								
START 24 KI LN	10.7-26.7/9.0-26.7	90.1	89.2	13.8	NG	C	B	**20151434**
START 28 KI LN	14.0-31.9/9.0-31.9	90.5	89.5	16.6	NG	C	B	**20151435**

(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Code
CONTROL DEVICES	
CHRONORIELLO 7D (7-day digital room thermostat)	**20063873**
CHRONORIELLO 7D WIRELESS (7-day digital room thermostat wireless)	**20101747**
COMBUSTION ACCESSORIES	
LPG conversion kit for Start 24 KI LN model	**20155079**
LPG conversion kit for Start 28 KI LN model	**20155101**
ELECTRICAL ACCESSORIES	
External probe	**1220559**
Kit for managing second pump or zone valves	**20062614**
HYDRAULIC ACCESSORIES	
Central heating taps	**4047476**
Central heating taps with filter	**4047475**
High head pump kit	**20105879**
Polyphosphates doser kit	**20135496**
Magnetic filter and polyphosphates doser kit	**20135495**
Solar diverter valve kit for instantaneous wall-hung combi boilers	**20025113**
Top hydraulic fittings kit	**20008795**

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface (*) and management through APP


Image	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**

(*) Possibility of connection via OTBus or in ON/OFF mode.
(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For cable OTBus connection to the boiler. Compatible for radio frequency connection with Hi, Comfort G100-W code 20193355 (accessory not included and necessary for internet connection via home ADSL modem) and compatible with Hi, Comfort G100-R code 20193356.

Standard efficiency wall-hung boilers

Start



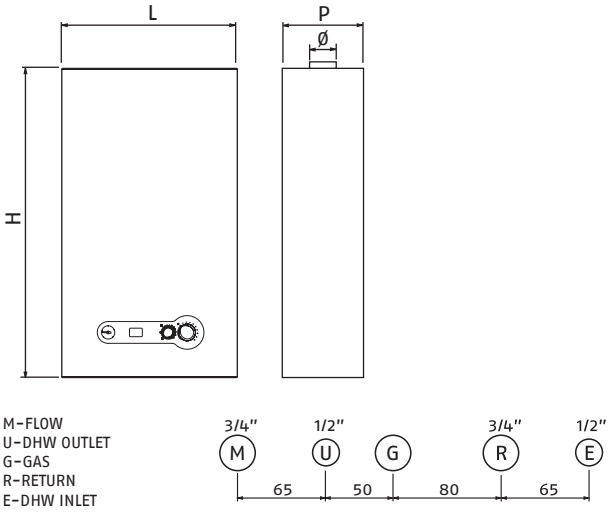

- Conventional flue and room-sealed models
- Models: heating-only and combi
- Digital display

Description	H mm	L mm	P mm	Ø mm	Net weight kg
START 24 KIS	715	405	248	-	31
START 28 KIS	740	400	328	-	33
START 35 KIS	780	505	328	-	42
START 28 KI	740	450	328	140	30

The Start range features a modern and functional design completed by a digital screen including essential information. The stylish casing, the compact size and special finishing details allows its installation into any setting.
The new Start is available both conventional flue and room sealed with 24, 28 and 35 kW output with heating only or heating and DHW production models.

- Double-heat exchanger (CH and DHW stainless steel plate heat-exchangers)
- CTR system to achieve faster desired comfort and reduce fuel consumption
- Frost protection function which protects the heating and DHW circuits down to -3 °C, with the possibility of extending protection down to -10 °C (as optional)
- Thermoregulation control supplied as standard fitted with the external probe (as optional).

TECHNICAL DATA

Description	Output 80°/60° min - max kW	Efficiency Pn (80°/60°) %	Efficiency Pn 30% (47 °C return) %	DHW production (Δt 25°) l/min	Fuel	Code
ROOM-SEALED - HEATING AND DHW PRODUCTION						
START 24 KIS	7.5-24.0	92.8	91.8	13.7	NG	**20122798**
START 28 KIS	11.0-27.9	93.0	91.9	16.0	NG	**20122801**
START 35 KIS (*)	10.8-34.9	92.9	92.5	20.0	NG	**20122802**
CONVENTIONAL FLUE - HEATING AND DHW PRODUCTION						
START 28 KI (*)	8.7-28.6	92.4	89.4	16.4	NG	**20122800**

(*) While stocks last

ACCESSORIES

Description	Code
CONTROL DEVICES	
CHRONORIELLO 7D (7-day digital room thermostat)	**20063873**
CHRONORIELLO 7D WIRELESS (7-day digital room thermostat wireless)	**20101747**
COMBUSTION ACCESSORIES	
LPG conversion kit (for START 24 KIS)	**20015586**
ELECTRICAL ACCESSORIES	
External probe	**1220559**
HYDRAULIC ACCESSORIES	
Central heating taps	**4047476**
Central heating taps with filter	**4047475**
Solar diverter valve kit for instantaneous wall-hung combi boilers	**20025113**

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface (*) and management through APP


Image	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**

(*) Functions available only in case of OTBus connection with a Riello boiler. Possibility to connect to generic boilers and other devices only in ON/OFF mode.
(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) Compatible with RF connection to the Hi, Comfort G100-W codice 20193355 accessory not included, necessary to connect to the home Wi-Fi).


Standard efficiency wall-hung boilers

Fastech



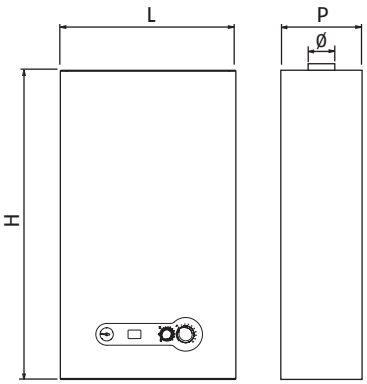

M-FLOW
U-DHW OUTLET
G-GAS
R-RETURN
E-DHW INLET



- Conventional flue and room sealed models
- Combi boiler

Description	H mm	L mm	P mm	Ø mm	Net weight kg
FASTECH 24 KI	740	400	332	130	30
FASTECH 24 KIS	715	405	248	-	28

Fastech is the new wall-hung boiler dedicated to new housing. Featuring a modern and essential design, Fastech satisfies the heating and DHW demand of small and mid-sized houses. Fastech is available with 24 kW output.

- High-efficiency, bithermic copper heat-exchanger
- The CTR system allows to reach faster the desidered temperature and to reduce consumption, limestone production inside the boiler and thermic variations in the heating terminals
- 8 liters expansion vessel
- Frost protection of the heating and sanitary circuits
- Thermoregulation control supplied as standard fitted with the external probe (as optional)
- Remote Control Panel to be interfaced
- IPX5D electrical protection rating
- Arranged system for the use of natural gas, which can be converted to LPG through the specific kit (optional), to be mounted by the technical assistance

TECHNICAL DATA

Description	Output 80°/60° min - max kW	Efficiency Pn (80°/60°) %	Efficiency P30% %	DHW production (Δt 25°) l/min	Fuel	Code
CONVENTIONAL FLUE - HEATING AND DHW PRODUCTION						
FASTECH 24 KI (*)	8.0-24.6	92.0	90.8	14.1	NG	**20122804**
ROOM SEALED - HEATING AND DHW PRODUCTION						
FASTECH 24 KIS (*)	7.5-23.9	92.8	91.8	13.7	NG	**20122807**

(*) While stocks last

ACCESSORIES

Description	Code
CONTROL DEVICES	
CHRONORIELLO 7D (7-day digital room thermostat)	**20063873**
CHRONORIELLO 7D WIRELESS (7-day digital room thermostat wireless)	**20101747**
COMBUSTION ACCESSORIES	
LPG conversion kit (for FASTECH 24 KI)	**20015587**
LPG conversion kit (for FASTECH 24 KIS)	**20015586**
ELECTRICAL ACCESSORIES	
External probe	**1220559**
Zone valves management kit	**20000785**
HYDRAULIC ACCESSORIES	
Central heating taps	**4047476**
Central heating taps with filter	**4047475**
Solar diverter valve kit for instantaneous wall-hung combi boilers	**20025113**
Top hydraulic fittings kit	**20008795**
MECHANICAL ACCESSORIES	
Hydraulic fittings cover	**20012594**
Mounting template kit for 24 KIS model (10 pcs)	**20017311**

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface (*) and management through APP

Image	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**


(*) Functions available only in case of OTBus connection with a Riello boiler. Possibility to connect to generic boilers and other devices only in ON/OFF mode.
(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) Compatible with RF connection to the Hi, Comfort G100-W codice 20193355 accessory not included, necessary to connect to the home Wi-Fi).

SYSTEM COMPLEMENTARY ITEMS

System complementary items

Bag³ Hybrid



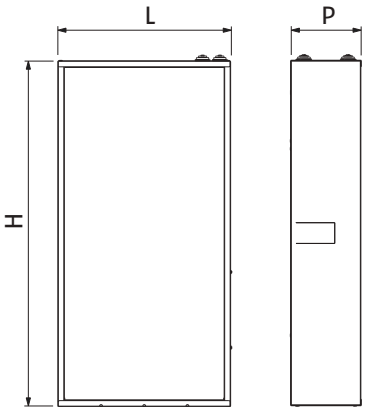

ERP

- Manageable via Modbus by boilers and heat pumps with REC10 control panel
- Setting of independent climatic curves for each zone
- Motorized mixing valves on mix zone
- Low-consumption self-modulating circulators

Description	H mm	L mm	P mm	Net weight kg
BAG³ HYBRID 1D	797	400	160	8,8
BAG³ HYBRID 2D	797	400	160	11,2
BAG³ HYBRID 1D+1M	797	400	160	12,4
IN-WALL INSTALLATION BOX	797	400	160	8,0

The distribution BAG³ is a specific accessory designed for hybrid systems intended for pairing with wall-hung and floor-standing boilers with versions for recessed or outdoor installation (IPX5D electrical protection).

- External housing that groups all components in galvanised sheet metal, for recessed or wall-hung installation
- Distribution collector (mixture bottle)
- Low-consumption self-modulating circulators
- Motorized mixing valve on the mixed zone
- Setting of independent climatic curves for each zone
- To be paired with REC10 H hybrid system control
- Possible connection of zone thermostats

With BAG³ the hybrid systems can be expanded with the addition of:

- single coil domestic hot water heater for pre-heating by the heat pump
- solar thermal collectors, solar circulation pump and electronic kit for solar thermal management
- interface with photovoltaic system to favour the use of the electrical source
- double coil domestic hot water heater for pre-heating by a solar thermal system and the heat pump.

TECHNICAL DATA

Description	Notes	Code
OUTDOOR RECESSED VERSIONS		
BAG³ HYBRID 1D	(1)	**20130805**
BAG³ HYBRID 2D	(1)	**20130806**
BAG³ HYBRID 1D+1M	(1)(2)	**20130807**
IN-WALL INSTALLATION BOX		**20130808**

To install the module, it is necessary to purchase the in-wall installation box code 20130808.
(1) Refer to the hybrid system section of the catalogue for compatible boiler pairing.
(2) Limit thermostat on mixed zone only.


ACCESSORIES

Description	Code
Cock kit for BAG³ HYBRID on system and heat pump side	**20131752**

System complementary items

Bag³



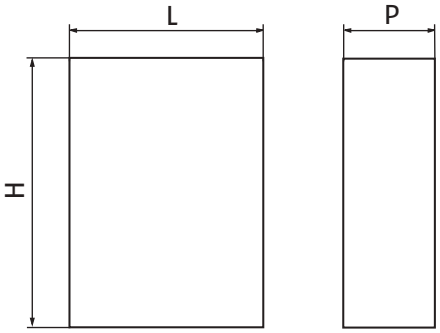

ERP

- Hydraulic separator
- Low-energy circulators

Description	H mm	L mm	P mm	Net weight kg
BAG³ AP – BAG³ 2 AP – BAG³ 3 AP	720	400	160	10, 12, 14
BAG³ MIX BASIC – BAG³ MIX CLIMA	720	400	160	16
BAG³ 2 MIX BASIC – BAG³ 2 MIX CLIMA	720	400	160	17
BAG³ MIX FAMILY COND	616	440	160	16
IN-WALL INSTALLATION BOX	720	400	160	6

BAG hydraulic separator is an accessory to be matched with wall-hung and floor-standing boilers that can be installed outdoor or in a in-wall place.

- BAG³ for high-flow rate direct circuit (1, 2 or 3 zones) works as a hydraulic separator between boiler and high-flow rate circuits. Equipped with self modulating energy-efficient circulators.
- BAG³ MIX and BAG³ 2 MIX for high-flow rate direct and mixed circuits, work as hydraulic separators between boiler and double or triple temperature circuits. Equipped with self modulating energy-efficient circulators.
- BAG³ MIX Family Condens for direct and mixed circuit: mixing valve and mixed circuit pump are controlled by the electronic board supplied as standard, that can be located inside the boiler.
- Energy-efficient circulators
- Suitable for in-wall and outdoor installation
- Galvanized sheet that can be white painted
- BAG³ and BAG³ M are supplied as standard with limit thermostat for low temperature circuits.

TECHNICAL DATA

Description	Notes	Code
VERSION FOR OUTDOOR IN-WALL INSTALLATION		
BAG³ AP	(1)	**20082277**
BAG³ 2 AP	(1)	**20082280**
BAG³ 3 AP	(1)	**20082282**
BAG³ MIX BASIC	(1)	**20082286**
BAG³ MIX CLIMA	(1)	**20082283**
BAG³ 2 MIX BASIC	(1)	**20082288**
BAG³ 2 MIX CLIMA	(1)	**20082284**
BAG³ MIX FAMILY CONDENS	(2)	**20102824**
IN-WALL INSTALLATION BOX		**20007305**


(1) Supplied without in-wall installation box
(2) Supplied with in-wall installation box

ACCESSORIES


Description	Notes	Code
Interface board ITRF11	(1)	**20164477**
Insulation kit for in-wall installation box		**20085456**

(1) It is necessary in case of installation of BAG³ MIX CLIMA (20082283 code) and BAG3 2 MIX CLIMA (20082284 code) with Family Aqua Condens, Family Externa Condens and Family In Condens to manage high and low temperature circuits according to the boiler flow temperature.


BAG³ AP

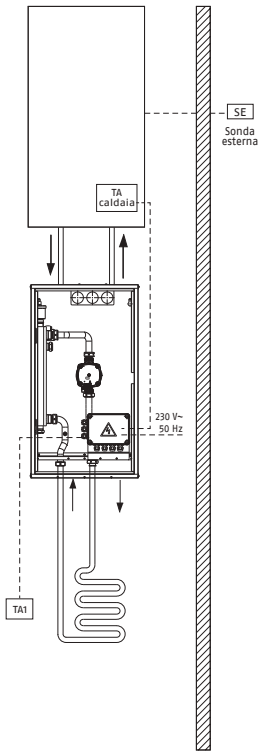


BAG³ 2 AP

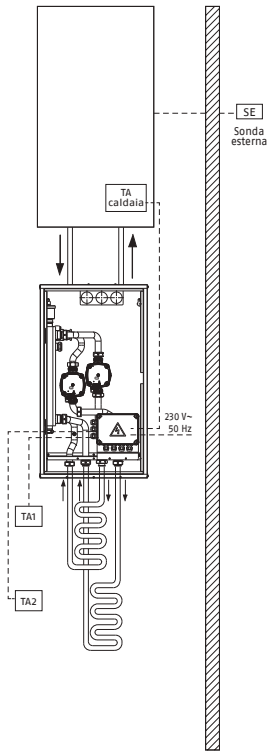


BAG³ 3 AP

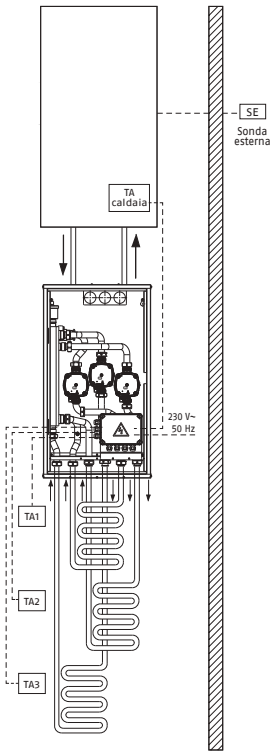


BAG³ MIX FAMILY CONDENS

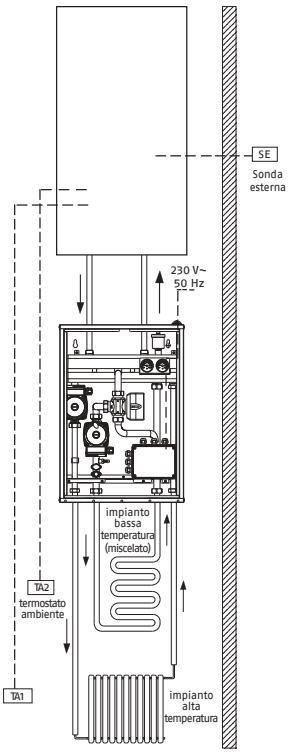


BAG³ MIX BASIC

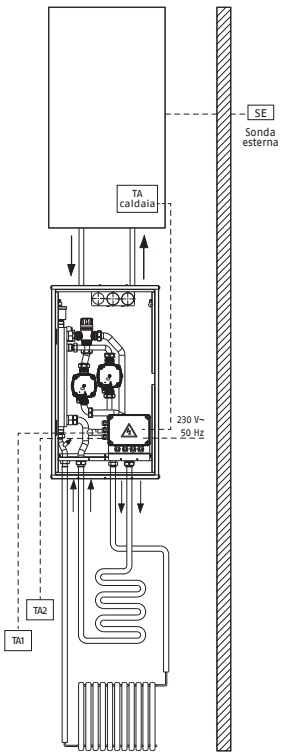


BAG³ MIX CLIMA

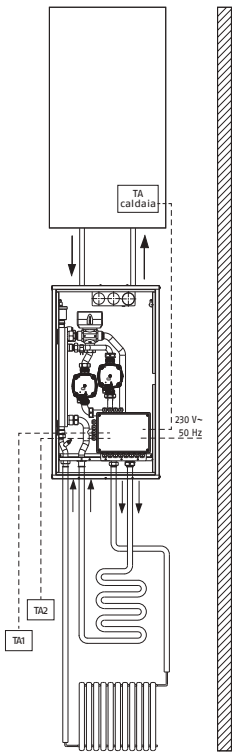

BAG³ 2 MIX BASIC

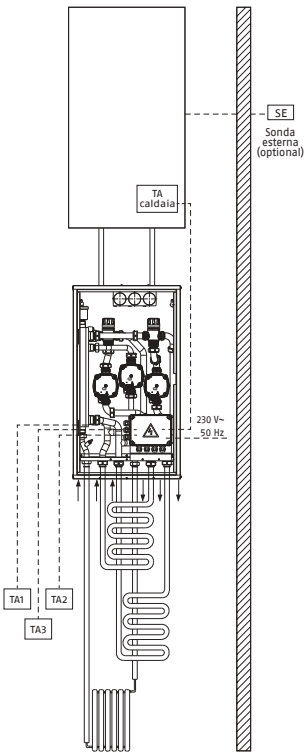

BAG³ 2 MIX CLIMA

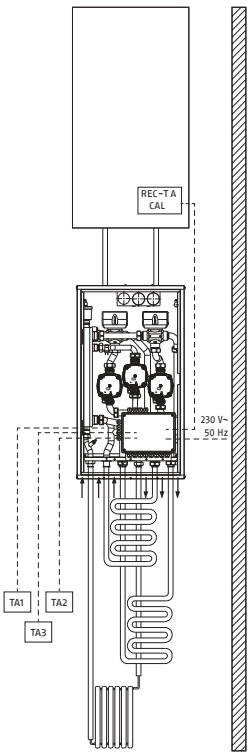



FLOOR-STANDING BOILERS

FLOOR-STANDING CONDENSING BOILERS 147

FLOOR-STANDING STANDARD EFFICIENCY BOILERS 151

FLOOR-STANDING CONDENSING BOILERS

STEEL OIL BOILERS

HEATNG ONLY

WITH 3 WAY VALVE



INSIEME EVO COND

INSIEME EVO COND 20 V LN (20 kW)*
INSIEME EVO COND 25 V LN (25 kW)*
INSIEME EVO COND 35 V LN (34,9 kW)*

page 150



INSIEME EVO COND

INSIEME EVO COND 45 LN (43,7 kW)*
INSIEME EVO COND 55 LN (38,9-53,3 kW)**
INSIEME EVO COND 70 LN (53,4-67,7 kW)**

page 150

HEATING AND DHW PRODUCTION

130 LITERS SORAGE TANK



INSIEME EVO COND

INSIEME EVO COND 25 B/130 LN (25 kW)*
INSIEME EVO COND 35 B/130 LN (34,9 kW)*

page 150

* Max useful power 80/60 °C
** Min/max useful power 80/60 °C

Please verify with Sales the availability of the product in the destination Country before ordering

Steel floor-standing oil condensing boilers


Insieme Evo Cond




ERP

- In conformity with Directive 2009/125/EC
- Steel boilers with oil burner for heating and for the production of domestic hot water
- Low NOx version - class 3 according to EN 267

INSIEME EVO COND 20-35 V LN
INSIEME EVO COND 45-70 LN

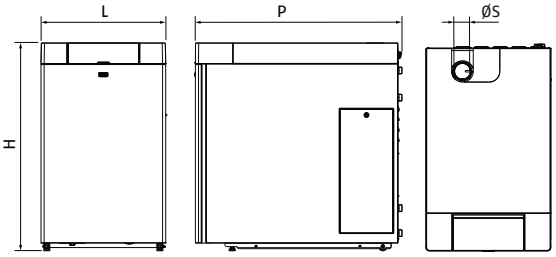

INSIEME EVO COND 25-35 B/130 LN

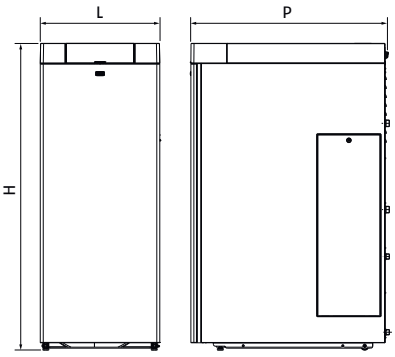

Description	H mm	L mm	P mm	ØA (*) mm	ØS mm	Net weight kg
Insieme EVO COND 20 V LN	1000	600	994	80	80	120
Insieme EVO COND 25 V LN	1000	600	994	80	80	120
Insieme EVO COND 35 V LN	1000	600	994	80	80	150
Insieme EVO COND 45 LN	1138	600	1155	110	110	195
Insieme EVO COND 55 LN	1138	600	1155	110	110	198
Insieme EVO COND 70 LN	1138	600	1155	110	110	202
Insieme EVO COND 25 B/130 LN	1540	600	975	80	80	150
Insieme EVO COND 35 B/130 LN	1540	600	975	80	80	195

(*) Type C transformation kit as optional.

Oil condensing thermal group equipped with single stage burner for heat outputs up to 45 kW, dual stage for 55.70 kW models with low pollutant emissions.
The stainless steel boiler body has an horizontal layout, coated with insulating and sound absorbing material. Insieme EVO COND is available with open chamber configuration as standard, convertible as sealed chamber with specifics accessory kits. "Heating only" or combined versions are available for the production of domestic hot water with storage tank.
All models are equipped with a new electronic panel with a backlit graphic display with five buttons and LEDs for operation status display.
The control system provides the climatic regulation, the management of up to 3 zones distribution with specific accessory kits, the management of the sanitary hot water.
The electronics also provides the possibility of the remote management by means of the 0-10 V input, or with the Modbus protocol.

- Low sound emissions
- Flexible and cheapness installation. All the accessories for the operation and the safety are included in the furniture
- Simple maintainability: combustion chamber, flue manifold, control panel and hydraulic connextions are easily accessible
- Low pollutant emissions (class 3 according to EN 267 with NOx emissions ≤100 mg/kWh)
- Maximum working pressure: 3 bar
- Complete with flexible oil hoses

Insieme EVO COND 20-35 V LN: thermal groups for the room heating with integrated 3 way valve for the connection with an external tank (optional)
Insieme EVO COND 25-35 B/130 LN: thermal group for the combined heating and domestic hot water production by means of an integrated 130 liters storage tank
Insieme EVO COND 45-70 LN: thermal groups for the room heating.

TECHNICAL DATA

Description	Output kW		Efficiency		DHW production l/min	Tank capacity (liters)	Energy efficiency class *		Notes	Code
	Useful 80°/60° max	Furnace min-max	Pn (80/60 °C) %	Useful 30% Pn (30°C) %			(D → A+++)	(F → A+)		
LOW NOX VERSION - HEATING ONLY										
INSIEME EVO COND 20 V LN	19.5	20.0	97.3	105.9	-	-	A	-	(1)	**20145974**
INSIEME EVO COND 25 V LN	24.2	25.0	96.9	105.6	-	-	A	-	(1)	**20145975**
INSIEME EVO COND 35 V LN	33.8	34.9	96.5	104.8	-	-	A	-	(1)	**20145976**
INSIEME EVO COND 45 LN	43.7	45	97.2	104.8	-	-	A	-		**20145977**
INSIEME EVO COND 55 LN	53.3	40-55	96.9	104.9	-	-	A	-		**20145978**
INSIEME EVO COND 70 LN	67.7	55-70	96.8	104.8	-	-	A	-		**20145979**
LOW NOX VERSION - HEATING AND DOMESTIC HOT WATER PRODUCTION WITH STORAGE TANK										
INSIEME EVO COND 25 B/130 LN	24.2	25.0	96.9	105.6	10.0	130	A	B	(2)	**20145980**
INSIEME EVO COND 35 B/130 LN	33.8	34.9	96.5	104.8	11.4	130	A	B	(2)	**20145981**

(1) Integrated 3 way valve.
(2) Domestic hot water production with reference to ΔT 35 °C.
(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Notes	Code
SECONDARY CIRCUIT MANAGEMENT		
External probe		**1220559**
Domestic hot water probe		**1220599**
1st direct/mixed zone management		**20132795**
2nd/3rd direct/mixed zone management		**20132796**
SEALED TRANSFORMATION (TYPE C)		
Ø80 mm type C transformation	(1)	**20163226**
Ø110 mm type C transformation	(2)	**20163285**
SAFETY DEVICES		
Fuel shut-off valve kit (VIC) - ØG.1"		**20009486**
Pressure gauge- safety valve kit (2,5 bar)	(3)	**20181008**
Safety devices kit	(2)(4)	**20180519**
Safety kit adapter	(2)	**20165826**
FUEL FILTER		
Oil filter		**20132792**
FLUE DISCHARGE		
Ø80 - Ø80/125 mm adapter	(1)	**20159698**
Ø110 - Ø110/160 mm adapter	(2)	**20160472**
HYDRAULIC ACCESSORIES		
DN70 hydraulic separator		**4047314**
CASCADE MANAGEMENT		
RIELLOtech CLIMA COMFORT	(2)	**4031069**
CLIMA COMFORT	(2)	**20010903**
CLIMA DISPLAY	(2)	**20010906**
RC3 remote control kit	(2)	**20155028**
Interface kit for bus comunication between Alu Pro Power and RIELLOtech	(2)(5)	**20021674**
NTC solar collector immersion probe (10kΩ)	(2)(6)	**4031913**
NTC immersion probe (10kΩ) - 5 metres	(2)(7)	**20010068**
NTC O-ring probe (10kΩ)	(2)(8)	**20168680**
NTC DHW-tank probe (10kΩ) - 5 metres	(2)(9)	**20010103**
CONDENSATE NEUTRALIZER		
DNO 1 neutralization kit (up to 50 kW)		**20182660**
DNO 2 neutralization kit (up to 300 kW)		**20182661**
HNO 1.6 neutralization kit (up to 200 kW)	(10)	**20182664**

(1) For 20-25-35 models.
(2) For 45-55-70 models.
(3) To be combined with code 20180519.
(4) It contains: pressure switch, minimum pressure switch and thermometer.
(5) It contains wiring and communication kit.
(6) Probe for solar system.
(7) Primary probe (hydraulic separator).
(8) Mixed zone probe.
(9) Cylinder probe.
(10) Equipped with extraction pump.

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface (*) and management through APP

Drawing	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**

(*) Functions available only in case of OTBus connection with a Riello boiler. Possibility to connect to generic boilers and other devices only in ON/OFF mode.
(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For cable connection to the boiler. Compatible for radio frequency connection with Hi, Comfort G100-W code 20193355 (accessory not included and necessary for internet connection via home ADSL modem).

FLOOR-STANDING STANDARD EFFICIENCY BOILERS

OIL BOILERS

STEEL

ONLY HEATNG CONVENTIONAL FLUE



INSIEME EVOe LN

INSIEME EVOe 25 LN (26,5 kW)*
INSIEME EVOe 32 V LN (33,9 kW)*

page 154

HEATING AND DHW PRODUCTION CONVENTIONAL FLUE

INSTANTANEOUS



INSIEME EVOe LN

INSIEME EVOE 25 K LN (26,5 KW)*
INSIEME EVOE 32 K LN (33,9 KW)*

page 154

70 LITERS STORAGE TANK



INSIEME EVOe LN

INSIEME EVOE 25 B/70 LN
(26,5 KW)*

page 154

100-130 LITERS STORAGE TANK



INSIEME EVOe LN

INSIEME EVOE 32 B/110 LN
(33,9 KW)*

page 154

* All versions can be transformed into a sealed chamber version with a dedicated accessory kit.


Please verify with Sales the availability of the product in the destination Country before ordering




Steel floor-standing standard boilers

Insieme EVOe LN

Insieme EVOe 25 LN - 32 V LN
Insieme EVOe 25/32 K LN

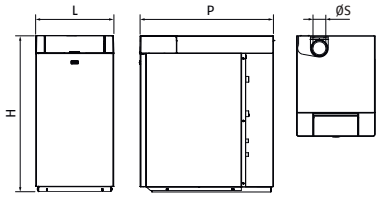

Insieme EVOe 25 B/70 LN
Insieme EVOe 32 B/110 LN



ERP

- In conformity with Directive 2009/125/EC
- Steel boilers with light oil burner for heating and for the production of domestic hot water
- Low NOx version class 3 according to EN 267

Description	H mm	L mm	P mm	Ø A mm	Ø S mm	Net weight kg
Insieme EVOe 25 LN	900	450	660	80	80	104
Insieme EVOe 32 V LN	900	600	760	80	120	136
Insieme EVOe 25 K LN	900	450	660	80	80	106
Insieme EVOe 32 K LN	900	600	760	80	120	138
Insieme EVOe 25 B/70 LN	1355	500	735	80	80	155
Insieme EVOe 32 B/110 LN	1490	600	700	80	120	206

* Type C conversion accessory kit

Steel boiler with low combustion pollutant emission one-stage light oil burner. The body of the boiler is vertical and is covered in insulating and sound-proofing material.
The standard Insieme EVOe is available with an open chamber that can be converted into a sealed chamber with the accessory kit. Versions are available for heating only or combined with instantaneous domestic hot water production or with storage.
All models have a new electronic panel with backlit graphic display and five keys and LEDs for displaying the operating status. The control system provides climatic adjustment, the management of the distribution of up to 3 zones using special accessory kits, and the regulation of the domestic hot water. The electronics also provide the possibility of remote management using a 0-10 V input or else with the Modbus protocol.

- Low sound emissions
- Easy and inexpensive to install. The delivery includes all the accessories for it to operate safely
- Easy to maintain: combustion chamber, flue gases manifold, control panel and hydraulic connections are can be easily accessed
- Low pollutant emissions, class 3 according to EN 267 (NOx≤100mg/kWh)
- Maximum operating pressure: 3 bar

Insieme EVOe 25 LN: boiler for room heating.

Insieme EVOe 32 V LN: boiler for room heating. Equipped with 3-way valve for combination with an external domestic hot water storage cylinder (accessory kit).

Insieme EVOe 25/32 K LN: boilers for room heating and the instantaneous priority production of domestic hot water using an instantaneous plate heat exchanger with a diverter valve and control of the modulating pump (PWM).

Insieme EVOe 25 B/70 LN: boilers for room heating and the production of domestic hot water with a 70 litre integrated storage cylinder.

Insieme EVOe 32 B/110 LN: boilers for room heating and the production of domestic hot water with a 110 litre integrated storage cylinder.

TECHNICAL DATA

Description	Output kW		Efficiency %		DHW production l/min	Tank capacity liters	Energy efficiency class *		Notes	Code
	Useful 80°/60° max	Furnace min-max	Pn (80/60 °C) %	Useful 30% Pn (37 °C) %			(D → A+++)	(F → A+)		
LOW NOX VERSION - ONLY HEATING										
INSIEME EVOE 25 LN	25.3	26.5	95.4	96.6	-	-	B	-		**20118240**
INSIEME EVOE 32 V LN	32.5	33.9	95.7	97.3	-	-	B	-		**20130415**
LOW NOX VERSION - HEATING AND INSTANTANEOUS DOMESTIC HOT WATER PRODUCTION										
INSIEME EVOE 25 K LN	25.3	26.5	95.4	96.6	9.4	-	B	B	(1)	**20118244**
INSIEME EVOE 32 K LN	32.5	33.9	95.7	97.3	12.7	-	B	B	(1)	**20118245**
LOW NOX VERSION - HEATING AND DOMESTIC HOT WATER PRODUCTION WITH STORAGE CYLINDER										
INSIEME EVOE 25 B/70 LN	25.3	26.5	95.4	96.6	9.4	69	B	B	(1)	**20118246**
INSIEME EVOE 32 B/110 LN	32.5	33.9	95.7	97.3	12.7	106	B	B	(1)	**20118250**

(1) Domestic hot water production with reference to ΔT 35 °C
(*) HEATING: the energy efficiency class of the products ranges from D up to A+++ / DHW: the energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Code
SECONDARY CIRCUIT MANAGEMENT	
External probe	**1220559**
Domestic hot water probe	**1220599**
1st direct/mixed zone management	**20132795**
2nd/3rd direct/mixed zone management	**20132796**
SEALED TRANSFORMATION (TYPE C)	
Type C transformation MOD 25	**20132799**
Type C transformation MOD 32	**20132800**
FUEL FILTERW	
Oil filter	**20132792**
Ø80 MM SINGLE DISCHARGE OR TWIN SUCTION/DISCHARGE	
Ø120/80 - Ø80/80 mm twin adapter	**20180504**
45° bend Ø80	**20162295**
90° bend Ø80	**20162296**
90° bend Ø80 with inspection	**20162297**
Extension L = 500 mm Ø80 mm	**20162298**
Extension L = 1000 mm Ø80 mm	**20162299**
Extension L = 2000 mm Ø80 mm	**20162300**
Horizontal terminal Ø80 mm	**20162442**
SINGLE EXHAUST OR CONCENTRIC INTAKE/EXHAUST SYSTEM Ø80/125 MM	
Concentric exhaust adapter Ø80/125 mm	**20132801**
HYDRAULIC ACCESSORIES	
Hydraulic separator	**20132798**

Hi, COMFORT CONTROLS

Room controls with capability of remote boiler interface (*) and management through APP

Drawing	Description	Notes	Code
	Hi, Comfort T100 Wi-Fi	(1)	**20193354**
	Hi, Comfort T100	(2)	**20193352**
	Hi, Comfort G100-W		**20193355**
	Hi, Comfort G100-R		**20193356**

(*) Functions available only in case of OTBus connection with a Riello boiler. Possibility to connect to generic boilers and other devices only in ON/OFF mode.
(1) With Hi, Comfort G100-W, included, for intrnet connection by means of ADSL Wi-Fi router.
(2) For cable connection to the boiler. Compatible for radio frequency connection with Hi, Comfort G100-W code 20193355 (accessory not included and necessary for internet connection via home ADSL modem).



WATER-HEATERS

HEAT PUMPS 159

LOW NOX INSTANTANEOUS - GAS 163

HEAT PUMPS

DHW AIR-WATER HEAT PUMP

WALL HUNG



NEXAQUA

NEXAQUA 80-120

page 160

FLOOR STANDING



NEXPRO ACS

NEXPRO 80-250


page 161

Please verify with Sales the availability of the product in the destination Country before ordering

DHW air-water heat pump

NexAqua



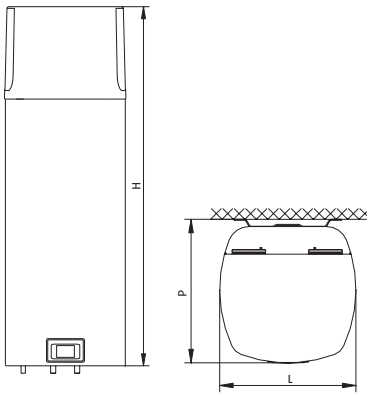

ERP

- Highest efficiency energy efficiency class A+

Description	H mm	L mm	P mm
NexAqua 80-80 Plus	1197	506	533
NexAqua 120-120 Plus	1497	506	533

NexAqua is Riello solution specifically designed to enhance DHW production in domestic applications. The unit consists mainly of a mini heat pump and a tank. The mini-heatpump, located in the upper part of the tank, heat the water contained in the in the 80-120 liters tank up to 55 °C in heat pump operation and up to 75 °C thanks to the additional electrical resistances.
A centrifugal fan sucks the air and allows the heat pump to operate in recirculation or in particular installation places, through pipes up to 15 m length with a DN 125 diameter. The energy recovered in this way is then transferred to water by an external exchanger located around the external surface of the tank, thus allowing a money-saving maintenance.
The high efficiency of NexAqua derives from a refrigeration circuit in R134A, which heat water up to 55 °C.
The tank is provided with 2 electrical resistances of 1,0 kW (each) as standard supply.

- Touch Screen Display
- High efficiency coefficient
- 2 additional electrical resistances of 1,0 kW (each) as standard
- Centrifugal fan with high available pressure for air duct systems
- Corrosion protection with magnesium anode and enamelled tank
- Highest efficiency energy efficiency class A+

TECHNICAL DATA


Description	Firing rate	Maximum power absorption average (2) W	Efficiency coefficient (1) COP	Air flow rate m3/h	Recovery time h:min (1)	Volume liters	Energy efficiency class (3) (F → A+)*	Code
NEXAQUA 80	+7/35 °C	350	3.1	100-230	4:40	80	A+	**20075560**
NEXAQUA 80 PLUS	-7/35 °C	350	3.1	100-230	4:40	80	A+	**20075563**
NEXAQUA 120	+7/35 °C	350	3.1	100-230	6:40	120	A+	**20075562**
NEXAQUA 120 PLUS	-7/35 °C	350	3.1	100-230	6:40	120	A+	**20075565**

Performance values refer to the following conditions:
(1) Compliance with EN 16147: room air temperature 15 °C with 74% humidity, DHW from 10 °C to 55 °C
(2) Value refers to heat pump operation without additional electrical resistances
(3) M load profile
(*) DHW: the energy efficiency class of the products ranges from F up to A+

DHW air-water heat pump

NEXPRO ACS



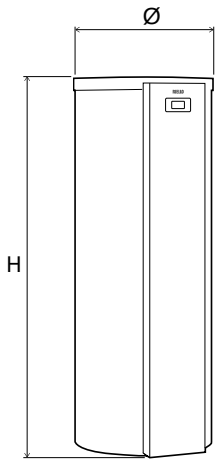

ERP

- Highest efficiency energy efficiency class A+

Description	H mm	Ø mm	Net weight kg
NexPRO 180 ACS	1555	584	95
NexPRO 250 ACS	1775	631	110
NexPRO 250 S ACS	1775	631	125

NEXPRO ACS is the Riello solution dedicated to domestic hot water production in residential applications.
The unit consists of a heat pump and a tank. The heat pump, placed directly on the upper part of the tank, uses the thermal energy of the air to heat the water contained in the tank.
The air is sucked by a centrifugal fan that allows the heat pump to operate in recirculation or through pipes with a DN 160 diameter.
The energy recovered is then transferred to water by an external exchanger located around the external surface of the tank, thus avoiding maintenance costs.
The high efficiency of NEXPRO ACS derives from a refrigeration circuit in R1234-ze, a high efficiency compressor, an electronic expansion valve and a bypass valve for hot gases to allow the operation up to -5 °C.
The tank are enameled and a 1,5 kW electrical resistance as standard supply (for the versions without coil).
The resistance accomplishes the four main functions: additional heating, frost protection, emergency heating and anti-legionella protection.
The whole system is managed and adjusted by an "intelligent" control device, to allow the best operation of each component.

- DHW production up to a temperature of 60 °C
- High efficiency coefficient
- Additional electrical resistance of 1,5 kW as standard
- Centrifugal fan with high available pressure for air duct systems
- Double enameled DHW tank (DIN 4753)
- Solar integration through RSS pump station
- Operation range -5 °C/+32 °C
- Corrosion protection with magnesium anode and enamelled tank
- Highest efficiency energy efficiency class A+

TECHNICAL DATA

Description	Nominal heating power (1) kW	Coefficient of performance (1)(3) COP	Recovery time (2)(3)	Nominal heating power (2) kW	Coefficient of performance (2)(3) COP	Recovery time (2)(3)	Electrical power consumed by the heat pump kW	Airflow rate Speed2 m3/h	Volume l	Energy efficiency class (3) (F → A+)*	Code
HEAT WATER IN HEAT PUMP											
NEXPRO 180 ACS	1,23	2,92	08:04	1,42	3,39	08:30	0,425	320	178	A+	**20217267**
NEXPRO 250 ACS	1,17	3,23	10:12	1,73	3,7	07:20	0,425	375	254	A+	**20217269**
HEAT WATER IN HEAT PUMP + SECONDARY SOURCE											
NEXPRO 250 S ACS	1,17	3,22	09:07	1,73	3,7	07:20	0,425	375	251	A+	**20217271**


The performance refers to the following conditions.
(1) Performance data for operation with external air according to EN 16147:2017 for A7/W10-53 (air inlet temperature 7 °C/ambient temperature 20 °C).
(2) Performance data for operation with recirculated air and operation with recirculated air with air outlet to the outside according to EN 16147:2017 for A20/W10-53
(air inlet temperature 20 °C/ambient temperature 20 °C).
(3) Load profile L.
(*) DHW: the energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Code
Flange with electric resistance socket	**20219436**
Electrical backup heater 1,5kw (for NEXPRO 250 S ACS)	**20219032**
Number 2 Outside air adapter (DN 160) (for NEXPRO 180 ACS)	**20219952**
Number 2 Outside air adapter (DN 160) (for NEXPRO 250 ACS - NEXPRO 250 S ACS)	**20219018**
Smart Grid connection set	**20219021**
Electronic anode	**20219027**
Carrying handles	**20219029**
Hydraulic connections for solar systems (for NEXPRO 250 S ACS)	**20219031**

*For the safety of the system, always include a safety valve, a check valve, and an expansion vessel for domestic water in the installation.
Accessories will be available in November.

CONNECTIONS ON DHW SIDE

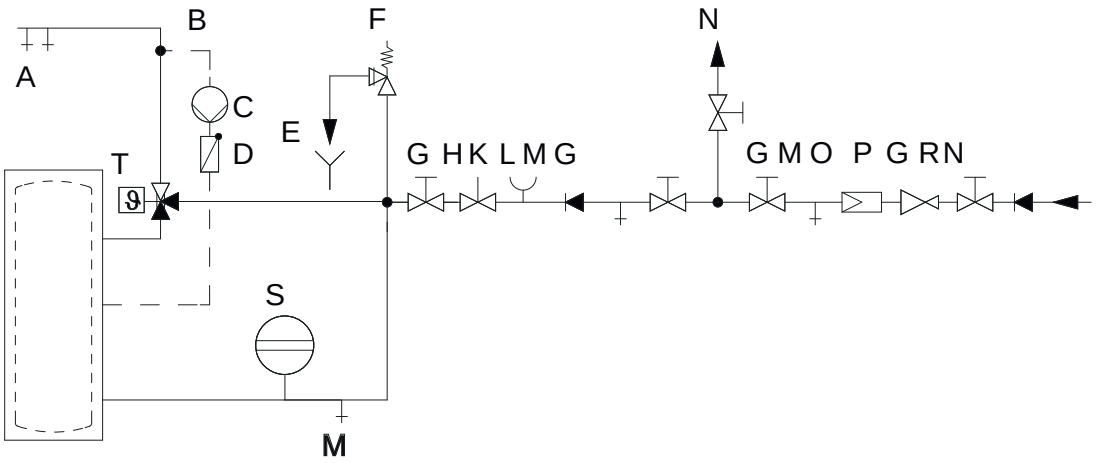

(A) DHW
(B) DHW circulation pipe
If no DHW circulation pipe is being connected, seal the aperture provided for this purpose.
(C) DHW circulation pump
(D) Spring-loaded check valve
(E) Visible discharge pipe outlet point
(F) Safety valve
(G) Shut-off valve
(H) Flow regulating valve
(K) Pressure gauge connector
(L) Non-return valve
(M) Drain valve
(N) Cold water
(O) Drinking water filter
(P) Pressure reducer
(R) Non-return valve/pipe separator
(S) Expansion vessel, suitable for potable water (not c)
(T) Automatic thermostatic mixing valve (on site)

LOW NOx INSTANTANEOUS – GAS

INDOOR

CONVENTIONAL FLUE



ACQUAFUN² LN P

ACQUAFUN² 11 LN P (18,5 kW–11 l/min)
ACQUAFUN² 14 LN P (23,3 kW–14 l/min)

page 164

ROOM–SEALED



RIELLO MINI LN

RIELLO MINI 11 LN (19,9 kW–11 l/min)*
RIELLO MINI 13 LN (22,5 kW–13 l/min)*
RIELLO MINI 17 LN (27,6 kW–17 l/min)*


page 165

* DHW production with ΔT = 25 °C

Conventional flue low NOx instantaneous gas water heater

Acquafun² LN P



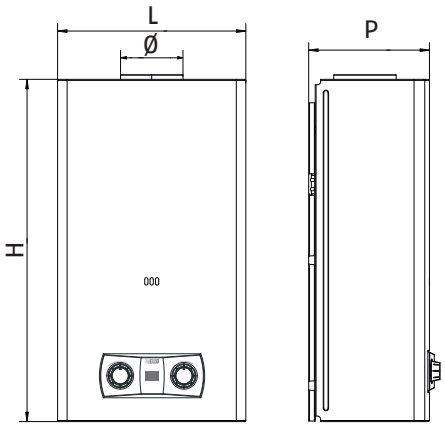

ERP

- Instantaneous conventional flue, natural gas and LPG
- Automatic battery-powered ignition
- Proportional modulation
- Mechanical interface adjustment
- Reduced NOx emissions

Description	H mm	L mm	P mm	Ø mm	Net weight kg
ACQUAFUN² 11 LN P	636	350	225	110	12,7
ACQUAFUN² 14 LN P	696	370	225	130	13,3

Dimensions without exhaust hood.

ACQUAFUN2 LN P is the instantaneous open chamber gas water heater with low NOx emissions available in 11 and 14 litres models in both NG and LPG versions.
Compact dimensions together with automatic battery-powered ignition make the product easy and quick to install.
–
– User interface with mechanical adjustment via knobs and backlit display for temperature visualization.
– Proportional flame modulation that can adapt gas consumption to domestic hot water withdrawal.
– Automatic battery-powered ignition with water control; 2 x 1.5 Volt – size D batteries supplied.
– Pressure regulator as standard.
– Increased load profile (XL) on 14-liter models.
– Sustainable sanitary comfort (NOx < 56mg/kWh) thanks to water cooling burner.
– Quick achievement of desired DHW temperature and stability when the flow rate changes.
– Safety devices: flame sensor, safety valve, limit and flue gas thermostats.
– Simple design, compact size and silent operation for easy integration into residential environments.

TECHNICAL DATA


Description	Useful output furnace kW	DHW flow rate l/min.	Fuel	Energy efficiency class (F→A⁺)*	Code n.
VERSION WITH ROOM SEALED WITH FORCED CIRCULATION – ELECTRONIC IGNITION					
ACQUAFUN² 11 LN P	18,5-21,5	11,0	GPL	A	**20213221**
ACQUAFUN² 11 LN P	18,5-21,5	11,0	MTN	A	**20213223**
ACQUAFUN² 14 LN P	23,2-27,0	14,0	GPL	A	**20213225**
ACQUAFUN² 14 LN P	23,7-27,5	14,0	MTN	A	**20213226**

(*) DHW: the energy efficiency class of the products ranges from F up to A+

Room sealed low N0x instantaneous gas water heater

RIELLO MINI LN



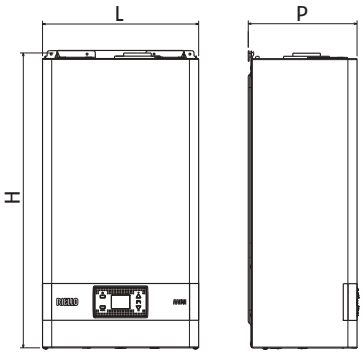

- Natural gas and LPG
- Room-sealed
- Electronic ignition
- Reduced N0x emissions

Description	H mm	L mm	P mm	Net weight kg
RIELLO MINI 11 LN	642	340	237	19
RIELLO MINI 13 LN	642	340	237	19
RIELLO MINI 17 LN	640	400	246	21

Riello Mini is a small boiler intended specifically to generate domestic hot water. It is available in models with 11, 13 and 17 litres per minute. Water heater with low N0x emissions <56 mg/kWh.
- Instantaneous gas water heater for indoor installation
- New electronics and icon interface with backlit display and four keys for carrying out adjustments
- Broad flame modulation that provides excellent stability of the domestic hot water delivery temperature, even with minimum draw-off
- Assembly template and power cable supplied.

TECHNICAL DATA

Description	Useful output furnace kW	DHW flow rate l/min.	Fuel	Energy efficiency class (F→A*)*	Notes	Code
VERSION WITH ROOM SEALED WITH FORCED CIRCULATION - ELECTRONIC IGNITION						
RIELLO MINI 11 LN	19.9-22.2	11.0	NG	A	(1)(2)	**20143047**
RIELLO MINI 11 LN	19.9-22.2	11.0	LPG	A	(1)(2)	**20143048**
RIELLO MINI 13 LN	22.5-25.0	13.0	NG	A	(1)(2)	**20143049**
RIELLO MINI 13 LN	22.5-25.0	13.0	LPG	A	(1)(2)	**20143050**
RIELLO MINI 17 LN	27.6-30.0	17.0	NG	A	(1)(2)	**20143051**
RIELLO MINI 17 LN	27.6-30.0	17.0	LPG	A	(1)(2)	**20143052**

(1) For low temperature installation (down to -10 °C), the anti-freeze resistors kit is available (code 20148036)
(2) The water heater can be installed also outdoors in a partially protected place, where it is not exposed directly to the elements. For these installations we recommend using anti-freeze systems that can adequately protect the appliance from the risk of freezing. Contact the pre-sales service for clarification or support.
(*) DHW: the energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Code
ELECTRICAL ACCESSORIES	
Anti-freeze resistors kit	**20148036**
HYDRAULIC ACCESSORIES	
Water connection with tap	**4047624**





FLUE OPTION SYSTEMS

FOR CONDENSING 168






STANDARD EFFICIENCY 178

Ø80 mm TWIN FLUE SYSTEM SPECIFIC FOR CONDENSING BOILERS

Drawing	Description	Material	Family (1)	Family Aqua Condens	Residence (1)	Start (1)	Start Aqua Condens	Start AR	Code
	Ø80 mm twin system kit	Met	•	•	•	•	•	•	**20162456**
	Flue adapter Ø80 mm with air inlet	Met	•	•	•	•	•		**20162448**
	45° Ø80 mm bend	Met	•	•	•	•	•	•	**20162295**
	90° Ø80 mm bend	Met	•	•	•	•	•	•	**20162296**
	Extension 50 cm Ø80 mm	Met	•	•	•	•	•	•	**20162298**
	Extension 100 cm Ø80 mm	Met	•	•	•	•	•	•	**20162299**
	Horizontal flue terminal Ø80 mm	Met	•	•	•	•	•	•	**20162442**
	Spacers for pipe Ø80 mm	Met	•	•	•	•	•	•	**20137532**
	90° bend with inspection door Ø80 mm	Met	•	•	•	•	•	•	**20162297**

(1) For boiler start-up, see the section on the flue 60/100 and only afterwords switch to diameter 80/125.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443)
NOTE: please, refer to boiler installation manual for maximum flue line length.

Ø80 mm TWIN FLUE SYSTEM SPECIFIC FOR CONDENSING BOILERS – H1 CLASS (*)

Drawing	Description	Material (*)	Family	Family Aqua Condens	Residence	Start	Start Aqua Condens	Start AR	Notes	Code
	Adjustable splitter device kit from Ø60/100 mm to Ø80/-80 mm	PP	•		•	•			(1)	**20134830**
	Compact swelling kit Ø60/100 - Ø80/80	PP	•		•	•			(1)	**20190475**
	Fixed twin system Ø80 mm kit	PP	•		•	•			(1)	**20129765**
	Splitter device kit B23 Ø80 mm for in-wall installation box	PP	•		•	•			(1)	**20129768**
	Twin system Ø80 mm kit	PP	•		•	•			(1)	**20137501**
	Ø80 mm twin system kit	PP		•				•	(1)	**20137523**
	Flue gas exhaust kit B23 Ø80 mm	PP	•		•	•			(1)	**20129769**
	45° Ø80 mm bend	PP	•	•	•	•	•	•	(1)	**20137503**
	90° Ø80 mm bend	PP	•	•	•	•	•	•	(1)	**20137506**
	Extension 50 cm Ø80 mm	PP	•	•	•	•	•	•	(1)	**20137508**
	Extension 100 cm Ø80 mm	PP	•	•	•	•	•	•	(1)	**20137509**
	Extension 200 cm Ø80 mm	PP	•	•	•	•	•	•	(1)	**20137511**
	Horizontal flue collector Ø80 mm	PP	•	•	•	•	•	•	(1)	**20137517**
	Horizontal air inlet collector Ø80 mm	PP	•	•	•	•	•	•	(1)	**20137515**
	Ø80 mm clapet with condensate trap	PP	•	•	•	•	•	•	(1)	**20164664**








(*) PP material: colour may change over time because of sun's rays exposure. Class H1 - High Positive pressure (max 5,000 Pa).
(1) H1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.

Ø60/100 mm CONCENTRIC FLUE SYSTEM SPECIFIC FOR CONDENSING BOILERS – H1 CLASS (*)

Drawing	Description	Material (*)	Family Aqua Condens	Start Aqua Condens	Notes	Code
	45° Ø60/100 mm concentric bend	PP/Met	•	•	(1)(2)	**20142823**
	90° Ø60/100 mm concentric bend	PP/Met	•	•	(1)(2)	**20142825**
	Concentric extension 50 cm, Ø60/100 mm	PP/Met	•	•	(1)(2)	**20142829**
	Concentric extension 100 cm, Ø60/100 mm	PP/Met	•	•	(1)(2)	**20142830**
	Concentric extension 200 cm, Ø60/100 mm	PP/Met	•	•	(1)(2)	**20142831**
	Ø60/100 mm horizontal flue terminal	PP/Met	•	•	(1)(2)	**20142836**
	Ø60/100 mm vertical flue terminal	PP/Met	•	•	(1)(2)	**20142839**
	Ø60/100 mm inspection extension	PP/Met	•	•	(1)(2)	**20142835**
	90° bend with inspection door Ø60/100 mm	PP/Met	•	•	(1)(2)	**20142828**
	Flat roof tile	Nylon	•	•		**20135579**
	Pitched roof tile	Nylon	•	•		**20132050**


(*) PP material: colour may change over time because of sun's rays exposure. Class H1 – High Positive pressure (max 5,000 Pa).
(1) P1 pressure level according to EN 1443.
(2) Until stocks are exhausted.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.

Ø60/100 mm CONCENTRIC FLUE SYSTEM SPECIFIC FOR CONDENSING BOILERS – H1 CLASS (*)

Drawing	Description	Material (*)	Family	Family Aqua Condens	Residence	Start	Start Aqua Condens	Start AR	Notes	Code
	45° Ø60/100 mm concentric bend	PP/PP	•	•	•	•	•	•	(1)	**20132012**
	90° boiler start bend kit Ø60/100 mm	PP/PP	•		•	•		•	(1)	**20129172**
	90° Ø60/100 mm concentric bend	PP/PP		•			•		(1)	**20132013**
	Concentric extension 50 cm, Ø60/100 mm	PP/PP	•	•	•	•	•	•	(1)	**20132043**
	Concentric extension 100 cm, Ø60/100 mm	PP/PP	•	•	•	•	•	•	(1)	**20132044**
	Concentric extension 200 cm, Ø60/100 mm	PP/PP	•	•	•	•	•	•	(1)	**20132045**
	Wall collector Ø60/100 mm	PP/PP	•		•	•		•	(1)	**20129175**
	Telescopic wall collector Ø60/100 mm	PP/PP	•		•	•		•	(1)	**20129176**
	Ø60/100 mm horizontal flue terminal	PP/PP		•			•		(1)	**20132018**
	Vertical collector Ø60/100 mm	PP/PP	•		•	•		•	(1)	**20129177**
	Ø60/100 mm vertical flue terminal – Ø125 mm external straight pipe	PP/PP		•			•		(1)	**20132020**
	Vertical connection Ø60/100 mm	PP/PP	•		•	•		•	(1)	**20129174**
	Ø60/100 mm inspection extension	PP/PP	•	•	•	•	•	•	(1)	**20132015**
	Flat roof tile	Nylon	•	•	•	•	•	•		**20135579**
	Pitched roof tile	Nylon	•	•	•	•	•	•		**20132050**


(*) PP material: colour may change over time because of sun's rays exposure. Class H1 – High Positive pressure (max 5,000 Pa).
(1) H1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.

Ø80/125 mm CONCENTRIC FLUE SYSTEM SPECIFIC FOR CONDENSING BOILERS – H1 CLASS (*)

Drawing	Description	Material (*)	Family (**)	Family Aqua Condens	Residence (**)	Start (**)	Start Aqua Condens	Start AR	Notes	Code
	45° Ø80/125 mm concentric bend	PP/Met	•	•	•	•	•	•	(1)	**20164651**
	87° Ø80/125 mm concentric bend	PP/Met	•	•	•	•	•	•	(1)	**20164653**
	Concentric extension 50 cm, Ø80/125 mm	PP/Met	•	•	•	•	•	•	(1)	**20164657**
	Concentric extension 100 cm, Ø80/125 mm	PP/Met	•	•	•	•	•	•	(1)	**20164659**
	Concentric extension 200 cm, Ø80/125 mm	PP/Met	•	•	•	•	•	•	(1)	**20164660**
	87° concentric bend with inspection door Ø80/125 mm	PP/Met	•	•	•	•	•	•	(1)	**20164655**
	Concentric extension with inspection door Ø80/125 mm	PP/Met	•	•	•	•	•	•	(1)	**20164661**
	Ø80/125 mm vertical flue terminal	PP/Met	•	•	•	•	•	•	(1)	**20164669**
	Ø80/125 mm horizontal flue terminal	PP/ABS	•	•	•	•	•	•	(1)	**20164673**
	Spacers Ø80-125 mm (5 pcs)	Met	•	•	•	•	•	•		**20164665**
	Flue adapter from Ø60/100 mm to 80/125 mm	PP/Met	•	•	•	•	•	•	(1)	**20164666**
	Flue adapter from Ø60/100 mm to Ø80/125 mm	PP/Met	•	•	•	•	•	•	(1)	**20164666**
	Ø80/125 mm clapet with condensate trap	PP/Met	•	•	•	•	•	•	(1)	**20164662**
	Flat roof tile	Nylon	•	•	•	•	•	•		**20135579**
	Pitched roof tile	Nylon	•	•	•	•	•	•		**20132050**



(*) PP material: colour may change over time because of sun's rays exposure. Class H1 – High Positive pressure (max 5,000 Pa).
(**) 60/100 boiler connection kit (cod. 20129174) and 60/100 to 80/125 adapter (cod. 20164666) are mandatory.
(1) H1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.

Ø80 mm FLUE RANGE FOR INSIDE-CHIMNEY INSTALLATION, SPECIFIC FOR CONDENSING BOILERS - H1 CLASS (*)

Drawing	Description	Material (*)	Family	Family Aqua Condens	Residence	Start	Start Aqua Condens	Start AR	Notes	Code
	45° Ø80 mm bend	PP	•	•	•	•	•	•	(2)	**20164570**
	90° Ø80 mm bend	PP	•	•	•	•	•	•	(2)	**20164572**
	Extension 50 cm Ø80 mm	PP	•	•	•	•	•	•	(2)	**20164574**
	Extension 100 cm Ø80 mm	PP	•	•	•	•	•	•	(2)	**20164577**
	Extension 200 cm Ø80 mm	PP	•	•	•	•	•	•	(2)	**20164578**
	Ø80/125 mm chimney adapter	PP	•	•	•	•	•	•	(2)	**20132520**
	T connection Ø60 mm	PP	•	•	•	•	•	•	(2)	**20164584**
	Ø60/80 mm adapter	PP	•	•	•	•	•	•	(2)	**20164585**
	Chimney support kit Ø80 mm	PP	•	•	•	•	•	•	(2)	**20132504**
	Pipe spacers	PP	•	•	•	•	•	•		**20132505**
	Ø80 mm inspection extension	PP	•	•	•	•	•	•	(2)	**20132506**
	Ø80 mm roof tile	PP	•	•	•	•	•	•	(2)	**20132508**
	Ø80 mm flexible extension (12,5m) with 8 spacers	PP	•	•	•	•	•	•	(2)	**20132509**
	Rigid/flexible connection Ø80 mm M	PP	•	•	•	•	•	•	(2)	**20132510**
	Flexible/rigid connection Ø80 mm F	PP	•	•	•	•	•	•	(2)	**20132512**
	Syphon kit	PP	•	•	•	•	•	•		**20046782**
	T connection Ø80 mm	PP	•	•	•	•	•	•	(1)	**20163018**
	Condensate trap cap for T-connection Ø80 mm	PP	•	•	•	•	•	•	(1)	**20163019**
	Shelf support kit for condensate trap	Met	•	•	•	•	•	•		**20145888**
	Flue cover panel kit		•	•	•	•	•	•		**20145889**

(*) PP material: colour may change over time because of sun's rays exposure. Class H1 - High Positive pressure (max 5,000 Pa).
(1) P1 pressure level according to EN 1443.
(2) H1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.


Ø60 mm FLUE RANGE FOR INSIDE-CHIMNEY INSTALLATION, SPECIFIC FOR CONDENSING BOILERS - H1 CLASS (*)

Drawing	Description	Material (*)	Family	Family Aqua Condens	Residence	Start Aqua Condens	Start AR	Notes	Code
	45° Ø60 mm bend	PP	•	•	•	•	•	(1)	**20145877**
	90° Ø60 mm bend	PP	•	•	•	•	•	(1)	**20145876**
	Extension 50 cm Ø60 mm	PP	•	•	•	•	•	(1)	**20145879**
	Extension 100 cm Ø60 mm	PP	•	•	•	•	•	(1)	**20145882**
	Extension 200 cm Ø60 mm	PP	•	•	•	•	•	(1)	**20145883**
	Ø60/100 mm vertical flue terminal - Ø100 mm external straight pipe	PP/PP	•	•	•	•	•	(1)	**20145884**
	3 spacers kit for inside-chimney Ø60 mm	PP	•	•	•	•	•		**20145886**
	Shelf support kit for inside-chimney	PP	•	•	•	•	•		**20145888**
	Chimney front cover kit	PP	•	•	•	•	•		**20145889**
	5 hose clamps kit Ø60 mm	PP	•	•	•	•	•		**20145890**
	Chimney connection kit Ø80-60 mm with bend 90° Ø60 mm	PP	•	•	•	•	•	(1)	**20145892**
	T-connection Ø60 mm with condensate trap	PP	•	•	•	•	•	(1)	**20145894**
	Syphon kit	PP	•	•	•	•	•		**20046782**
	Flue reduction kit 80-60 mm	PP	•	•	•	•	•	(1)	**20145897**

(*) PP material: colour may change over time because of sun's rays exposure. Class H1 - High Positive pressure (max 5,000 Pa).
(1) H1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.

ONLY EXTRA EU COUNTRIES





Ø80 mm TWIN FLUE SYSTEM SPECIFIC FOR STANDARD-EFFICIENCY BOILERS

Drawing	Description	Material	Family	Start	Fastech	Notes	Code
	Ø80 mm twin system kit	Met	•	•		(1)	**20162667**
	Air box twin system kit	Met	•	•	•	(1)	**20162666**
	45° bend Ø80 mm with gasket	Met	•	•	•	(1)	**20162295**
	90° bend Ø80 mm with gasket	Met	•	•	•	(1)	**20162296**
	Ø80 mm extension 100 cm with gasket	Met	•	•	•	(1)	**20162299**
	Ø80 mm extension 50 cm with gasket	Met	•	•	•	(1)	**20162298**
	Ø80 mm extension 195 cm with gasket	Met	•	•	•	(1)	**20162300**
	Air intake collector	Met	•	•	•	(1)	**20162665**
	Flue collector horizontal	Met	•	•	•	(1)	**20162664**
	Spacers for Ø80 mm pipe (10 pcs)	Met	•	•	•		**20137532**
	Ø80 mm condensate trap horizontal	Met	•	•	•	(1)	**20162662**
	Ø80 mm condensate trap vertical	Met	•	•	•	(1)	**20162663**
	Ø80 mm pipes terminal	Met	•	•	•	(1)	**20162443**
	90° bend with inspection door Ø80 mm (Slovenia)	Met	•	•	•	(1)	**20162297**

(1) P1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443)
NOTE: please, refer to boiler installation manual for maximum flue line length

ONLY EXTRA EU COUNTRIES


Ø60/100 mm CONCENTRIC FLUE SYSTEM SPECIFIC FOR STANDARD-EFFICIENCY BOILERS

Drawing	Description	Material	Family	Start	Fastech	Notes	Code
	Ø60-100 mm vertical flue terminal - Ø125 mm external straight pipe	Met/Met	•	•	•	(1)	**20163422**
	Standard collector horizontal	Met/Met	•	•	•	(1)	**20163408**
	Telescopic collector horizontal extensible from 43 to 73,5 cm	Met/Met	•	•	•	(1)	**20163410**
	Concentric extension Ø60-100 mm (75 cm)	Met/Met	•	•	•	(1)	**20163391**
	Concentric extension Ø60-100 mm (147 cm)	Met/Met	•	•	•	(1)	**20163393**
	90° bend Ø60-100 mm	Met/Met	•	•	•	(1)	**20163333**
	90° bend kit Ø60-100 mm for installation replacement	Met			•	(1)	**20163388**
	45° bend Ø60-100	Met/Met	•	•	•	(1)	**20163327**
	Ø60-100 mm condensate trap vertical	Met/Met	•	•	•	(1)	**20163403**
	Ø60-100 mm condensate trap horizontal	Met/Met	•	•	•	(1)	**20163400**
	Clip kit H 45 mm with gasket Ø100 mm (4 pcs)		•	•	•		**20163429**
	Pipe spacers Ø100 mm (4 pcs)	Met	•	•	•		**20135584**
	Ø60-100 mm telescopic extension (from 165 to 220 mm)	Met/Met	•	•	•	(1)	**20163396**
	Ø60-100 mm 90° bend with inspection door	Met/Met	•	•	•	(1)	**20163390**
	Connection clip kit boiler-flue Ø60-100 mm		•	•	•		**20163425**
	Flat roof tile	Nylon	•	•	•		**20135579**
	Pitched roof tile	Nylon	•	•	•		**20132050**

(1) P1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.

ONLY EXTRA EU COUNTRIES

Ø60/100 mm CONCENTRIC FLUE SYSTEM SPECIFIC FOR STANDARD-EFFICIENCY BOILERS

Drawing	Description	Material	Family	Start	Fastech	Notes	Code
	45° Ø60-100 mm concentric bend in Met/PPu	Met/PP	•	•	•	(1)	**20162785**
	90° Ø60-100 mm concentric bend in Met/PPu	Met/PP	•	•	•	(1)	**20162786**
	90° Ø60-100 mm concentric bend in Met/PPu - for boiler connection	Met/PP	•	•	•	(1)	**20162791**
	Concentric extension M-F Ø60-100 mm in Met/PPu (500 mm)	Met/PP	•	•	•	(1)	**20162793**
	Concentric extension M-F Ø60-100 mm in Met/PPu (1000 mm)	Met/PP	•	•	•	(1)	**20162795**
	Concentric extension M-F Ø60-100 mm in Met/PPu (2000 mm)	Met/PP	•	•	•	(1)	**20162796**
	Ø60-100 mm vertical flue terminal; Ø125 mm external straight pipe	Met/PP	•	•	•	(1)	**20162797**
	Ø60-100 mm concentric horizontal flue terminal in Met/PPu	Met/PP	•	•	•	(1)	**20162798**
	Ø60-100 mm telescopic horizontal flue terminal in Met/PPu (extensible from 500 mm to 800 mm)	Met/PP	•	•	•	(1)	**20162799**
	Flat roof tile	Nylon	•	•	•		**20135579**
	Pitched roof tile	Nylon	•	•	•		**20132050**



(1) P1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.

TWIN FLUE GAS EXHAUST SYSTEM Ø80 mm FOR WATER HEATER (ONLY FOR RIELLO MINI LN)

Drawing	Description	Material	Notes	Code
	Twin system without flue gas analysis outlet	Met	(1)	**1220329**
	Twin system connection kit	Met	(1)(3)	**20162668**
	Twin system connection kit	Met	(1)(4)	**20162669**
	Bend 45° Ø80 with gasket	Met	(1)	**20162295**
	Bend 90° with gasket	Met	(1)	**1220079**
	Extension 100 cm with gasket	Met	(1)	**1220269**
	Extension 50 cm with gasket	Met	(1)	**1220149**
	Extension 195 cm with gasket	Met	(1)	**1220229**
	Type B22 flue gas exhaust kit for open air installation	Met	(1)	**20162455**
	Air suction terminal	Met	(1)	**1220109**
	Flue gas exhaust terminal	Met	(1)	**1220119**
	Spacer ring/support for Ø80 pipes (4 pieces)			**20137532**
	Horizontal condensation collection kit	Met		**1220039**
	Vertical condensation collection kit	Met		**1220049**
	Terminal for Ø80 mm pipes	Met	(1)	**20162443**
	Bend 90° Ø80 mm with inspection	Met	(1)	**20162297**

(1) P1 pressure level according to EN 1443
(2) H1 pressure level according to EN 1443
(3) For Mini 11-13 LN versions
(4) For Mini 17 LN version
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443)
NOTE: please, refer to boiler installation manual for maximum flue line length

COAXIAL FLUE GAS EXHAUST SYSTEM Ø60/100 mm FOR WATER HEATER (ONLY FOR RIELLO MINI LN)

Drawing	Description	Material	Notes	Code
	Vertical discharge kit	Met/Met	(1)	**20163422**
	Coaxial discharge terminal kit	Met/Met	(1)	**20163409**
	Telescopic coaxial discharge terminal kit (from 430 to 735 mm)	Met/Met	(1)	**20163412**
	Coaxial extension (75 cm)	Met/Met	(1)	**20163392**
	Double coaxial extension (147 cm)	Met/Met	(1)	**20163394**
	Coaxial bend 90°	Met/Met	(1)	**20163334**
	Coaxial bend 45°	Met/Met	(1)	**20163330**
	Tile for flat roof	Nylon		**20135579**
	Universal lead tile	Nylon		**20132050**
	Vertical coaxial condensation collection kit	Met/Met		**20163403**
	Horizontal coaxial condensation collection kit	Met/Met		**20163400**
	Clamps kit H 45 mm with gasket Ø100 mm (4 pieces)			**20163427**
	Spacer ring/support for Ø100 pipes (10 pieces)			**20135584**
	Telescopic manifold 60-100 mm (from 165 to 220 mm)	Met/Met	(1)	**20163396**
	Combustion analysis sockets kit			**20163430**
	Bend 90° Ø60 -100 mm with inspection	Met/Met	(1)	**20163390**
	Bend adaptor kit Ø60-100 mm (for replacing Mini 11 and 13 with rear flue gas exhaust)	Met/Met	(1)	**20122792**

(1) P1 pressure level according to EN 1443
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443)
NOTE: please, refer to boiler installation manual for maximum flue line length



SOLAR THERMAL AND CYLINDER

SOLAR SYSTEMS 183

SOLAR COLLECTORS 191

SOLAR DHW AND STORAGE CYLINDERS 198

COMPLEMENTARY ITEMS 215

ACCESSORIES 221

SOLAR SYSTEMS

SYSTEMS FOR DHW PRODUCTION

FLAT PLATE SOLAR COLLECTOR

FORCED CIRCULATION

2 FITTINGS



RPS 25/4 A SYSTEM

200 liters
300 liters
430 liters
550 liters
800 liters
1000 liters

page 184

NATURAL CIRCULATION

4 FITTINGS



CSNA-A SYSTEM

160 liters
200 liters
300 liters

page 188


Please verify with Sales the availability of the product in the destination Country before ordering

Relax PRO

Forced circulation systems

RPS 25/4 A System



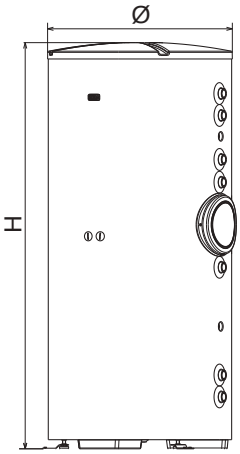

ERP

- Domestic hot water production

Complete and integrated system for the production of domestic hot water, dedicated to household customers.
It consists of all the elements necessary for the construction of the solar system and is designed for a simple and safe installation.

The system consists of:
- High-efficiency RPS 25/4 A solar collectors, thanks to the selective absorber TiNOx Energy Al.
- The RSS MRS hydraulic unit is complete with a modulating circulator, safety devices, load valves, non-return valve, delivery and return thermometers, pressure gauge and EVOSOL control unit for solar system management.
- RBS 2S heater, in dual coil steel, internally glazed to ensure hygiene and facilitate cleaning of limescale deposits; with excellent aesthetic finishes (in embossed ABS) and energy performance.
- Expansion reservoir, designed to withstand high temperatures.
- Antifreeze, non-toxic, biodegradable and biocompatible fluid.
- ¾" thermostatic mixer to optimize the system.
- 5-year warranty on both collectors and heater.
- Wide selection of bracket kits to meet all installation needs.

For more details on heater and solar panel please refer to the dedicated product pages.

TECHNICAL DATA

Description	Solar collectors		Glycol quantity kg	Expansion vessel liters	Number of people	Solar cylinder				Notes	Code
	Number	Gross area m²				Capacity liters	H mm	Ø mm	Energy efficiency class (F→A+)*		
RPS 25/4 A 200	1	2,5	10	18	2-3	208	1338	604	B	(1)	**20218084**
RPS 25/4 A 300	2	5	10	18	4-5	301	1838	604	B	(1)	**20218085**
RPS 25/4 A 430	3	7,5	15	24	6-7	430	1644	755	B	(1)	**20218086**
RPS 25/4 A 550	4	10	20	35	8-9	551	1988	755	B	(1)	**20218087**
RPS 25/4 A 800	5	12,5	20	50	10-11	731	1846	1000	B	(1)(2)	**20218088**
RPS 25/4 A 1000	6	15	20	50	12-13	883	2171	1000	B	(1)(2)	**20218090**

(1) Components provided in a single pallet.
(2) Heater supplied with insulation disassembled.
All solar systems include: solar collectors, bivalent solar tank with RSS hydraulic group with integrated EVOSOL solar regulator, glycol, expansion tank and thermostatic mixer.
(*) The energy efficiency class of the products ranges from F up to A+

RPS 25/4 A Systems Configurations

Code	Description	20116675	20116335	20117339	20116587	20132268	20132269	20116166	20201316	20201047	20201317	4383085	4383059	4383052	4383053	4383054	4383256	20020778	20201448	20201449	20201450	20201451	20201453	20201454
		RBS 200 2S	RBS 300 2S	RBS 430 2S	RBS 550 2S	RBS 800 2S	RBS 1000 2S	RSS MRS	RPS 25/4 A	RPS 25/4 A X2	RPS 25/4 A X5	Kit glicole 5 kg	Kit glicole 10 kg	18 lt expansion vessel with bracket	24 lt expansion vessel with bracket	35 lt expansion vessel with bracket	50L expansion vessel	1" thermostatic mixing valve with 3/4" adapter	Hydraulic kit for 1 collector "A"	Hydraulic kit for 2 collector "A"	Hydraulic kit for 3 collector "A"	Hydraulic kit for 4 collector "A"	Hydraulic kit for 5 collector "A"	Hydraulic kit for 6 collector "A"
20218084	RPS 25/4 A 200	1						1	1				1	1				1	1					
20218085	RPS 25/4 A 300		1					1		1			1	1				1		1				
20218086	RPS 25/4 A 430			1				1	1	1		1	1		1			1			1			
20218087	RPS 25/4 A 550				1			1		2		1	1			1		1				1		
20218088	RPS 25/4 A 800					1		1			1		2				1	1					1	
20218090	RPS 25/4 A 1000						1	1	1		1		2				1	1						1

For further information on available accessories, see the dedicated section

ACCESSORIES FOR RPS 25/4 A - VERTICAL INSTALLATION


Description	Notes	Code
HYDRAULIC ACCESSORIES		
2-fittings kit for the connection between DN18 copper pipe and hydraulic group		**20132219**
2 straight fittings kit to connect the solar collectors with stainless steel pipes (copper pipe DN18/stainless steel pipe DN16)	(1)	**20027289**
2-fittings kit for the connection between copper pipe and hydraulic group (copper pipe DN18/stainless steel pipe DN16)		**20132220**
Manual solar air vent kit	(2)	**20026577**
Flexible stainless steel pipe kit DN16 of 15 m (contains: stainless steel wavy double-pipe for flow and return, solar probe cable and suitable insulation for solar applications)	(2)	**4383254**
Flexible stainless steel pipe kit DN16 of 20 m (contains: stainless steel wavy double-pipe for flow and return, solar probe cable and suitable insulation for solar applications)	(1)	**4383255**
FLOW RATE REGULATORS		
Flow rate regulator 12 (DN20; 2-12 l/min; kvs=2,2 m^3/h)		**20011536**
Flow rate regulator 20 (DN20, 8-20 l/min, kvs=5 m^3/h)		**20011538**
Manual solar air vent kit		**20026577**
ACCESSORIES FOR FLAT ROOF WITH 30-45° INCLINATION		
Brackets 1 COLL. 2,5m^2 "A" FR 30-45°		**20201443**
Extension +1 COLL. 2,5m^2 "A" FR 30-45°		**20201444**
ACCESSORIES FOR INCLINED ROOF		
Brackets 1 COLL. 2-2,5 "A" under tile IR		**20201446**
Brackets 2 COLL. 2-2,5 "A" under tile IR		**20201447**
Extension +1 COLL. 2-2,5 "A" under tile IR		**20201611**
Kit 4 hooks for IR - COLL. "A"		**20201445**
Kit 6 hooks for IR - COLL. "A"		**20202639**
HYDRAULIC KIT FOR SOLAR COLLECTORS TYPE "A"		
Hydraulic kit for 1 collector "A"		**20201448**
Hydraulic kit for 2 collectors "A"		**20201449**
Hydraulic kit for 3 collectors "A"		**20201450**
Hydraulic kit for 4 collectors "A"		**20201451**
Hydraulic kit for 5 collectors "A"		**20201453**
Hydraulic kit for 6 collectors "A"		**20201454**
Hydraulic kit for 7 collectors "A"		**20201455**
Hydraulic kit for 8 collectors "A"		**20201457**
Hydraulic kit for 9 collectors "A"		**20201458**
Hydraulic kit for 10 collectors "A"		**20201459**

(1) Fittings kit to be ordered with the stainless steel flexible pipe.
(2) Stainless steel flexible pipe, insulated, without fittings.


For other accessories, refer to the SOLAR THERMAL ACCESSORIES section of the catalog.


SOLAR SYSTEMS CONNECTION DIAGRAMS

DN22 copper pipes connections

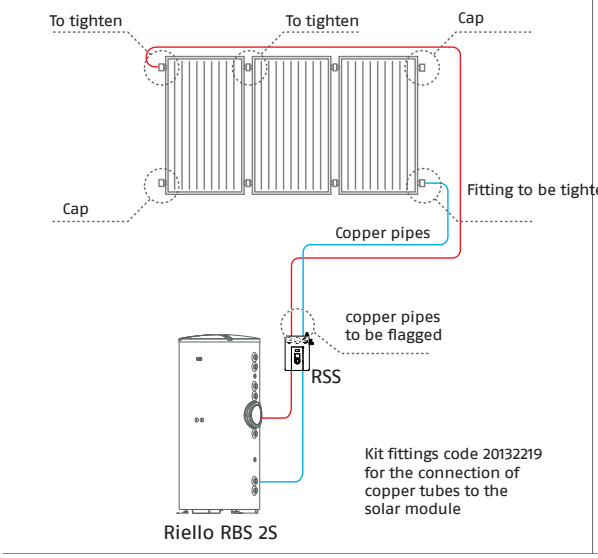

DN16 stainless steel pipes connections

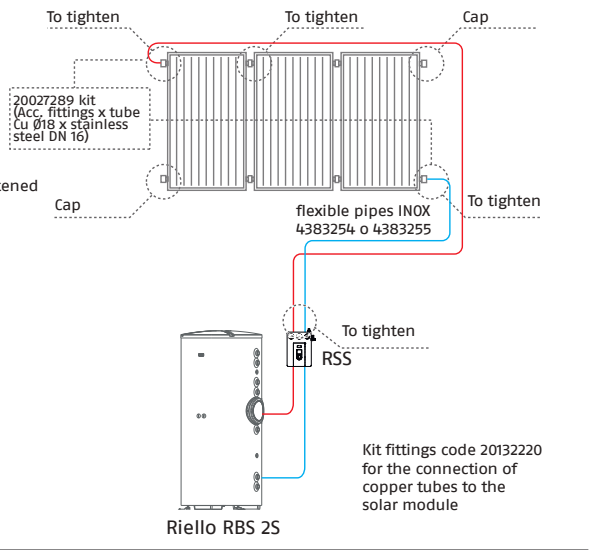

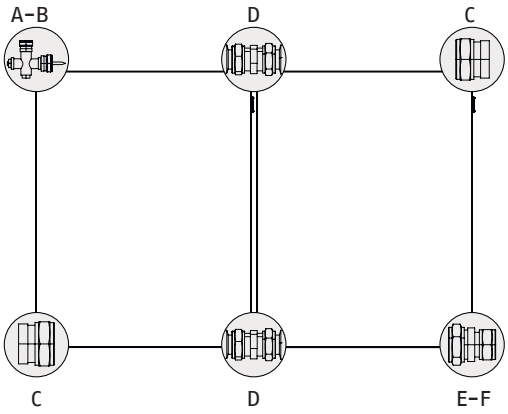


A - T-joint with inspection chamber and vent valve (ø 22x18 mm)
B - Hot water from the manifold to the heat exchange circuit
C - Cap (ø 22 mm)

D - Joint fitting (ø 22x22 mm)
E - Inlet fitting (ø 22x18 mm)
F - Cold water to the manifold from the heat exchange circuit

Solar system-Natural circulation system

CSNA-A System



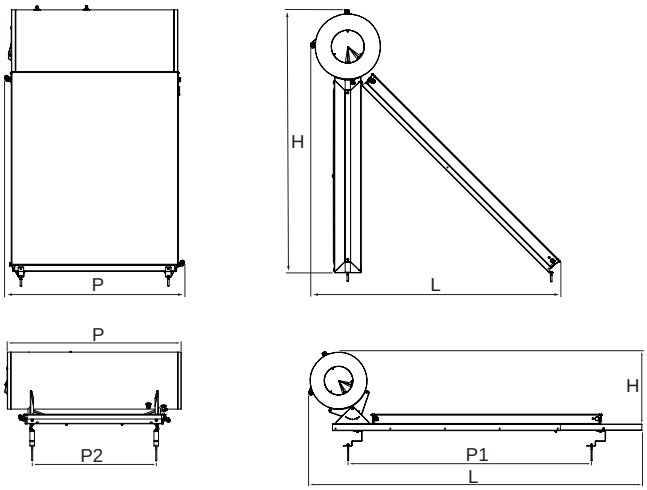

- Domesti hot water production
- Solar keymark certificate

Description	H mm	L mm	P mm	Net weight kg
CSNA-A 160/2,5 45°	2006	1903	1314	93,4
CSNA-A 200/2,5 45°	2006	1903	1526	108,4
CSNA-A 200/4 45°	1727	1626	2578	131,3
CSNA-A 300/4 45°	1727	1626	2578	154,3
CSNA-A 300/5 45°	2006	1903	2524	166,8
CSNA-A 160/2,5 0°	689	2936	1314	93,4
CSNA-A 200/2,5 0°	689	2936	1526	108,4
CSNA-A 200/4 0°	689	2948	2498	131,3
CSNA-A 300/4 0°	689	2948	2498	154,3
CSNA-A 300/5 0°	689	2948	2498	166,8

Plant solutions dedicated to the production of domestic hot water for residential applications, even in climate areas that are not particularly favorable.
They are made up of pre-assembled elements and do not require a pump or electronic controls, thus ensuring simple and quick installation.
The supply consists of:
- High efficiency, well insulated solar collector with highly selective aluminum absorber.
- Enamelled cylinder with polyurethane insulation and magnesium anode.
- Brackets for the installation parallel to the roof or inclined at 45° on flat surfaces.
- Supplementary single-phase electric resistance (can also be used as antifreeze) already present in the cylinder.
- Antifreeze liquid.
- Solar Keymark certified solar panels.
- Solar Keymark certified solar system.
- 5 year warranty on the system.

TECHNICAL DATA

Description	Solar collectors		Glicol kg	Number of people	Capacity liters	Notes	Code
	Number	Gross area m²					
KIT FOR FLAT ROOF WITH 45° OF INCLINATION							
CSNA-A 160/2,5 45°	1	2,49	2	3	151	(2)	**20202369**
CSNA-A 200/2,5 45°	1	2,49	3	3-4	192	(2)	**20202374**
CSNA-A 200/4 45°	2	2	3	4	192	(2)	**20202377**
CSNA-A 300/4 45°	2	2	4	4-5	295	(2)	**20202378**
CSNA-A 300/5 45°	2	2,49	4	5	295	(2)	**20202409**
KIT FOR INCLINED ROOF							
CSNA-A 160/2,5 0°	1	2,49	2	3	151	(1)	**20202184**
CSNA-A 200/2,5 0°	1	2,49	3	3-4	192	(1)	**20202185**
CSNA-A 200/4 0°	2	2	3	4	192	(1)	**20202225**
CSNA-A 300/4 0°	2	2	4	4-5	295	(1)	**20202226**
CSNA-A 300/5 0°	2	2,49	4	5	295	(1)	**20202227**

ACCESSORIES

Description	Code
DIVERTER VALVES AND THERMOSTATIC VALVES	
1" thermostatic mixing valve with 3/4" adapter	**20020778**
EXPANSION VESSELS	
18 lt expansion vessel with bracket	**4383052**
24 lt expansion vessel	**4383053**

SOLAR THERMAL ACCESSORIES

Description	Notes	Code
HYDRAULIC ACCESSORIES		
2-fittings kit for the connection between DN18 copper pipe and hydraulic group		**20132219**
2 straight fittings kit to connect the solar collectors with stainless steel pipes (copper pipe DN18/stainless steel pipe DN16)	(1)	**20027289**
2-fittings kit for the connection between copper pipe and hydraulic group (copper pipe DN18/ stainless steel pipe DN16)		**20132220**
Flexible stainless steel pipe kit DN16 of 15 m (contains: stainless steel wavy double-pipe for flow and return, solar probe cable and suitable insulation for solar applications)	(2)	**4383254**
Flexible stainless steel pipe kit DN16 of 20 m (contains: stainless steel wavy double-pipe for flow and return, solar probe cable and suitable insulation for solar applications)	(2)	**4383255**
FLOW RATE REGULATORS		
Flow rate regulator 12 (DN20; 2-12 l/min; kvs=2,2 m^3/h)		**20011536**
Flow rate regulator 20 (DN20, 8-20 l/min, kvs=5 m^3/h)		**20011538**
Manual solar air vent kit		**20026577**
GLYCOL		
5 kg propylene glycol kit (concentrated heat-transfer liquid, with corrosion inhibitors, for flat-plate collectors)		**4383085**
10 kg propylene glycol kit (concentrated heat-transfer liquid, with corrosion inhibitors, for flat-plate collectors)		**4383059**
20 kg pre-mixed glycol for CSV R (ready-to-use heat transfer liquid, suitable for vacuum collectors, frost-protection up to -28 °C)		**4383118**
20 kg glycol-free heat-transfer liquid (long-lasting and non-toxic)		**20094030**
EXPANSION VESSELS		
18L SUN expansion vessel (ideal for solar systems, bracket equipped, ¾" fitting)		**4383052**
24L SUN expansion vessel (ideal for solar systems, bracket equipped, ¾" fitting)		**4383053**
35L SUN expansion vessel (ideal for solar systems, bracket equipped, ¾" fitting)		**4383054**
50L expansion vessel (ideal for solar systems, provided with supporting base and 1" fitting)		**4383256**
100L expansion vessel (ideal for solar systems, provided with supporting base and 1" fitting)		**4383257**
150L expansion vessel (ideal for solar systems, provided with supporting base and 1" fitting)		**4383258**
300L expansion vessel (ideal for solar systems, provided with supporting base and 1" fitting)		**4383259**
OTHER ACCESSORIES		
¾" thermostatic mixing valve kit		**20020778**
Differential electronic thermostat		**20039694**

(1) Fittings kit to be ordered with the stainless steel flexible pipe.
(2) Stainless steel flexible pipe, insulated, without fittings.

SOLAR COLLECTORS

VERTICAL

4 FITTINGS

FLAT PLATE

SURFACE 2,49 m²



RPS 25/4 A

Packages:
1 pc
2 – 7 pcs

page 192

SURFACE 1,91 m²



RPS 20/4 A

Packages:
1 pc
2 – 7 pcs

page 195


Please verify with Sales the availability of the product in the destination Country before ordering

Relax PRO

Vertical flat solar panels

RPS 25/4 A



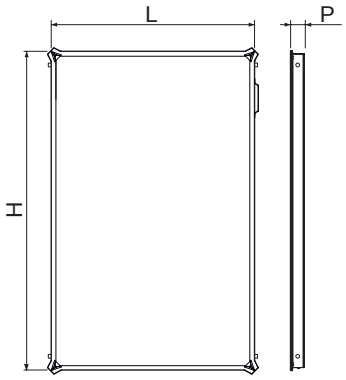

- 4 Hydraulic compression fittings of 22mm
- Possibility of connecting in series up to 10 collectors vertically
- Solar Keymark certificate
- 5-year warranty for solar panel

Description	H mm	L mm	P mm	Net weight kg
RPS 25/4 A	2020	1235	85	35
RPS 25/4 A X2	2020	1235	85	35
RPS 25/4 A X5	2020	1235	85	35
RPS 25/4 A X7	2020	1235	85	35

The solar collector RPS 25/4 A can be used for vertical installations. It is equipped with an aluminum absorber plate with high selective finishing in TiNOx Energy Al that allows 95% energy absorption on the surface and reduce its emission to 4%.
On the plate are welded harp-shaped pipes through which the heat-transfer fluid runs.
The high transparency sun glass guarantees high transmissivity.
Along with the glass wool insulation, that is 30 mm thickness, guarantees high efficiency even in case of bad weather conditions.
It is possible to connect in series up to 10 panels in vertical installations. A wide range of accessories and fixing systems is available to ensure maximum installation flexibility.
The solar collector complies with EN 12975, ISO 9806 and is Solar Keymark certified.
5 year warranty.

TECHNICAL DATA

Description	Solar collectors		Absorber data			Stagnation temperature °C	Notes	Code
	Gross area m²	Absorbed area m²	ηo	a1 W/m²K	a2 W/m²K²			
RPS 25/4 A	2,49	2,38	0,76	2,990	0,027	180	(1)	**20201316**
RPS 25/4 A X2	4,98	4,76	0,76	2,990	0,027	180	(2)	**20201047**
RPS 25/4 A X5	12,45	11,9	0,76	2,990	0,027	180	(2)	**20201317**
RPS 25/4 A X7	17,43	16,66	0,76	2,990	0,027	180	(2)	**20201754**

η0 = optical efficiency.
a1, a2 = heat loss coefficients.
(1) One single collector in one package
(2) Collectors supplied in pallet of 2, 5 or 7 pcs

ACCESSORIES FOR RPS 25/4 A - VERTICAL INSTALLATION

Description	Code
ACCESSORIES FOR FLAT ROOF WITH 30-45° INCLINATION	
Brackets 1 COLL. 2,5m² "A" FR 30-45°	**20201443**
Extension +1 COLL. 2,5m² "A" FR 30-45°	**20201444**
ACCESSORIES FOR INCLINED ROOF	
Brackets 1 COLL. 2-2,5 "A" under tile IR	**20201446**
Brackets 2 COLL. 2-2,5 "A" under tile IR	**20201447**
Extension +1 COLL. 2-2,5 "A" under tile IR	**20201611**
Kit 4 hooks for IR - COLL. "A"	**20201445**
Kit 6 hooks for IR - COLL. "A"	**20202639**
HYDRAULIC KIT FOR SOLAR COLLECTORS TYPE "A"	
Hydraulic kit for 1 collector "A"	**20201448**
Hydraulic kit for 2 collectors "A"	**20201449**
Hydraulic kit for 3 collectors "A"	**20201450**
Hydraulic kit for 4 collectors "A"	**20201451**
Hydraulic kit for 5 collectors "A"	**20201453**
Hydraulic kit for 6 collectors "A"	**20201454**
Hydraulic kit for 7 collectors "A"	**20201455**
Hydraulic kit for 8 collectors "A"	**20201457**
Hydraulic kit for 9 collectors "A"	**20201458**
Hydraulic kit for 10 collectors "A"	**20201459**
HYDRAULIC ACCESSORIES	
2-fittings kit for the connection between DN18 copper pipe and hydraulic group	**20132219**
2 straight fittings kit to connect the solar collectors with stainless steel pipes (copper pipe DN18/ stainless steel pipe DN16)	**20027289**
2-fittings kit for the connection between copper pipe and hydraulic group (copper pipe DN18/stainless steel pipe DN16)	**20132220**
Manual solar air vent kit	**20026577**
Flexible stainless steel pipe kit DN16 of 15 m (contains: stainless steel wavy double-pipe for flow and return, solar probe cable and suitable insulation for solar applications)	**4383254**
Flexible stainless steel pipe kit DN16 of 20 m (contains: stainless steel wavy double-pipe for flow and return, solar probe cable and suitable insulation for solar applications)	**4383255**

Note: The above-mentioned accessories do not include the collector probe, which is included in the EVOSOL accessory code 20120499 or can be purchased separately through the SOLAR COLLECTOR PROBE KIT code 20008787.
For other accessories, refer to the SOLAR THERMAL ACCESSORIES section of the catalog.

COMPONENTS FOR VERTICAL INSTALLATIONS AT 30 OR 45° ON FLAT ROOF FOR RPS 25/4 A COLLECTORS

	20201443	20201444	20201448	20201449	20201450	20201451	20201453	20201454	20201455	20201457	20201458	20201459
	Brackets 1 COLL. 2,5m² "A" FR 30-45	Extension +1 COLL. 2,5m² "A" FR 30-45	Hydraulic kit for 1 collector "A"	Hydraulic kit for 2 collectors "A"	Hydraulic kit for 3 collectors "A"	Hydraulic kit for 4 collectors "A"	Hydraulic kit for 5 collectors "A"	Hydraulic kit for 6 collectors "A"	Hydraulic kit for 7 collectors "A"	Hydraulic kit for 8 collectors "A"	Hydraulic kit for 9 collectors "A"	Hydraulic kit for 10 collectors "A"
Kit for 1 COLL. 2,5M² TP 30-45°	1		1									
Kit for 2 COLL. 2,5M² TP 30-45°	1	1		1								
Kit for 3 COLL. 2,5M² TP 30-45°	1	2			1							
Kit for 4 COLL. 2,5M² TP 30-45°	1	3				1						
Kit for 5 COLL. 2,5M² TP 30-45°	1	4					1					
Kit for 6 COLL. 2,5M² TP 30-45°	1	5						1				
Kit for 7 COLL. 2,5M² TP 30-45°	1	6							1			
Kit for 8 COLL. 2,5M² TP 30-45°	1	7								1		
Kit for 9 COLL. 2,5M² TP 30-45°	1	8									1	
Kit for 10 COLL. 2,5M² TP 30-45°	1	9										1

COMPONENTS FOR VERTICAL INSTALLATIONS ON INCLINED ROOF WITH UNDER-TILE MOUNTING FOR RPS 20/4 A AND RPS 25/4 A COLLECTORS.


	20201446	20201447	20201611	20201445	20202639	20201448	20201449	20201450	20201451	20201453	20201454	20201455	20201457	20201458	20201459
	Brackets 1 COLL. 2-2,5 "A" under tile IR	Brackets 2 COLL. 2-2,5 "A" under tile IR	Extension + 1 COLL. 2-2,5 "A" under tile IR	Kit 4 hooks for IR - COLL. "A"	Kit 6 hooks for IR - COLL. "A"	Kit 6 hooks for IR - COLL. "A"	Hydraulic kit for 2 collectors "A"	Hydraulic kit for 3 collectors "A"	Hydraulic kit for 4 collectors "A"	Hydraulic kit for 5 collectors "A"	Hydraulic kit for 6 collectors "A"	Hydraulic kit for 7 collectors "A"	Hydraulic kit for 8 collectors "A"	Hydraulic kit for 9 collectors "A"	Hydraulic kit for 10 collectors a
Kit for 1 COLL. 2-2,5M² TI	1			1		1									
Kit for 2 COLL. 2-2,5M² TI		1			1		1								
Kit for 3 COLL. 2-2,5M² TI		1	1	1	1			1							
Kit for 4 COLL. 2-2,5M² TI		1	2	2	1				1						
Kit for 5 COLL. 2-2,5M² TI		1	3	3	1					1					
Kit for 6 COLL. 2-2,5M² TI		1	4	4	1						1				
Kit for 7 COLL. 2-2,5M² TI		1	5	5	1							1			
Kit for 8 COLL. 2-2,5M² TI		1	6	6	1								1		
Kit for 9 COLL. 2-2,5M² TI		1	7	7	1									1	
Kit for 10 COLL. 2-2,5M² TI		1	8	8	1										1

Relax PRO

Vertical flat solar panels

RPS 20/4 A



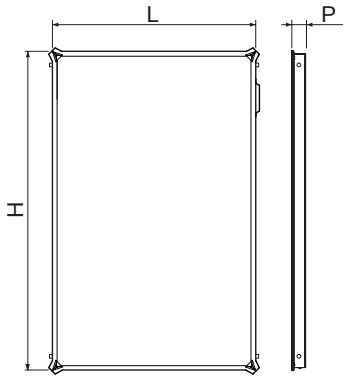

- 4 Hydraulic compression fittings of 22mm
- Possibility of connecting in series up to 10 collectors vertically
- Solar Keymark certified
- 5-year warranty for solar panel

Description	H mm	L mm	P mm	Net weight kg
RPS 20/4 A	1625	1235	85	29
RPS 20/4 A X2	1625	1235	85	29
RPS 20/4 A X7	1625	1235	85	29

The solar collector RPS 20/4 A can be used for vertical installations.
It is equipped with an aluminum absorber plate with high selective finishing in TiNOx Energy Al that allows 95% energy absorption on the surface and reduce its emission to 4%.
On the plate are welded harp-shaped pipes through which the heat-transfer fluid runs.
The high transparency sun glass guarantees high transmissivity.
Along with the glass wool insulation, that is 30 mm thickness, guarantees high efficiency even in case of bad weather conditions.
It is possible to connect in series up to 10 panels in vertical installations.
A wide range of accessories and fixing systems is available to ensure maximum installation flexibility.
The solar collector complies with EN 12975, ISO 9806 and is Solar Keymark certified.
5 year warranty.

TECHNICAL DATA

Description	Solar collectors		Absorber data			Stagnation temperature °C	Notes	Code
	Gross area m^2	Absorbed area m^2	ηo	a1 W/m^2K	a2 W/m^2K^2			
RPS 20/4 A	2	1,9	0,76	2,990	0,027	180	(1)	**20201319**
RPS 20/4 A X2	4	3,8	0,76	2,990	0,027	180	(2)	**20201320**
RPS 20/4 A X7	14	13,3	0,76	2,990	0,027	180	(2)	**20201321**

ηo = optical efficiency.
a1, a2 = heat loss coefficients.
(1) One single collector in one package
(2) Collectors supplied in pallet of 2 or 7 pcs

ACCESSORIES FOR RPS 20/4 A – VERTICAL INSTALLATION

Description	Code
ACCESSORIES FOR FLAT ROOF WITH 30-45° INCLINATION	
Brackets 1 COLL. 2m² "A" FR 30-45	**20201441**
Extension +1 COLL. 2m² "A" FR 30-45	**20201442**
ACCESSORIES FOR INCLINED ROOF	
Brackets 1 COLL. 2-2,5 "A" under tile IR	**20201446**
Brackets 2 COLL. 2-2,5 "A" under tile IR	**20201447**
Extension +1 COLL. 2-2,5 "A" under tile IR	**20201611**
Kit 4 hooks for IR - COLL. "A"	**20201445**
Kit 6 hooks for IR - COLL. "A"	**20202639**
HYDRAULIC KIT FOR SOLAR COLLECTORS TYPE "A"	
Hydraulic kit for 1 collector "A"	**20201448**
Hydraulic kit for 2 collectors "A"	**20201449**
Hydraulic kit for 3 collectors "A"	**20201450**
Hydraulic kit for 4 collectors "A"	**20201451**
Hydraulic kit for 5 collectors "A"	**20201453**
Hydraulic kit for 6 collectors "A"	**20201454**
Hydraulic kit for 7 collectors "A"	**20201455**
Hydraulic kit for 8 collectors "A"	**20201457**
Hydraulic kit for 9 collectors "A"	**20201458**
Hydraulic kit for 10 collectors "A"	**20201459**
HYDRAULIC ACCESSORIES	
2-fittings kit for the connection between DN18 copper pipe and hydraulic group	**20132219**
2 straight fittings kit to connect the solar collectors with stainless steel pipes (copper pipe DN18/ stainless steel pipe DN16)	**20027289**
2-fittings kit for the connection between copper pipe and hydraulic group (copper pipe DN18/stainless steel pipe DN16)	**20132220**
Manual solar air vent kit	**20026577**
Flexible stainless steel pipe kit DN16 of 15 m (contains: stainless steel wavy double-pipe for flow and return, solar probe cable and suitable insulation for solar applications)	**4383254**
Flexible stainless steel pipe kit DN16 of 20 m (contains: stainless steel wavy double-pipe for flow and return, solar probe cable and suitable insulation for solar applications)	**4383255**

Note: The above-mentioned accessories do not include the collector probe, which is included in the EVOSOL accessory code 20120499 or can be purchased separately through the SOLAR COLLECTOR PROBE KIT code 20008787.
For other accessories, refer to the SOLAR THERMAL ACCESSORIES section of the catalog.

COMPONENTS FOR VERTICAL INSTALLATIONS AT 30 OR 45° ON FLAT ROOF FOR RPS 20/4 A COLLECTORS

	20201441	20201442	20201448	20201449	20201450	20201451	20201453	20201454	20201455	20201457	20201458	20201459
	Brackets 1 coll. 2m² "A" FR 30-45	Extension +1 coll. 2m² "A" FR 30-45	Hydraulic kit for 1 collector "A"	Hydraulic kit for 2 collectors "A"	Hydraulic kit for 3 collectors "A"	Hydraulic kit for 4 collectors "A"	Hydraulic kit for 5 collectors "A"	Hydraulic kit for 6 collectors "A"	Hydraulic kit for 7 collectors "A"	Hydraulic kit for 8 collectors "A"	Hydraulic kit for 9 collectors "A"	Hydraulic kit for 10 collectors "A"
Kit per 1 COLL. 2M² TP 30-45°	1		1									
Kit per 2 COLL. 2M² TP 30-45°	1	1		1								
Kit per 3 COLL. 2M² TP 30-45°	1	2			1							
Kit per 4 COLL. 2M² TP 30-45°	1	3				1						
Kit per 5 COLL. 2M² TP 30-45°	1	4					1					
Kit per 6 COLL. 2M² TP 30-45°	1	5						1				
Kit per 7 COLL. 2M² TP 30-45°	1	6							1			
Kit per 8 COLL. 2M² TP 30-45°	1	7								1		
Kit per 9 COLL. 2M² TP 30-45°	1	8									1	
Kit per 10 COLL. 2M² TP 30-45°	1	9										1

COMPONENTS FOR VERTICAL INSTALLATIONS ON INCLINED ROOF WITH UNDER-TILE MOUNTING FOR RPS 20/4 A AND RPS 25/4 A COLLECTORS.

	20201446	20201447	20201611	20201445	20202639	20201448	20201449	20201450	20201451	20201453	20201454	20201455	20201457	20201458	20201459
	Brackets 1 COLL. 2-2,5 "A" under tile IR	Brackets 2 COLL. 2-2,5 "A" under tile IR	Extension + 1 COLL. 2-2,5 "A" under tile IR	Kit 4 hooks for IR - COLL. "A"	Kit 6 hooks for IR - COLL. "A"	Kit 6 hooks for IR - COLL. "A"	Hydraulic kit for 2 collectors "A"	Hydraulic kit for 3 collectors "A"	Hydraulic kit for 4 collectors "A"	Hydraulic kit for 5 collectors "A"	Hydraulic kit for 6 collectors "A"	Hydraulic kit for 7 collectors "A"	Hydraulic kit for 8 collectors "A"	Hydraulic kit for 9 collectors "A"	Hydraulic kit for 10 collectors a
Kit for 1 COLL. 2-2,5M² TI	1			1		1									
Kit for 2 COLL. 2-2,5M² TI		1			1		1								
Kit for 3 COLL. 2-2,5M² TI		1	1	1	1			1							
Kit for 4 COLL. 2-2,5M² TI		1	2	2	1				1						
Kit for 5 COLL. 2-2,5M² TI		1	3	3	1					1					
Kit for 6 COLL. 2-2,5M² TI		1	4	4	1						1				
Kit for 7 COLL. 2-2,5M² TI		1	5	5	1							1			
Kit for 8 COLL. 2-2,5M² TI		1	6	6	1								1		
Kit for 9 COLL. 2-2,5M² TI		1	7	7	1									1	
Kit for 10 COLL. 2-2,5M² TI		1	8	8	1										1

SOLAR DHW AND STORAGE CYLINDERS

HEAT -EXCHANGERS (COILS)

	0 COIL	1 COILS	2 COILS	FLANGES*
DHW SOLAR CYLINDER		 RBC HP S 150-200-300 litres 500-800 litres 1000 litres page 203		 7200/3F HV PLUS 800-1000-1500 2000-3000 liters page 201
		 7200 HP 300-500 800 liters page 207	 RBS 2S 200-300-430-550 800-1000 liters page 199	
			 7200/2 HV PLUS 1500-2000 liters page 201	
DHW PUFFER		 7200 KOMBI PLUS 550-800 1000 liters page 210	 7200 KOMBISOLAR^{2S} 430-500 1000 liters page 209	
PUFFER		 7000/S 1000-1500 liters page 211		 7000/F* 2000-3000 5000 liters page 211
HOT/COLD PUFFER	 7000 ACI PLUS 60-120-200-300 400-500-800 1000-1500 2000 liters page 213			


* Flanges for the insertion of heat-exchangers (coils).

Please verify with Sales the availability of the product in the destination Country before ordering

Double-coil solar cylinders

RBS 2S



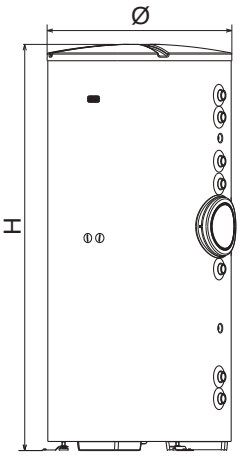

ERP

- Double-coil solar cylinder
- Domestic hot water production
- Erp Ready – Energy efficiency class B

Description	H mm	Ø (*) mm	IT (**) mm	Net weight kg
RBS 200 2S	1338	604	50	86
RBS 300 2S	1838	604	50	108
RBS 430 2S	1644	755	50	146
RBS 550 2S	1988	755	50	171
RBS 800 2S	1846	1000	100	222
RBS 1000 2S	2171	1000	100	245

(*) Dimensions with insulation
(**) Insulation thikness

Steel double coil solar cylinders of high energy efficiency (all models are class B) and internal glazed enamel treatment (vitrification, according to DIN 4753) to ensure maximum hygiene and facilitate cleaning of limestone deposits. The RBS cylinders, with embossed ABS finish, are provided with a thick insulation obtained by direct foaming method for models up to 550 liters and made of removable shells for models 800 and 1000 (to be assembled).
The cylinder and the elliptic coils have been carefully designed to reach the best performance in terms of heat exchange, recovery time and stratification. The hydraulic connections are arranged on a single row, as well as the inspection flange between the two coils, in order to facilitate cleaning and to insert an additional electric resistance.
Through a specific kit, RBS 2S can operate in parallel with one RBS 2S Ready-i of the same capacity up to 550 liters (RBS 2S Ready-i + RBS 2S + installation kit in parallel). Specific transport handles are available as accessories; they have been studied to allow easy access through a 800 mm door.

TECHNICAL DATA

Description	Cylinder capacity liters	Maximum temperature °C	Maximum pressure bar	Thermal losses W	Energy efficiency class (F→A+)*	Notes	Code
RBS 200 2S	208	99	10	62	B		**20116675**
RBS 300 2S	301	99	10	69	B		**20116335**
RBS 430 2S	430	99	10	75	B		**20117339**
RBS 550 2S	551	99	10	85	B		**20116587**
RBS 800 2S	731	99	7	94	B	(1)	**20132268**
RBS 1000 2S	883	99	7	101	B	(1)	**20132269**

(1) Insulation to be assembled.
(*) The energy efficiency class of the products ranges from F up to A+

UPPER COIL HEAT EXCHANGER TECHNICAL DATA

Description	Water content liters	Exchange surface m^2	DHW production l/h	Coil power input kW	Max operation pressure bar	Notes
RBS 200 2S	3.5	0.7	400	16.1	10	(1)
RBS 300 2S	4.0	0.8	572	23.0	10	(1)
RBS 430 2S	5.0	1.0	774	31.4	10	(1)
RBS 550 2S	5.0	1.0	774	31.4	10	(1)
RBS 800 2S	8.0	1.6	1240	50.0	7	(1)
RBS 1000 2S	8.0	1.6	1240	50.0	7	(1)

(1) According to DIN 4708 with ΔT=20 °C (80/60 °C) on exchanger.

LOWER COIL HEAT EXCHANGER TECHNICAL DATA

Description	Water content liters	Exchange surface m^2	Max operation pressure bar
RBS 200 2S	3.5	0.7	10
RBS 300 2S	5.0	1.0	10
RBS 430 2S	7.0	1.4	10
RBS 550 2S	9.0	1.8	10
RBS 800 2S	11.5	2.3	7
RBS 1000 2S	13.5	2.7	7

ACCESSORIES

Description	Code
Electric anode with plug	**20055206**
Curve for electronic anode kit	**20123851**
Thermometer kit	**20123850**
Single-phase electrical resistance 1,5 kW (for 200-550 liters models)	**20119911**
Single-phase electrical resistance 2,2 kW (for 200-550 liters models)	**20119912**
Single-phase electrical resistance 3,0 kW (for 200-550 liters models)	**20119913**
Three-phase electrical resistance 3,8 kW (for 200-550 liters models)	**20119914**
Single-phase electrical resistance 1,5 kW (for 800-1000 liters models)	**20131666**
Single-phase electrical resistance 2,2 kW (for 800-1000 liters models)	**20131667**
Single-phase electrical resistance 3,0 kW (for 800-1000 liters models)	**20131669**
Three-phase electrical resistance 3,8 kW (for 800-1000 liters models)	**20131670**

NOTE: for installation in parallel please consult the "RBS 2S Ready-i" page.


Flanged and double-coil DHW cylinders

7200/3F HV PLUS
7200/2 HV PLUS



ERP

- Flanged and double-coil DHW cylinders
- Domestic hot water Production
- Heat exchanger coil kit for 7200/3F to be ordered separately according to the capacity

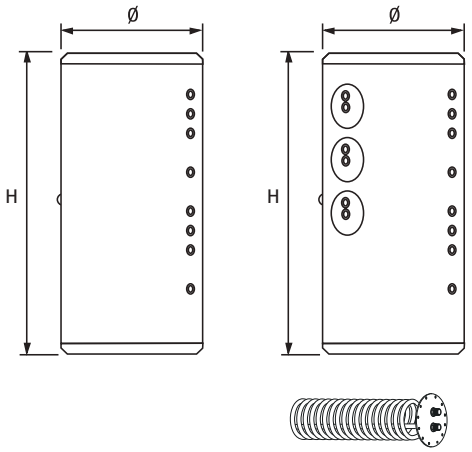

Description	H (*) mm	Ø (*) mm	IT (**) mm	Net weight kg
7200/2 - 1500 HV PLUS	2185	1200	100	325
7200/2 - 2000 HV PLUS	2470	1300	100	540
7200/3F - 800 HV PLUS	1875	990	100	150
7200/3F - 1000 HV PLUS	2105	990	100	190
7200/3F - 1500 HV PLUS	2185	1200	100	305
7200/3F - 2000 HV PLUS	2470	1300	100	325
7200/3F - 3000 HV PLUS	2730	1450	100	543

(*) Dimensions with insulation
(**) Insulation thikness

Vertical steel double-coil solar cylinders, with internal double-layer enamel (according to DIN 4753) bacteriologically inert to ensure the absolute hygiene of water, to avoid limestone deposits and make cleaning easier.
The outer coating made of hard plastic provides a better aesthetic and a high solidity of the product, without compromising the installation in terms of ease of use and flexibility.
The cylinders, are already provided with CFC-free polyurethane hard and soft removable insulation (thickness of 100 mm) to make the installation easier; insulation supplied separately for the 2000-liters model. The care taken to study the geometry of solar cylinder and coils provides the best stratification, heat exchange and recovery time.
Easy maintenance thanks to the lateral flange for inspection, anticorrosion anodic protection. It is possible to use additional electrical resistance.

TECHNICAL DATA

Description	Cylinder capacity liters	Maximum temperature °C	Maximum pressure bar	Thermal losses W	Energy efficiency class (F→A+)*	Notes	Code
7200/2 - 1500 HV PLUS	1390	99	8	162	C		**20136237**
7200/2 - 2000 HV PLUS	1950	99	8	186	C		**20136239**
7200/3F - 800 HV PLUS	749	99	10	130	C	(1)	**20136273**
7200/3F - 1000 HV PLUS	955	99	10	142	C	(1)	**20136274**
7200/3F - 1500 HV PLUS	1430	99	8	162	C	(1)	**20136275**
7200/3F - 2000 HV PLUS	1990	99	8	186	C	(1)	**20136277**
7200/3F - 3000 HV PLUS	2959	99	8	344	-	(1)	**20052788**

(1) Flanged solar cylinder supplied without coils, to be ordered separately.
NOTE: flanged solar cylinder supplied without coils, to be ordered separately.
(*) The energy efficiency class of the products ranges from F up to A+

UPPER COIL HEAT EXCHANGER TECHNICAL DATA

Description	Water content liters	Exchange surface m²	DHW production l/h	Coil power input kW	Max operation temperature °C	Max operation pressure bar	Notes
7200/2 - 1500 HV PLUS	10.4	1.8	1200	47	110	10	(1)
7200/2 - 2000 HV PLUS	16.9	2.8	1800	73	110	10	(1)

(1) According to DIN 4708 with ΔT=20 °C (80/60 °C) on exchanger.

LOWER COIL HEAT EXCHANGER TECHNICAL DATA

Description	Water content liters	Exchange surface m²	DHW production l/h	Coil power input kW	Max operation temperature °C	Max operation pressure bar	Notes
7200/2 - 1500 HV PLUS	19.4	3.4	2200	88	110	10	(1)
7200/2 - 2000 HV PLUS	28.1	4.6	2900	120	110	10	(1)

(1) According to DIN 4708 with ΔT=20 °C (80/60 °C) on exchanger.


ACCESSORIES

Description	Notes	Code
Three-phase electrical resistence 3.8 kW of 1" ½		**20020707**
Tin coated copper coil kit 2.63 m² - 1.74 l - 10 bar	(1)	**20055205**
Tin coated copper coil kit 4.54 m² - 3.56 l - 10 bar	(1)	**4383089**
Tin coated copper coil kit 6.34 m² - 5.10 l - 10 bar	(1)(2)	**4383087**
Electric anode with plug		**20055206**

(1) Only for 7200/3F HV PLUS.
(2) Not suitable for 7200/3F 800 HV Plus and 7200/3F 1000 HV Plus.
Pump stations and differential controller are available at page 216.
Other available accessories at page 222.

HEAT EXCHANGER COIL

Description	L mm	H mm	A mm	Net weight kg
Tin coated copper coil kit 2,63 m²	580	DN200	80	14.9
Tin coated copper coil kit 4,54 m²	750	DN200	80	22.6
Tin coated copper coil kit 6,34 m²	980	DN200	80	29.0

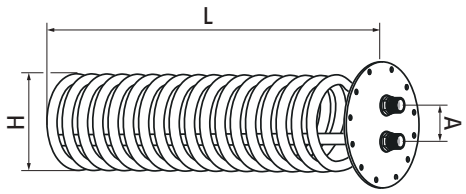

TECHNICAL DATA

Description	Water exchanger surface m²	Absorbed power (*) kW	Necessary capacity heat exchanger (*) m³/h	DHW output (*) m³/h	Pressure loss mbar	Maximum operating pressure of coil bar	Pipe diameter mm	Pipe's number	Water capacity l
Tin coated copper coil kit 2,63 m²	2.63	53	2.3	1.3	748	10	18x1	1	1.74
Tin coated copper coil kit 4,54 m²	4.54	91	3.9	2.2	720	10	18x1	2	3.56
Tin coated copper coil kit 6,34 m²	6.34	127	5.5	3.1	2017	10	18x1	2	5.10


(*) According to DIN 4708, to get domestic hot water with ΔT 35 °C (10/45 °C) and ΔT 20 °C (80/60 °C) on the heat-exchanger, please observe the values showed in the datasheet concerning absorbed power and necessary capacity heat-exchanger.

Single coil DHW cylinders

RBC-HP 1S



RBC-HP 1S 150÷500 RBC-HP 1S 800/1000

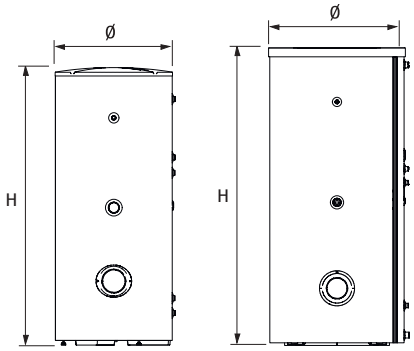

ERP

- Vertical cylinder in enamelled steel with one coil
- Domestic hot water production
- Suitable for use with boilers or heat pumps

Description	H (*) mm	Ø (*) mm	IT (**) mm	Net weight (*) kg
RBC-HP 150 1S	1138	604	52	62
RBC-HP 200 1S	1354	604	52	78
RBC-HP 300 1S	1838	604	52	103
RBC-HP 500 1S	1793	755	52	150
RBC-HP 800 1S	1835	974	92	203
RBC-HP 1000 1S	2155	974	92	225

(*) Dimensions and weight with insulation
(**) Insulation thikness

The RBC-HP 1S range guarantees excellent versatility as it can work in conjunction with both boilers and heat pumps.
Vertical cylinder in enamelled steel with one coil DHW cylinder, internally glazed (as per DIN 4753) to ensure hygiene and limescale cleaning. The range includes 6 models from 150 to 1000 (ErP Ready – Energy class B) while the shape of the tank and the elliptical cross-section of the exchanger enable excellent heat exchange performance (minimal heat dispersion) and rapid restore times.
Option to add an extractable coil for use with a solar thermal system.
Option to add a back-up heating element.

TECHNICAL DATA

Description	Cylinder capacity l	Coil exchange surface m²	Coil exchange power with heat pump (*) kW	Coil exchange power with boiler (**) kW	Maximum temperature °C	Maximum pressure bar	Thermal losses (***) W	Energy efficiency class (F→A+) (2)	Notes	Code
RBC-HP 150 1S	170	0,85	6,3	27	99	10	55	B		**20202962**
RBC-HP 200 1S	210	1,38	8,8	39	99	10	58	B		**20203095**
RBC-HP 300 1S	305	1,7	12,4	49	99	10	68	B		**20201786**
RBC-HP 500 1S	500	2,2	15,8	57	99	10	84	B		**20201984**
RBC-HP 800 1S	735	2,5	18,5	69	99	7	94	-	(1)	**20202273**
RBC-HP 1000 1S	890	2,9	24,9	75	99	7	101	-	(1)	**20202861**

(*) With ΔT = 5 °C and coil outlet temperature of 50 °C.
(**) With ΔT = 20 °C and coil outlet temperature of 80 °C.
(***) According to EN 12897:2006, Δt = 45 °C (outdoor temperature 20 °C, storage temperature 65 °C).
(1) Insulation to be assembled.
(2) The energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Note	Code
Electronic anode with plug		**20055206**
Curve for electronic anode kit		**20123851**
Thermometer kit		**20123850**
Single-phase electrical resistance 1.5 kW (150-500 lt) on flange	(1)	**20119911**
Single-phase electrical resistance 2.2 kW (150-500 lt) on flange	(1)	**20119912**
Single-phase electrical resistance 3.0 kW (150-500 lt) on flange	(1)	**20119913**
Three-phase electrical resistance 3.8 kW (150-500 lt) on flange	(1)	**20119914**
Single-phase electrical resistance 1.5 kW (800-1000 lt) on flange	(1)	**20131666**
Single-phase electrical resistance 2.2 kW (800-1000 lt) on flange	(1)	**20131667**
Single-phase electrical resistance 3.0 kW (800-1000 lt) on flange	(1)	**20131669**
Three-phase electrical resistance 3.8 kW (800-1000 lt) on flange	(1)	**20131670**
1.5 kW single-phase electric heater kit (150-300 lt) on 1"1/2 hole		**4383270**
2.2 kW single-phase electric heater kit (300-500 lt) on 1"1/2 hole		**4383271**
3.0 kW single-phase electric heater kit (500 lt) on 1"1/2 hole		**4383272**
3.8 kW three-phase electric heater kit (500-800-1000 lt) on 1"1/2 hole		**20020707**
6.0 kW single-phase electric heater kit (1000 lt) on 1"1/2 hole		**20079908**
Solar exchanger 0,8 m^2 for RBC-HP 150-300	(1)	**20203248**
Solar exchanger 1,2 m^2 for RBC-HP 500	(1)	**20203246**
Solar exchanger 1,9 m^2 for RBC-HP 800-1000	(1)	**20203245**

(1) The flange electrical resistance kit is not available with the solar heat exchanger kit. If you install the solar heat exchanger kit on the flange, you can't fix the flange electrical resistance kit.

RECOMMENDED COMBINATIONS – BOILER AND HEAT PUMP

Cylinder		NXHP Heat pumps							
Description	Code	004	006	008	010	012	014	012T	014T
		20197104	20197105	20197106	20197107	20197108	20197109	20197111	20197112
RBC-HP 150 1S	**20202962**	●	●						
RBC-HP 200 1S	**20203095**	●	●	●					
RBC-HP 300 1S	**20201786**	●	●	●	●	●		●	
RBC-HP 500 1S	**20201984**			●	●	●	●	●	●
RBC-HP 800 1S	**20202273**					●	●	●	●
RBC-HP 1000 1S	**20202861**						●		●

For correct cylinder sizing, see the technical data given on the product technical sheets.

Cylinder		NXHM Heat pumps											
Description	Code	004	006	008	010	012	014	016	012T	014T	016T	018T	022T	026T
		20203404	20203407	20203409	20203410	20203649	20203650	20203651	20203652	20203653	20203655	20194140	20194141	20194142
RBC-HP 150 1S	**20202962**	●	●											
RBC-HP 200 1S	**20203095**	●	●	●										
RBC-HP 300 1S	**20201786**	●	●	●	●	●			●					
RBC-HP 500 1S	**20201984**			●	●	●	●	●	●	●	●			
RBC-HP 800 1S	**20202273**					●	●	●	●	●	●	●		
RBC-HP 1000 1S	**20202861**							●			●	●	●	●

For correct cylinder sizing, see the technical data given on the product technical sheets.

Cylinder		FAMILY SPRINT Heat pumps									
Description	Code	4 M	6 M	8 M	10 M	12 M	14 M	16 M	12 T	14 T	16 T
		20205753	20205755	20205757	20205760	20205766	20205769	20205773	20205778	20205780	20205782
RBC-HP 150 1S	**20202962**	●	●								
RBC-HP 200 1S	**20203095**	●	●	●							
RBC-HP 300 1S	**20201786**	●	●	●	●	●			●		
RBC-HP 500 1S	**20201984**			●	●	●	●	●	●	●	●
RBC-HP 800 1S	**20202273**					●	●	●	●	●	●
RBC-HP 1000 1S	**20202861**							●			●


For correct cylinder sizing, see the technical data given on the product technical sheets.

Cylinder		FAMILY ES Heat pumps							
Description	Code	5M	7M	9M	12M	15M	12T	15T	18T
		20204781	20204782	20204783	20204784	20204785	20204786	20204787	20204788
RBC-HP 150 1S	**20202962**	●							
RBC-HP 200 1S	**20203095**	●	●						
RBC-HP 300 1S	**20201786**	●	●	●					
RBC-HP 500 1S	**20201984**		●	●	●	●	●		
RBC-HP 800 1S	**20202273**			●	●	●	●	●	
RBC-HP 1000 1S	**20202861**								●

For correct cylinder sizing, see the technical data given on the product technical sheets.

EXAMPLES OF SYSTEM

MONOVALENT HEATING, COOLING AND DHW PRODUCTION SYSTEM COMBINED WITH HEAT PUMP

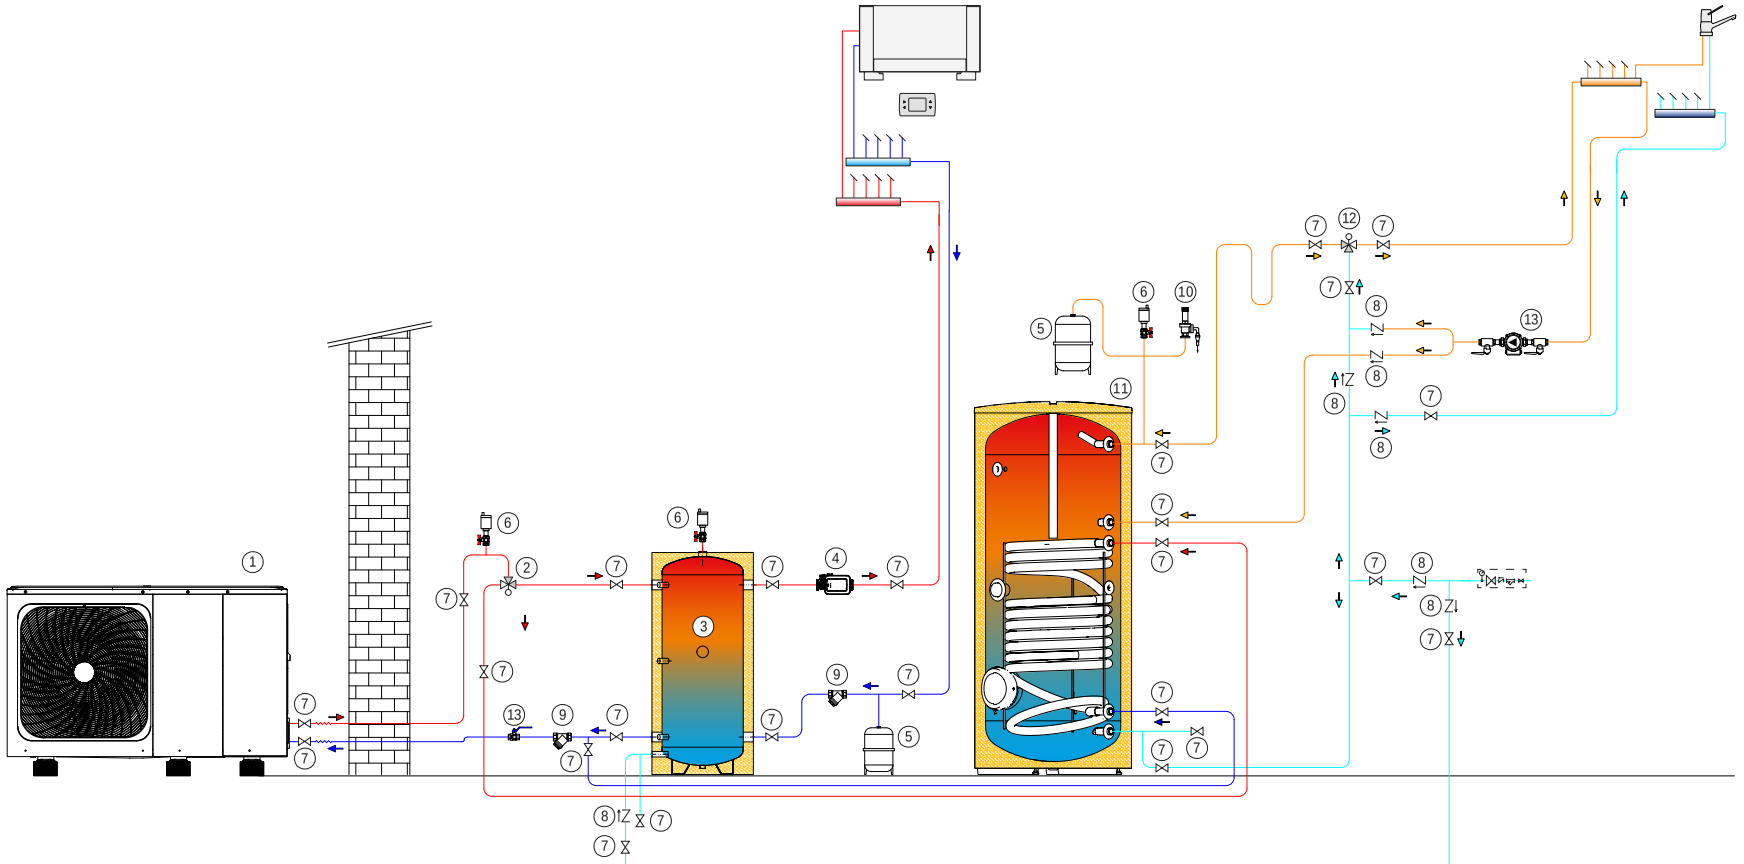


1 Monobloc heat pump
2 DHW diverting valve
3 Storage tank
4 Zone pump
5 Expansion reservoir
6 Deaerator
7 Shut-off valve
8 Non-return valve
9 Filter
10 Safety valve
11 DHW heater
12 DHW mixer
13 DHW recirculation pump

DHW solar cylinder

7200 HP



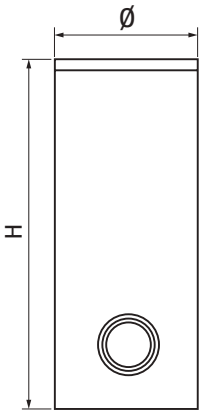

ERP

- Cylinder for heat pump
- Domestic hot water production

Description	H (*) mm	Ø (*) mm	IT (**) mm	Net weight (*) kg
7200 300 HP	1615	600	50	119
7200 500 HP	1690	750	50	166
7200 800 HP	1875	990	100	220

(*) Dimensions and weight with insulation
(**) Insulation thikness

DHW steel cylinders for vertical installation, protected by inner enamel and equipped with a coil (with a large exchange surface) for a suitable combination with a heat pump and with a flange in the bottom part to allow the insertion of an exchanger (optional) for the combination with the solar thermal. Specifically designed for the application in systems with heat pumps, they allow a high heat transfer thanks to the wide exchange surface.
They are complete with sockets, a magnesium anode and with a 1"½ connection for the insertion of an electrical resistance (optional). The insulation is made of rigid polyurethane for the sizes 300 and 500 and soft polyurethane for size 800.

TECHNICAL DATA

Description	Cylinder capacity liters	Maximum temperature °C	Maximum pressure bar	Thermal losses W	Energy efficiency class (F→A+)*	Notes	Code
7200 300 HP	263	99	10	85	C	(1)	**4383500**
7200 500 HP	470	99	10	112	C	(2)	**4383501**
7200 800 HP	702	99	10	130	C		**20136293**

(1) To combine with heat-pump Family ES and NHX.
(2) To combine with heat-pump Family ES and NHX.
(*) The energy efficiency class of the products ranges from F up to A+

COIL HEAT EXCHANGER TECHNICAL DATA

Description	Water content liters	Exchange surface m^2	DHW production l/h	Coil power input kW	Max operation temperature °C	Max operation pressure bar	Notes
7200 300 HP	23.0	4	500	19	110	10	(1)
7200 500 HP	51.5	6	800	31	110	10	(1)
7200 800 HP	60.0	7	900	38	110	10	(1)

(1) According to DIN 4708 with ΔT=10 °C (60/50 °C) on exchanger.

ACCESSORIES


Description	Code
Single-phase electrical resistance 1,5 kW of 1" ½	**4383270**
Three-phase electrical resistence 3,8 kW of 1" ½	**20020707**
0,8 m² solar heat exchanger (for HP 300 model)	**4383504**
1,2 m² solar heat exchanger (for HP 500-800 models)	**4383505**
Electronic anode with plug	**20055206**

Other available accessories at page 222.

Combined solar storage tanks

7200 KombiSolar^{2S}



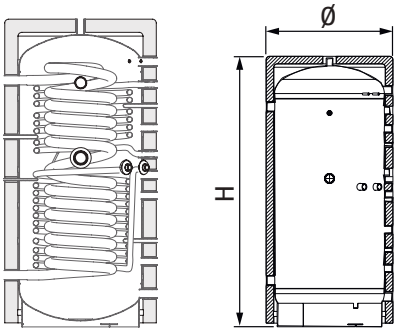

ERP

- Combined storage tank
- Instantaneous production of domestic hot water and heating supplement

Description	H (*) mm	Ø (*) mm	IT (**) mm	Net weight (*) kg
7200 KOMBISOLAR 430 2S	1635	755	50	155
7200 KOMBISOLAR 550 2S	1985	755	50	177
7200 KOMBISOLAR 750 2S	1845	1000	100	218
7200 KOMBISOLAR 1000 2S	2170	1000	100	248

(*) Dimensions and weight with insulation
(**) Insulation thikness

7200 KombiSolar^{2S} is a combi storage tank designed for the instantaneous production of domestic hot water and the heating supplement. It contains three coils: one at the bottom for the solar circuit, one at the top for the heating circuit and one in stainless steel for the production of domestic hot water.
The rapid-exchange corrugated coil in stainless steel AISI 316L, for the production of domestic hot water (bacteriologically inert), ensures the absolute hygiene of water, while preventing bacteria from reproducing and limestone deposits from occurring, together with providing a fast, efficient and comfortable domestic hot water production.
The storage tank is specifically designed to enhance flexibility in installation through the synergetic and organic combination of thermal solar systems, traditional or biomass generators (also with open vessel) and heat pumps.
The presence of an integrated diffusion tube permits a high stratification of temperature along the solar tank height.
The CFC-free polyurethane insulation reduces heat losses and, as a consequence, enhances efficiency; the hard insulation makes the installation easier.
It is possible to use additional electrical resistances.

TECHNICAL DATA

Description	Cylinder capacity liters	Maximum temperature °C	Maximum pressure bar	Thermal losses W	Energy efficiency class (F→A+)*	Notes	Code
7200 KOMBISOLAR 430 2S	415	99	3	78	B		**20088789**
7200 KOMBISOLAR 550 2S	528	99	3	85	B		**20088790**
7200 KOMBISOLAR 750 2S	742	99	5	93	B	(1)(2)	**20145329**
7200 KOMBISOLAR 1000 2S	908	99	5	98	B	(1)	**20145332**

(1) Supplied with insulation removed.
(2) Progressively available when the corresponding previous model runs out.
(*) The energy efficiency class of the products ranges from F up to A+

ACCESSORIES


Description	Code
Single-phase electrical resistance 1,5 kW of 1" ½	**4383270**
Single-phase electrical resistance 2,2 kW of 1" ½	**4383271**
Single-phase electrical resistance 3,0 kW of 1" ½	**4383272**
Three-phase electrical resistance 3,8 kW of 1" ½	**20020707**
18L rectangular expansion vessel kit (including: mounting template for vertical solar cylinder and F-F ¾" connection pipe, 110 mm)	**20005831**
Flexible pipe kit to connect the solar expansion vessel (F-F ¾", 800 mm, not insulated)	**20011797**

Other available accessories at page 222.

Combined solar storage tanks

7200 Kombi Plus



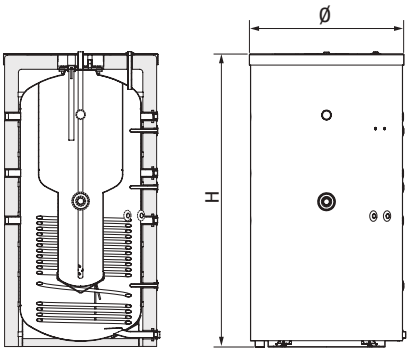

ERP

- Combined storage tank
- Production of domestic hot water and heating supplement

Description	H mm	Ø (*) mm	IT (**) mm	Net weight kg
7200.550 Kombi Plus	2055	755	50	192
7200.800 Kombi Plus	1870	990	100	210
7200.1000 Kombi Plus	2196	990	100	265

(*) Dimensions with insulation
(**) Insulation thikness

7200 Kombi Plus is a combi storage tank (tank-in-tank technology) designed for the production of domestic hot water and the heating supplement. The completely enamelled internal tank (bacteriologically inert) is suitable to contain domestic hot water as it ensures the absolute hygiene of the water, while avoiding limestone deposits and making cleanliness easier.
The storage tank is specifically designed to enhance flexibility of installation through the synergetic and organic integration with thermal solar systems, heat generators and heat pumps.
The exchange surfaces and the geometry of tank provide the best performance in terms of stratification, heat exchange, recovery time and domestic hot water production (up to 2700 liters/hour).
The CFC-free polyurethane insulation reduces heat losses and, as a consequence, enhances efficiency; the hard insulation makes the installation easier. Anticorrosion anodic protection.
Easy maintenance thanks to the lateral flange for inspection. It is possible to use additional electrical resistances.

TECHNICAL DATA

Description	Cylinder capacity liters	DHW capacity liters	Maximum temperature °C	Maximum pressure of inertial storage cylinder bar	Thermal losses W	Energy efficiency class (F→A+)*	Code
7200.550 KOMBI PLUS	388	160	99	3	95	C	**20090256**
7200.800 KOMBI PLUS	560	240	99	3	123	C	**20145308**
7200.1000 KOMBI PLUS	695	285	99	3	143	C	**20145313**

(*) The energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Code
Single-phase electrical resistance 1,5 kW of 1" ½	**4383270**
Single-phase electrical resistance 2,2 kW of 1" ½	**4383271**
Single-phase electrical resistance 3,0 kW of 1" ½	**4383272**
Three-phase electrical resistance 3,8 kW of 1" ½	**20020707**
18L rectangular expansion vessel kit (including: mounting template for vertical solar cylinder and F-F ¾" connection pipe, 110mm)	**20005831**
Flexible pipe kit to connect the solar expansion vessel (F-F ¾", 800mm, not insulated)	**20011797**


Other available accessories at page 222.

Puffers


7000 Puffer



7000/S



7000/F



ERP

- Inertial storage for heating supplement

Description	H (*) mm	Ø (*) mm	IT (**) mm	Net weight (*) kg
7000.1000/S	2190	990	100	172
7000.1500/S	2165	1200	100	239
7000.2000/F	2489	1300	100	330
7000.3000/F	2720	1450	100	415
7000.5000/F	2870	1800	100	570

(*) Dimensions and weight with insulation
(**) Insulation thikness

Storage tanks 7000 Puffer can be easily integrated into solar systems and are designed for heating supplement (not for DHW production or storage). The care taken to study the geometry of the tank (also provided with inner diaphragm) and coil (only for /S models) provides the best performance in terms of stratification, heat exchange and recovery time.
The connection at various heights permits the use of different heat generators and avoids affecting stratification.
The CFC-free polyurethane insulation reduces heat losses and, as a consequence, enhances efficiency; the hard insulation makes the installation easier (/F models).
The use of the flange (only for /F models) makes maintenance easier and allows to connect an additional exchanger.
It is possible to use additional electrical resistances.

TECHNICAL DATA

Description	Cylinder capacity l	Coil surface (m²)	Maximum temperature °C	Maximum pressure bar	Thermal losses (*) W	Notes	Energy efficiency class (F→A+)**	Code
INERTIAL PUFFER WITH SOLAR EXCHANGER COIL								
7000.300/S	270	1.8	95	3	93	(1)(D)	C	**20182681**
7000.500/S	476	1.8	95	3	110	(1)(D)	C	**20182682**
7000.1000/S	920	2.6	99	3	143	(1)(D)	C	**20136260**
7000.1500/S	1410	3.8	99	3	167	(1)(D)	C	**20136261**
INERTIAL PUFFER WITH ONE FLANGE								
7000.2000/F	2010	-	99	3	190	(2)(D)	C	**20136256**
7000.3000/F	2959	-	99	3	344	(2)(D)	-	**4383411**
7000.5000/F	5055	-	99	3	646		-	**4383412**

(1) Supplied with assembled insulation.
(2) Supplied with separated insulation.
(D) Availability of the material at our warehouse: 20 working days from the date of the order's validation.
(*) Discharges according to EN 12897:2006 (ΔT=45 °C, ambient 20 °C and storage at 65 °C).
(**) The energy efficiency class of the products ranges from F up to A+

COIL HEAT EXCHANGER TECHNICAL DATA

Description	Water content liters	Exchange surface m²	DHW production l/h	Coil power input kW	Max operation temperature °C	Max operation pressure bar	Notes
7000.1000/S	14,6	2,6	2900	68	110	6	(1)
7000.1500/S	21,6	3,8	4200	99	110	6	(1)

(1) According to DIN 4708 with ΔT=20 °C (80/60 °C) on exchanger.

ACCESSORIES


Description	Notes	Code
4,54 m² - tin plated copper coil kit with flange coupling for models/F (coil exchanger power 91 kW)	(1)	**4383089**
6,34 m² - tin plated copper coil kit with flange coupling for models/F (coil exchanger power 127 kW)	(1)	**4383087**
Electronic anode with plug		**20055206**

(1) To use only with 7000.2000/F, 7000.3000/F and 7000.5000/F models.
Other available accessories at page 222.

Puffers

7000 ACI Plus



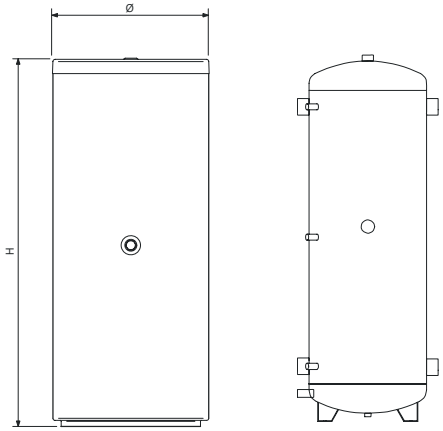

ERP

- Inertial storage

Description	H(*) mm	Ø(*) mm	Weight (empty) kg
7000 ACI 60 PLUS	935	400	25
7000 ACI 120 PLUS	1095	500	35
7000 ACI 200 PLUS	1395	550	45
7000 ACI 300 PLUS	1560	600	55
7000 ACI 400 PLUS	1540	700	95
7000 ACI 500 PLUS	1840	700	100
7000 ACI 800 PLUS	1800	990	115
7000 ACI 1000 PLUS	2050	990	170
7000 ACI 1500 PLUS	2165	1200	185
7000 ACI 2000 PLUS	2480	1300	305

(*) Dimensions with insulation.

Storage tanks 7000 ACI Plus can be easily integrated both into traditional systems (heat generators) and into systems using renewable sources (chillers, heat pumps). Therefore it is necessary to cope with the lack of time balance between demand and supply of energy with the help of suitable storage systems.
This product, which is supplied in a single package, is provided with a closed-cell insulation made of CFC-and-HCFC-free polyurethane and is suitable for heating/cooling systems as it provides particularly excellent performances in terms of low heat losses (according to UNI TS 11300).
The care taken to study the geometry of the tank provides the best stratification, heat exchange and recovery time.
New hydraulic connections, having a larger diameter, allow the reduction of head losses when operating with reduced ΔT; their positioning at various heights permits the use of different heat generators at the same time without affecting stratification. Ease of use is ensured by reduced weights and dimensions.
It is possible to use additional electrical resistances.

TECHNICAL DATA

Description	Cylinder capacity liters	Thermal losses W	Maximum temperature °C	Maximum pressure bar	Energy efficiency class (F→A+)**	Code
7000 ACI 60 PLUS	57	34	99	6	B	**20090056**
7000 ACI 120 PLUS	123	50	99	6	B	**20082450**
7000 ACI 200 PLUS	203	68	99	6	C	**20028093**
7000 ACI 300 PLUS	277	82	99	6	C	**20028094**
7000 ACI 400 PLUS	390	105	99	6	C	**20028095**
7000 ACI 500 PLUS	473	114	99	6	C	**20028096**
7000 ACI 800 PLUS	732	131	99	6	C	**20137619**
7000 ACI 1000 PLUS	855	139	99	6	C	**20137620**
7000 ACI 1500 PLUS	1420	168	99	6	C	**20137622**
7000 ACI 2000 PLUS	2013	190	99	6	C	**20137624**

(*) The energy efficiency class of the products ranges from F up to A+

ACCESSORIES

Description	Notes	Code
Single-phase electrical resistance 1,5 kW of 1" ½	(1)	**4383270**
Single-phase electrical resistance 2,2 kW of 1" ½	(1)	**4383271**
Single-phase electrical resistance 3,0 kW of 1" ½	(1)	**4383272**
Three-phase electrical resistence 3,8 kW of 1" ½	(1)	**20020707**
Electronic anode with plug		**20055206**

(1) Not compatible with 7000 ACI 60 Plus
0ther available accessories at page 222.

COMPLEMENTARY ITEMS

Pump stations and differential controllers

RSS & EVOSOL



ERP

- Pump station RSS
- Differential controller EVOSOL

Description	H mm	L mm	P mm	Net weight kg
RSS MRS	418	313	185	5,0
RSS MR	418	313	185	4,7
RSS R	364	228	183	4,1
RSS MR 14 MT	290	390	250	0,8
EVOSOL	170	106	52	0,3

EVOSOL is a solar regulation able to manage 9 kinds of plant layouts and meet all different domestic and professional requirements. EVOSOL is able to manage a modulating solar circulator with constant ΔT regulation between solar collector and cylinder, thus allowing the operation of the system even in case of low radiation.
The user-friendly menu and the display allow to control easily the available functions and the selected layout. The frontal access to components eases the electrical wiring; the wide range of accessories allows to customize any system.
RSS is a solar pump station available in four versions: flow and return with differential controller EVOSOL assembled on the system (MRS), flow and return (MR) and only return (R).
The pump stations RSS MRS and MR are provided with circulator pump with PWM controlling, safety devices, filling taps, non-return valve, flow and return temperature gauge. RSS R is provided with circulator pump both for ON/OFF and PWM controlling, safety devices, filling taps, flow regulator and flow meter, non-return valve and temperature gauge.

TECHNICAL DATA

Description	Connection and ball valve	Net area connectable collectors m^2	Notes	Code
RSS MRS	Flow/Return	55	(1)	**20116166**
RSS MR	Flow/Return	55	(2)	**20116167**
RSS R	Only return	20	(3)	**20116168**
RSS MR 14 MT	Flow/Return	30	(2)(4)	**20156553**

(1) Equipped with differential controller EVOSOL.
(2) Suitable only for PWM controlling.
(3) Suitable for PWM or ON/OFF controlling.
(4) Equipped with modulating circulator pump with PWM controlling (a wall mount solar controller has to be installed separately) .


TECHNICAL DATA

Description	Relay standard output nr.	Probe inputs nr.	Supplied probe nr.	Configured schemes nr.	Code
EVOSOL	2	4	1x collector + 2x cylinders	9	**20120499**


USEFUL HEAD AVAILABLE

Solar delivery and return station.
Values referred to a mix of water and 30% glycol.

RSS MRS – RSS R

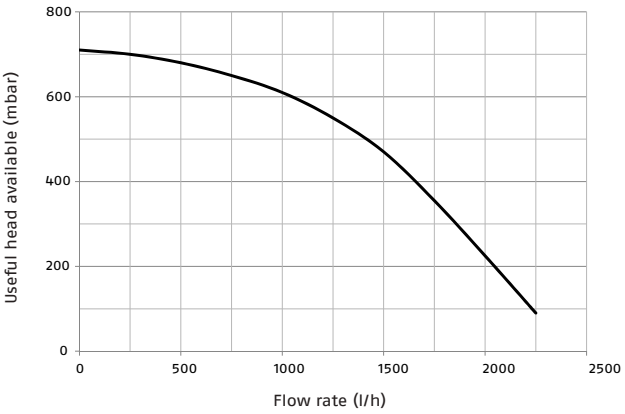

RSS MR 14 MT

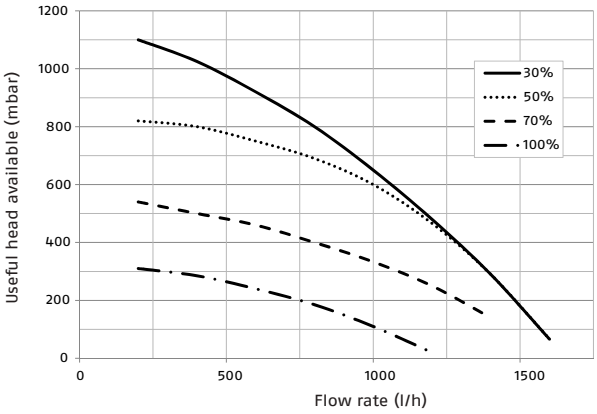

ACCESSORIES


Description	Notes	Code
Electronic anode	(1)	**20123853**
Electronic anode with plug	(2)	**20055206**
Immersion temperature probe in Platinum Pt1000, cable 2,5 m PUR (-10/+80 °C) for tanks or return pipe (FRP6 Pt1000)		**4383196**
Contact temperature probe with platinum gauge Pt1000, olflex cable 2,5 m (-10/+80 °C) for tanks or return pipe (FRP21 Pt1000)		**4383197**
Well temperature probe for high temperature in Platinum Pt1000 PTFE cable 1,5 m (-50/+230 °C) for vacuum collectors (FKP6/H Pt1000)		**4383199**
Probes protection kit against overvoltage (SP1)		**4383415**
Additional temperature probe kit for solar collector		**20125097**
Additional temperature probe kit for cylinder		**20123856**

(1) Suitable for pump station with differential controller (MRS type).
(2) Suitable for pump station without differential controller (R and MR type).

Solar differential controller

Sun Pro





ERP

- Solar controller Sun Pro

Description	H mm	L mm	P mm
SUN 5 PRO 5 RS	227	156	62
SUN 14 PRO 14 RS	260	216	64

SUN PRO is a solar controller able to meet all different domestic and professional requirements, able to manage several system schemes. The design is simple and stylish and suits all environments.
The menu is user-friendly, the display allows the user to easily control the functions and the selected scheme.
Easy access to the electrical wiring from the front side.
Wide range of accessories to customize any system.

TECHNICAL DATA

Description	Relay standard output nr.	Probe inputs nr.	Supplied probe (*) (for flat collector) nr.	Configured schemes nr.	Code
SUN 5 PRO 5 RS	5	9	2x collector + 3x cylinders	7 (+variants)	**20099595**
SUN 14 PRO 14 RS	14	12	2x collector + 4x cylinders	9 (+variants)	**20099607**

(*) Specific probes for flat collectors

ACCESSORIES


Description	Notes	Code
Electronic anode to be wired with differential controller	(1)	**20123853**
Electronic anode with plug	(2)	**20055206**
Immersion temperature probe in Platinum Pt1000, cable 2,5 m PUR (-10/+80 °C) for tanks or return pipe (FRP6 Pt1000)		**4383196**
Contact temperature probe with platinum gauge Pt1000, olflex cable 2,5 m (-10/+80 °C) for tanks or return pipe (FRP21 Pt1000)		**4383197**
Well temperature probe for high temperature in Platinum Pt1000 PTFE cable 1,5 m (-50/+230 °C) for vacuum collectors (FKP6/H Pt1000)		**4383199**
Probes protection kit against overvoltage (SP1)		**4383415**

(1) Suitable for pump station with differential controller (MRS type).
(2) Suitable for pump station without differential controller (R and MR type).

Complementary items

Riello SC Sun
Riello SC Acs



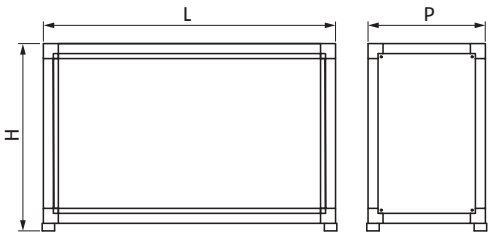

ERP

- Solar heat exchange units
- DHW heat exchange units
- High efficiency pump

Description	H mm	L mm	P mm	Net weight kg
SC SUN 50	600	400	260	22.8
SC SUN 120	835	475	195	32
SC SUN 120 ACS	835	475	195	32
SC SUN 300	1140	1000	500	155
SC ACS 25	600	400	250	16.1
SC ACS 35	600	400	250	19.1
SC ACS 40	600	400	250	19.2
SC ACS 80	835	475	226	30
SC ACS 160	1100	1000	500	158
SC ACS 225	1100	1000	500	176

Riello offers complete and ready-to-install solutions when using puffer storage tanks, while optimizing stratification: heat exchange units both on the solar and the DHW sides.
Riello SC Sun is the solar heat exchanger designed for puffer storage tanks. Its components are sized and managed to transfer the heat with maximum efficiency. The range offers three sizes: up to 50, 120 and 300 m2 of exposed area.
There is also a heat-exchanger that produces directly istantaneous DHW; it can work up to 120 m² of exposed area.
Riello SC ACS is the heat exchanger for the instantaneous production of domestic hot water.
It is designed to be connected with puffer storage tanks and ensures maximum hygiene of the treated water.
The range offers five sizes: 25, 40, 80, 160 and 225 l/min.

TECHNICAL DATA

Description	Exchanged power (*) kW	Max primary output l/h	Temperature Primary min-max °C	Exchange surface m²	Max pressure primary/ secondary bar	Notes	Code
HEAT EXCHANGER FOR SOLAR CIRCUIT							
SC SUN 50	32	1.500	2/110	0.9	6/3	(D)	**20156326**
SC SUN 120	52	2.400	2/110	3.0	6/6	(D)	**20156327**
SC SUN 300	129	6.000	2-110	-	10/10		**20156330**
DHW HEAT EXCHANGER							
SC SUN 120 ACS	52	2.400	2/110	3.0	6/6	(D)	**20156331**

(*) Referred to ΔT=20 °C and 30% glicol.
(D) Availability of the material at our warehouse: 25 working days from the date of the order's validation.

TECHNICAL DATA

Description	DHW production l/min	Min DHW production output l/min	DHW temperature set °C	Max primary delivery output l/h	Plate exchange surface m²	Max. operating pressure bar	Notes	Code
FOR TECHNICAL WATER-DOMESTIC WATER HEAT EXCHANGE								
SC ACS 25	19	2,5	40...55	1.200	0.9	10	(D)	**20156322**
SC ACS 35	28	2,5	40...55	1.700	1.8	10	(D)	**20156324**
SC ACS 40	38	2	30...90	1.850	1.8	6	(1)	**20156325**
SC ACS 80	60	5	30...90	3.600	3	6	(D)(1)	**20182669**
SC ACS 160	100	10	30...85	8.000	-	10	(D)(1)	**20176021**
SC ACS 225	150	10	30...85	10.500	-	10	(D)(1)	**20156329**


(*) DHW production at 45 °C, with water inlet at 10 °C and storage tank temperature at 55 °C.
(**) Max primary/secondary pressure.
(D) Availability of the material at our warehouse: 25 working days from the date of the order's validation.
(1) Heat exchange module that can be assembled in cascade with the appropriate accessories (see accessories).

ACCESSORIES


Description	Notes	Code
Thermostatic sanitary recirculation kit (for SC ACS 25-35)	(D)	**20083502**
Electronic DHW recirculation kit (only for SC ACS 40)		**20182673**
2 modules cascade connection kit (only for SC ACS 40)		**20182674**
3 modules cascade connection kit (only for SC ACS 40)	(D)	**20182675**
Recirculation kit (only for SC ACS 80)	(D)	**20182676**
2 modules cascade connection kit (only for SC ACS 80)	(D)	**20182677**
3 modules cascade connection kit (only for SC ACS 80)	(D)	**20182678**

(D) Availability of the material at our warehouse: 25 working days from the date of the order's validation.
Other available accessories at page 222.

PRINCIPLE EXEMPLARY SCHEME

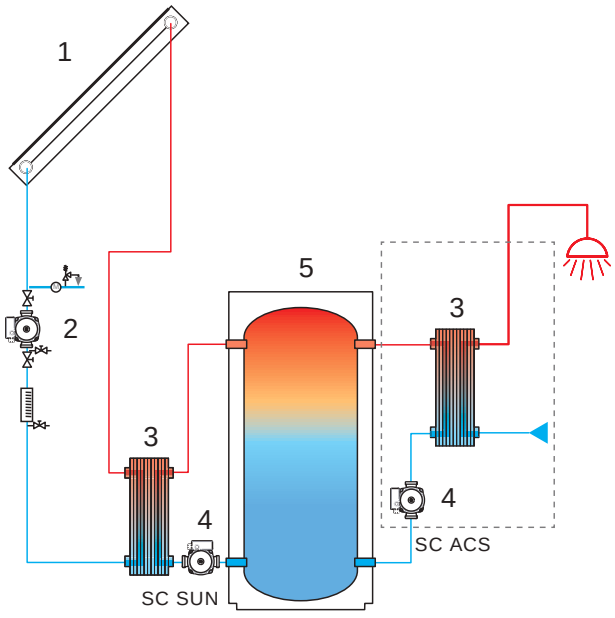

1. Riello solar collector
2. High efficiency solar circulator
3. Plate heat-exchanger
4. High efficiency circulator
5. 7000 Puffer

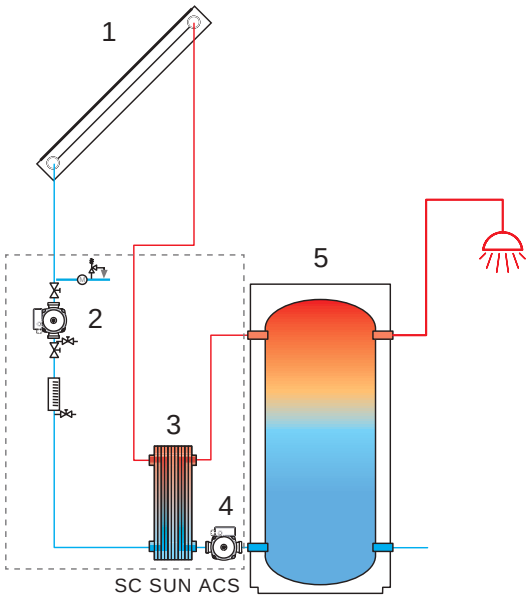


1. Riello solar collector
2. High efficiency solar circulator
3. Plate heat-exchanger
4. High efficiency circulator
5. 7200/3F HV PLUS

ACCESSORIES

SOLAR THERMAL ACCESSORIES

Description	Notes	Code
FITTINGS AND STAINLESS STEEL PIPES		
2 straight fittings kit to be tightened to connect the solar collectors with DN18 copper pipes		**20027281**
2-fittings kit to be tightened (90°) to connect the solar collectors with DN18 copper pipes		**20055236**
Kit of two fittings to tighten terminals	(2)	**20094627**
2-fittings kit for the connection between DN18 copper pipe and hydraulic group		**20132219**
2 straight fittings kit to connect the solar collectors with stainless steel pipes (copper pipe DN18/stainless steel pipe DN16)		**20027289**
2-fittings kit for the connection between copper pipe and hydraulic group (copper pipe DN18/ stainless steel pipe DN16)		**20132220**
Fittings kit to be welded		**20132142**
Fittings kit for stainless steel pipe	(1)	**20132143**
Flexible stainless steel pipe kit DN16 of 15 m (contains: stainless steel wavy double-pipe for flow and return, solar probe cable and suitable insulation for solar applications)	(2)	**4383254**
Flexible stainless steel pipe kit DN16 of 20 m (contains: stainless steel wavy double-pipe for flow and return, solar probe cable and suitable insulation for solar applications)	(2)	**4383255**
FLOW RATE REGULATORS		
Flow rate regulator 12 (DN20; 2-12 l/min; kvs=2,2 m^3/h)		**20011536**
Flow rate regulator 20 (DN20, 8-20 l/min, kvs=5 m^3/h)		**20011538**
Manual solar air vent kit		**20026577**
GLYCOL		
5 kg propylene glycol kit (concentrated heat-transfer liquid, with corrosion inhibitors, for flat-plate collectors)		**4383085**
10 kg propylene glycol kit (concentrated heat-transfer liquid, with corrosion inhibitors, for flat-plate collectors)		**4383059**
20 kg pre-mixed glycol for CSV R (ready-to-use heat transfer liquid, suitable for vacuum collectors, frost-protection up to -28 °C)		**4383118**
20 kg glycol-free heat-transfer liquid (long-lasting and non-toxic)		**20094030**
EXPANSION VESSELS		
18L SUN expansion vessel (ideal for solar systems, bracket equipped, ¾" fitting)		**4383052**
24L SUN expansion vessel (ideal for solar systems, bracket equipped, ¾" fitting)		**4383053**
35L SUN expansion vessel (ideal for solar systems, bracket equipped, ¾" fitting)		**4383054**
50L expansion vessel (ideal for solar systems, provided with supporting base and 1" fitting)		**4383256**
100L expansion vessel (ideal for solar systems, provided with supporting base and 1" fitting)		**4383257**
150L expansion vessel (ideal for solar systems, provided with supporting base and 1" fitting)		**4383258**
300L expansion vessel (ideal for solar systems, provided with supporting base and 1" fitting)		**4383259**
OTHER ACCESSORIES		
¾" thermostatic mixing valve kit		**20020778**
Differential electronic thermostat		**20039694**

(1) Fittings kit to be ordered with the stainless steel flexible pipe.
(2) Stainless steel flexible pipe, insulated, without fittings.



CENTRALIZED HEATING

WALL-HUNG MODULAR SYSTEM 228

FLOOR-STANDING MODULAR SYSTEM 248

FLOOR-STANDING BOILERS 277

STEEL JET BURNER BOILERS GAS/OIL 300

CONTROL PANELS AND THERMOREGULATIONS 349

FLUE OPTIONS SYSTEM 359

WALL-HANG/FLOOR-STANDING CONDENSATION MODULES

	GAS INDOOR	GAS OUTDOOR
WALL-HUNG THERMAL MODULES STAINLESS STEEL	 CONDEXA HPR CONDEXA HPR 35 (33,99-68,22kW)** page 234	
	 CONDEXA PRO (55.7-1098.0 kW)** page 234	 CONDEXA PRO* (55.7-1098.0 kW)** page 234
FLOOR-STANDING THERMAL MODULES STAINLESS STEEL	 STEEL PRO POWER (111.4-1290.0 kW)** page 248	 STEEL PRO POWER* (111.4-1290.0 kW)** page 248
FLOOR-STANDING THERMAL MODULES ALUMINUM	 ALU PRO POWER (112.1-585.0 kW)** page 261	


* Provided with kit for outdoor installation.
** The output data are referred to the min-max (80°/60 °C) of cascade applications.

Please verify with Sales the availability of the product in the destination Country before ordering

Indoor wall-hung gas condensing modules

Condexa HPR



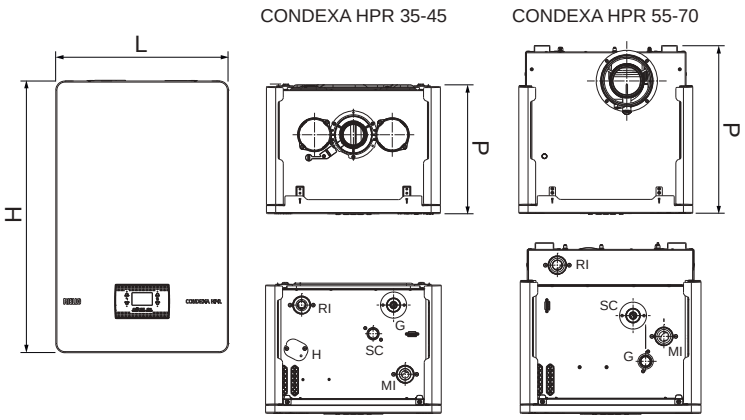

MI - FLOW Ø G 1" ½ M
RI - RETURN Ø G 1" ½ M
SC - CONDENSATE DISCHARGE Ø 25 mm
G - GAS Ø G 1" M

ERP

- In conformity with Directive 2009/125/EC
- Condensing thermal modules for indoor use
- Possible cascade up to 280 kW
- Modular design to ensure an easy and fast installation
- Low polluting emissions, Class 6 (DIN EN 15502)

Description	H mm	L mm	P mm	Ø mm	Net weight kg
CONDEXA HPR 35	740	470	350	60/100	39
CONDEXA HPR 45	740	470	350	60/100	39
CONDEXA HPR 55	740	470	453	80/125	53
CONDEXA HPR 70	740	470	453	80/125	53

Condexa HPR is the wall-hung modular condensing system which make the compactness the primary point of strength. The primary stainless steel heat exchanger with horizontal envelope, with a combustion chamber with frontal access, ensure high performances in terms of efficiency and reliability in times.
The range is composed by 4 models in only heating configuration, with thermal modules from 34,9 up to 70 kW.
Condexa HPR can be installed as stand alone either indoor or outdoor in partially covered environment, while the cascade can be installed indoor up to 4 modules, both in FRONT and BACK-to-BACK configurations.
The management of the cascade is ensured by the new electronic system manager, ease and user friendly which can also manage, parametrize and visualize up to 4 modules in cascade as well as manage up to 6 independent zones.

- Designed to operate with natural gas and hydrogen mixtures, up to a maximum of 20% of hydrogen.
- 8:1 turndown ratio in stand alone installation, up to 32:1 in cascade.
- Modulating circulator with high hydraulic head and low consumption.
- Maximum operating pressure: 5 bar.
- Ease of installation.
- Wide range of accessories to complete both the stand alone and the cascade installation, both in FRONT and BACK-to-BACK configuration.

TECHNICAL DATA

Description	Output kW			Efficiency - %			Energy efficiency class (D→A+++)*	Language	Code
	Useful 80°/60° max	Useful 50°/30° max	Furnace min-max	Useful Pn (80°/60°)	Useful Pn (50°/30°)	Useful 30% Pn (50°/30°)			
CONDEXA HPR 35	33,99	37,31	5,2-34,9	97,4	106,9	108,2	A	IT/EN	**20190064**
								FR/NL/DE	**20202709**
								ES/PT	**20202710**
								RU/UA	**20202711**
								PL/HU/RO	**20202712**
								SK/SR/GR/SI/HR	**20202714**
CONDEXA HPR 45	43,88	47,30	5,2-45,0	97,5	105,1	107,9	A	IT/EN	**20190066**
								FR/NL/DE	**20202715**
								ES/PT	**20202716**
								RU/UA	**20202717**
								PL/HU/RO	**20202718**
								SK/SR/GR/SI/HR	**20202720**
CONDEXA HPR 55	53,60	58,25	8,2-55,0	97,5	105,9	107,6	A	IT/EN	**20190067**
								FR/NL/DE	**20202721**
								ES/PT	**20202722**
								RU/UA	**20202723**
								PL/HU/RO	**20202724**
								SK/SR/GR/SI/HR	**20202725**
CONDEXA HPR 70	68,22	74,19	8,2-70,0	97,5	106,0	107,5	A	IT/EN	**20190068**
								FR/NL/DE	**20202726**
								ES/PT	**20202727**
								RU/UA	**20202728**
								PL/HU/RO	**20202730**
								SK/SR/GR/SI/HR	**20202732**

(*) HEATING: the energy efficiency class of the products ranges from D up to A+++

ACCESSORIES - STAND ALONE INSTALLATION

Description	Notes	Code
HYDRAULIC ACCESSORIES		
Hydraulic separator/plate heat exchanger connection	(1)	**20195886**
Horizontal hydraulic separator		**20195884**
Brazed plate heat exchanger kit for stand alone boiler (20 plates)	(2)	**20195888**
Brazed plate heat exchanger kit for stand alone boiler (30 plates)	(2)	**20197360**
Internal 3 way valve kit	(3)	**20195889**
External 3 way valve kit	(4)	**20195890**
Delivery/return connection for direct installation		**20195891**
SAFETY ACCESSORIES		
Safety kit manifold	(5)	**20195883**
Safety valve 4,5 bar FF 3/4"x1"	(6)	**20199254**
MECHANICAL ACCESSORIES		
Cover for safety kit/hydraulic separator		**20195885**
Cover for plate heat exchanger		**20195887**
Spacer kit for fixing to wall	(7)	**20200070**
ELECTRICAL ACCESSORIES		
REC10MHC remote control	(8)	**20207837**

(1) Suitable for the combination with safety valve cod.20199254.
(2) To be installed mandatory with cod.20196701.
(3) Suitable for 35-45 kW models.
(4) Suitable with the plate heat exchanger kit for stand alone boiler for the DHW production.
(5) Contains: thermometer, pressure gauge, safety valve, pressure switch and fuel shut-off valve.
(6) For Italian market: suitable only for 35 kW model.
(7) Kit required for rear wall concentric discharge for 55-70 kW models.
(8) Allows the management of: solar thermal and up to 3 direct/mixed independent zones.

ACCESSORIES – CASCADE INSTALLATION

Description	Notes	Code
HYDRAULIC ACCESSORIES		
Ramps with shut-off	(1)(2)	20197002
Ramps with shut-off - B2B	(1)(2)	20197004
Ramps without shut-off	(1)(2)	20197005
Ramps without shut-off - B2B	(1)(2)	20197006
Gas ramp kit for cascade installation 35-45 kW	(1)	20197634
Gas ramp kit for cascade installation 55-70 kW	(1)	20197635
Gas ramp kit for cascade installation 35-45 kW - B2B	(1)	20197639
Gas ramp kit for cascade installation 55-70 kW - B2B	(1)	20197640
2" 1/2 manifolds for 2 boiler cascade		20197007
2" 1/2 manifolds for 1 boiler cascade		20197362
Flange 2" 1/2 PN6		20197366
Blind flanges 2''1/2 PN6		20197367
Condensate discharge kit for cascade		20197364
Manifold kit for 2" 1/2 safety devices housing		20196449
2"1/2 hydraulic separator kit		20197642
DN65/DN50 connection kit (HEATGATE DN50)	(3)	20196494
Heat exchanger SP 35-DN50 21 (21) N	(11)	20200611
Heat exchanger SP 35-DN50 27 (27) N	(11)	20200613
Heat exchanger SP 35-DN50 33 (33) N	(11)	20200614
Heat exchanger SP 35-DN50 41 (41) N	(11)	20200615
Heat exchanger SP 35-DN50 49 (49) N	(11)	20200616
Heat exchanger SP 35-DN50 53 (53) N	(11)	20200618
Heat exchanger SP 35-DN50 61 (61) N	(11)	20200619
SAFETY ACCESSORIES		
Safety devices kit	(4)	20071190
Safety valve up to 400 kW (4,5 bar)		20197368
Fuel shut-off valve kit (VIC) - ØG.1"	(5)(8)	20009486
Fuel shut-off valve kit (VIC) - ØG.1" ½	(6)(8)	20009482
Fuel shut-off valve kit (VIC) - ØG.2"	(7)(8)	20009483
MECHANICAL ACCESSORIES		
Manifolds and ramps cover for stand alone boiler		20197363
Ground fixing kit (SP 35-40 models)	(9)	20120282
FLUE DISCHARGE(*)		
Fixed split system kit Ø80 mm		20129765
Adapter Ø80 to Ø110 mm		20197070
Ø80/110 mm - Rainproof vertical adapter		20196319
90° Ø80 mm bend		20137506
Air-intake kit B23		20137538
Cascade terminal Ø160 mm with condensate drain		20062338
Collector Ø160 mm for 1 boiler		20197583
Collector Ø200 mm for 1 boiler		20197584
Adapter Ø160 to Ø200 mm		20132391
Y-fitting Ø160/160 mm		20197582
ELECTRICAL ACCESSORIES		
Cascade and zone remote control	(10)	20200265






(1) To be ordered for each boiler of the cascade system (qty = no. boiler).
(2) Without gas ramp.
(3) To be ordered with the "Ground fixing kit (SP35-40 models) cod. 20120282.
(4) Safety and fuel-shut-off valve are not included.
(5) Recommended up to a maximum output of 131 kW, calculated taking into consideration the gas supply pressure = 20 mbar.
(6) Recommended up to a maximum output of 230 kW, calculated taking into consideration the gas supply pressure = 20 mbar.
(7) Recommended up to a maximum output of 580 kW, calculated taking into consideration the gas supply pressure = 20 mbar.
(8) Intervention temperature 97 °C - Capillary length 5 m.
(9) Allows the plate exchanger to be fixed to the structure contained in the cod.20196494.
(10) Allows the management of: solar thermal and up to 6 direct/mixed independent zones.
(11) Configurations with plate heat exchangers: see the product Riello HEATgate, section SYSTEM COMPLEMENTARY ITEMS.
(*) Specific codes for the flue discharge/air intake in case of cascade installation.
NOTE: to calculate the maximum admissible output of the fuel shut-off valves, with supply pressures other than 20 mbar, contact the pre-sales service.
For the flue gas system, refer to the current catalog.

ACCESSORIES TO COMPLETE THE SYSTEM

Description	Notes	Code
HYDRAULIC ACCESSORIES		
1''1/2 MF shut-off cock		20190221
Condensate neutralizer N2 (up to 450 kW)		4031810
Condensate neutralizer HN2 (up to 280 kW)	(1)	4031811
MECHANICAL ACCESSORIES		
Support frame	(2)	20196701
Support frame rig	(3)	20196699
ELECTRICAL ACCESSORIES		
Board BE09 with double multi-function relay		20192808
1st direct/mixed area control	(4)	20132795
Control of 2nd and 3rd direct/mixed zone	(4)	20132796
External probe		1220559
Immersion probe	(5)	1220599
Solar thermal unit interface kit		20168672
LPG TRANSFORMATION ACCESSORIES		
LPG transformation kit (35/45 kW)		20201490
LPG transformation kit (55/70 kW)		20201489

(1) Equipped with extraction pumps.
(2) Frame required in case of either cascade installation or stand alone installation with plate heat exchanger.
(3) Necessary in case of back-to-back cascade configuration.
(4) In combination with cod.20207837 in stand alone installation or with cod.20200265 in cascade installation for the management of direct/mixed zones.
(5) Usable as: primary probe, secondary probe, cylinder probe.

COMBINATIONS OF PUMPS AND PLATE HEAT EXCHANGERS FOR BOILER OPERATION WITH PRIMARY ΔT = 20 °C

Description	Safety devices			Frame		Heat exchangers			
	Only safety valve		Safety devices			ΔT primary/secondary = 10 °C		ΔT primary/secondary = 7.2 °C	
									
	Hydraulic separator/plate heat exchanger connection	Safety valve 4,5 bar FF 3/4"x1"	Safety kit manifold	Support frame	Support frame rig	Brazed plate heat exchanger kit for stand alone boiler (20 plates)	Brazed plate heat exchanger kit for stand alone boiler (30 plates)	Brazed plate heat exchanger kit for stand alone boiler (20 plates)	Brazed plate heat exchanger kit for stand alone boiler (30 plates)
	20195886	20199254	20195883	20196701	20196699	20195888	20197360	20195888	20197360
CONDEXA HPR 35	●	●		●	● (*)	●		●	
CONDEXA HPR 45	●	●	●	●	● (*)	●		●	
CONDEXA HPR 55	●	●	●	●	● (*)		●		●
CONDEXA HPR 70	●	●	●	●	● (*)		●		●

(*) To be used in case where the frame is not bound to the wall.

TABLE OF COMBINATION OF BOILER CASCADE COLLECTORS

Model	CONDEXA HPR 35	CONDEXA HPR 45	CONDEXA HPR 55	CONDEXA HPR 70
Boiler heat output kW	**34,9**	**45**	**55**	**70**
No. boilers	TOTAL CASCADE OUTPUT/DIAMETER H_2O COLLECTORS			
2	70/ 2" ½	90/ 2" ½	11/ 2" ½	140/ 2" ½
3	105/ 2" ½	135/ 2" ½	165/ 2" ½	210/ 2" ½
4	140/ 2" ½	180/ 2" ½	220/ 2" ½	280/ 2" ½

TABLE OF COMBINATION OF COLLECTOR CODES IN RELATION TO THE NUMBER OF BOILERS IN CASCADE, IN A FRONT CONFIGURATION

Model	CONDEXA HPR 35	CONDEXA HPR 45	CONDEXA HPR 55	CONDEXA HPR 70
Boiler heat output kW	**34,9**	**45**	**55**	**70**
No. boilers	SELECTION OF COLLECTOR CODES FOR FRONT CONFIGURATION			
2	1x 20197007	1x 20197007	1x 20197007	1x 20197007
3	1x 20197007 1x 20197362	1x 20197007 1x 20197362	1x 20197007 1x 20197362	1x 20197007 1x 20197362
4	2x 20197007	2x 20197007	2x 20197007	2x 20197007

TABLE OF COMBINATION OF COLLECTOR CODES IN RELATION TO THE NUMBER OF BOILERS IN CASCADE, IN A BACK TO BACK CONFIGURATION

Model	CONDEXA HPR 35	CONDEXA HPR 45	CONDEXA HPR 55	CONDEXA HPR 70
Boiler heat output kW	**34,9**	**45**	**55**	**70**
No. boilers	SELECTION OF COLLECTOR CODES FOR BACK TO BACK CONFIGURATION			
2	1x 20197362	1x 20197362	1x 20197362	1x 20197362
3	1x 20197007	1x 20197007	1x 20197007	1x 20197007
4	1x 20197007	1x 20197007	1x 20197007	1x 20197007

TABLE FOR SELECTING THE FLUE GASES COLLECTORS DIAMETERS IN RELATION TO THE NUMBER OF BOILERS ON EACH COLLECTOR

Model	CONDEXA HPR 35	CONDEXA HPR 45	CONDEXA HPR 55	CONDEXA HPR 70
Boiler heat output kW	**34,9**	**45**	**55**	**70**
No. boilers	FLUE COLLECTORS DIAMETER			
1a	Ø160	Ø160	Ø160	Ø160
2a	Ø160	Ø160	Ø160	Ø160
3a	Ø160	Ø160	Ø160	Ø160
4a	Ø160	Ø160	Ø160	Ø200

TABLE FOR SELECTING THE FLUE GASES COLLECTORS CODES IN RELATION TO THE NUMBER OF BOILERS IN FRONT CONFIGURATION

Model	CONDEXA HPR 35	CONDEXA HPR 45	CONDEXA HPR 55	CONDEXA HPR 70
Boiler heat output kW	**34,9**	**45**	**55**	**70**
No. boilers	TOTAL CASCADE OUTPUT/DIAMETER H_2O COLLECTORS			
2	2x 20129765 4x 20137506 2x 20137538 2x 20197070 1x 20062338 2x 20197583	2x 20129765 4x 20137506 2x 20137538 2x 20197070 1x 20062338 2x 20197583	2x 20196319 1x 20062338 2x 20197583	2x 20196319 1x 20062338 2x 20197583
3	3x 20129765 6x 20137506 3x 20137538 3x 20197070 1x 20062338 3x 20197583	3x 20129765 6x 20137506 3x 20137538 3x 20197070 1x 20062338 3x 20197583	3x 20196319 1x 20062338 3x 20197583	3x 20196319 1x 20062338 3x 20197583
4	4x 20129765 8x 20137506 4x 20137538 4x 20197070 1x 20062338 4x 20197583	4x 20129765 8x 20137506 4x 20137538 4x 20197070 1x 20062338 4x 20197583	4x 20196319 1x 20062338 4x 20197583	4x 20196319 1x 20062338 1x 20132391 3x 20197583 1x 20197584


TABLE FOR SELECTING THE FLUE GASES COLLECTORS CODES IN RELATION TO THE NUMBER OF BOILERS IN BACK TO BACK CONFIGURATION

Model	CONDEXA HPR 35	CONDEXA HPR 45	CONDEXA HPR 55	CONDEXA HPR 70
Boiler heat output kW	**34,9**	**45**	**55**	**70**
No. boilers	SELECTION OF FLUE GASES COLLECTOR CODES FOR BACK TO BACK CONFIGURATIONS			
2	2x 20129765 4x 20137506 2x 20137538 2x 20197070 2x 20062338 1x 20197582 2x 20197583	2x 20129765 4x 20137506 2x 20137538 2x 20197070 2x 20062338 1x 20197582 2x 20197583	2x 20196319 2x 20062338 1x 20197582 2x 20197583	2x 20196319 2x 20062338 1x 20197582 2x 20197583
3	3x 20129765 6x 20137506 3x 20137538 3x 20197070 2x 20062338 1x 20197582 3x 20197583	3x 20129765 6x 20137506 3x 20137538 3x 20197070 2x 20062338 1x 20197582 3x 20197583	3x 20196319 2x 20062338 1x 20197582 3x 20197583	3x 20196319 2x 20062338 1x 20197582 3x 20197583
4	4x 20129765 8x 20137506 4x 20137538 4x 20197070 2x 20062338 1x 20197582 4x 20197583	4x 20129765 8x 20137506 4x 20137538 4x 20197070 2x 20062338 1x 20197582 4x 20197583	4x 20196319 2x 20062338 1x 20197582 4x 20197583	4x 20196319 2x 20062338 1x 20137538 4x 20197583

Indoor wall-hung gas condensing modules

Condexa Pro



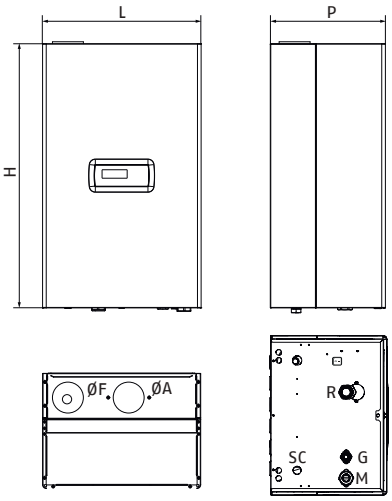

M-FLOW G 1" ½
G-GAS G 1"
R-RETURN G 1" ½
SC-CONDENSATE DISCHARGE Ø24 mm
ØF-FUME
ØA-AIR (opz)

ERP

- In conformity with Directive 2009/125/EC
- Condensing thermal modules for indoor use (for outdoors with optional kit)
- Possible cascade up to 1120 kW
- Modular design to ensure an easy and fast installation
- Low polluting emissions, Class 6 (DIN EN 15502)

Description	H mm	L mm	P mm	Ø mm	Net weight kg
CONDEXA PRO 57 P	1000	600	435	80	64
CONDEXA PRO 70 P	1000	600	435	80	64
CONDEXA PRO 90	1000	600	435	110	69
CONDEXA PRO 100	1000	600	435	110	69
CONDEXA PRO 115	1170	600	435	110	84
CONDEXA PRO 135	1170	600	435	110	90

The Condexa Pro System is the new Riello high performance wall-hung condensing modular system that can cover a vast range of applications, and which can be installed indoors or outdoors, with an open or sealed combustion chamber, with a single boiler or in cascade up to 1120 kW.
The range consists of 6 models with thermal modules from 57 to 131 kW.
Each thermal module has a new heat exchanger, with patented structures, composed of two smooth concentric stainless steel pipes, having respectively an internal pentagonal section and a circular outside section, designed to maximise the heat exchange surface and provide maximum resistance to corrosion.
The primary circuit pump with modulating adjustment allows you top operate with a settable consent ΔT, thereby reducing the system's steady state times and maximising the condensation. The standard electronics includes climatic regulation, management of the cascade of the modules, with integrated master/slave functions, the automatic switching between summer/winter and the possibility of managing a direct zone and a DHW storage cylinder.
The electronics also provides the possibility of the remote management using the 0-10V input or with the Modbus protocol.
Included as standard are: boiler discharge tap, LPG conversion kit and wall support.
Completing the system are accessories specifically designed for modular and cascade applications, with the possibility of working with various hydraulic management logics, namely thermal modules with circulators or no shut-off.
With specific accessories it is also possible to manage the distribution of the secondary circuit, up to 16 mixed zones. The optimal management of the combustion and the high modulation ratios, up to 1 to 50 for the version with 10 thermal modules, provide high levels of efficiency and low levels of polluting emissions (Class 6 UNI EN 15502).

- Continuity of service is guaranteed by system modularity: even in the event of fault of a module, overall operation shall not be compromised
- The anti-freeze and anti-seizing functions ensure it operates in all weather conditions
- A wide range of accessories is available to ensure the installation is simple, fast and complete with cascade
- Maximum operating pressure: 6 bar.

TECHNICAL DATA

Description	Power - kW			Efficiency - %			Energy efficiency class (D→A+++)*	Language	Code
	Output useful 80°/60° max	Output useful 50°/30° max	Furnace input min-max	Useful Pn (80°/60°)	Useful Pn (50°/30°)	Useful 30% Pn (50°/30°)			
CONDEXA PRO 57 P	55.7	61.9	14.0-57.0	98.3	108.6	109.2	A	IT/EN	**20115223**
								DE	**20150685**
								ES/PT	**20151706**
								RU/UA	**20151726**
								PL/RO	**20151754**
								SK/CZ/GR/SI/CR	**20151824**
CONDEXA PRO 70 P	67.0	73.9	14.0-68.0	97.9	108.1	108.8	A	IT/EN	**20115224**
								DE	**20150686**
								ES/PT	**20151707**
								RU/UA	**20151727**
								SK/CZ/GR/SI/CR	**20151756**
								PL/RO	**20151825**
CONDEXA PRO 90	88.3	97.4	19.4-90.0	98.0	108.3	108.9	-	IT/EN	**20115225**
								DE	**20150687**
								ES/PT	**20151709**
								RU/UA	**20151728**
								SK/CZ/GR/SI/CR	**20151759**
								PL/RO	**20151826**
CONDEXA PRO 100	95.3	105.1	19.4-97.0	97.9	108.2	108.8	-	IT/EN	**20115226**
								DE	**20150688**
								ES/PT	**20151721**
								RU/UA	**20151730**
								SK/CZ/GR/SI/CR	**20151762**
								PL/RO	**20151827**
CONDEXA PRO 115	109.8	121.1	22.4-112.0	98.3	108.6	108.8	-	IT/EN	**20115228**
								DE	**20150689**
								ES/PT	**20151722**
								RU/UA	**20151731**
								SK/CZ/GR/SI/CR	**20151767**
								PL/RO	**20151828**
CONDEXA PRO 135	129.0	142.1	26.2-131.0	97.9	108.3	108.9	-	IT/EN	**20115229**
								DE	**20150690**
								ES/PT	**20151723**
								RU/UA	**20151732**
								SK/CZ/GR/SI/CR	**20151768**
								PL/RO	**20151829**

(*) HEATING: the energy efficiency class of the products ranges from D up to A+++

STAND ALONE BOILER CONFIGURATION GUIDE AND ACCESSORIES SELECTION



1. STAND ALONE BOILER CONFIGURATION
2. ACCESSORIES TO COMPLETE THE SYSTEM
3. OPTIONAL ACCESSORIES
   - 3.1 Shunt pumps
   - 3.2 Additional safety devices
   - 3.3 Hydraulic separator or plate heat exchanger*
   - 3.4 Secondary circuit management
   - 3.5 Indoor/outdoor installation
   - 3.6 Sealed chamber conversion kit
   - 3.7 Flue system
   - 3.8 Treatment systems for condensate neutralization

(*) Configurations with plate heat exchangers: see the product Riello HEATgate, section SYSTEM COMPLEMENTARY ITEMS.

1. STAND ALONE BOILER CONFIGURATION

Powers obtainable with stand alone installation

Model	CONDEXA PRO 57 P	CONDEXA PRO 70 P	CONDEXA PRO 90	CONDEXA PRO 100	CONDEXA PRO 115	CONDEXA PRO 135
Thermal flow kW	57	68	90	97	112	131

2. ACCESSORIES TO COMPLETE THE SYSTEM

Description	Notes	Code
External probe		**20132778**
Condensate drain kit for stand alone boiler	(1)	**20133102**

(1) Mandatory on all models.

3. OPTIONAL ACCESSORIES

3.1 Shunt pumps (only for 90-135 kW)

Description	Notes	Code
Injection pump kit (90-115 kW)	(1)(2)	**20125034**
Injection pump kit with high residual head (115 kW) and low residual head (135 kW)	(1)(3)	**20125035**
Injection pump kit with high residual head (135 kW)	(1)(4)	**20125040**

(1) On the models Condexa Pro 57-70 P the shunt pump is already onboard.
(2) This shunt pump, that can be fitted within the boiler, offers a high residual head on Condexa Pro 90 - 100 and with these boilers it can be combined with the (optional) plate heat exchanger; if used with Condexa Pro 115, it can be combined with the (optional) hydraulic separator but not with the plate heat exchanger.
(3) If combined with Condexa Pro 135, this shunt pump can be fitted within the boiler and offers a very low residual head (10 mbar); It has to be used ONLY in case of combination with horizontal hydraulic separator code: 20131897.
(4) This shunt pump cannot be fitted within the boiler, it has to be installed under the gas fired boiler.

3.2 Additional safety devices

Description	Notes	Code
SA installation kit for stand-alone boiler	(1)(2)	**20142219**
Manifold kit with safety devices (INAIL) for stand alone boiler	(3)	**20131898**
Manifold kit with safety devices for stand alone boiler	(4)(5)	**20189780**
Safety valve 5.4 bar ØG.¾'' FF		**20143981**
Kit with connection pipe to hydraulic separator for stand alone boiler		**20131899**
Shut-off cock		**20190221**






(1) This kit is necessary for the stand-alone installation. It contains: connection pipe kit (1x code 20131899), hydraulic separator kit for stand alone boiler (1x code 20131897), condensate drain syphone (1x code 20133102), safety valve 5.4 bar (1x code 20143981) and 2 ball valves.
(2) Condensate drain syphone (code 20133102) is not included in the boilers.
(3) Includes all the safety devices, including safety valve and VIC mandatory for the Italian market.
(4) Includes pressure gauge, thermometer and 3 bar safety valve (¾ "FF). Coupled with the under boiler cover kits (20145587 or 20133224) it allows the display of temperature and pressure values
(5) If an operating pressure> 3 bar is required, it can be combined with the safety valve code 20143981.

3.3 Hydraulic separator or plate heat exchanger

Description	Notes	Code
Horizontal hydraulic separator kit for stand alone boiler		**20131897**
Frame kit for front cascades	(1)	**20131663**
Frame conversion kit for B2B cascades		**20131664**
2/3 way valve kit	(2)	**20125037**
Brazed plate heat exchanger kit for stand alone boiler (20 plates)	(3)	**20132368**
Brazed plate heat exchanger kit for stand alone boiler (30 plates)	(3)	**20132369**
Brazed plate heat exchanger kit for stand alone boiler (40 plates)	(3)	**20132370**
Brazed plate heat exchanger kit for stand alone boiler (50 plates)	(3)	**20132371**
Brazed plate heat exchanger kit for stand alone boiler (60 plates)	(3)(4)	**20132372**
Delivery/return line fittings kit for direct installation (57-135 kW)		**20136823**
Cover for plate heat exchanger		**20145587**
Cover for safety kit/hydraulic separator unit for stand alone boiler		**20133224**

(1) The frame is necessary in the case of installation with plate heat exchanger.
(2) Kit combinable with plate heat exchanger kits for stand alone boiler for DHW production.
(3) To be installed mandatory with code 20131663.
(4) To be mandatory combined with the circulator code 20125040.

COMBINATIONS OF PUMPS AND PLATE HEAT EXCHANGERS FOR BOILER OPERATION WITH PRIMARY ΔT = 20 °C

Description	Safety devices				Frame		Pumps			Plate heat exchangers							
	Safety devices			INAIL						ΔT primary/secondary = 10 °C				ΔT primary/secondary = 7.2 °C			
																	
	Kit with connection pipe to hydraulic separator for stand alone boiler	Safety valve 5.4 bar ØG.¾" FF	Manifold kit with safety devices for stand alone boiler	Manifold kit with INAIL safety devices for stand alone boiler	Frame kit for front cascades	Frame conversion kit for B2B cascades	Injection pump kit (90-115 kW)	Injection pump kit with high residual head (115 kW) and low residual head (135 kW)	Injection pump kit with high residual head (135 kW)	Brazed plate heat exchanger kit for stand alone boiler (20 plates)	Brazed plate heat exchanger kit for stand alone boiler (30 plates)	Brazed plate heat exchanger kit for stand alone boiler (40 plates)	Brazed plate heat exchanger kit for stand alone boiler (60 plates)	Brazed plate heat exchanger kit for stand alone boiler (30 plates)	Brazed plate heat exchanger kit for stand alone boiler (40 plates)	Brazed plate heat exchanger kit for stand alone boiler (50 plates)	Brazed plate heat exchanger kit for stand alone boiler (60 plates)
	20131899	20143981	20189780	20131898	20131663	20131664	20125034	20125035	20125040	20132368	20132369	20132370	20132372	20132369	20132370	20132371	20132372
CONDEXA PRO 57 P	●	●	●	●	●	● (*)	●			●				●			
CONDEXA PRO 70 P	●	●	●	●	●	● (*)	●			●				●			
CONDEXA PRO 90	●	●	●	●	●	● (*)	●				●				●		
CONDEXA PRO 100	●	●	●	●	●	● (*)	●				●				●		
CONDEXA PRO 115	●	●	●	●	●	● (*)		●				●				●	
CONDEXA PRO 135	●	●	●	●	●	● (*)			●				●				●

(*) To be used in case where the frame is not bound to the wall.

3.4 Secondary circuit management

Description	Notes	Code
Immersion probe	(1)	**1220599**
Electronic kit for managing additional direct or mixed zone	(2)	**20220356**

(1) Utilized for the management of secondary/tank circuit.
(2) The maximum number of kits that can be installed is 16
NOTE: for adjusting the ambient temperature use Riello thermostats and chronothermostats on page 420.

3.5 Outdoor installation

Description	Code
IPX5D kit for outdoor installation (57-70 kW)	**20132365**
IPX5D kit for outdoor installation (90-135 kW)	**20128135**

3.6 Sealed chamber conversion kit (C type)

Description	Code
Conversion kit C type (57-70 kW)	**20131665**
Conversion kit C type (90-135 kW)	**20131668**

3.7 Flue system

Description	Notes	Code
Spacer kit for fixing to wall	(1)	**20131270**

(1) Kit required for rear wall concentric discharge
NOTE: for each type check the maximum equivalent lengths by consulting the technical data sheet and/or contacting the pre-sales service.
For the flue gas system, refer to page 359.

3.8 Treatment systems for condensate neutralization

Description	Notes	Code
Condensate neutralizer HN2 (up to 280 kW)	(1)	**4031811**
Condensate neutralizer N2 (up to 450 kW)		**4031810**

(1) Equipped with extraction pumps.

BOILERS CASCADE CONFIGURATION GUIDE AND ACCESSORIES SELECTION



1. BOILERS CASCADE CONFIGURATION
2. SELECTION OF THE LAYOUT FRONT OR BACK-TO-BACK
3. ACCESSORIES TO COMPLETE THE SYSTEM
4. ACCESSORIES
   - 4.1 Support frame
   - 4.2 Shunt pumps
   - 4.3 Connection pipes
   - 4.4 Water collectors (delivery/return) -gas-condensate
   - 4.5 Additional safety devices
   - 4.6 Hydraulic separator or plate heat exchanger*
   - 4.7 Secondary circuit management
   - 4.8 Sealed chamber conversion kit
   - 4.9 Flue gas exhaust systems
   - 4.10 Treatment systems for condensate neutralization

(*) Configurations with plate heat exchangers: see the product Riello HEATgate, section SYSTEM COMPLEMENTARY ITEMS.

1. BOILERS CASCADE CONFIGURATION

Powers obtainable with cascade system installation


Model	CONDEXA PRO 57 P	CONDEXA PRO 70 P	CONDEXA PRO 90	CONDEXA PRO 100	CONDEXA PRO 115	CONDEXA PRO 135
Nr. boilers	TOTAL POWER					
2	114	136	180	194	224	262
3	171	204	270	291	336	393
4	228	272	360	388	448	524
5	285	340	450	485	560	655
6	342	408	540	582	672	786
7	399	476	630	679	784	917
8	456	544	720	776	896	1048
9	513	612	810	873	1008	ND
10	570	680	900	970	1120	ND

Key to lay-out


	Solution that provides the least number of boilers
	A solution that provides, with the same power, a greater number of boilers and therefore a greater modulation ratio
	Solution that provides, with the same power mdi, the maximum modulation ratio
ND	Solution not available

2. SELECTION OF THE LAYOUT FRONT OR BACK-TO-BACK,
In relation to the space available

FRONT configuration

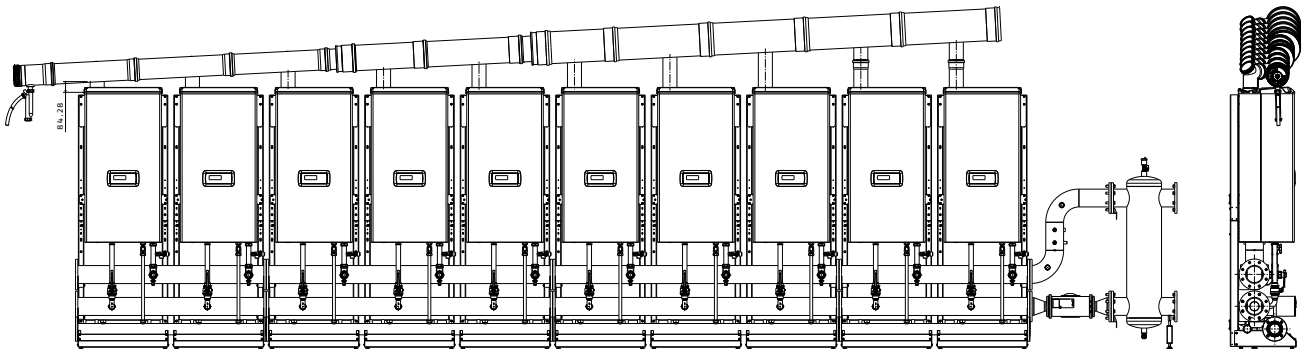

BACK-TO-BACK configuration

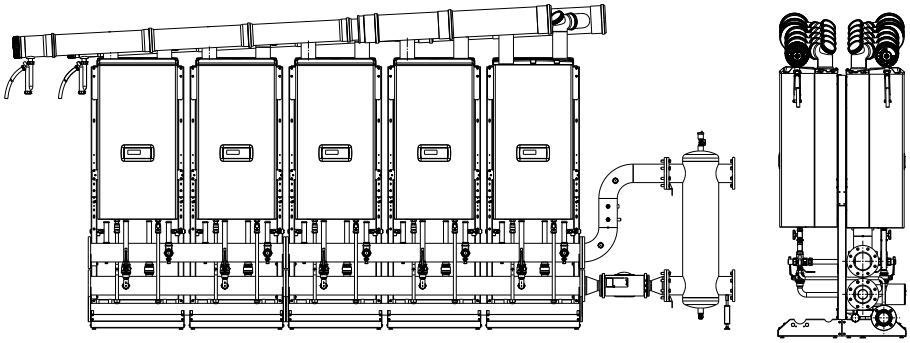

3. ACCESSORIES TO COMPLETE THE SYSTEM

Description	Language	Notes	Code
Condensate drain kit for cascade boiler		(1)	**20131267**
External probe		(2)	**20132778**
Primary probe	IT/EN	(2)(3)	**20175714**
Set of manuals for the CONDEXA PRO CASCADE	FR/NL/DE		**20150950**
Set of manuals for the CONDEXA PRO CASCADE	ES/PT		**20151280**
Set of manuals for the CONDEXA PRO CASCADE	RU/UA		**20151282**
Set of manuals for the CONDEXA PRO CASCADE	PL/HU/RO		**20151281**
Set of manuals for the CONDEXA PRO CASCADE	SK/CZ/GR/SI/CR		**20151949**

(1) To be ordered for each boiler of the cascade system (q.ty = no. boilers)
(2) One probe for each system in cascade, to be connected to the master boiler
(3) It must be associated mandatorily with the appropriate "Set of manuals for the CONDEXA PRO CASCADE".

4. ACCESSORIES

4.1 Support frame

Description	Code
Frame kit for front cascades	**20131663**
Frame conversion kit for B2B cascades	**20131664**

No. boilers	FRONT	BACK-TO-BACK	
	20131663 Q.ty frame	20131663 Q.ty frame	20131664 Q.ty conversion kit
2	2	1	1
3	3	2	2
4	4	2	2
5	5	3	3
6	6	3	3
7	7	4	4
8	8	4	4
9	9	5	5
10	10	5	5

4.2 Shunt pumps for single boiler (only for 90-135 kW)

Description	Notes	Code
Injection pump kit (90-115 kW)	(1)	**20125034**
Injection pump kit with high residual head (115 kW) and low residual head (135 kW)	(1)	**20125035**
Injection pump kit with high residual head (135 kW)	(2)	**20125040**

(1) To be ordered for each boiler of the cascade system (q.ty = no. boilers); pump to be installed inside the boiler.
(2) To be ordered for each boiler of the cascade system (q.ty = no. boilers); pump to be installed outside the boiler.

4.3 Connection pipes

Description	Notes	Code
FRONT CONFIGURATION		
Pipes without shut-off (57-135 kW)	(1)	**20130658**
Pipes with shut-off (57-135 kW)	(1)	**20131124**
Pipes without shut-off (135 kW) (external pump)	(2)	**20131121**
Pipes with shut-off (135 kW) (external pump)	(2)	**20131125**
BACK-TO-BACK CONFIGURATION		
Pipes without shut-off (57-135 kW)	(3)	**20130658**
Pipes with shut-off (57-135 kW)	(3)	**20131124**
Pipes without shut-off (135 kW) (external pump)	(4)	**20131121**
Pipes with shut-off (135 kW) (external pump)	(4)	**20131125**
Pipes without shut-off (57-135 kW) (B2B)	(5)	**20131787**
Pipes with shut-off (35-135 kW) (B2B)	(5)	**20131791**
Pipes without shut-off (135 kW) (external pump) (B2B)	(6)	**20131788**
Pipes with shut-off (135 kW) (external pump) (B2B)	(6)	**20131792**

(1) To be ordered for each boiler of the cascade system (q.ty = no. boilers) with pump or valve installed inside the boiler.
(2) To be ordered for each boiler of the cascade system (q.ty = no. boilers) with pump or valve installed outside the boiler.
(3) To be ordered for each boiler on collectors side with pump or valve installed inside the boiler.
(4) To be ordered for each boiler on collectors side with pump or valve installed outside the boiler.
(5) To be ordered for each boiler on the side opposite the collectors with pump or valve installed inside the boiler.
(6) To be ordered for each boiler on the side opposite the collectors with pump or valve installed outside the boiler.

4.4 Water collectors (delivery/return) - gas - condensate

Description	Notes	Code
3" collectors kit for cascades for 1 boiler	(1)	**20133220**
3" collectors kit for cascades for 2 boilers	(2)	**20130220**
3" collectors kit for cascades for 3 boilers	(2)	**20130221**
5" collectors kit for cascades for 2 boilers	(3)	**20130222**
5" collectors kit for cascades for 3 boilers	(3)	**20130223**
3" closing plugs kit		**20070903**
3" through-flanges kit		**20082190**
5" closing plugs kit		**20070907**
5" through-flanges kit		**20082191**
Cover with insulation for cascade collectors/pipes		**20132377**

(1) To be used for the BACK TO BACK configuration with 2 boilers; includes 3" flanged deliver/return collectors DN80, 2" threaded gas collector, condensate drain collector.
(2) To be used with a maximum output of up to 485 kW. Includes 3" flanged deliver/return collectors DN80, 2" threaded gas collector, condensate drain collector.
(3) To be used with a maximum output of over 485 kW. Includes 5" flanged deliver/return collectors DN125, 3" threaded gas collector DN80, condensate drain collector.

TABLE OF COMBINATION OF BOILER CASCADE COLLECTORS

Model	CONDEXA PRO 57 P	CONDEXA PRO 70 P	CONDEXA PRO 90	CONDEXA PRO 100	CONDEXA PRO 115	CONDEXA PRO 135
Boiler heat output kW	**57**	**68**	**90**	**97**	**112**	**131**
No. boilers	TOTAL CASCADE OUTPUT/DIAMETER H_2O COLLECTORS					
2	114/3"	136/3"	180/3"	194/3"	224/3"	262/3"
3	171/3"	204/3"	270/3"	291/3"	336/3"	393/3"
4	228/3"	272/3"	360/3"	388/3"	448/3"	524/5"
5	285/3"	340/3"	450/3"	485/3"	560/5"	655/5"
6	342/3"	408/3"	540/5"	582/5"	672/5"	786/5"
7	399/3"	476/3"	630/5"	679/5"	784/5"	917/5"
8	456/3"	544/5"	720/5"	776/5"	896/5"	1048/5"
9	513/5"	612/5"	810/5"	873/5"	1008/5"	-
10	570/5"	680/5"	970/5"	970/5"	1120/5"	-

TABLE OF COMBINATION OF COLLECTOR CODES IN RELATION TO THE NUMBER OF BOILERS IN CASCADE, IN A FRONT CONFIGURATION

Model	CONDEXA PRO 57 P	CONDEXA PRO 70 P	CONDEXA PRO 90	CONDEXA PRO 100	CONDEXA PRO 115	CONDEXA PRO 135
Boiler heat output kW	**57**	**68**	**90**	**97**	**112**	**131**
No. boilers	SELECTION OF COLLECTOR CODES FOR FRONT CONFIGURATION					
2	1 x 20130220	1 x 20130220	1 x 20130220	1 x 20130220	1 x 20130220	1 x 20130220
3	1 x 20130221	1 x 20130221	1 x 20130221	1 x 20130221	1 x 20130221	1 x 20130221
4	2 x 20130220	2 x 20130220	2 x 20130220	2 x 20130220	2 x 20130220	2 x 20130222
5	1 x 20130220 1 x 20130221	1 x 20130220 1 x 20130221	1 x 20130220 1 x 20130221	1 x 20130220 1 x 20130221	1 x 20130222 1 x 20130223	1 x 20130222 1 x 20130223
6	2 x 20130221	2 x 20130221	2 x 20130223	2 x 20130223	2 x 20130223	2 x 20130223
7	2 x 20130220 1 x 20130221	2 x 20130220 1 x 20130221	2 x 20130222 1 x 20130223	2 x 20130222 1 x 20130223	2 x 20130222 1 x 20130223	2 x 20130222 1 x 20130223
8	1 x 20130220 2 x 20130221	1 x 20130222 2 x 20130223	1 x 20130222 2 x 20130223	1 x 20130222 2 x 20130223	1 x 20130222 2 x 20130223	1 x 20130222 2 x 20130223
9	3 x 20130223	3 x 20130223	3 x 20130223	3 x 20130223	3 x 20130223	-
10	2 x 20130222 2 x 20130223	2 x 20130222 2 x 20130223	2 x 20130222 2 x 20130223	2 x 20130222 2 x 20130223	2 x 20130222 2 x 20130223	-

TABLE OF COMBINATION OF COLLECTOR CODES IN RELATION TO THE NUMBER OF BOILERS IN CASCADE, IN A BACK TO BACK CONFIGURATION

Model	CONDEXA PRO 57 P	CONDEXA PRO 70 P	CONDEXA PRO 90	CONDEXA PRO 100	CONDEXA PRO 115	CONDEXA PRO 135
Boiler heat output kW	**57**	**68**	**90**	**97**	**112**	**131**
No. boilers	SELECTION OF H2O COLLECTOR CODES FOR BACK TO BACK CONFIGURATIONS					
2	1 x 20133220	1 x 20133220	1 x 20133220	1 x 20133220	1 x 20133220	1 x 20133220
3	1 x 20130220	1 x 20130220	1 x 20130220	1 x 20130220	1 x 20130220	1 x 20130220
4	1 x 20130220	1 x 20130220	1 x 20130220	1 x 20130220	1 x 20130220	1 x 20130222
5	1 x 20130221	1 x 20130221	1 x 20130221	1 x 20130221	1 x 20130223	1 x 20130223
6	1 x 20130221	1 x 20130221	1 x 20130223	1 x 20130223	1 x 20130223	1 x 20130223
7	2 x 20130220	2 x 20130220	2 x 20130222	2 x 20130222	2 x 20130222	2 x 20130222
8	2 x 20130220	2 x 20130222	2 x 20130222	2 x 20130222	2 x 20130222	2 x 20130222
9	1 x 20130222 1 x 20130223	1 x 20130222 1 x 20130223	1 x 20130222 1 x 20130223	1 x 20130222 1 x 20130223	1 x 20130222 1 x 20130223	-
10	1 x 20130222 1 x 20130223	1 x 20130222 1 x 20130223	1 x 20130222 1 x 20130223	1 x 20130222 1 x 20130223	1 x 20130222 1 x 20130223	-

4.5 Additional safety devices

Description	Notes	Code
Manifold kit for 3" safety devices housing		**20070910**
Manifold kit for 5" safety devices housing		**20070912**
Safety devices kit	(1)	**20071190**
Safety valve up to 460 kW (5,4 bar ØG.¾" F)		**20023104**
Safety valve up to 580 kW (5,4 bar ØG.1" F)		**20023106**
Fuel shut-off valve kit (VIC) - ØG.1"	(2)(6)	**20009486**
Fuel shut-off valve kit (VIC) - ØG.1" ½	(3)(6)	**20009482**
Fuel shut-off valve kit (VIC) - ØG.2"	(4)(6)	**20009483**
Fuel shut-off valve kit (VIC) - ØG.3"	(5)(6)	**20061640**
Flanged 3" DN80 PN6/flanged ØG.3" DN80 PN16 adapter kit for VIC valve	(7)	**20161191**

(1) Does not include safety valve and VIC.
(2) Recommended up to a maximum output of 131 kW, calculated taking into consideration the gas supply pressure = 20 mbar.
(3) Recommended up to a maximum output of 230 kW, calculated taking into consideration the gas supply pressure = 20 mbar.
(4) Recommended up to a maximum output of 580 kW, calculated taking into consideration the gas supply pressure = 20 mbar.
(5) Recommended up to a maximum output of 1150 kW, calculated taking into consideration the gas supply pressure = 20 mbar.
(6) Intervention temperature 97 °C - Capillary length 5 m.
(7) To be istalled in combiantion with flanged 3" DN80 PN6/flanged ØG.3" DN80 PN16 adapter kit for VIC valve code 20061640.

NOTE: to calculate the maximum admissible output of the VIC, with supply pressures other than 20 mbar, contact the pre-sales service.

TABLE FOR SELECTING THE SAFETY VALVES

Total cascade heat output (kW)	0-460	461-580	581-920	921-1160
(No.) Diameter safety valve	1 x ¾"	1 x 1"	2 x ¾"	2 x 1"
	1 x code 20023104	1 x code 20023106	2 x code 20023104	2 x code 20023106

4.6 Hydraulic separator or plate heat exchanger

Description	Notes	Code
Hydraulic separator kit 5"-up to 485 kW	(1)	**20009467**
Hydraulic separator kit 10"-up to 580 kW	(2)	**20069073**
Hydraulic separator kit 10"-up to 1120 kW	(3)	**20069074**
Fittings kit for plate heat exchanger (DN80 collectors side - 3"/DN50 plate heat exchanger side)	(4)	**20132373**
Fittings kit for plate heat exchanger (DN125 collectors side - 5"/DN65 plate heat exchanger side)	(4)	**20203733**
Fittings kit for plate heat exchanger (DN125 collectors side - 5"/DN100 plate heat exchanger side)	(5)	**20132376**
Ground fixing kit (SP 35-40 models)		**20120282**
Ground fixing kit (SP 60 models)		**20120284**


(1) To be used with a maximum output of up to 485 kW in combination with 3" collectors.
(2) To be used with a maximum output of over 485 and up to 580 kW in combination with 5" collectors.
(3) To be used with a maximum output of over 580 kW and up to 1120 kW in combination with 5" collectors.
(4) To be mandatory ordered with "Ground fixing kit SP 35-40" code 20120282.
(5) To be mandatory ordered with "Ground fixing kit SP 60" code 20120284.

4.7 Secondary circuit management

Description	Notes	Code
Immersion probe	(1)	**1220599**
Electronic kit for managing additional direct or mixed zone (max 16)	(2)	**20220356**

(1) Utilized for the management of secondary/tank circuit.
(2) Kit required whenever the number of the heating zones, direct or mixed, is higher than the number of slave boilers.

NOTE: for adjusting the ambient temperature use Riello thermostats and chronothermostats.

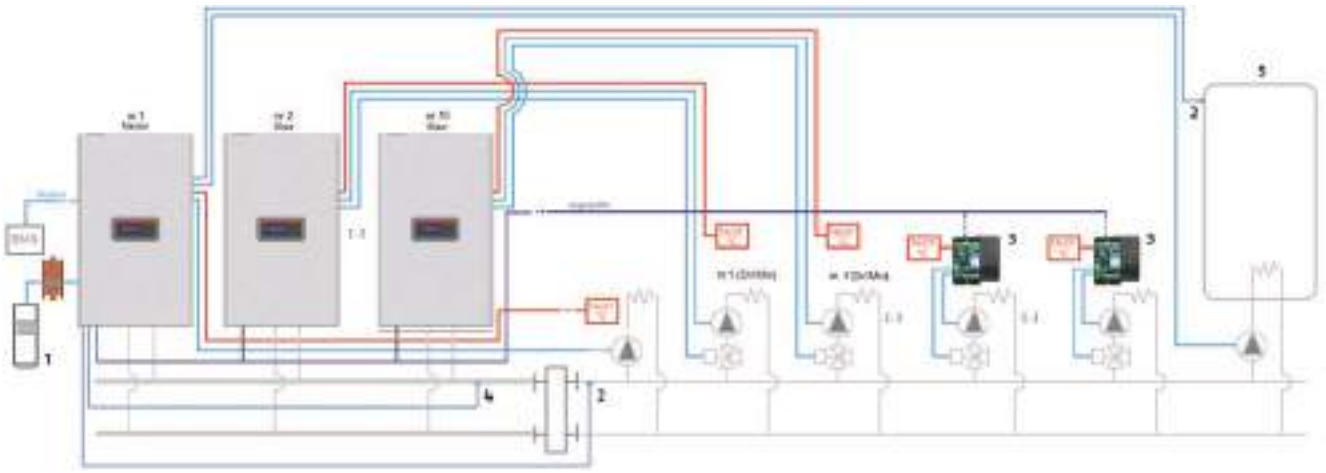

Key to layout
1. External probe code 20132778
2. Immersion probe code 1220599
3. Electronic kit for managing additional direct or mixed zone (max 16) code 20220356
4. Primary probe code 20175714
5. DHW cylinder

4.8 Sealed chamber conversion kit


Description	Code
Conversion kit C type (57-70 kW)	**20131665**
Conversion kit C type (90-135 kW)	**20131668**

4.9 Flue gas exhaust systems

Description	Notes	Code
Adaptor Ø80/110	(1)	**20131238**
Cascade terminal Ø160 with condensate drain		**20062338**
Collector Ø160 for 1 boiler		**20131266**
Eccentric adaptor Ø160/200		**20132391**
Collector Ø200 for 1 boiler		**20131901**
Eccentric adaptor Ø200/250		**20132393**
Collector Ø250 for 1 boiler		**20131903**
Y-fitting Ø160/160		**20132381**
Y-fitting Ø160/200		**20132384**
Y-fitting Ø160/250		**20132385**
Y-fitting Ø200/250		**20132386**


(1) Mandatory only for models 57-70.

FRONT configuration - max 10 boilers

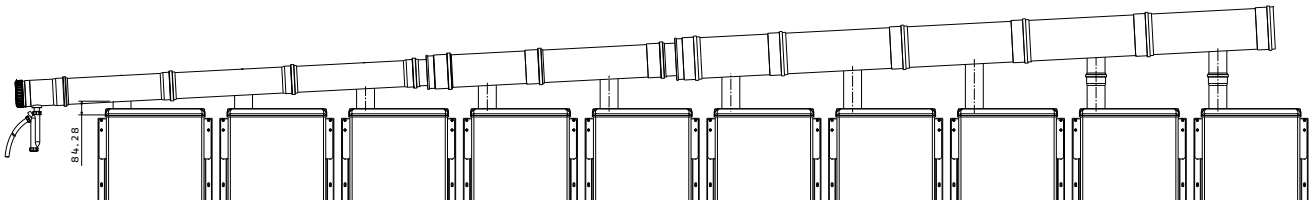


BACK-TO-BACK configuration - max 5 + 5 boilers

NOTE: the BACK TO BACK configuration has separate lines for each row of boilers, collectors side and the opposite side.

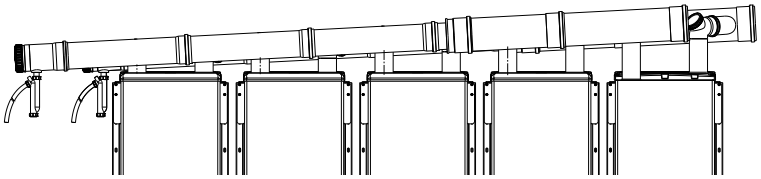

FLUE CONFIGURATION LAY-OUT

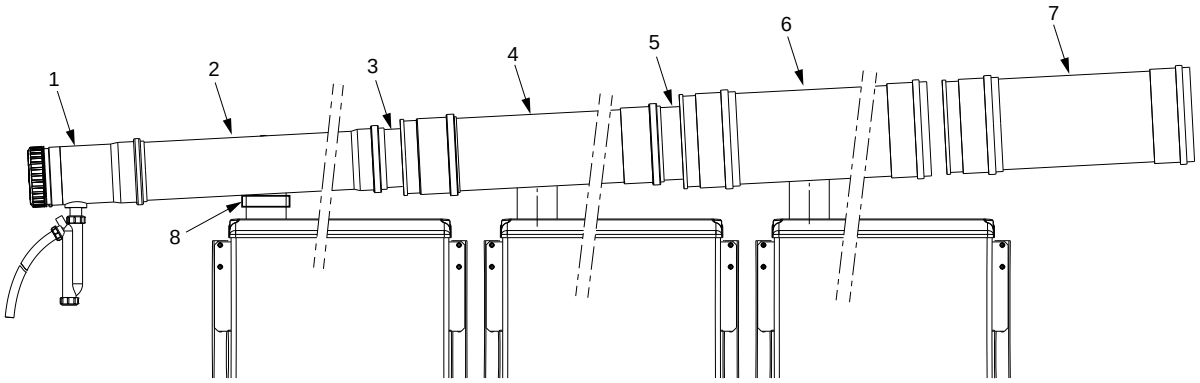

1 Code 20062338 Cascade terminal ø160 with condensate drain
2 Code 20131266 Collector ø160 for 1 boiler
3 Code 20132391 Eccentric adaptor ø160/200
4 Code 20131901 Collector ø200 for 1 boiler
5 Code 20132393 Eccentric adaptor ø200/250
6 Code 20131903 Collector ø250 for 1 boiler
7 Only for BACK TO BACK layout
Code 20132381 Y-fitting ø160/160
Code 20132384 Y-fitting ø160/200
Code 20132385 Y-fitting ø160/250
Code 20132386 Y-fitting ø200/250
8 Code 20131238 Adaptor ø80/110 (only for models 57-70)

TABLE FOR SELECTING THE FLUE GASES COLLECTORS DIAMETERS IN RELATION TO THE NUMBER OF BOILERS ON EACH COLLECTOR

Model	CONDEXA PRO 57 P	CONDEXA PRO 70 P	CONDEXA PRO 90	CONDEXA PRO 100	CONDEXA PRO 115	CONDEXA PRO 135
Boiler heat output kW	**57**	**68**	**90**	**97**	**112**	**131**
No. boilers	FLUE GASES/AIR DIAMETERS					
1ª	Ø160	Ø160	Ø160	Ø160	Ø160	Ø160
2ª	160	160	160	160	160	160
3ª	160	160	160	160	160	160
4ª	160	160	160	160	160	200
5ª	160	160	200	200	200	200
6ª	160	160	200	200	200	250
7ª	160	200	200	200	250	250
8ª	200	200	250	250	250	250
9ª	200	200	250	250	250	–
10ª	200	200	250	250	250	–

TABLE FOR SELECTING THE FLUE GASES COLLECTORS CODES IN RELATION TO THE NUMBER OF BOILERS IN FRONT CONFIGURATION

Model	CONDEXA PRO 57 P	CONDEXA PRO 70 P	CONDEXA PRO 90	CONDEXA PRO 100	CONDEXA PRO 115	CONDEXA PRO 135
Boiler heat output kW	**57**	**68**	**90**	**97**	**112**	**131**
No. boilers	SELECTION OF FLUE GASES COLLECTOR CODES FOR FRONT CONFIGURATIONS					
2	2 x 20131238 1 x 20062338 2 x 20131266	2 x 20131238 1 x 20062338 2 x 20131266	1 x 20062338 2 x 20131266	1 x 20062338 2 x 20131266	1 x 20062338 2 x 20131266	1 x 20062338 2 x 20131266
3	3 x 20131238 1 x 20062338 3 x 20131266	3 x 20131238 1 x 20062338 3 x 20131266	1 x 20062338 3 x 20131266	1 x 20062338 3 x 20131266	1 x 20062338 3 x 20131266	1 x 20062338 3 x 20131266
4	4 x 20131238 1 x 20062338 4 x 20131266	4 x 20131238 1 x 20062338 4 x 20131266	1 x 20062338 4 x 20131266	1 x 20062338 4 x 20131266	1 x 20062338 4 x 20131266	1 x 20062338 3 x 20131266 1 x 20132391 1 x 20131901
5	5 x 20131238 1 x 20062338 5 x 20131266	5 x 20131238 1 x 20062338 5 x 20131266	1 x 20062338 4 x 20131266 1 x 20132391 1 x 20131901	1 x 20062338 4 x 20131266 1 x 20132391 1 x 20131901	1 x 20062338 4 x 20131266 1 x 20132391 1 x 20131901	1 x 20062338 3 x 20131266 1 x 20132391 2 x 20131901
6	6 x 20131238 1 x 20062338 6 x 20131266	6 x 20131238 1 x 20062338 6 x 20131266	1 x 20062338 4 x 20131266 1 x 20132391 2 x 20131901	1 x 20062338 4 x 20131266 1 x 20132391 2 x 20131901	1 x 20062338 4 x 20131266 1 x 20132391 2 x 20131901	1 x 20062338 3 x 20131266 1 x 20132391 2 x 20131901 1 x 20132393 1 x 20131903
7	7 x 20131238 1 x 20062338 7 x 20131266	7 x 20131238 1 x 20062338 6 x 20131266 1 x 20132391 1 x 20131901	1 x 20062338 4 x 20131266 1 x 20132391 3 x 20131901	1 x 20062338 4 x 20131266 1 x 20132391 3 x 20131901	1 x 20062338 4 x 20131266 1 x 20132391 2 x 20131901 1 x 20132393 1 x 20131903	1 x 20062338 3 x 20131266 1 x 20132391 2 x 20131901 1 x 20132393 2 x 20131903
8	8 x 20131238 1 x 20062338 7 x 20131266 1 x 20132391 1 x 20131901	8 x 20131238 1 x 20062338 6 x 20131266 1 x 20132391 2 x 20131901	1 x 20062338 4 x 20131266 1 x 20132391 3 x 20131901 1 x 20132393 1 x 20131903	1 x 20062338 4 x 20131266 1 x 20132391 3 x 20131901 1 x 20132393 1 x 20131903	1 x 20062338 4 x 20131266 1 x 20132391 2 x 20131901 1 x 20132393 2 x 20131903	1 x 20062338 3 x 20131266 1 x 20132391 2 x 20131901 1 x 20132393 3 x 20131903
9	9 x 20131238 1 x 20062338 7 x 20131266 1 x 20132391 2 x 20131901	9 x 20131238 1 x 20062338 6 x 20131266 1 x 20132391 3 x 20131901	1 x 20062338 4 x 20131266 1 x 20132391 3 x 20131901 1 x 20132393 2 x 20131903	1 x 20062338 4 x 20131266 1 x 20132391 3 x 20131901 1 x 20132393 2 x 20131903	1 x 20062338 4 x 20131266 1 x 20132391 2 x 20131901 1 x 20132393 3 x 20131903	nd
10	10 x 20131238 1 x 20062338 7 x 20131266 1 x 20132391 3 x 20131901	10 x 20131238 1 x 20062338 6 x 20131266 1 x 20132391 4 x 20131901	1 x 20062338 4 x 20131266 1 x 20132391 3 x 20131901 1 x 20132393 3 x 20131903	1 x 20062338 4 x 20131266 1 x 20132391 3 x 20131901 1 x 20132393 3 x 20131903	1 x 20062338 4 x 20131266 1 x 20132391 2 x 20131901 1 x 20132393 4 x 20131903	nd

NOTE: in the case of a channelled suction line and gas-tight combustion (type C) double the amounts indicated in the table.

TABLE FOR SELECTING THE FLUE GASES COLLECTORS CODES IN RELATION TO THE NUMBER OF BOILERS IN BACK TO BACK CONFIGURATION

Model	CONDEXA PRO 57 P	CONDEXA PRO 70 P	CONDEXA PRO 90	CONDEXA PRO 100	CONDEXA PRO 115	CONDEXA PRO 135
Boiler heat output kW	**57**	**68**	**90**	**97**	**112**	**131**
No. boilers	SELECTION OF FLUE GASES COLLECTOR CODES FOR BACK TO BACK CONFIGURATIONS					
2	2 x 20131238 2 x 20062338 2 x 20131266 1 x 20132381	2 x 20131238 2 x 20062338 2 x 20131266 1 x 20132381	2 x 20062338 2 x 20131266 1 x 20132381	2 x 20062338 2 x 20131266 1 x 20132381	2 x 20062338 2 x 20131266 1 x 20132381	2 x 20062338 2 x 20131266 1 x 20132381
3	3 x 20131238 2 x 20062338 3 x 20131266 1 x 20132381	3 x 20131238 2 x 20062338 3 x 20131266 1 x 20132381	2 x 20062338 3 x 20131266 1 x 20132381	2 x 20062338 3 x 20131266 1 x 20132381	2 x 20062338 3 x 20131266 1 x 20132381	2 x 20062338 3 x 20131266 1 x 20132381
4	4 x 20131238 2 x 20062338 4 x 20131266 1 x 20132381	4 x 20131238 2 x 20062338 4 x 20131266 1 x 20132381	2 x 20062338 4 x 20131266 1 x 20132381	2 x 20062338 4 x 20131266 1 x 20132381	2 x 20062338 4 x 20131266 1 x 20132381	2 x 20062338 4 x 20131266 1 x 20132384
5	5 x 20131238 2 x 20062338 5 x 20131266 1 x 20132381	5 x 20131238 2 x 20062338 5 x 20131266 1 x 20132381	2 x 20062338 5 x 20131266 1 x 20132384	2 x 20062338 5 x 20131266 1 x 20132384	2 x 20062338 5 x 20131266 1 x 20132384	2 x 20062338 5 x 20131266 1 x 20132384
6	6 x 20131238 2 x 20062338 6 x 20131266 1 x 20132381	6 x 20131238 2 x 20062338 6 x 20131266 1 x 20132381	2 x 20062338 6 x 20131266 1 x 20132384	2 x 20062338 6 x 20131266 1 x 20132384	2 x 20062338 6 x 20131266 1 x 20132384	2 x 20062338 6 x 20131266 1 x 20132385
7	7 x 20131238 2 x 20062338 7 x 20131266 1 x 20132381	7 x 20131238 2 x 20062338 7 x 20131266 1 x 20132384	2 x 20062338 7 x 20131266 1 x 20132384	2 x 20062338 7 x 20131266 1 x 20132384	2 x 20062338 7 x 20131266 1 x 20132385	2 x 20062338 5 x 20131266 2 x 20132391 2 x 20131901 1 x 20132386
8	8 x 20131238 2 x 20062338 8 x 20131266 1 x 20132384	8 x 20131238 2 x 20062338 8 x 20131266 1 x 20132384	2 x 20062338 8 x 20131266 1 x 20132385	2 x 20062338 8 x 20131266 1 x 20132385	2 x 20062338 8 x 20131266 1 x 20132385	2 x 20062338 6 x 20131266 2 x 20132391 2 x 20131901 1 x 20132386
9	9 x 20131238 2 x 20062338 9 x 20131266 1 x 20132384	9 x 20131238 2 x 20062338 9 x 20131266 1 x 20132384	2 x 20062338 7 x 20131266 2 x 20131901 2 x 20132391 1 x 20132386	2 x 20062338 7 x 20131266 2 x 20131901 2 x 20132391 1 x 20132386	2 x 20062338 7 x 20131266 2 x 20131901 2 x 20132391 1 x 20132386	nd
10	10 x 20131238 2 x 20062338 10 x 20131266 1 x 20132384	10 x 20131238 2 x 20062338 10 x 20131266 1 x 20132384	2 x 20062338 8 x 20131266 2 x 20131901 2 x 20132391 1 x 20132386	2 x 20062338 8 x 20131266 2 x 20131901 2 x 20132391 1 x 20132386	2 x 20062338 8 x 20131266 2 x 20131901 2 x 20132391 1 x 20132386	nd

NOTE: in the case of a channelled suction line and gas-tight combustion (type C) double the amounts indicated in the table.

4.10 Treatment systems for condensate neutralization


Description	Notes	Code
Condensate neutralizer HN2 (up to 280 kW)	(1)	**4031811**
Condensate neutralizer N2 (up to 450 kW)		**4031810**
Condensate neutralizer N3 (450-1500 kW)		**4031812**
Condensate neutralizer HN3 (280-750 kW)	(1)(D)	**4031813**

(1) Equipped with extraction pumps.
(D) Availability of the material at our warehouse: 30 working days from the date of the order's validation.

Floor-standing gas condensing units for indoor use

Steel Pro Power



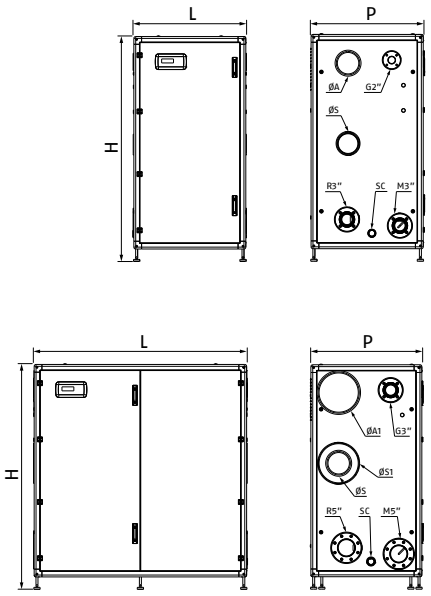

G = GAS
M = FLOW
R = RETURN
SC = CONDENSATE DISCHARGE

ERP

- In conformity with Directive 2009/125/EC
- Condensing modular thermal units for indoor applications (outdoor with optional kit) composed of painted technical cabinet, thermal modules from 57 kW up to 131 kW and system accessories
- Low polluting emissions, class 6 (UNI EN 15502)

Description	H mm	L mm	P mm	ØA mm	ØA1 mm	ØS mm	ØS1 mm	Net weight kg
STEEL PRO POWER 114-2	1800	900	890	160	-	160	-	270
STEEL PRO POWER 140-2	1800	900	890	160	-	160	-	270
STEEL PRO POWER 180-2	1800	900	890	160	-	160	-	280
STEEL PRO POWER 230-2	1800	900	890	160	-	160	-	300
STEEL PRO POWER 270-2	1800	900	890	-	300	160	300	350
STEEL PRO POWER 300-3	1800	1700	890	160	-	160	-	450
STEEL PRO POWER 345-3	1800	1700	890	160	-	160	-	490
STEEL PRO POWER 405-3	1800	1700	890	-	300	160	300	540
STEEL PRO POWER 460-4	1800	1700	890	160	-	160	-	560
STEEL PRO POWER 540-4	1800	1700	890	-	300	160	300	600

Steel Pro Power is the new Riello modular condensing system, specially designed and developed to achieve very high energy efficiency values, minimizing the space occupied.
The system, ready for a simple and quick installation, consists of technical cabinets designed according to the principles of modularity, consisting of an anodised aluminium frame assembly and painted panels.
The standard product is suitable for open chamber indoor installation and it can be transformed into sealed or outdoor installation version with the fitting of specific accessory kits. The cabinets are equipped with 2, 3 or 4 heating elements from 57 up to 131 kW, for a total heat input from 114 up to 524 kW and are available in the versions that associate to each thermal module low consumption circulators ("P" models) or 2-way valves ("V" models); the standard supply also includes electronic control, hydraulic supply and return, gas, fumes and condensate discharge manifolds.
The heat exchangers, with patented geometries, consist of two smooth concentric stainless steel pipes, having the pentagonal section of the inside and the circular section outside of the chamber; they have been specially designed to maximize the exchange surface, offering maximum corrosion resistance and minimum load losses. These features allow you to work with high ΔT, reducing the time of system start-up.
The models with 131 kW exchanger (270-405-540) are designed for side-by-side cascade installation, up to a maximum of 10 units and a power of 1310 kW in total. The control electronics, compatible with the MOD-BUS protocol, allow the climatic regulation with cascade management of the thermal modules, automatic summer/winter switching, possibility of remote management via 0..10V input and alarm output signal.

The control system manages the heat distribution on the secondary circuit, controlling: one direct zone, one or more mixed zones (from 1 to 3 depending on the model) and the cylinder circuit.
Through special accessories there is also the possibility to manage additional mixed zones (up to max 16).
Optimal combustion management and high modulation ratios (up to 1:50) allow high efficiency and low pollutant emissions (Class 6 according to UNI EN 15502). The continuity of service is ensured by the system modularity: even in the event of a module failure, the overall operation is not compromised. The accessories designed to guarantee a simple, rapid and complete installation of the thermal power plant are also available. Maximum operating pressure 6 bar.

TECHNICAL DATA

Description	Power - kW			Efficiency - %			Notes	Language	Code
	Output useful 80°/60° max	Output useful 50°/30° max	Furnace input min-max	Useful Pn (80°/60°)	Useful Pn (50°/30°)	Useful 30% Pn (50°/30°)			
STEEL PRO POWER 114-2 P	114,4	123,8	13,7-114	97,7	108,6	109,4	(1)	IT/EN FR/DE ES/PT RU/UA PL/RO GR/CR	**20138572** **20162048** **20162091** **20162140** **20162171** **20162191**
STEEL PRO POWER 140-2 P	134,0	147,8	13,7-136	98,5	108,1	109,3	(1)	IT/EN FR/DE ES/PT RU/UA PL/RO GR/CR	**20138573** **20162051** **20162092** **20162141** **20162172** **20162192**
STEEL PRO POWER 180-2 P	176,6	194,8	19,4-180	98,1	108,3	108,9	(1)	IT/EN FR/DE ES/PT RU/UA PL/RO GR/CR	**20138574** **20162052** **20162093** **20162143** **20162173** **20162193**
STEEL PRO POWER 230-2 P	219,6	242,2	22,4-223,2	98,4	108,6	108,9	(1)	IT/EN FR/DE ES/PT RU/UA PL/RO GR/CR	**20138575** **20162060** **20162094** **20162144** **20162174** **20162194**
STEEL PRO POWER 270-2 P	258,0	284,2	26,3-262	98,5	108,3	109,4	(1)(4)	IT/EN FR/DE ES/PT RU/UA PL/RO GR/CR	**20138576** **20162063** **20162095** **20162145** **20162175** **20162195**
STEEL PRO POWER 300-3 P	285,9	315,3	19,4-291	98,2	108,2	108,9	(2)	IT/EN FR/DE ES/PT RU/UA PL/RO GR/CR	**20138577** **20162064** **20162097** **20162146** **20162176** **20162196**
STEEL PRO POWER 345-3 P	329,4	363,6	22,4-334,8	98,4	108,6	108,9	(2)	IT/EN FR/DE ES/PT RU/UA PL/RO GR/CR	**20138578** **20162065** **20162098** **20162148** **20162177** **20162197**
STEEL PRO POWER 405-3 P	387,0	426,3	23,6-393	98,5	108,3	109,4	(2)(4)	IT/EN FR/DE ES/PT RU/UA PL/RO GR/CR	**20138579** **20162066** **20162101** **20162151** **20162178** **20162198**

Description	Power - kW			Efficiency - %			Notes	Language	Code
	Output useful 80°/60° max	Output useful 50°/30° max	Furnace input min-max	Useful Pn (80°/60°)	Useful Pn (50°/30°)	Useful 30% Pn (50°/30°)			
STEEL PRO POWER 460-4 P	439,2	484,4	22,4-446,4	98,4	108,6	108,9	(3)	IT/EN FR/DE ES/PT RU/UA PL/RO GR/CR	**20138580** **20162074** **20162103** **20162152** **20162179** **20162199**
STEEL PRO POWER 540-4 P	516,0	568,4	26,3-524	98,5	108,3	109,4	(3)(4)	IT/EN FR/DE ES/PT RU/UA PL/RO GR/CR	**20138581** **20162077** **20162104** **20162153** **20162180** **20162200**

(1) Model with 2 thermal elements.
(2) Model with 3 thermal elements.
(3) Model with 4 thermal elements.
(4) Models usable for cascaded systems.

SYSTEM CONFIGURATION GUIDE AND ACCESSORIES SELECTION



1. BOILER CONFIGURATION
2. SEALED COMBUSTION TRANSFORMATION KIT (TYPE C)
3. HYDRAULIC INTERCEPTION OF THERMAL MODULES
4. MANIFOLDS, SAFETY KITS AND HYDRAULIC ACCESSORIES
5. HYDRAULIC SEPARATORS/PLATE HEAT EXCHANGERS*
6. AUXILIARY ACCESSORIES FOR TECHNICAL BOX
7. AUXILIARY ACCESSORIES FOR OUTDOOR INSTALLATION
8. SECONDARY CIRCUIT MANAGEMENT ACCESSORIES
9. TREATMENT SYSTEMS FOR CONDENSATE NEUTRALIZATION

(*) Configurations with plate heat exchangers: see the product Riello HEATgate, section SYSTEM COMPLEMENTARY ITEMS.

1. BOILER CONFIGURATION

Choice of the type of installation:
A - Stand alone
B - Cascade

A - STAND ALONE HEAT INPUT

Description	STEEL PRO POWER									
	114-2	140-2	180-2	230-2	270-2	300-3	345-3	405-3	460-4	540-4
Rated heat input kW	114	136	180	224	262	291	336	393	448	524

B - CASCADE SYSTEM HEAT INPUT

Description	Heat input kW	STEEL PRO POWER 270-2 P/270-2 V	STEEL PRO POWER 405-3 P/405-3 V	STEEL PRO POWER 540-4 P/540-4 V
		N. of units		
STEEL PRO POWER SYSTEM 675	655	1	1	-
STEEL PRO POWER SYSTEM 810	786	1	-	1
STEEL PRO POWER SYSTEM 945	917	-	1	1
STEEL PRO POWER SYSTEM 1080	1048	-	-	2
STEEL PRO POWER SYSTEM 1215	1179	1	1	1
STEEL PRO POWER SYSTEM 1350	1310	1	-	2

2. SEALED COMBUSTION TRANSFORMATION KIT (TYPE C)

Description	Code
Ø50/80 mm air adapter	**20145144**
Air hose kit for fan/collector connection Ø160 mm	**20145141**
Air hose kit for fan/manifold connection Ø300 mm	**20145137**
Air manifold for Ø160 mm models - for models with 2 thermal modules	**20145185**
Air manifold for Ø160 mm models - for models with ¾ thermal modules	**20145186**
Air manifold for Ø300 mm models - for models with 2 thermal modules	**20145187**
Air manifold for Ø300 mm models - for models with ¾ thermal modules	**20145189**

MATCHING TABLE OF SEALED TRANSFORMATION KIT CODES IN RELATION TO THE UNIT MODEL

Description	Kit code/Quantity						
	20145144	20145141	20145137	20145185	20145186	20145187	20145189
STEEL PRO POWER 114-2	2x●	2x●		1x ●			
STEEL PRO POWER 140-2	2x●	2x●		1x ●			
STEEL PRO POWER 180-2		2x●		1x ●			
STEEL PRO POWER 230-2		2x●		1x ●			
STEEL PRO POWER 270-2			2x●			1x ●	
STEEL PRO POWER 300-3		3x●			1x ●		
STEEL PRO POWER 345-3		3x●			1x ●		
STEEL PRO POWER 405-3			3x●				1x ●
STEEL PRO POWER 460-4		4x●			1x ●		
STEEL PRO POWER 540-4			4x●				1x ●
STEEL PRO POWER SYSTEM 675			5x●			1x ●	1x ●
STEEL PRO POWER SYSTEM 810			6x●			1x ●	1x●
STEEL PRO POWER SYSTEM 945			7x●				2x ●
STEEL PRO POWER SYSTEM 1080			8x●				2x●
STEEL PRO POWER SYSTEM 1215			9x●			1x ●	2x●
STEEL PRO POWER SYSTEM 1350			10x●			1x ●	2x●

3. HYDRAULIC INTERCEPTION OF THERMAL MODULES

Description	Notes	Code
2-way valve kit for hydraulic interception kit	(1)	**20145169**

(1) To be ordered in number equal to the number of modules in the system.

4. MANIFOLDS, SAFETY KITS AND HYDRAULIC ACCESSORIES

Description	Notes	Code
Junction kit for cascade (Fume Ø300 - Air Ø300 - Condensation Ø50)		**20157593**
Junction kit for cascade with spacer (150 mm)	(1)	**20145237**
Safety kit	(2)	**20071190**
Safety valve up to 460 kW (5.4 bar ØG.¾" F)		**20023104**
Safety valve up to 580 kW (5.4 bar ØG.1" F)		**20023106**
Fuel shut-off valve kit (VIC) - ØG.1"	(3)(4)	**20009486**
Fuel shut-off valve kit (VIC) - ØG.1" ½	(4)(5)	**20009482**
Fuel shut-off valve kit (VIC) - ØG.2"	(4)(6)	**20009483**
Fuel shut-off valve kit (VIC) - ØG.3"	(4)(7)	**20061640**
Flanged reduction kit 3"/2" (DN80/DN50)		**20145184**
Flanged 2" DN50 PN6/threaded ØG.2" adapter kit for VIC valve		**20094187**
Flanged 3" DN80 PN6/flanged ØG.3" DN80 PN16 adapter kit for VIC valve		**20161191**
2 "- 1" gas adapter for VIC valve		**20147994**
2 "- 1" ½ gas adapter for VIC valve		**20147990**
Adapter kit for VIC valve flanged from DN80 to threaded ØG.2 "		**20146852**
Flanged reduction kit 5"/3" (DN125/DN80)		**20145183**
3" closing plugs kit	(8)	**20070903**
5" closing plugs kit	(8)	**20070907**
Flange kit 3"		**20082190**
Flange kit 5"		**20082191**
Extension kit 3"	(9)(11)	**20167872**
Extension kit 5"	(10)(11)	**20167873**
Hydraulic flow manifold 3"		**20145172**
Hydraulic flow manifold 5"		**20145177**
Hydraulic return manifold 3"		**20145181**
Hydraulic return manifold 5"		**20145182**

(D) Availability of the material at our warehouse: 25 working days from the date of the order's validation.
(1) Includes connections H_2O 5" - Gas 3" - Fumes Ø300 - Condensation Ø50.
(2) It does not include a safety valve and VIC.
(3) Recommended up to a maximum power of 131 kW, calculated considering gas supply pressure = 20 mbar.
(4) Operating temperature at 97 ° C - Capillary tube 5 m.
(5) Recommended up to maximum power of 230 kW, calculated considering gas supply pressure = 20 mbar.
(6) Recommended up to a maximum power of 580 kW, calculated considering gas supply pressure = 20 mbar.
(7) Recommended up to maximum power of 1310 kW, calculated considering gas supply pressure = 20 mbar.
(8) Kit to close the unused side.
(9) To be installed in case of remote primary / secondary circuit interface with or without technical cabinet up to 485 kW.
(10) To be installed in case of remote primary / secondary circuit interface with or without technical cabinet up to 1310 kW.
(11) On the delivery pipe there are specific sleeves for housing safety kit devices.

NOTE: to calculate the maximum permissible power of the VICs, with different pressure supply from 20 mbar, contact the pre-sales service.

5. HYDRAULIC SEPARATORS/PLATE HEAT EXCHANGERS*

Description	Notes	Code
3" hydraulic separator (up to 485 kW)		**20145255**
5" hydraulic separator (up to 1310 kW)		**20145260**
Left technical box with hydraulic separator (up to 485 kW)	(1)	**20145252**
Left technical box with hydraulic separator (up to 1310 kW)	(D)(1)	**20145254**
Right technical box with hydraulic separator (up to 485 kW)	(1)	**20145247**
Right technical box with hydraulic separator (up to 1310 kW)	(D)(1)	**20145250**
Connection kit for plate heat exchanger DN80/DN50		**20146827**
Connection kit for plate heat exchanger DN125/DN65		**20203748**
Connection kit for plate heat exchanger DN125/DN100		**20146829**
Left technical box for plate heat exchanger (up to 485 kW)		**20146833**
Left technical box for plate heat exchanger (up to 800 kW)	(D)	**20203212**
Left technical box for plate heat exchanger (up to 1310 kW)	(D)	**20146836**
Right technical box for plate heat exchanger (up to 485 kW)		**20146830**
Right technical box for plate heat exchanger (up to 800 kW)	(D)	**20203211**
Right technical box for plate heat exchanger (up to 1310 kW)	(D)	**20146832**
Right/left technical box or 3" extension kit (270/485 kW)	(D)(2)(3)	**20158562**
Right/left technical box or 5" extension kit (580/1310 kW)	(D)(2)(3)	**20158564**

(D) Availability of the material at our warehouse: 25 working days from the date of the order's validation.
(1) Contain the hydraulic separator within them.
(2) Single or twin type pump.
(3) They do not contain the circulator inside them.
(*) Configurations with plate heat exchangers: see the product Riello HEATgate, section SYSTEM COMPLEMENTARY ITEMS.

MATCHING TABLE OF SAFETY DEVICES IN RELATION TO THE UNIT MODEL

Description	Safety kit	Safety valves		VIC valves								
	MANDATORY ACCESSORIES							ACCESSORIES TO BE SELECTED ACCORDING TO INSTALLATION				
								Without technical box			With technical box	
	Safety kit	Safety valve up to 460 kW (5.4 bar ØG.¾" F)	Safety valve up to 580 kW (5.4 bar ØG.1" F)	Fuel shut-off valve kit (VIC) - ØG.1"	Fuel shut-off valve kit (VIC) - ØG.1" ½	Fuel shut-off valve kit (VIC) - ØG.2"	Fuel shut-off valve kit (VIC) - ØG.3"	3"/2" flanged reduction kit (DN80/DN50)	Flanged 2" DN50 PN6/ threaded ØG.2" adapter kit	Flanged 3" DN80 PN6/flanged ØG.3" DN80 PN16 adapter kit	3"/2" flanged reduction kit (DN80/DN50)	Flanged DN80/threaded ØG.2" adapter kit
	20071190	20023104	20023106	20009486	20009482	20009483	20061640	20145184	20094187	20161191	20145184	20146852
STEEL PRO POWER 114-2	1x ●	1x ●		1x ●					1x ●			
STEEL PRO POWER 140-2	1x ●	1x ●			1x ●				1x ●			
STEEL PRO POWER 180-2	1x ●	1x ●			1x ●				1x ●			
STEEL PRO POWER 230-2	1x ●	1x ●			1x ●				1x ●			
STEEL PRO POWER 270-2	1x ●	1x ●				1x ●		1x ●	1x ●		1x ●	
STEEL PRO POWER 300-3	1x ●	1x ●				1x ●			1x ●			
STEEL PRO POWER 345-3	1x ●	1x ●				1x ●			1x ●			
STEEL PRO POWER 405-3	1x ●	1x ●				1x ●		1x ●	1x ●		1x ●	
STEEL PRO POWER 460-4	1x ●	1x ●				1x ●			1x ●			
STEEL PRO POWER 540-4	1x ●		1x ●			1x ●		1x ●	1x ●			1x ●
STEEL PRO POWER SYSTEM 675	1x ●	2x ●					1x ●			1x ●		
STEEL PRO POWER SYSTEM 810	1x ●	2x ●					1x ●			1x ●		
STEEL PRO POWER SYSTEM 945	1x ●	2x ●					1x ●			1x ●		
STEEL PRO POWER SYSTEM 1080	1x ●	3x ●					1x ●			1x ●		
STEEL PRO POWER SYSTEM 1215	1x ●	3x ●					1x ●			1x ●		
STEEL PRO POWER SYSTEM 1350	1x ●	3x ●					1x ●			1x ●		

MATCHING TABLE OF FLANGE, HYDRAULIC REDUCTION CODES IN RELATION TO THE UNIT MODEL

Description	Flanged reduction kit 5"/3" (DN125/DN80)	3" closing plugs kit	5" closing plugs kit	3" through-flanges kit	5" through-flanges kit
	20145183	20070903	20070907	20082190	20082191
STEEL PRO POWER 114-2		1x ●		2x●	
STEEL PRO POWER 140-2		1x ●		2x●	
STEEL PRO POWER 180-2		1x ●		2x●	
STEEL PRO POWER 230-2		1x ●		2x●	
STEEL PRO POWER 270-2	2x● (*)		1x ●	2x●	
STEEL PRO POWER 300-3		1x ●		2x●	
STEEL PRO POWER 345-3		1x ●		2x●	
STEEL PRO POWER 405-3	2x● (*)		1x ●	2x●	
STEEL PRO POWER 460-4		1x ●		2x●	
STEEL PRO POWER 540-4			1x ●		2x●
STEEL PRO POWER SYSTEM 675			1x ●		2x●
STEEL PRO POWER SYSTEM 810			1x ●		2x●
STEEL PRO POWER SYSTEM 945			1x ●		2x●
STEEL PRO POWER SYSTEM 1080			1x ●		2x●
STEEL PRO POWER SYSTEM 1215			1x ●		2x●
STEEL PRO POWER SYSTEM 1350			1x ●		2x●

(*) Accessories necessary for the hydraulic connection to technical box.

EXTENSION KIT SELECTION TABLE

Description	With/without technical box		With technical box			
	Extension kit 3"	Extension kit 5"	Right/left technical box or 3" extension kit	Right/left technical box or 5" extension kit	2 "- 1" ½ gas adapter for VIC valve	2 "- 1" gas adapter for VIC valve
	20167872	20167873	20158562	20158564	20147990	20147994
STEEL PRO POWER 114-2	●		●			●
STEEL PRO POWER 140-2	●		●		●	
STEEL PRO POWER 180-2	●		●		●	
STEEL PRO POWER 230-2	●		●		●	
STEEL PRO POWER 270-2	●		●			
STEEL PRO POWER 300-3	●		●			
STEEL PRO POWER 345-3	●		●			
STEEL PRO POWER 405-3	●		●			
STEEL PRO POWER 460-4	●		●			
STEEL PRO POWER 540-4		●		●		
STEEL PRO POWER SYSTEM 675		●		●		
STEEL PRO POWER SYSTEM 810		●		●		
STEEL PRO POWER SYSTEM 945		●		●		
STEEL PRO POWER SYSTEM 1080		●		●		
STEEL PRO POWER SYSTEM 1215		●		●		
STEEL PRO POWER SYSTEM 1350		●		●		

TECHNICAL CABINET SELECTION TABLE FOR EXTENSION KIT HOUSING

Description	2 "– 1" gas adapter for VIC valve	2 "– 1" ½ gas adapter for VIC valve	Right/left technical box or 3" extension kit	Right/left technical box or 5" extension kit
	20147994	20147990	20158562	20158564
STEEL PRO POWER 114-2	●		●	
STEEL PRO POWER 140-2		●	●	
STEEL PRO POWER 180-2		●	●	
STEEL PRO POWER 230-2		●	●	
STEEL PRO POWER 270-2			●	
STEEL PRO POWER 300-3			●	
STEEL PRO POWER 345-3			●	
STEEL PRO POWER 405-3			●	
STEEL PRO POWER 460-4			●	
STEEL PRO POWER 540-4				●
STEEL PRO POWER SYSTEM 675				●
STEEL PRO POWER SYSTEM 810				●
STEEL PRO POWER SYSTEM 945				●
STEEL PRO POWER SYSTEM 1080				●
STEEL PRO POWER SYSTEM 1215				●
STEEL PRO POWER SYSTEM 1350				●

MATCHING TABLE OF HYDRAULIC SEPARATOR AND ACCESSORIES IN RELATION TO THE UNIT MODEL

Description	Without technical box						With technical box			
	Left/right side installation						Left side installation		Right side installation	
	3" connections up to 485 kW	5" connections up to 1310 kW	3" hydraulic flow manifold	5" hydraulic flow manifold	3" hydraulic return manifold	5" hydraulic return manifold	Left technical box for hydraulic separator up to 485 kW	Left technical box for hydraulic separator up to 1310 kW	Right technical box for hydraulic separator up to 485 kW	Right technical box for hydraulic separator up to 1310 kW
	20145255	20145260	20145172	20145177	20145181	20145182	20145252	20145254	20145247	20145250
STEEL PRO POWER 114-2	●		●		●		●		●	
STEEL PRO POWER 140-2	●		●		●		●		●	
STEEL PRO POWER 180-2	●		●		●		●		●	
STEEL PRO POWER 230-2	●		●		●		●		●	
STEEL PRO POWER 270-2	●		●		●		●		●	
STEEL PRO POWER 300-3	●		●		●		●		●	
STEEL PRO POWER 345-3	●		●		●		●		●	
STEEL PRO POWER 405-3	●		●		●		●		●	
STEEL PRO POWER 460-4	●		●		●		●		●	
STEEL PRO POWER 540-4		●		●		●		●		●
STEEL PRO POWER SYSTEM 675		●		●		●		●		●
STEEL PRO POWER SYSTEM 810		●		●		●		●		●
STEEL PRO POWER SYSTEM 945		●		●		●		●		●
STEEL PRO POWER SYSTEM 1080		●		●		●		●		●
STEEL PRO POWER SYSTEM 1215		●		●		●		●		●
STEEL PRO POWER SYSTEM 1350		●		●		●		●		●

MATCHING TABLE OF HYDRAULIC ACCESSORIES FOR HEAT EXCHANGER INSTALLATION IN RELATION TO THE UNIT MODEL

Description	Without technical box			With technical box					
				Left side installation			Right side installation		
	Connection kit for plate heat exchanger DN80 (Ø3")/DN50	Connection kit for plate heat exchanger DN125 (Ø5")/DN65	Connection kit for plate heat exchanger DN125 (Ø5")/DN100	Left technical box for plate heat exchanger up to 485 kW	Left technical box for plate heat exchanger up to 800 kW	Left technical box for plate heat exchanger up to 1310 kW	Right technical box for plate heat exchanger up to 485 kW	Right technical box for plate heat exchanger up to 800 kW	Right technical box for plate heat exchanger up to 1310 kW
	20146827	20203748	20146829	20146833	20203212	20146836	20146830	20203211	20146832
STEEL PRO POWER 114-2	●			●			●		
STEEL PRO POWER 140-2	●			●			●		
STEEL PRO POWER 180-2	●			●			●		
STEEL PRO POWER 230-2	●			●			●		
STEEL PRO POWER 270-2	●			●			●		
STEEL PRO POWER 300-3	●			●			●		
STEEL PRO POWER 345-3	●			●			●		
STEEL PRO POWER 405-3	●			●			●		
STEEL PRO POWER 460-4	●			●			●		
STEEL PRO POWER 540-4		●			●			●	
STEEL PRO POWER SYSTEM 675		●			●			●	
STEEL PRO POWER SYSTEM 810		●			●			●	
STEEL PRO POWER SYSTEM 945			●			●			●
STEEL PRO POWER SYSTEM 1080			●			●			●
STEEL PRO POWER SYSTEM 1215			●			●			●
STEEL PRO POWER SYSTEM 1350			●			●			●

6. AUXILIARY ACCESSORIES FOR TECHNICAL BOX

Description	Notes	Code
Air/flue manifold technical box Ø160 mm L = 900 mm	(1)	**20147030**
Air/flue manifold technical box Ø300 mm L = 900 mm	(1)	**20147028**
Air/flue manifold technical box Ø160 mm L = 1800 mm	(1)	**20157595**
Air/flue manifold technical box Ø300 mm L = 1800 mm	(1)	**20157598**
"S" flue manifold technical box Ø300 mm L = 1800 mm (SP60-DN100)	(1)	**20157599**
Bands for crane lifting handling		**20146844**
Handling wheels	(2)	**20146845**
Internal light emergency and service kit		**20146846**

(1) To be used as indicated in the tables below.
(2) To be used during installation.

OPEN CHAMBER BOILER CONFIGURATION

Selection table	Exhaust flue side	Technical box side
Table A	Right	Right
	Left	Left
Collectors not necessary	Left	Right
	Right	Left

ROOM SEALED BOILER CONFIGURATION

Selection table	Exhaust flue side	Air suction side	Technical box side
Table A	Right	Right	Right
	Left	Left	Left
Table B	Left	Right	Right
	Left	Right	Left
	Right	Left	Right
	Right	Left	Left
Collectors not necessary	Left	Left	Right
	Right	Right	Left

LEFT SIDE CONFIGURATION

Technical box for hydraulic separator



Technical box for plate heat exchanger



RIGHT SIDE CONFIGURATION

Technical box for hydraulic separator



Technical box for plate heat exchanger



TABLE A

Code and number of the air/fume manifold	Technical box for circulator (only "V" versions)				Technical box for hydraulic separator				Technical box for heat exchanger					
Chamber type	Open chamber		Room sealed		Open chamber		Room sealed		Open chamber			Room sealed		
	20147030	20147028	20147030	20147028	20147030	20147028	20147030	20147028	20157595	20157598	20157599	20157595	20157598	20157599
STEEL PRO POWER 114-2	1x ●		2x●		1x ●		2x●		1x ●			2x●		
STEEL PRO POWER 140-2	1x ●		2x●		1x ●		2x●		1x ●			2x●		
STEEL PRO POWER 180-2	1x ●		2x●		1x ●		2x●		1x ●			2x●		
STEEL PRO POWER 230-2	1x ●		2x●		1x ●		2x●		1x ●			2x●		
STEEL PRO POWER 270-2 (*)	1x ●				1x ●				1x ●					
STEEL PRO POWER 300-3	1x ●		2x●		1x ●		2x●		1x ●			2x●		
STEEL PRO POWER 345-3	1x ●		2x●		1x ●		2x●		1x ●			2x●		
STEEL PRO POWER 405-3 (*)	1x ●				1x ●				1x ●					
STEEL PRO POWER 460-4	1x ●		2x●		1x ●		2x●		1x ●			2x●		
STEEL PRO POWER 540-4		1x ●		2x●		1x ●		2x●		1x ●			2x●	
STEEL PRO POWER SYSTEM 675		1x ●		2x●		1x ●		2x●		1x ●			2x●	
STEEL PRO POWER SYSTEM 810		1x ●		2x●		1x ●		2x●		1x ●			2x●	
STEEL PRO POWER SYSTEM 945		1x ●		2x●		1x ●		2x●			1x ●			(**)
STEEL PRO POWER SYSTEM 1080		1x ●		2x●		1x ●		2x●			1x ●			(**)
STEEL PRO POWER SYSTEM 1215		1x ●		2x●		1x ●		2x●			1x ●			(**)
STEEL PRO POWER SYSTEM 1350		1x ●		2x●		1x ●		2x●			1x ●			(**)

NOTE: to be used only if the fume outlet side is the same as the hydraulic outlet side.
(*) Flue discharge/ air intake on the technical box side not available in case of sealed chamber, the air intake is mandatory on the boiler side.
(**) In case of a technical box with plate heat exchanger and sealed installation, the air intake must take place on the boiler side and not on the technical box side. In this case also for the pump technical box, if present, is necessary to adopt only one code 20147028.

TABLE B

Code and number of the air/fume manifold	Technical box for circulator (only "V" versions)				Technical box for hydraulic separator				Technical box for heat exchanger					
Chamber type	Open chamber		Room sealed		Open chamber		Room sealed		Open chamber			Room sealed		
	20147030	20147028	20147030	20147028	20147030	20147028	20147030	20147028	20157595	20157598	20157599	20157595	20157598	20157599
STEEL PRO POWER 114-2	1x ●		1x ●		1x ●		1x ●		1x ●			1x ●		
STEEL PRO POWER 140-2	1x ●		1x ●		1x ●		1x ●		1x ●			1x ●		
STEEL PRO POWER 180-2	1x ●		1x ●		1x ●		1x ●		1x ●			1x ●		
STEEL PRO POWER 230-2	1x ●		1x ●		1x ●		1x ●		1x ●			1x ●		
STEEL PRO POWER 270-2	1x ●		1x ●		1x ●		1x ●		1x ●			1x ●		
STEEL PRO POWER 300-3	1x ●		1x ●		1x ●		1x ●		1x ●			1x ●		
STEEL PRO POWER 345-3	1x ●		1x ●		1x ●		1x ●		1x ●			1x ●		
STEEL PRO POWER 405-3	1x ●		1x ●		1x ●		1x ●		1x ●			1x ●		
STEEL PRO POWER 460-4	1x ●		1x ●		1x ●		1x ●		1x ●			1x ●		
STEEL PRO POWER 540-4		1x ●		1x ●		1x ●		1x ●		1x ●			1x ●	
STEEL PRO POWER SYSTEM 675		1x ●		1x ●		1x ●		1x ●		1x ●			1x ●	
STEEL PRO POWER SYSTEM 810		1x ●		1x ●		1x ●		1x ●		1x ●			1x ●	
STEEL PRO POWER SYSTEM 945		1x ●		1x ●		1x ●		1x ●			1x ●			1x ●
STEEL PRO POWER SYSTEM 1080		1x ●		1x ●		1x ●		1x ●			1x ●			1x ●
STEEL PRO POWER SYSTEM 1215		1x ●		1x ●		1x ●		1x ●			1x ●			1x ●
STEEL PRO POWER SYSTEM 1350		1x ●		1x ●		1x ●		1x ●			1x ●			1x ●

7. AUXILIARY ACCESSORIES FOR OUTDOOR INSTALLATION

Description	Code
Kit IPX5D upper coverage for outdoor installation L = 900 mm	**20146841**
Kit IPX5D upper coverage for outdoor installation L = 1800 mm	**20146842**
Kit IPX5D display coverage	**20146843**
Outdoor insulation kit for 3" blind flanges	**20146953**
Outdoor insulation kit for 5" blind flanges	**20146954**

NOTE: to be used only in the case of outdoor installation.


MATCHING TABLE OF BOX + DISPLAY COVERS SELECTION TABLE FOR OUTDOOR INSTALLATION

Description	Configuration with technical box for hydraulic separator					Configuration with technical box for plate heat exchanger				
	20146841	20146842	20146843	20146953	20146954	20146841	20146842	20146843	20146953	20146954
STEEL PRO POWER 114-2 P	2x ●		1x ●	1x ●		1x ●	1x ●	1x ●	1x ●	
STEEL PRO POWER 140-2 P	2x ●		1x ●	1x ●		1x ●	1x ●	1x ●	1x ●	
STEEL PRO POWER 180-2 P	2x ●		1x ●	1x ●		1x ●	1x ●	1x ●	1x ●	
STEEL PRO POWER 230-2 P	2x ●		1x ●	1x ●		1x ●	1x ●	1x ●	1x ●	
STEEL PRO POWER 270-2 P	2x ●		1x ●		1x ●	1x ●	1x ●	1x ●		1x ●
STEEL PRO POWER 300-3 P	1x ●	1x ●	1x ●	1x ●			2x ●	1x ●	1x ●	
STEEL PRO POWER 345-3 P	1x ●	1x ●	1x ●	1x ●			2x ●	1x ●	1x ●	
STEEL PRO POWER 405-3 P	1x ●	1x ●	1x ●		1x ●		2x ●	1x ●		1x ●
STEEL PRO POWER 460-4 P	1x ●	1x ●	1x ●	1x ●			2x ●	1x ●	1x ●	
STEEL PRO POWER 540-4 P	1x ●	1x ●	1x ●		1x ●		2x ●	1x ●		1x ●
STEEL PRO POWER SYSTEM 675	2x ●	1x ●	2x ●		1x ●	1x ●	2x ●	2x ●		1x ●
STEEL PRO POWER SYSTEM 810	2x ●	1x ●	2x ●		1x ●	1x ●	2x ●	2x ●		1x ●
STEEL PRO POWER SYSTEM 945	1x ●	2x ●	2x ●		1x ●		3x ●	2x ●		1x ●
STEEL PRO POWER SYSTEM 1080	1x ●	2x ●	2x ●		1x ●		3x ●	2x ●		1x ●
STEEL PRO POWER SYSTEM 1215	2x ●	2x ●	3x ●		1x ●	1x ●	3x ●	3x ●		1x ●
STEEL PRO POWER SYSTEM 1350	2x ●	2x ●	3x ●		1x ●	1x ●	3x ●	3x ●		1x ●

8. SECONDARY CIRCUIT MANAGEMENT ACCESSORIES

Description	Notes	Code
External probe		**20132778**
Immersion probe	(1)	**1220599**
Electronic management kit for single direct or additional mixed zone (max 16)		**20220356**

(1) Utilized for the management of secondary/tank circuit.

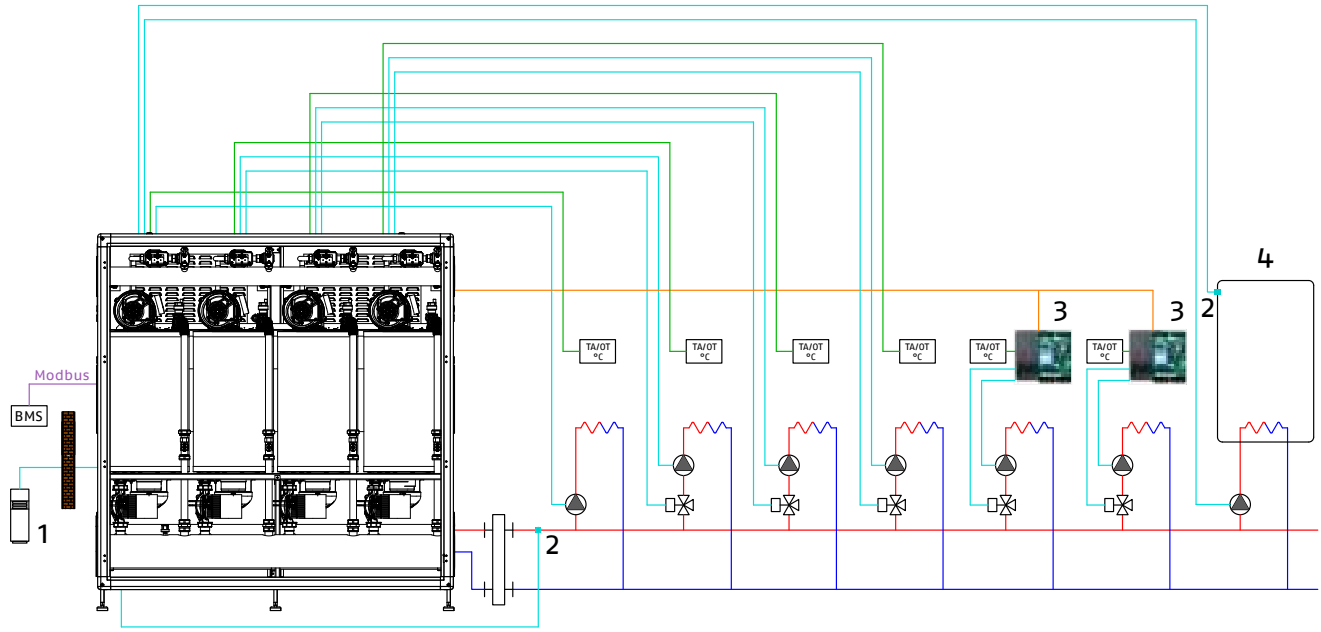

Key to layout
1. External probe code 20132778
2. Immersion probe code 1220599
3. Electronic kit for managing additional direct or mixed zone (max 16) code 20220356
4. DHW cylinder

9. TREATMENT SYSTEMS FOR CONDENSATE NEUTRALIZATION


Description	Notes	Code
Condensate neutralizer N2 (up to 450 kW)		**4031810**
Condensate neutralizer N3 (450-1500 kW)	(D)	**4031812**
Condensate neutralizer HN2 (up to 280 kW)	(1)	**4031811**
Condensate neutralizer HN3 (280-750 kW)	(D)(1)	**4031813**

(D) Availability of the material at our warehouse: 30 working days from the date of the order's validation.
(1) Equipped with condensate pump.

Modular condensing floor-standing boilers for indoor installation

Alu Pro Power



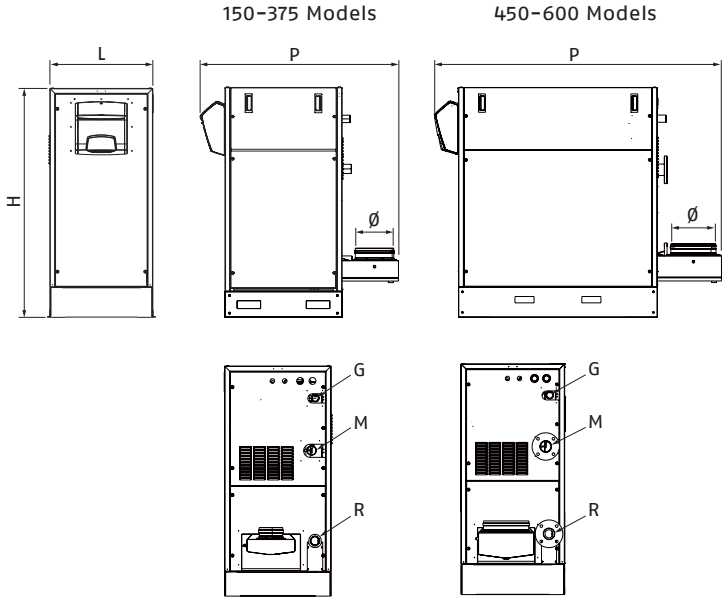

ERP

- In conformity with Directive 2009/125/EC
- Modular floor-standing condensing boilers, featuring a heat-exchanger made of a special aluminium and silicon alloy with a wide modulation range (up to 1:40) and extremely reduced dimensions

Description	H mm	L mm	P mm	Ø mm	M/R Flow/Return connection	G Gas connection	Weight (empty) kg
ALU 115 PRO POWER	1534,5	690	1264	150	Ø 2" G	Ø 1" ½ G	240
ALU 150 PRO POWER	1534,5	690	1264	150	Ø 2" G	Ø 1" ½ G	240
ALU 225 PRO POWER	1534,5	690	1264	200	Ø 2" G	Ø 1" ½ G	310
ALU 300 PRO POWER	1534,5	690	1654	250	Ø 2" G	Ø 1" ½ G	395
ALU 349 PRO POWER	1534,5	690	1654	250	Ø 2" G	Ø 1" ½ G	470
ALU 375 PRO POWER	1534,5	690	1654	250	Ø 2" G	Ø 1" ½ G	470
ALU 450 PRO POWER	1534,5	690	2103	300	Flange PN10 DN65	Ø 1" ½ G	565
ALU 525 PRO POWER	1534,5	690	2103	300	Flange PN10 DN65	Ø 1" ½ G	640
ALU 600 PRO POWER	1534,5	690	2298	300	Flange PN10 DN65	Ø 1" ½ G	735

The heat-generator is composed by a cascade of independent 75-kW thermal modules, managed in cascade sequence, ensuring the best adaptation to the heat request and maximum reliability and peace of mind.
Continuous pre-mix burner in stainless steel ensures efficient, noiseless and high-efficiency combustion with low polluting emissions allowing to achieve Class 5 NOx (according to UNI EN 297). It is provided with thermoregulation suitable for the control of a modulating pump for the primary ring circuit.
The RIELLOtech regulation can control up to 8 boilers in a cascade application.

- Type of Appliance B23, B23P
- Low head losses
- Wide range of accessories for an easy, fast, flexible and complete installation
- Compact dimensions, reduced weight and the basement make the transport and the placement easier
- Maximum operating pressure: 6 bar.


TECHNICAL DATA

Description	Power - kW			Efficiency - %			Code
	Output useful 80°/60° max	Output useful 50°/30° max	Furnace input min-max	Useful Pn (80°/60°)	Useful Pn (50°/30°)	Useful 30% Pn (50°/30°)	
ALU 115 PRO POWER	112.1	119.6	15 - 115	97.5	104.0	108.0	**20021781**
ALU 150 PRO POWER	146.3	156.0	15 - 150	97.5	104.0	108.0	**20020843**
ALU 225 PRO POWER	219.4	234.0	15 - 225	97.8	104.0	108.0	**20020844**
ALU 300 PRO POWER	293.0	312.0	15 - 300	98.0	104.0	108.0	**20020845**
ALU 349 PRO POWER	340.3	363.0	15 - 349	98.3	104.0	108.0	**20029287**
ALU 375 PRO POWER	365.6	390.0	15 - 375	98.3	104.0	108.0	**20020846**
ALU 450 PRO POWER	438.8	468.0	15 - 450	98.3	104.0	108.0	**20020847**
ALU 525 PRO POWER	511.9	546.0	15 - 525	98.3	104.0	108.0	**20020848**
ALU 600 PRO POWER	585.0	624.0	15 - 600	98.3	104.0	108.0	**20020849**

SYSTEM CONFIGURATION GUIDE AND ACCESSORIES SELECTION

1. BOILER CONFIGURATION
2. MANIFOLDS, SAFETY KITS AND HYDRAULIC ACCESSORIES
3. HYDRAULIC SEPARATORS/PLATE HEAT EXCHANGERS*
4. ELECTRICAL ACCESSORIES
5. TREATMENT SYSTEMS FOR CONDENSATE NEUTRALIZATION

(*) Configurations with plate heat exchangers: see the product Riello HEATgate, section SYSTEM COMPLEMENTARY ITEMS.

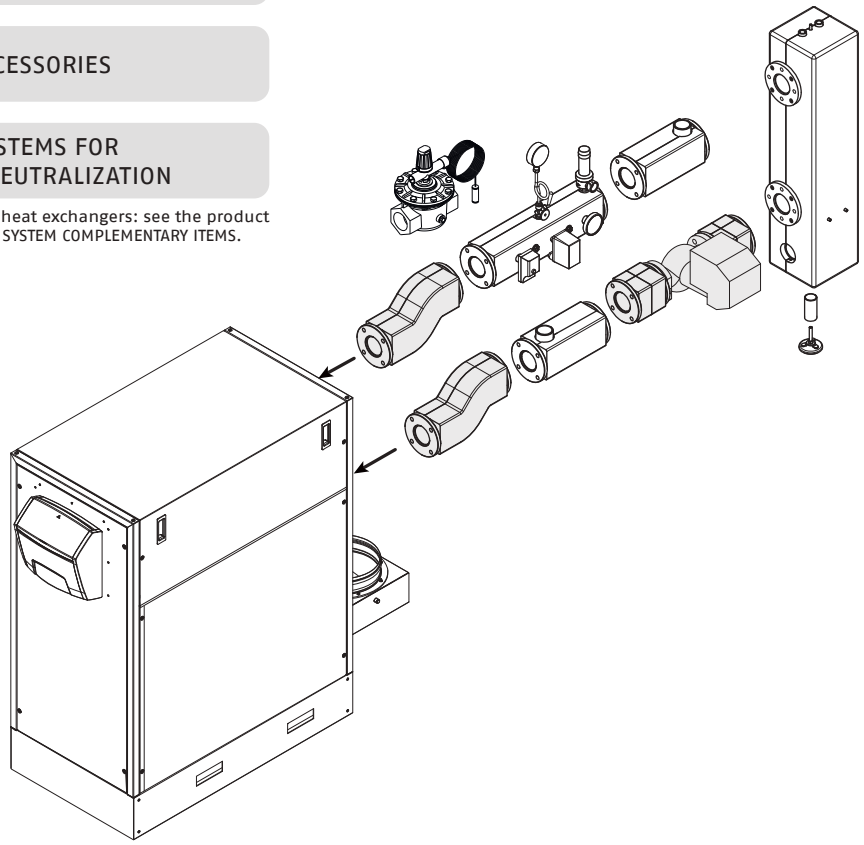

1. BOILER CONFIGURATION

Choice of the type of installation:
A - Stand alone
B - Cascade


A - STAND ALONE HEAT INPUT

Description	ALU 115 PRO POWER	ALU 150 PRO POWER	ALU 225 PRO POWER	ALU 300 PRO POWER	ALU 349 PRO POWER	ALU 375 PRO POWER	ALU 450 PRO POWER	ALU 525 PRO POWER	ALU 600 PRO POWER
Rated heat input kW	115.0	150.0	225.0	300.0	349.0	375.0	450.0	525.0	600.0

B - CASCADE SYSTEM HEAT INPUT

Description	ALU 115 PRO POWER	ALU 150 PRO POWER	ALU 225 PRO POWER	ALU 300 PRO POWER	ALU 349 PRO POWER	ALU 375 PRO POWER	ALU 450 PRO POWER	ALU 525 PRO POWER	ALU 600 PRO POWER
Boiler heat output kW	115	150	225	300	349	375	450	525	600
No. boilers	TOTAL POWER								
2	230	300	450	600	698	750	900	1050	1200
3	345	450	675	900	1047	1125	1350	1575	1800
4	460	600	900	1200	1396	1500	1800	2100	2400
5	575	750	1125	1500	1745	1875	2250	2625	3000
6	690	900	1350	1800	2094	2250	2700	3150	3600
7	805	1050	1575	2100	2443	2625	3150	3675	4200
8	920	1200	1800	2400	2792	3000	3600	4200	4800

PRIMARY AND SECONDARY CIRCUIT CONFIGURATION KIT

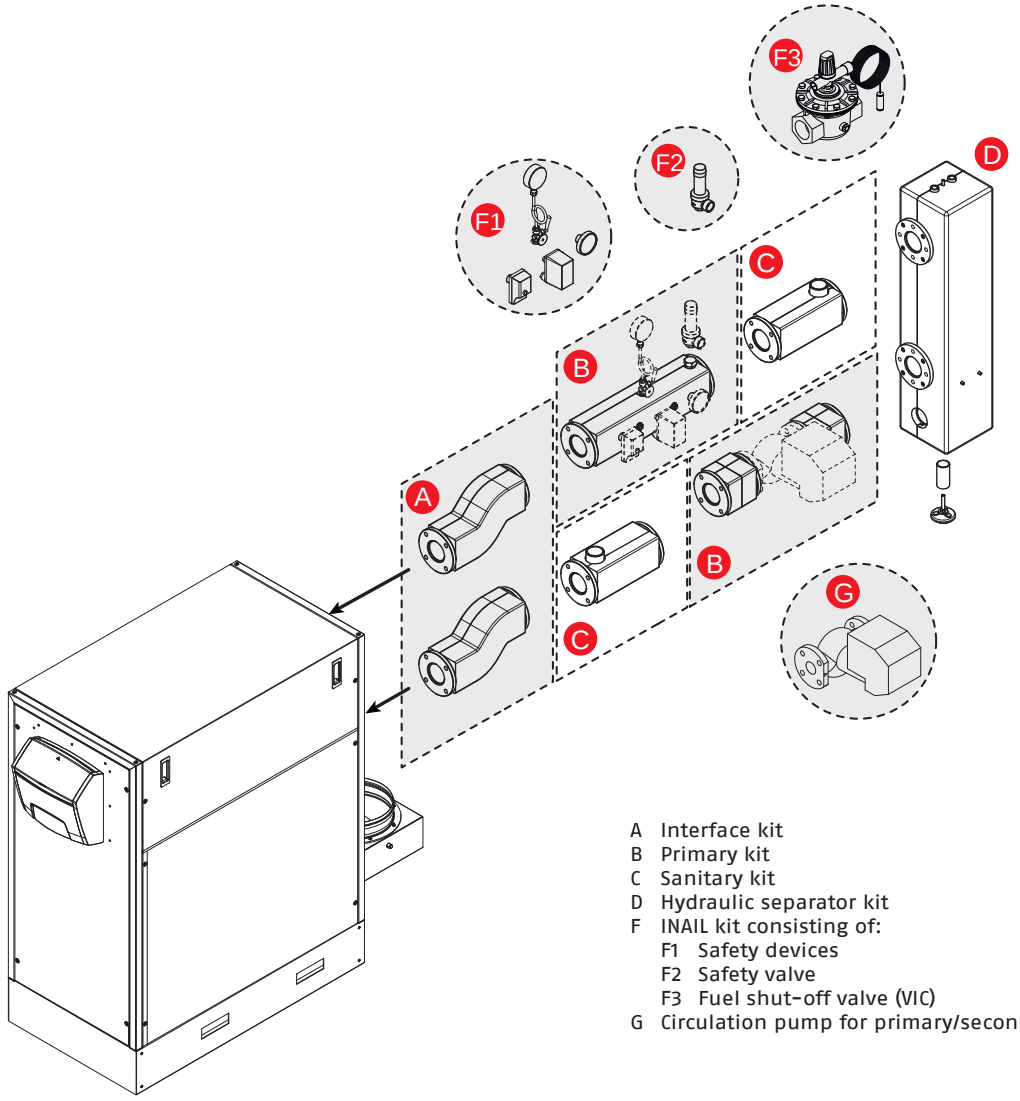

A Interface kit
B Primary kit
C Sanitary kit
D Hydraulic separator kit
F INAIL kit consisting of:
F1 Safety devices
F2 Safety valve
F3 Fuel shut-off valve (VIC)
G Circulation pump for primary/secondary circuit

2. MANIFOLDS, SAFETY KITS AND HYDRAULIC ACCESSORIES

Description	Notes	Code
Interface primary circuit kit up to 375 kW	(1)	**20021753**
Interface primary circuit kit up to 600 kW	(1)	**20021752**
Primary kit up to 300 kW	(2)	**20021751**
Primary kit up to 600 kW	(2)	**20021750**
Safety kit	(3)	**4030091**
Safety valve up to 460 kW (5.4 bar ØG.¾" F)	(4)	**20023104**
Safety valve up to 580 kW (5.4 bar ØG.1" F)	(4)	**20023106**
Fuel shut-off valve kit (VIC) - ØG.1"	(5)(9)	**20009486**
Fuel shut-off valve kit (VIC) - ØG.1" ½	(5)(10)	**20009482**
Fuel shut-off valve kit (VIC) - ØG.2"	(5)(11)	**20009483**
Fuel shut-off valve kit (VIC) - ØG.3"	(5)(12)	**20061640**
Domestic water connection kit	(6)	**20022521**
Primary circuit pump MAGNA3 40-120 F	(8)	**20183650**
Primary circuit pump MAGNA3 65-120 F	(8)	**20183652**

Refer to the paragraph "PRIMARY AND SECONDARY CIRCUIT CONFIGURATION KIT", specifically:
(1) Accessory type A.
(2) Accessory type B.
(3) Accessory type F1. To be completed with safety valve (F2) and VIC fuel shut-off valve (F3).
(4) Accessory type F2.
(5) Accessory type F3. Tripping temperature at 97 °C - Capillary length 5 m.
(6) Accessory type C.
(8) Accessory type G.
(9) Recommended up to maximum power of 131 kW, calculated considering gas supply pressure = 20 mbar.
(10) Recommended up to a maximum power of 230 kW, calculated considering gas supply pressure = 20 mbar.
(11) Recommended up to a maximum power of 580 kW, calculated considering gas supply pressure = 20 mbar.
(12) Recommended up to maximum power of 1310 kW, calculated considering gas supply pressure = 20 mbar.

3. HYDRAULIC SEPARATORS/PLATE HEAT EXCHANGERS

Description	Notes	Code
Hydraulic separator (up to 300 kW)	(1)	**20009385**
Hydraulic separator (up to 600 kW)	(1)	**20009431**
Plate heat exchangers	(2)	*

Refer to the paragraph "PRIMARY AND SECONDARY CIRCUIT CONFIGURATION KIT", specifically:
(1) Accessory type D.
(2) Plate heat exchangers for physical separation of primary and secondary circuits. To be used as an alternative to the hydraulic separator.
(*) Configurations with plate heat exchangers: see the product Riello HEATgate, section SYSTEM COMPLEMENTARY ITEMS.

MATCHING TABLE FOR PRIMARY CIRCUIT MANAGMENT (A–B–C)

Description	Interface primary circuit kit		Primary kit		Primary circuit pumps		DHW connection kit
	MANDATORY ACCESSORIES						OPTIONAL
	Interface primary circuit kit up to 375 kW	Interface primary circuit kit up to 600 kW	Primary kit up to 300 kW	Primary kit up to 600 kW	Primary circuit pump MAGNA3 40-120 F	Primary circuit pump MAGNA3 65-120 F	Domestic water connection kit
	20021753	20021752	20021751	20021750	20183650	20183652	20022521
ALU 115 PRO POWER	1x ●		1x ●		1x ●		1x ●
ALU 150 PRO POWER	1x ●		1x ●		1x ●		1x ●
ALU 225 PRO POWER	1x ●		1x ●		1x ●		1x ●
ALU 300 PRO POWER	1x ●		1x ●		1x ●		1x ●
ALU 349 PRO POWER	1x ●			1x ●		1x ●	1x ●
ALU 375 PRO POWER	1x ●			1x ●		1x ●	1x ●
ALU 450 PRO POWER		1x ●		1x ●		1x ●	1x ●
ALU 525 PRO POWER		1x ●		1x ●		1x ●	1x ●
ALU 600 PRO POWER		1x ●		1x ●		1x ●	1x ●

MATCHING TABLE OF SAFETY DEVICES (F)

Description	Safety kit	Safety valves		Fuel shut-off valve			
	Safety kit	Safety valve up to 460 kW (5.4 bar ØG.¾" F)	Safety valve up to 580 kW (5.4 bar ØG.1" F)	Fuel shut-off valve kit (VIC) - ØG.1"	Fuel shut-off valve kit (VIC) - ØG.1" ½	Fuel shut-off valve kit (VIC) - ØG.2"	Fuel shut-off valve kit (VIC) - ØG.3"
	4030091	20023104	20023106	20009486	20009482	20009483	20061640
ALU 115 PRO POWER	1x ●	1x ●		1x ●			
ALU 150 PRO POWER	1x ●	1x ●			1x ●		
ALU 225 PRO POWER	1x ●	1x ●			1x ●		
ALU 300 PRO POWER	1x ●	1x ●				1x ●	
ALU 349 PRO POWER	1x ●	1x ●				1x ●	
ALU 375 PRO POWER	1x ●	1x ●				1x ●	
ALU 450 PRO POWER	1x ●	1x ●				1x ●	
ALU 525 PRO POWER	1x ●		1x ●			1x ●	
ALU 600 PRO POWER	1x ●	2x ●					1x ●

MATCHING TABLE OF HYDRAULIC SEPARATOR (D)

Description	Hydraulic separators	
	Hydraulic separator (up to 300 kW)	Hydraulic separator (up to 600 kW) kW
	20009385	20009431
ALU 115 PRO POWER	1x ●	
ALU 150 PRO POWER	1x ●	
ALU 225 PRO POWER	1x ●	
ALU 300 PRO POWER	1x ●	
ALU 349 PRO POWER		1x ●
ALU 375 PRO POWER		1x ●
ALU 450 PRO POWER		1x ●
ALU 525 PRO POWER		1x ●
ALU 600 PRO POWER		1x ●

4. ELECTRICAL ACCESSORIES

Description	Notes	Code
RIELLOtech CLIMA COMFORT		4031069
CLIMA COMFORT		20010903
CLIMA DISPLAY		20010906
RC3 remote control kit		20155028
Interface kit for bus comunication between Alu Pro Power and RIELLOtech	(1)	20021674
NTC solar collector immersion probe (10kΩ)	(2)	4031913
NTC immersion probe (10kΩ) - 5 metres	(3)	20010068
NTC O-ring probe (10kΩ)	(4)	20168680
NTC DHW-tank probe (10kΩ) - 5 metres	(5)	20010103

(1) Includes wiring and communication kit.
(2) Solar system probe.
(3) Primary probe (separator).
(4) Mixed zone probe.
(5) Storage tank probe.

5. TREATMENT SYSTEMS FOR CONDENSATE NEUTRALIZATION

Description	Notes	Code
N2 neutralisation kit (up to 450 kW)		4031810
HN2 neutralisation kit (up to 280 kW)		4031811
N3 neutraliser kit (from 450 to 1500 kW)		4031812
HN3 neutraliser kit (from 280 to 750 kW)	(1)	4031813


(1) Equipped with extraction pumps.

POSSIBLE SYSTEM COMPOSITIONS

DIRECT SYSTEM BASE CONFIGURATION 1

Description	Quantity	Code
ALU PRO POWER 115-600	1	(1)
Interface primary circuit kit (375-600 kW)	1	(2)
Primary kit (300-600 kW)	1	(2)
Safety kit	1	4030091
Safety valve (460-580 kW)	1	(2)
Fuel shut-off valve kit (1"-3")	1	(2)
Primary circuit pump	1	(2)


(1) Refer to table "A - STAND ALONE HEAT INPUT".
(2) Refer to the matching tables on the previous pages.

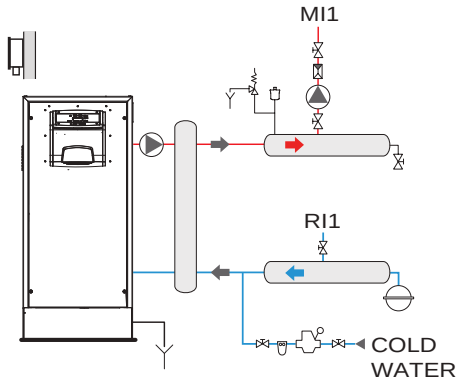

DHW BASE CONFIGURATION WITH HEATER UPSTREAM OF THE HYDRAULIC COMPENSATOR

Description	Quantity	Code
ALU PRO POWER 115-600	1	(1)
Interface primary circuit kit (375-600 kW)	1	(2)
Primary kit (300-600 kW)	1	(2)
Safety kit	1	4030091
Safety valve (460-580 kW)	1	(2)
Fuel shut-off valve kit (1"-3")	1	(2)
Domestic water connection kit	1	20022521
Sanitary kit (300-600 kW)	1	(2)
Primary circuit pump	1	(2)
NTC DHW-tank probe (10kΩ) - 5 metres	1	20010103


(1) Refer to table "A - STAND ALONE HEAT INPUT".
(2) Refer to the matching tables on the previous pages.

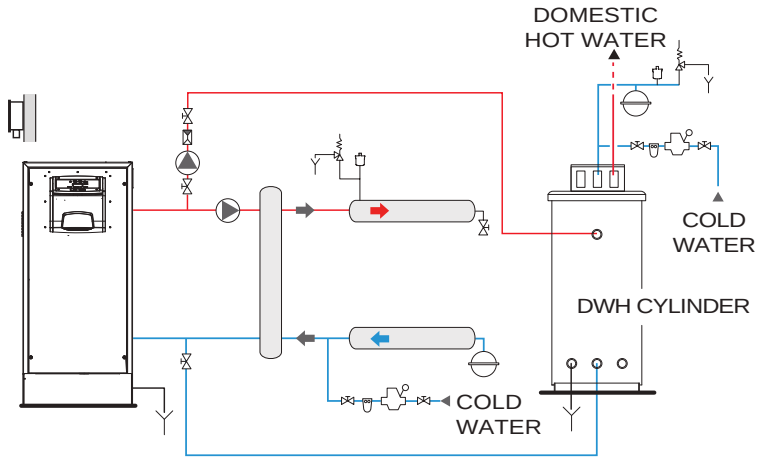

DHW BASE CONFIGURATION WITH HEATER DOWNSTREAM OF THE HYDRAULIC COMPENSATOR

Description	Quantity	Code
ALU PRO POWER 115-600	1	(1)
Interface primary circuit kit (375-600 kW)	1	(2)
Primary kit (300-600 kW)	1	(2)
Safety kit	1	4030091
Safety valve (460-580 kW)	1	(2)
Fuel shut-off valve kit (1"-3")	1	(2)
Sanitary kit (300-600 kW)	1	(2)
Primary circuit pump	1	(2)
NTC DHW-tank probe (10kΩ) - 5 metres	1	20010103

(1) Refer to table "A - STAND ALONE HEAT INPUT".
(2) Refer to the matching tables on the previous pages.

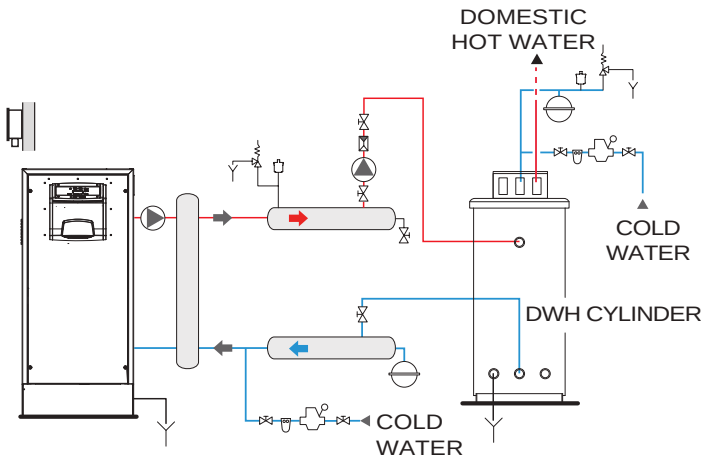


CONTROL PANEL SOLUTION

CONFIGURATION OF 1 DIRECT SYSTEM + 1 MIXED SYSTEM + DHW

Description	Quantity	Code
ALU PRO POWER 115-600	1	(1)
Interface primary circuit kit (375-600 kW)	1	(2)
Primary kit (300-600 kW)	1	(2)
Safety kit	1	4030091
Safety valve (460-580 kW)	1	(2)
Fuel shut-off valve kit (1"-3")	1	(2)
Primary circuit pump	1	(2)
Interface kit for bus comunication between Alu Pro Power and RIELLOtech	1	20021674
CLIMA COMFORT	1	20010903
CLIMA DISPLAY (*)	1	20010906
NTC O-ring probe (10kΩ)	1	20168680
NTC DHW-tank probe (10kΩ) - 5 metres	1	20010103
NTC immersion probe (10kΩ) - 5 metres	1	20010068


(1) Refer to table "A - STAND ALONE HEAT INPUT".
(2) Refer to the matching tables on the previous pages.
(*) To replace the CLIMA DISPLAY code 20010906, install the RC3 room control kit code 20155028.

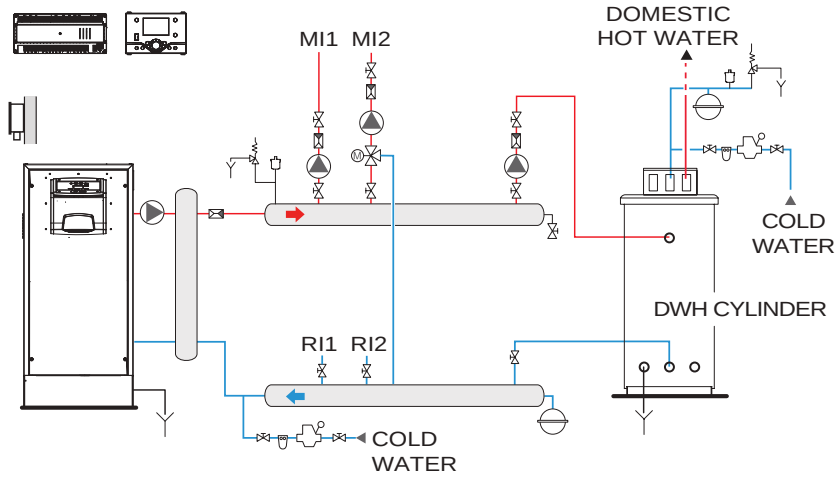

CONFIGURATION OF 2 MIXED SYSTEMS + DHW

Description	Quantity	Code
ALU PRO POWER 115-600	1	**(1)**
Interface primary circuit kit (375-600 kW)	1	**(2)**
Primary kit (300-600 kW)	1	**(2)**
Safety kit	1	**4030091**
Safety valve (460-580 kW)	1	**(2)**
Fuel shut-off valve kit (1"-3")	1	**(2)**
Primary circuit pump	1	**(2)**
Interface kit for bus comunication between Alu Pro Power and RIELLOtech	1	**20021674**
CLIMA COMFORT	1	**20010903**
CLIMA DISPLAY (*)	1	**20010906**
NTC O-ring probe (10kΩ)	2	**20168680**
NTC DHW-tank probe (10kΩ) - 5 metres	1	**20010103**
NTC immersion probe (10kΩ) - 5 metres	1	**20010068**


(1) Refer to table "A - STAND ALONE HEAT INPUT".
(2) Refer to the matching tables on the previous pages.
(*) To replace the CLIMA DISPLAY code 20010906, install the RC3 room control kit code 20155028.

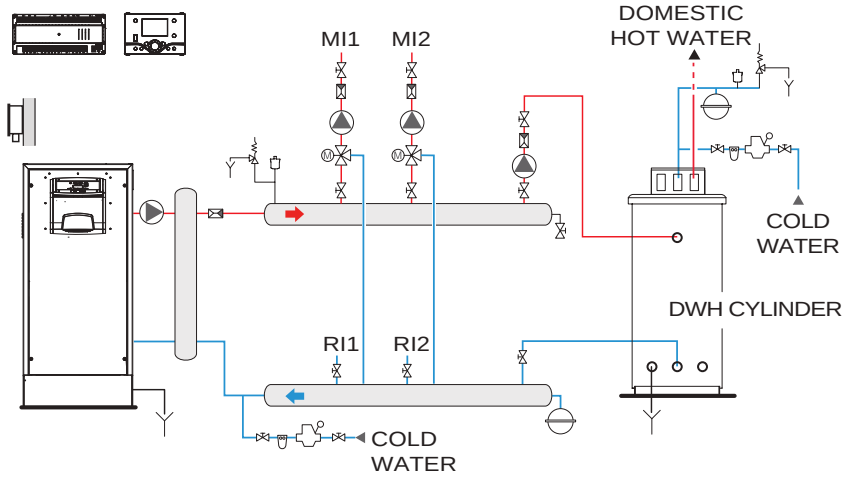

CASCADE CONFIGURATION OF 1 DIRECT SYSTEM + 1 MIXED SYSTEM + DHW (maximum 8 generators)

Description	Quantity	Code
ALU PRO POWER 115-600	1-8	(1)
Interface primary circuit kit (375-600 kW)	1-8	(2)
Primary kit (300-600 kW)	1-8	(2)
Safety kit	1-8	4030091
Safety valve (460-580 kW)	1-8	(2)
Fuel shut-off valve kit (1"-3")	1-8	(2)
Primary circuit pump	1-8	(2)
Interface kit for bus comunication between Alu Pro Power and RIELLOtech	1-8	20021674
CLIMA COMFORT	1	20010903
CLIMA DISPLAY (*)	1	20010906
NTC immersion probe (10kΩ) - 5 metres	1	20010068
NTC O-ring probe (10kΩ)	1	20168680
NTC DHW-tank probe (10kΩ) - 5 metres	1	20010103


(1) Refer to table "B - CASCADE SYSTEM HEAT INPUT".
(2) Refer to the matching tables on the previous pages.
(*) To replace the CLIMA DISPLAY code 20010906, install the RC3 room control kit code 20155028.

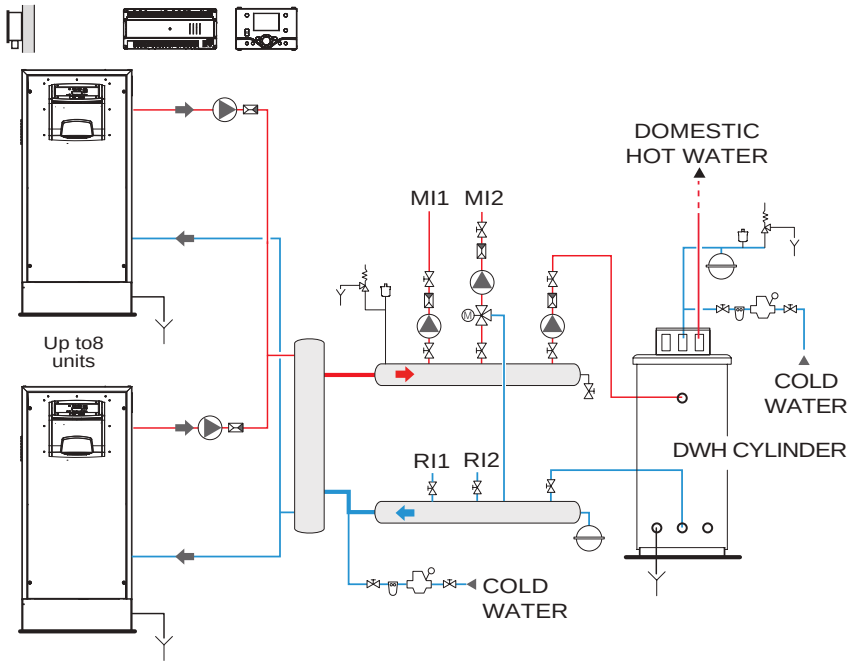

CONFIGURATION OF 1 DIRECT SYSTEM + 1 MIXED SYSTEM + DHW WITH SOLAR PANEL

Description	Quantity	Code
ALU PRO POWER 115-600	1	**(1)**
Interface primary circuit kit (375-600 kW)	1	**(2)**
Primary kit (300-600 kW)	1	**(2)**
Safety kit	1	**4030091**
Safety valve (460-580 kW)	1	**(2)**
Fuel shut-off valve kit (1"-3")	1	**(2)**
Primary circuit pump	1	**(2)**
Interface kit for bus comunication between Alu Pro Power and RIELLOtech	1	**20021674**
CLIMA COMFORT	1	**20010903**
CLIMA DISPLAY (*)	1	**20010906**
NTC O-ring probe (10kΩ)	1	**20168680**
NTC DHW-tank probe (10kΩ) - 5 metres	1	**20010103**
NTC immersion probe (10kΩ) - 5 metres	1	**20010068**
NTC solar collector immersion probe (10kΩ)	1	**4031913**

(1) Refer to table "A - STAND ALONE HEAT INPUT".
(2) Refer to the matching tables on the previous pages.
(*) To replace the CLIMA DISPLAY code 20010906, install the RC3 room control kit code 20155028.

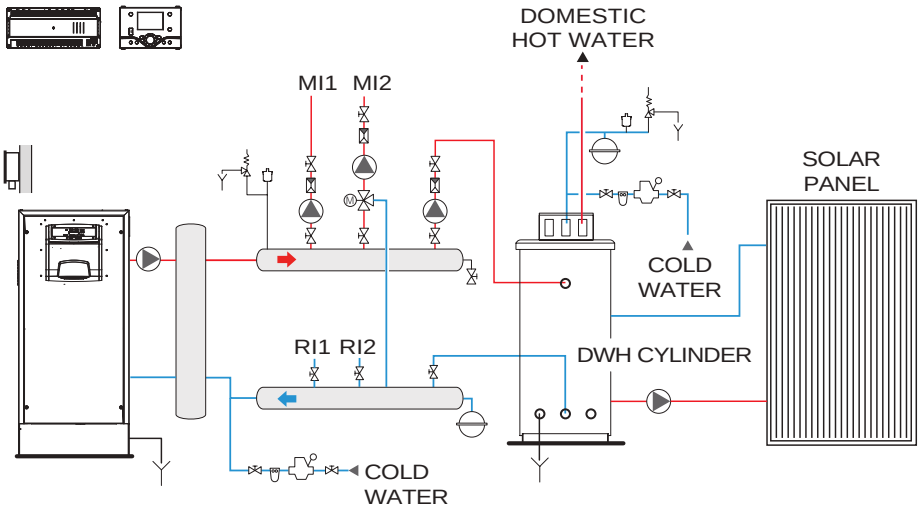


WALL MOUNTED SOLUTION

CONFIGURATION OF 1 DIRECT SYSTEM + 1 MIXED SYSTEM + DHW

Description	Quantity	Code
ALU PRO POWER 115-600	1	(1)
Interface primary circuit kit (375-600 kW)	1	(2)
Primary kit (300-600 kW)	1	(2)
Safety kit	1	4030091
Safety valve (460-580 kW)	1	(2)
Fuel shut-off valve kit (1"-3")	1	(2)
Primary circuit pump	1	(2)
Interface kit for bus comunication between Alu Pro Power and RIELLOtech	1	20021674
RIELLOtech CLIMA COMFORT	1	4031069
NTC O-ring probe (10kΩ)	1	20168680
NTC DHW-tank probe (10kΩ) - 5 metres	1	20010103
NTC immersion probe (10kΩ) - 5 metres	1	20010068


(1) Refer to table "A - STAND ALONE HEAT INPUT".
(2) Refer to the matching tables on the previous pages.

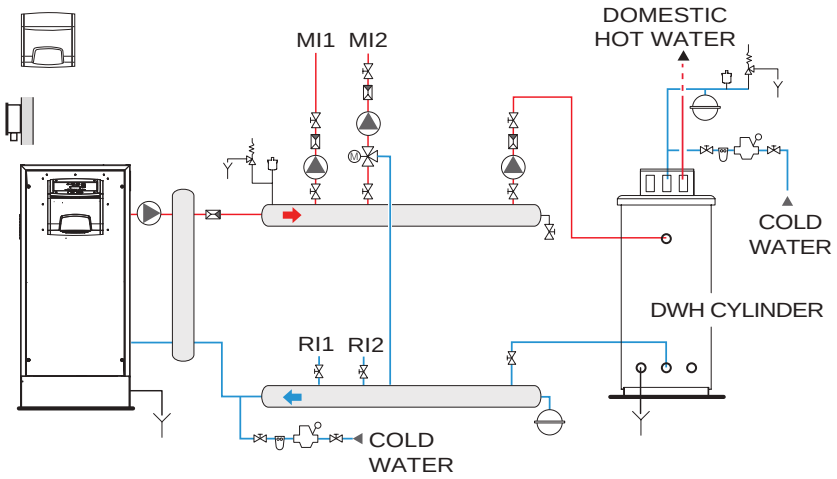

CONFIGURATION OF 2 MIXED SYSTEMS + DHW

Description	Quantity	Code
ALU PRO POWER 115-600	1	**(1)**
Interface primary circuit kit (375-600 kW)	1	**(2)**
Primary kit (300-600 kW)	1	**(2)**
Safety kit	1	**4030091**
Safety valve (460-580 kW)	1	**(2)**
Fuel shut-off valve kit (1"-3")	1	**(2)**
Primary circuit pump	1	**(2)**
Interface kit for bus comunication between Alu Pro Power and RIELLOtech	1	**20021674**
RIELLOtech CLIMA COMFORT	1	**4031069**
NTC O-ring probe (10kΩ)	2	**20168680**
NTC DHW-tank probe (10kΩ) - 5 metres	1	**20010103**
NTC immersion probe (10kΩ) - 5 metres	1	**20010068**


(1) Refer to table "A - STAND ALONE HEAT INPUT".
(2) Refer to the matching tables on the previous pages.

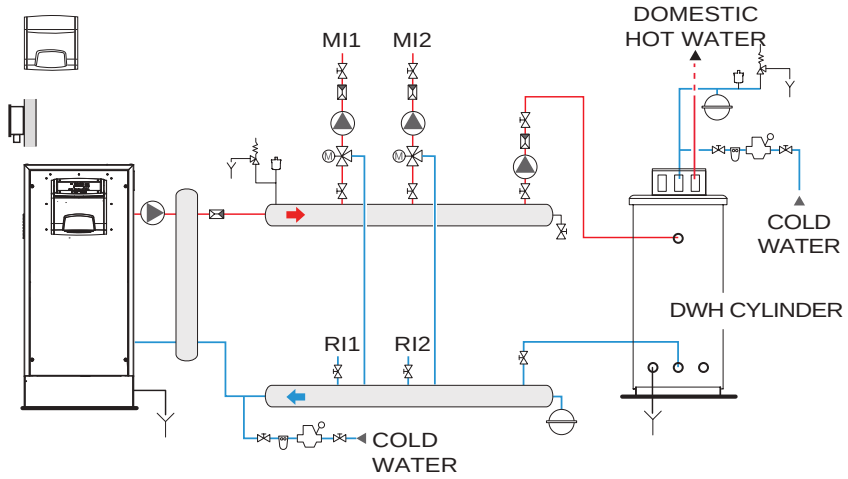

CASCADE CONFIGURATION OF 1 DIRECT SYSTEM + 1 MIXED SYSTEM + DHW (maximum 8 generators)

Description	Quantity	Code
ALU PRO POWER 115-600	1-8	(1)
Interface primary circuit kit (375-600 kW)	1-8	(2)
Primary kit (300-600 kW)	1-8	(2)
Safety kit	1-8	4030091
Safety valve (460-580 kW)	1-8	(2)
Fuel shut-off valve kit (1"-3")	1-8	(2)
Primary circuit pump	1-8	(2)
Interface kit for bus comunication between Alu Pro Power and RIELLOtech	1-8	20021674
RIELLOtech CLIMA COMFORT	1	4031069
NTC immersion probe (10kΩ) - 5 metres	1	20010068
NTC O-ring probe (10kΩ)	1	20168680
NTC DHW-tank probe (10kΩ) - 5 metres	1	20010103


(1) Refer to table "B - CASCADE SYSTEM HEAT INPUT".
(2) Refer to the matching tables on the previous pages.

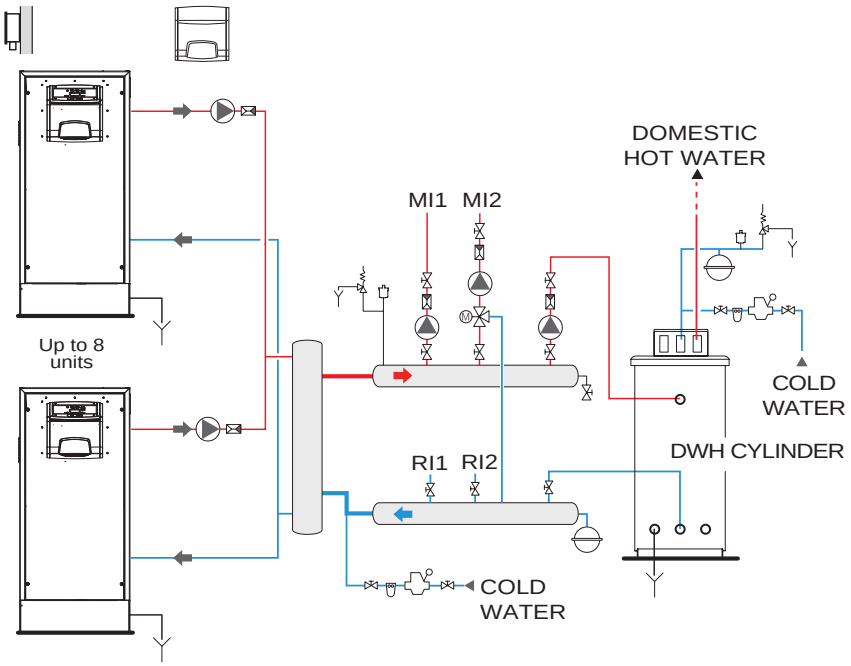

CONFIGURATION OF 1 DIRECT SYSTEM + 1 MIXED SYSTEM + DHW WITH SOLAR PANEL

Description	Quantity	Code
ALU PRO POWER 115-600	1	**(1)**
Interface primary circuit kit (375-600 kW)	1	**(2)**
Primary kit (300-600 kW)	1	**(2)**
Safety kit	1	**4030091**
Safety valve (460-580 kW)	1	**(2)**
Fuel shut-off valve kit (1"-3")	1	**(2)**
Primary circuit pump	1	**(2)**
Interface kit for bus comunication between Alu Pro Power and RIELLOtech	1	**20021674**
RIELLOtech CLIMA COMFORT	1	**4031069**
NTC O-ring probe (10kΩ)	1	**20168680**
NTC DHW-tank probe (10kΩ) - 5 metres	1	**20010103**
NTC immersion probe (10kΩ) - 5 metres	1	**20010068**
NTC solar collector immersion probe (10kΩ)	1	**4031913**

(1) Refer to table "A - STAND ALONE HEAT INPUT".
(2) Refer to the matching tables on the previous pages.

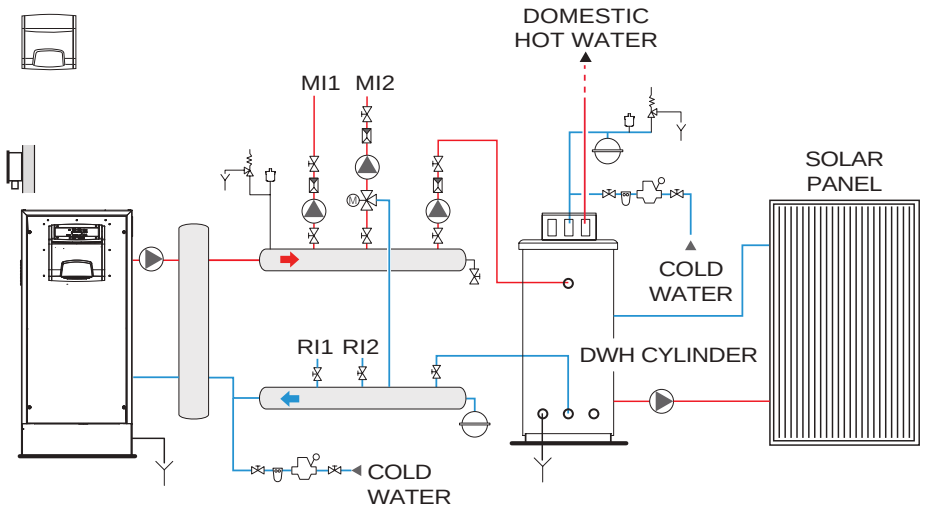

FLOOR-STANDING BOILERS

ONLY HEATING

GAS



TAU UNIT

TAU UNIT 35 (3,4-34,1 KW)**
TAU UNIT 50 (4,9-48,7 KW)**
TAU UNIT 70 (6,7-68,6 KW)**
TAU UNIT 100 (9,7-97,5 KW)**
TAU UNIT 115 (11,2-111,7 KW)**
TAU UNIT 140 (13,9-138,9 KW)**
TAU UNIT 190 (18,6-185,8 KW)**

page 278



TAU N

TAU 115 N (78,4-112,4 kW)***
TAU 150 N (108,2-146,6 kW)***
TAU 210 N (147,5-205,2 kW)***
TAU 270 N (207,2-264,3 kW)***
TAU 350 N (266,4-342,7 kW)***
TAU 450 N (345,0-441,9 kW)***
TAU 600 N (443,3-589,2 kW)***
TAU 750 N (590,8-735,5 kW)***
TAU 800 N (590,8-785,6 kW)***
TAU 1000 N (787,4-982,0 kW)***
TAU 1150 N (984,3-1129,3 kW)***
TAU 1250 N (1131,8-1227,5 kW)***
TAU 1450 N (1229,7-1423,9 kW)***
TAU 1750 N (1424,0-1718,5 kW)***
TAU 2100 N (1721,2-2062,2 kW)***
TAU 2600 N (2065,3-2553,2 kW)***
TAU 3000 N (2056,8-2946,0 kW)***

page 284



TAU N PREMIX

TAU 115 N PREMIX (78,4-112,4 kW)***
TAU 150 N PREMIX (108,2-146,6 kW)***
TAU 210 N PREMIX (147,5-205,2 kW)***
TAU 270 N PREMIX (207,2-264,3 kW)***
TAU 270 N PREMIX LPG (207,2-264,3 kW)***
TAU 350 N PREMIX (266,4-342,7 kW)***
TAU 450 N PREMIX (345,0-441,9 kW)***
TAU 600 N PREMIX (443,3-589,2 kW)***
TAU 800 N PREMIX (590,8-785,6 kW)***
TAU 1000 N PREMIX (787,4-982,0 kW)***
TAU 1150 N PREMIX (984,3-1129,3 kW)***
TAU 1250 N PREMIX (1131,8-1227,5 kW)***
TAU 1450 N PREMIX (1229,7-1423,9 kW)***
TAU 1750 N PREMIX (1424,0-1718,5 kW)***
TAU 2100 N PREMIX (1721,2-2062,2 kW)***
TAU 2600 N PREMIX (2065,3-2553,2 kW)***
TAU 3000 N PREMIX (2056,8-2946,0 kW)***

page 292

OIL



TAU N OIL

TAU 115 N OIL (80,0-112,2 kW)***
TAU 150 N OIL (108,2-146,4 kW)***
TAU 210 N OIL (147,5-205,2 kW)***
TAU 270 N OIL (207,3 -264,3 kW)***
TAU 350 N OIL (266,5-343,7 kW)***
TAU 450 N OIL (344,7-441,9 kW)***
TAU 600 N OIL (442,9-589,2 kW)***

page 294



TAU N OIL PRO

TAU 100 N OIL PRO (80,0-96,6 kW)***
TAU 115 N OIL PRO (80,0-112,2 kW)***
TAU 150 N OIL PRO (108,2-146,4 kW)***
TAU 210 N OIL PRO (147,5-205,2 kW)***
TAU 270 N OIL PRO (207,3 -264,3 kW)***
TAU 350 N OIL PRO (266,5-343,7 kW)***
TAU 450 N OIL PRO (344,7-441,9 kW)***
TAU 600 N OIL PRO (442,9-589,2 kW)***
TAU 800 N OIL PRO (590,2-785,6 kW)***
TAU 1000 N OIL PRO (786,6-982,0 kW)***

page 297

** Min/max useful power 80/60 °C
*** Max useful power 80/60 °C (approved power band)

Please verify with Sales the availability of the product in the destination Country before ordering

Floor standing gas condensing boilers


Tau Unit




ERP

- In conformity with Regulation (EU) 2016/426
- Gas condensing boilers with a high water content titanium stabilised stainless steel body (AISI 316 "Ti" + AISI 444) and a low pollutant emission (Class 6 according to UNI EN 15502) modulating premix burner

TAU UNIT 35-140

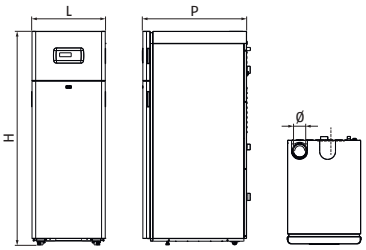

TAU UNIT 190

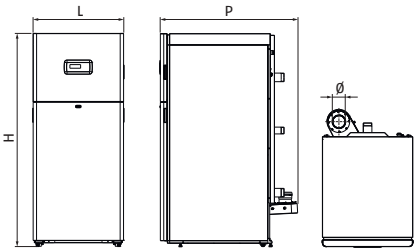

Description	H mm	L mm	P mm	Ø mm	Net weight kg
TAU UNIT 35	1365	600	760	80	135
TAU UNIT 50	1550	600	890	80	155
TAU UNIT 70	1550	600	890	80	165
TAU UNIT 100	1810	600	870	110	245
TAU UNIT 115	1810	600	870	110	245
TAU UNIT 140	1885	800	973	110	400
TAU UNIT 190	1880	800	1250	160	450

The high water content body has a vertical smoke pipe, and has two return lines to provide the best possible operation in condensing mode. The water stratifies at a high temperature at the top of the body, while the cold water accumulates at the bottom where the condensation occurs.
The boiler board, which has an easy-to-use interface, allows you to optimise the combustion, manage a remote storage cylinder for the production of domestic hot water and the supply temperature in climatic mode. The basic electronics includes include climatic regulation, management of the cascade of the modules, with integrated master/slave functions, the automatic switching between summer/winter and the possibility of managing a direct zone and a DHW storage cylinder.
The electronics also provides the possibility of the remote management using the 0-10V input or with the Modbus protocol.
With specific accessories it is also possible to manage the distribution of the secondary circuit, up to 16 mixed zones.
The optimal combustion management and the high modulation ratio of 1:10 (for models 35-115), provide a high performance and low polluting emissions (NOx in Class 6 according to UNI EN 15502). All models include the external probe.
The range can operate with both methane gas and LPG (with the relative accessory).

- High quality and precision finishings
- 1:10 modulation ratio (up to model 115)
- Easy to maintain because all the internal components are fully accessible
- Smaller overall dimensions
- Maximum operating pressure: 5 bar.

TECHNICAL DATA

Description	Power - kW			Efficiency - %			Energy efficiency class	Code
	Output useful 80°/60° max	Output useful 50°/30° max	Furnace input max	Useful Pn (80°/60°)	Useful Pn (50°/30°)	Useful 30% Pn (50°/30°)		
TAU UNIT 35	34.0	37.0	3.5-34.8	97.7	106.3	107.7	A	**20145133**
TAU UNIT 50	48.5	54.5	4.9-49.0	97.1	109.2	108.9	A	**20144105**
TAU UNIT 70	68.0	76.5	6.9-69.9	97.3	109.4	108.5	A	**20144106**
TAU UNIT 100	97.5	106.5	10.0-100.0	97.5	109.2	108.6	-	**20144107**
TAU UNIT 115	112.0	125.4	11.5-115.0	97.4	109.0	108.8	-	**20144108**
TAU UNIT 140	136.8	152.3	14.0-140.0	97.8	108.6	108.8	-	**20145135**
TAU UNIT 190	185.8	205.2	38.0-190.0	97.8	108.0	108.4	-	**20145136**

ACCESSORIES

Description	Notes	Code
SAFETY ACCESSORIES		
Safety devices kit	(1)	**20180519**
Pressure gauge and safety valve set 4,5 bar	(2)	**20181867**
Pressure gauge and safety valve set 4 bar	(3)	**20181010**
Reduction fitting 2" - 1" ½	(4)	**20182680**
Reduction fitting 2"½ - 1"½	(5)	**20154992**
Fuel shut-off valve kit (VIC) - ØG.1"	(6)	**20009486**
Fuel shut-off valve kit (VIC) - ØG.1" ½	(7)	**20009482**
DN15 flowmeter		**20149998**
DN20 flowmeter		**20149996**
DN25 flowmeter		**20146343**
DN32 flowmeter		**20146345**
HYDRAULIC ACCESSORIES		
Expansion vessel (only for TAU UNIT 35)		**20154816**
Circulation pump (only for TAU UNIT 35)		**20154812**
Condensate neutralizer HN2 (up to 280 kW)	(8)	**4031811**
Condensate neutralizer N2 (up to 450 kW)		**4031810**
Condensate neutralizer N3 (450-1500 kW)		**4031812**
Condensate neutralizer HN3 (280-750 kW)	(8)(D)	**4031813**
LPG TRANSFORMATION KIT		
LPG transformation kit (TAU UNIT 35)		**20145150**
LPG transformation kit (TAU UNIT 50)		**20144699**
LPG transformation kit (TAU UNIT 70)		**20144700**
LPG transformation kit (TAU UNIT 100)		**20144703**
LPG transformation kit (TAU UNIT 115)		**20144704**
LPG transformation kit (TAU UNIT 140)		**20206822**
LPG transformation kit (TAU UNIT 190)		**20194063**
CASCADE CONFIGURATION, SECONDARY CIRCUIT AND ELECTRONIC ACCESSORIES		
External probe		**20132778**
Electronic kit for managing additional direct or mixed zone (max 16)	(9)	**20220356**
Immersion probe	(10)(11)	**1220599**
SEALED ROOM TRANSFORMATION KIT (TYPE C)		
Type C conversion kit (TAU UNIT 35-50)	(12)	**20144759**
Type C conversion kit (TAU UNIT 70)	(12)	**20144760**
Type C conversion kit (TAU UNIT 100-115)	(12)	**20144761**
Type C conversion kit (TAU UNIT 140)	(12)	**20206220**
Type C conversion kit (TAU UNIT 190)		**20145154**
FLUE DISCHARGE SYSTEM		
Conversion kit for back flue discharge (TAU UNIT 35)	(13)	**20160064**
Conversion kit for back flue discharge (TAU UNIT 50-70)	(13)	**20147234**
Conversion kit for back flue discharge (TAU UNIT 100-115)	(13)	**20147235**

Description	Notes	Code
PRIMARY CIRCUIT PUMPS FOR PLATE HEAT EXCHANGERS		
Primary circuit pump UPM3 FLEX AS 15-70 130 H6	(14)	**20147597**
Primary circuit pump UPML 32-105/180	(14)	**20125034**
Primary circuit pump UPM GEO 25-85/130	(14)	**20147604**
Primary circuit pump STRATOS PARA 30/1-12	(14)	**20125040**
Primary circuit pump MAGNA3 32-120 F	(14)	**20183636**
Primary circuit pump MAGNA3 40-120 F	(14)	**20183650**

(D) Availability of the material at our warehouse: 30 working days from the date of the order's validation.
(1) Includes stub pipe with safety kit, excluding: safety valve set + pressure gauge, fuel shut-off valves and flow meter set (to be ordered separately).
(2) To be provided for Tau Unit 50-70 models
(3) To be provided for Tau Unit 100-190 models
(4) To be provided in case of safety kit installation for Tau Unit 100 and 115 models.
(5) To be provided in case of safety kit installation for Tau Unit 140 and 190 models.
(6) Recommended up to maximum power of 131 kW, calculated considering gas supply pressure = 20 mbar.
(7) Recommended up to maximum power of 230 kW, calculated considering gas supply pressure = 20 mbar.
(8) Equipped with extraction pumps.
(9) For ambient temperature adjustment, use Riello thermostats and timed thermostats.
(10) Used for secondary and heater management.
(11) Used as primary probe for cascade system management.
(12) Accessories for split discharge, for concentric discharge, to complete the installation, for the flue gas system, refer to page 359.
(13) For each type, check the maximum equivalent lengths by referring to the technical data sheet and/or by contacting the pre-sales service. For the flue gas system, refer to page 359.
(14) To be paired with HEATgate plate heat exchangers, depending on the operating conditions (primary/secondary ΔT°).

NOTE: Tau Unit 140 and 190 do not require the accessory kit for LPG conversion.

COMBINATIONS SAFETY KIT ACCESSORIES


Description	Safety basic kit	Hydraulic fitting		Safety valve and pressure gauge		Fuel shut-off valve		Flowmeter											
																			
								ΔT = 20 °C				ΔT = 15 °C				ΔT = 10 °C			
	Safety devices kit	Reduction fitting 2" - 1" ½	Reduction fitting 2"½ - 1"½	4.5 bar pressure gauge and safety valve set	Pressure gauge and safety valve set 4 bar	Gas shutting valve (VIC) - ØG.1"	Fuel shut-off valve kit (VIC) - ØG.1" ½	DN15 flowmeter	DN20 flowmeter	DN25 flowmeter	DN32 flowmeter	DN15 flowmeter	DN20 flowmeter	DN25 flowmeter	DN32 flowmeter	DN15 flowmeter	DN20 flowmeter	DN25 flowmeter	DN32 flowmeter
	20180519	20182680	20154992	20181867	20181010	20009486	20009482	20149998	20149996	20146343	20146345	20149998	20149996	20146343	20146345	20149998	20149996	20146343	20146345
TAU UNIT 50	●			●		●		●					●				●		
TAU UNIT 70	●			●		●			●				●					●	
TAU UNIT 100	●	●			●	●			●					●					●
TAU UNIT 115	●	●			●	●				●				●					●
TAU UNIT 140	●		●		●		●			●				●					●
TAU UNIT 190	●		●		●		●				●				●				●

POSSIBLE SYSTEM COMPOSITIONS

STANDARD CONFIGURATION 1 DIRECT SYSTEM

Description	Quantity	Code
TAU UNIT 35-190	1	(1)
External probe	1	20132778
Safety devices kit (only for TAU UNIT 50-190)	1	20180519
Hydraulic fitting	1	(2)
Safety valve and pressure gauge	1	(2)
Fuel shut-off valve (only for TAU UNIT 50-190)	1	20009486
Flowmeter (only for TAU UNIT 50-190)	1	(2)


(1) Refer to the "TECHNICAL DATA" table.
(2) Refer to the "COMBINATIONS SAFETY KIT ACCESSORIES" table in the "ACCESSORIES" section.

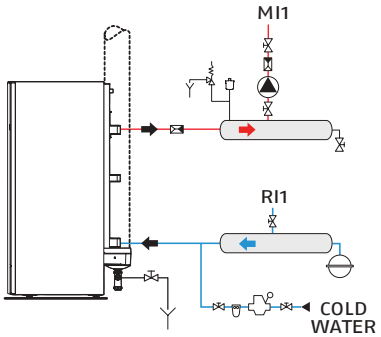

CONFIGURATION 1 DIRECT + DHW SYSTEM

Description	Quantity	Code
TAU UNIT 35-190	1	(1)
External probe	1	20132778
Immersion probe	1	1220599
Safety devices kit (only for TAU UNIT 50-190)	1	20180519
Hydraulic fitting	1	(2)
Safety valve and pressure gauge	1	(2)
Fuel shut-off valve (only for TAU UNIT 50-190)	1	20009486
Flowmeter (only for TAU UNIT 50-190)	1	(2)


(1) Refer to the "TECHNICAL DATA" table.
(2) Refer to the "COMBINATIONS SAFETY KIT ACCESSORIES" table in the "ACCESSORIES" section.

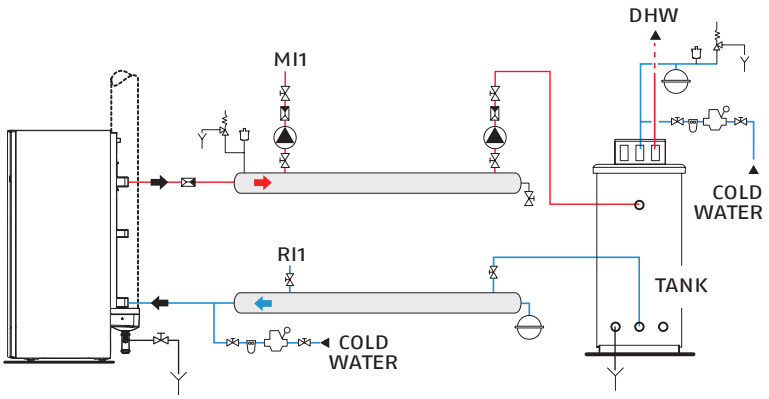

CONFIGURATION 1 DIRECT SYSTEM + 1 MIXED + DHW SYSTEM

Description	Quantity	Code
TAU UNIT 35-190	1	(1)
External probe	1	20132778
Safety devices kit (only for TAU UNIT 50-190)	1	20180519
Hydraulic fitting	1	(2)
Safety valve and pressure gauge	1	(2)
Fuel shut-off valve (only for TAU UNIT 50-190)	1	20009486
Immersion probe	1	1220599
Electronic kit for managing additional direct or mixed zone (max 16)	1	20220356
Flowmeter (only for TAU UNIT 50-190)	1	(2)


(1) Refer to the "TECHNICAL DATA" table.
(2) Refer to the "COMBINATIONS SAFETY KIT ACCESSORIES" table in the "ACCESSORIES" section.

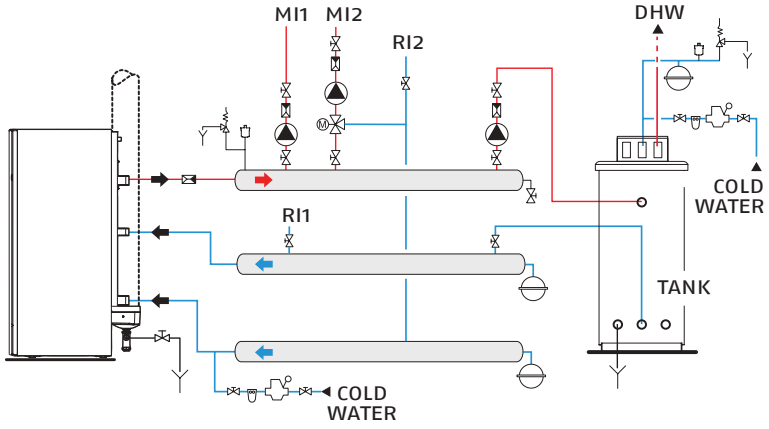

CONFIGURATION 1 DIRECT SYSTEM + 2 MIXED + DHW SYSTEMS

Description	Quantity	Code
TAU UNIT 35-190	1	(1)
External probe	1	20132778
Safety devices kit (only for TAU UNIT 50-190)	1	20180519
Hydraulic fitting	1	(2)
Safety valve and pressure gauge	1	(2)
Fuel shut-off valve (only for TAU UNIT 50-190)	1	20009486
Immersion probe	1	1220599
Electronic kit for managing additional direct or mixed zone (max 16)	2	20220356
Flowmeter (only for TAU UNIT 50-190)	1	(2)


(1) Refer to the "TECHNICAL DATA" table.
(2) Refer to the "COMBINATIONS SAFETY KIT ACCESSORIES" table in the "ACCESSORIES" section.

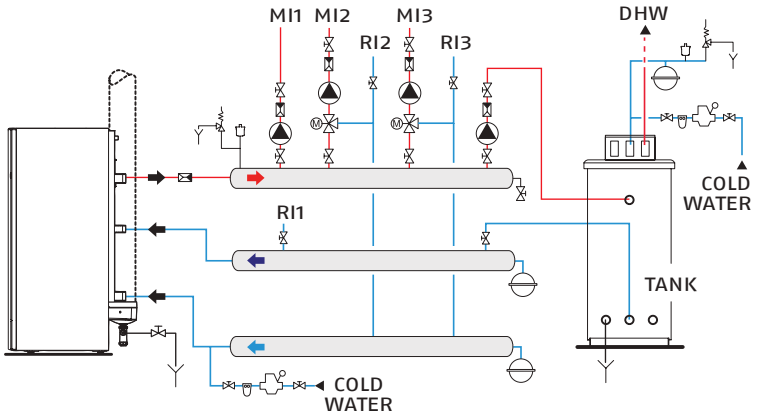

CASCADE CONFIGURATION 1 DIRECT SYSTEM + 1 MIXED + DHW SYSTEM (maximum 16 generators)

Description	Quantity	Code
TAU UNIT 35-190	2	(1)
External probe	1	20132778
Safety devices kit (only for TAU UNIT 50-190)	2	20180519
Hydraulic fitting	2	(2)
Safety valve and pressure gauge	2	(2)
Fuel shut-off valve (only for TAU UNIT 50-190)	1	20009486
Immersion probe	2	1220599
Electronic kit for managing additional direct or mixed zone (max 16)	1	20220356
Flowmeter (1 for each boiler; only for TAU UNIT 50-190)	2	(2)


(1) Refer to the "TECHNICAL DATA" table.
(2) Refer to the "COMBINATIONS SAFETY KIT ACCESSORIES" table in the "ACCESSORIES" section.

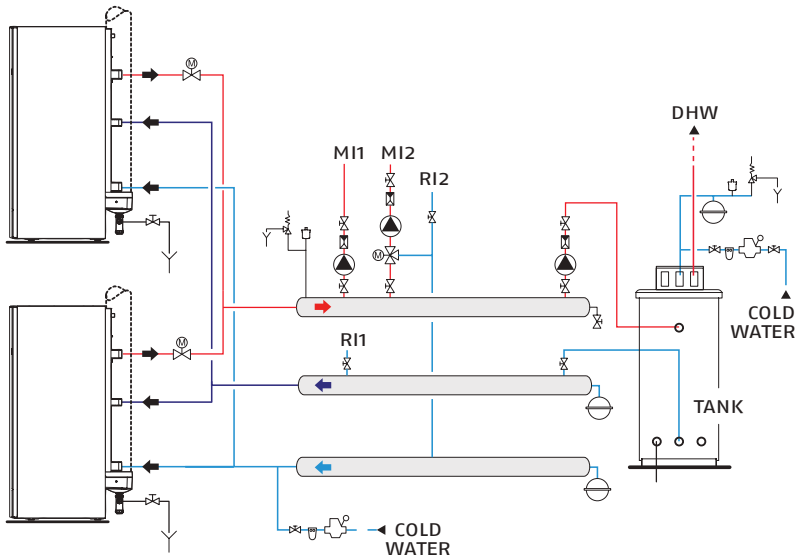

STANDARD CONFIGURATION 1 DIRECT SYSTEM WITH PLATE HEAT EXCHANGER

Description	Quantity	Code
TAU UNIT 35-190	1	(1)
External probe	1	20132778
Safety devices kit (only for TAU UNIT 50-190)	1	20180519
Hydraulic fitting	1	(2)
Safety valve and pressure gauge	1	(2)
Fuel shut-off valve (only for TAU UNIT 50-190)	1	20009486
Pump	1	(3)
Plate heat exchanger	1	(3)
Electronic kit for managing additional direct or mixed zone (max 16)	1	20220356
Flowmeter (only for TAU UNIT 50-190)	1	(2)

(1) Refer to the "TECHNICAL DATA" table.
(2) Refer to the "COMBINATIONS SAFETY KIT ACCESSORIES" table in the "ACCESSORIES" section.
(3) Refer to the "COMBINATIONS OF PUMPS AND PLATE HEAT EXCHANGERS" table in the "ACCESSORIES" section.

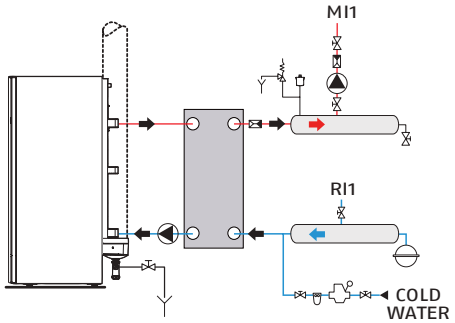


Condensing three flue gas passes stainless steel jet burners boilers


Tau N




TAU 115-1250 N

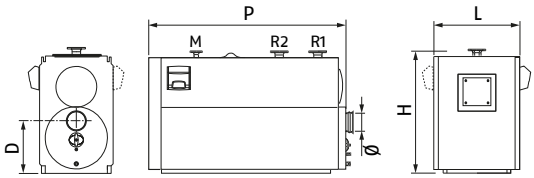

TAU 1450 N

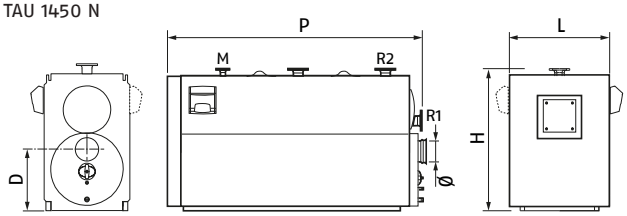

TAU 2100-3000 N

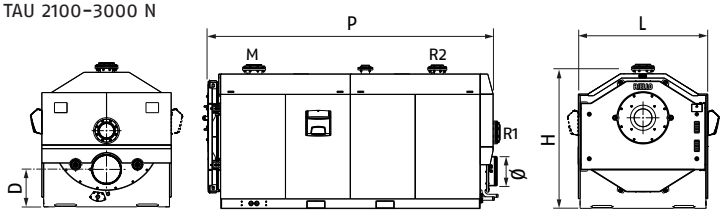

ERP

- In conformity with Directive 2009/125/EC
- Condensing boilers made of stainless steel with three flue gas passes, with a high water content, suitable for the operation with gas jet burners

Description	H mm	L mm	P mm	D mm	Ø mm	M DN	R1 DN	R2 DN	Net weight kg
TAU 115 N	1315	740	1455	505	160	65	65	50	545
TAU 150 N	1315	740	1455	505	200	65	65	50	545
TAU 210 N	1315	740	1455	505	200	65	65	50	580
TAU 270 N	1450	850	1630	545	250	65	65	50	737
TAU 350 N	1450	850	1830	545	250	80	80	65	823
TAU 450 N	1630	900	2035	645	300	100	100	80	1185
TAU 600 N	1630	900	2235	645	300	100	100	80	1370
TAU 750 N	1910	1060	2560	680	350	125	125	80	2010
TAU 800 N	1910	1060	2560	680	350	125	125	80	2010
TAU 1000 N	1910	1060	2810	680	350	125	125	80	2245
TAU 1150 N	2030	1180	3010	720	400	150	150	100	2730
TAU 1250 N	2030	1180	3010	720	400	150	150	100	2730
TAU 1450 N	2180	1225	3175	805	450	150	150	100	3280
TAU 1750 N	1945	1750	3620	521	400	200	200	150	4265
TAU 2100 N	1945	1750	4020	521	400	200	200	150	4750
TAU 2600 N	2128	1850	4425	552	450	200	200	150	5550
TAU 3000 N	2170	1950	4640	600	450	200	200	150	6750

M Delivery.
R1 Low temperature return system.
R2 High temperature return system.

TAU N is a condensing floor standing boiler, with high water content for heating room installation; suitable for heating and domestic hot water production in combination with a proper water tank .
Three-pass boiler, in which all the components in contact with the flue gas smokes are in titanium-stabilized stainless steel, designed on the principle of heat stratification: the combustion chamber at the top and the tube bundle at the bottom (smooth pipes with removable turbulators), allow to optimize heat exchange and energy efficiency, so as to obtain high efficiency, thanks to the condensation technique. The generator has been designed with a structure capable of containing thermal expansions; particular attention has been paid to the thermal insulation of the boiler body, the painted steel panels and the door, with the use of high density glass wool mats.
Some models are also available in a modular version. The models up to 1450 kW are developed with a vertical structure with overlapping planes, to facilitate handling and make easier the introduction into the heating room.
The new 1750-3000 models are developed on a "square" structure with a single planking, to maintain the high water content and, at the same time, guarantee maximum efficiency.
To make easier the inspections, maintenance and cleaning of the internal parts, the front door and the closing of the smoke chamber can be fully opened.
- Reduced average temperature of the body and quick start-up time
- Several solutions thanks to the combination with RIELLOtech control panels
- Built-in drain condensate
- Maximum operating pressure 6 bar.

TECHNICAL DATA

Description	Power - kW			Efficiency - %			Back-pressure in combustion chamber mbar	Notes	Code
	Output useful 80°/60° max	Output useful 40°/30° max	Furnace input max	Useful Pn (80°/60°)	Useful Pn (40°/30°) %	Useful 30% Pn (30 °C)			
TAU 115 N	112.1	123.1	115	97.5	107	108	2.2		**20120144**
TAU 150 N	146.3	159.7	150	97.5	106.5	108.5	2.0		**4031860.0**
TAU 210 N	205.2	223.6	210	97.7	106.5	109.3	2.7		**4031861.0**
TAU 270 N	265.1	290.2	270	98.2	107.5	109.2	3.2		**4031862.0**
TAU 350 N	344.1	375.2	349	98.3	107.5	108.5	4.6		**4031863.0**
TAU 450 N	442.4	481.5	450	98.3	107	108.5	5.0		**4031864.0**
TAU 600 N	589.8	642	600	98.3	107	108.5	5.5		**4031865.0**
TAU 750 N	735.5	804	749	98.2	107	108.7	5.6	(D)(T)	**20217443**
TAU 800 N	786.4	860	800	98.3	107	108.5	5.7	(D)(T)	**4031866.0**
TAU 1000 N	983	1070	1000	98.3	107	108.5	6.3	(D)(T)	**4031867.0**
TAU 1150 N	1129.3	1230.5	1150	98.3	107	108.5	6.6	(D)(T)	**20136528**
TAU 1250 N	1229.7	1337.5	1250	98.3	107	108.5	6.8	(D)(T)	**4031868.0**
TAU 1450 N	1425.6	1551.5	1450	98.3	107	108.5	7.4	(D)(T)	**4031869.0**
TAU 1750 N	1718.5	1881.2	1750	98.3	107.5	108.7	8.4	(D)(T)	**20162157**
TAU 2100 N	2062.2	2258.7	2100	98.3	107.5	108.7	9.6	(D)(T)	**20162158**
TAU 2600 N	2553.2	2796.5	2600	98.3	107.5	108.7	11.5	(D)(T)	**20162159**
TAU 3000 N	2946.0	3226.8	3000	98.3	107.5	108.7	11.6	(D)(T)	**20162160**

(D) Availability of the material at our warehouse: 30-40 working days from the date of the order's validation.
(T) Product not subject to standard transport rates. For transport enhancement contact the Order Management Office.
Maximum operating pressure 6 bar.

ACCESSORIES

Description	Notes	Code
HYDRAULIC ACCESSORIES		
N2 neutralisation kit up to 450 kW		**4031810**
N3 neutraliser kit from 450 to 1500 kW		**4031812**
HN2 neutralisation kit up to 280 kW	(1)	**4031811**
HN3 neutraliser kit from 280 to 750 kW	(1)(D)	**4031813**
MECHANICAL ACCESSORIES		
Burner flange		**4031196**
Burner flange		**20178775**
Burner flange		**20163867**

(1) Equipped with extraction pumps.
(D) Availability of the material at our warehouse: 30 working days from the date of the order's validation.

CONTROL PANELS

Description	Installation	Code
RIELLOtech CLIMA COMFORT	Vertical	**4031069**

NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS – EU COUNTRIES

Description	Back-pressure in combustion chamber (mbar)	Gas burner																		Burner flange		Control panels	
		Yellow flame (Standard)																					
		Two stage								Modulating													
		-								Mechanical cam													
		-								-													
		RS 50 TC	RS 70 TC	RS 100 TC	RS 130 TC	RS 310/M MZ FS1	RS 410/M MZ FS1	RS 250/M MZ TC	RS 190 TC	RS 50/M MZ TC	RS 70/M TC	RS 100/M TC	RS 130/M TC	RS 190/M TL	RS 190/M TC	RS 250/M MZ TL	RS 310/M MZ FS1	RS 410/M MZ FS1	Burner flange	Burner flange	Riellotech Clima Comfort	3-point modulation kit
		3784702	20194283	20194281	20194288	20068351	20068361	3788410	3785813	3781622	3789610	3789710	3789810	20052616	3787623	3788411	20068351	20068361	20178757	20178775	4031069	20013035
TAU 450 N	5.0	●																			●	
	5.0									●											●	●
TAU 600 N	5.5		●																		●	
	5.5										●										●	●
TAU 750 N	5.6		●																		●	
	5.6										●										●	●
TAU 800 N	5.7			●																	●	
	5.7											●									●	●
TAU 1000 N	6.3			●																	●	
	6.3											●									●	●
TAU 1150 N	6.6				●														●		●	
	6.6												●						●		●	●
TAU 1250 N	6.8				●														●		●	
	6.8												●						●		●	●
TAU 1450 N	7.4								●											●	●	
	7.4														●					●	●	●
TAU 1750 N	8.4								●												●	
	8.4													●							●	●
TAU 2100 N	9.6							●													●	
	9.6															●					●	●
TAU 2600 N	11.5					●															●	
	11.5																●				●	●
TAU 3000 N	11.6						●														●	
	11.6																	●			●	●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Gas burner																										Burner accessory				Burner flange			Control panels	
		Blue flame (Low NOx)																																		
		Modulating																																		
		Mechanical cam									Electronic cam																									
		-																0_2 control				0_2 control + Inverter													
		BS3/M	RS 120/M BLU TC	RS 160/M BLU TC	RS 25/M BLU TC	RS 35/M BLU TC	RS 68/M BLU TC	RS 55/M BLU TC	RS 200/M BLU TL	RS 310/M BLU FS1	RS 410/M BLU FS1	RS 120/E BLU	RS 160/E BLU	RS 200/E BLU	RS 25/E BLU	RS 35/E BLU	RS 68/E BLU	RS 55/E BLU	RS 310/E BLU FS1	RS 410/E BLU FS1	RS 120/E O2 BLU TC	RS 160/E O2 BLU TL	RS 200/E O2 BLU TL	RS 310/E O2 BLU TC	RS 410/E O2 BLU TC	RS 120/EV O2 BLU TC	RS 160/EV O2 BLU TC	RS 200/EV O2 BLU TL	RS 310/EV O2 BLU TC	RS 410/EV O2 BLU TC	Oxygen Control kit	Variable speed drive 3,0 kW	Variable speed drive 5,5 kW	Variable speed drive 7,5 kW	Variable speed drive 11 kW	Burner flange	Burner flange	Burner flange	Riellotech Clima Comfort	3-point modulation kit
		3762350	3897606	3788006	3910510	3910610	3897406	20038484	3899711	20068219	20068270	3897632	3788032	3899810	3910710	3910810	3897432	20038491	20068217	20068279	20165996	20164535	20166368	20166002	20179072	20154943	20158956	20156077	20166004	20174935	20045187	20163064	20163071	20163074	20163093	4031196	20178775	20163867	4031069	20013035
TAU 115 N	2.2	●																																			●	●
TAU 150 N	2.0	●																																			●	●
TAU 210 N	2.7				●																																●	●
	2.7														●																						●	●
TAU 270 N	3.2				●																																●	●
	3.2														●																						●	●
TAU 350 N	4.6					●																															●	●
	4.6															●																					●	●
TAU 450 N	5.0							●																											●		●	●
	5.0																	●																	●		●	●
TAU 600 N	5.5						●																												●		●	●
	5.5																●																		●		●	●
TAU 750 N	5.6						●																												●		●	●
	5.6																●																		●		●	●
	5.6		●																																●		●	●
	5.6											●																							●		●	●
TAU 800 N	5.7		●																																●		●	●
	5.7											●																							●		●	●
	5.7																				●									●					●		●	●
	5.7																								●					●	●				●		●	●
TAU 1000 N	6.3		●																																●		●	●
	6.3											●																							●		●	●
	6.3																				●									●							●	●
	6.3																								●					●	●						●	●
TAU 1150 N	6.6			●																																●	●	●
	6.6												●																							●	●	●
	6.6																					●								●					●	●	●
	6.6																										●			●		●			●	●	●
TAU 1250 N	6.8			●																																●	●	●
	6.8												●																							●	●	●
	6.8																					●								●					●	●	●
	6.8																										●			●		●			●	●	●
TAU 1450 N	7.4			●																																●	●	●
	7.4												●																							●	●	●
	7.4																					●								●					●	●	●
	7.4																										●			●		●			●	●	●
TAU 1750 N	8.4								●																												●	●
	8.4													●																							●	●
	8.4																						●							●						●	●	●
	8.4																											●		●			●			●	●	●
TAU 2100 N	9.6									●																											●	●	●
	9.6																		●																		●	●	●
	9.6																							●							●						●	●	●
	9.6																												●		●			●			●	●	●
TAU 2600 N	11.5										●																											●	●
	11.5																			●																		●	●

Description	Back-pressure in combustion chamber (mbar)	Gas burner																													Burner accessory				Burner flange			Control panels	
		Blue flame (Low NOx)																																					
		Modulating																																					
		Mechanical cam											Electronic cam																											
		-																					O_2 control					O_2 control + Inverter											
		BS3/M	RS 120/M BLU TC	RS 160/M BLU TC	RS 25/M BLU TC	RS 35/M BLU TC	RS 68/M BLU TC	RS 55/M BLU TC	RS 200/M BLU TL	RS 310/M BLU FS1	RS 410/M BLU FS1	RS 120/E BLU	RS 160/E BLU	RS 200/E BLU	RS 25/E BLU	RS 35/E BLU	RS 68/E BLU	RS 55/E BLU	RS 310/E BLU FS1	RS 410/E BLU FS1	RS 120/E 02 BLU TC	RS 160/E 02 BLU TL	RS 200/E 02 BLU TL	RS 310/E 02 BLU TC	RS 410/E 02 BLU TC	RS 120/EV 02 BLU TC	RS 160/EV 02 BLU TC	RS 200/EV 02 BLU TL	RS 310/EV 02 BLU TC	RS 410/EV 02 BLU TC	Oxygen Control kit	Variable speed drive 3,0 kW	Variable speed drive 5,5 kW	Variable speed drive 7,5 kW	Variable speed drive 11 kW	Burner flange	Burner flange	Burner flange	Riellotech Clima Comfort	3-point modulation kit
		3762350	3897606	3788006	3910510	3910610	3897406	20038484	3899711	20068219	20068270	3897632	3788032	3899810	3910710	3910810	3897432	20038491	20068217	20068279	20165996	20164535	20166368	20166002	20179072	20154943	20158956	20156077	20166004	20174935	20045187	20163064	20163071	20163074	20163093	4031196	20178775	20163867	4031069	20013035
TAU 2600 N	11.5																								●					●									●	●
	11.5																												●	●				●				●	●
TAU 3000 N	11.6										●																												●	●
	11.6																			●																			●	●
	11.6																								●						●								●	●
	11.6																												●	●				●				●	●

NOTE:
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

RECOMMENDED COMBINATIONS WITH BURNERS – EXTRA EU COUNTRIES

Description	Back-pressure in combustion chamber (mbar)	Gas burner																					Burner flange		Control panels	
		Yellow flame (Standard)																								
		Two stage										Modulating														
		–										Mechanical cam														
		–																								
		RS 44 MZ TC	RS 50 TC	RS 70 TC	RS 100 TC	RS 130 TC	RS5D	RS 310/M MZ FS1	RS 410/M MZ FS1	RS 250/M MZ TC	RS 190 TC	RS 34/M MZ TC	RS 44/M MZ TC	RS 50/M MZ TC	RS 70/M TC	RS 100/M TC	RS 130/M TC	RS 190/M TL	RS 190/M TC	RS 250/M MZ TL	RS 310/M MZ FS1	RS 410/M MZ FS1	Burner flange	Burner flange	Riellotech Clima Comfort	3-point modulation kit
		3789110	3784702	20194283	20194281	20194288	3762016	20068351	20068361	3788410	3785813	3788710	3788810	3781622	3789610	3789710	3789810	20052616	3787623	3788411	20068351	20068361	20178757	20178775	4031069	20013035
TAU 270 N	3.2						●																		●	
	3.2											●													●	●
TAU 350 N	4.6	●																							●	
	4.6												●												●	●
TAU 450 N	5.0		●																						●	
	5.0													●											●	●
TAU 600 N	5.5			●																					●	
	5.5														●										●	●
TAU 750 N	5.6			●																					●	
	5.6														●										●	●
TAU 800 N	5.7				●																				●	
	5.7															●									●	●
TAU 1000 N	6.3				●																				●	
	6.3															●									●	●
TAU 1150 N	6.6					●																	●		●	
	6.6																●						●		●	●
TAU 1250 N	6.8					●																	●		●	
	6.8																●						●		●	●
TAU 1450 N	7.4										●													●	●	
	7.4																		●					●	●	●
TAU 1750 N	8.4										●														●	
	8.4																	●							●	●
TAU 2100 N	9.6									●															●	
	9.6																			●					●	●
TAU 2600 N	11.5							●																	●	
	11.5																				●				●	●
TAU 3000 N	11.6								●																●	
	11.6																					●			●	●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Gas burner																												Burner accessory				Burner flange				Control panels	
		Blue flame (Low NOx)																																					
		Modulating																																					
		Mechanical cam										Electronic cam																													
		–																	0_2 control					0_2 control + Inverter															
		3762350	3910510	3910610	20038484	3897406	3897606	3788006	3899711	20068219	20068270	3910710	3910810	20038491	3897432	3897632	3788032	3899810	20068261	20068294	20165996	20164535	20166368	20166002	20179072	20154943	20158956	20156077	20166004	20174935	20045187	20163064	20163071	20163074	20163093	4031196	20178757	20178775	20163867	4031069	20013035
		BS3/M	RS 25/M BLU TC	RS 35/M BLU TC	RS 55/M BLU TC	RS 68/M BLU TC	RS 120/M BLU TC	RS 160/M BLU TC	RS 200/M BLU TL	RS 310/M BLU FS1	RS 410/M BLU FS1	RS 25/E BLU	RS 35/E BLU	RS 55/E BLU	RS 68/E BLU	RS 120/E BLU	RS 160/E BLU	RS 200/E BLU	RS 310/E BLU FS1	RS 410/E BLU FS1	RS 120/E 02 BLU TC	RS 160/E 02 BLU TL	RS 200/E 02 BLU TL	RS 310/E 02 BLU TC	RS 410/E 02 BLU TC	RS 120/EV 02 BLU TC	RS 160/EV 02 BLU TC	RS 200/EV 02 BLU TL	RS 310/EV 02 BLU TC	RS 410/EV 02 BLU TC	Oxygen Control kit	Variable speed drive 3,0 kW	Variable speed drive 5,5 kW	Variable speed drive 7,5 kW	Variable speed drive 11 kW	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Clima Comfort	3-point modulation kit
TAU 115 N	2.2	●																																				●	●
TAU 150 N	2.0	●																																				●	●
TAU 210 N	2.7		●																																			●	●
	2.7											●																											●	●
TAU 270 N	3.2		●																																			●	●
	3.2											●																											●	●
TAU 350 N	4.6			●																																		●	●
	4.6												●																											●	●
TAU 450 N	5.0				●																																●				●	●
	5.0													●																							●				●	●
TAU 600 N	5.5					●																															●				●	●
	5.5														●																						●				●	●
TAU 750 N	5.6					●																															●				●	●
	5.6														●																						●				●	●
	5.6						●																														●				●	●
	5.6															●																						●				●	●
TAU 800 N	5.7						●																														●				●	●
	5.7															●																						●				●	●
	5.7																				●										●					●				●	●
	5.7																									●					●	●			●				●	●
TAU 1000 N	6.3						●																														●				●	●
	6.3															●																						●				●	●
	6.3																				●										●					●				●	●
	6.3																									●					●	●			●				●	●
TAU 1150 N	6.6							●																															●		●	●
	6.6																●																							●		●	●
	6.6																					●									●									●	●
	6.6																										●				●		●							●	●
TAU 1250 N	6.8							●																															●		●	●
	6.8																●																							●		●	●
	6.8																					●									●									●	●
	6.8																										●				●		●							●	●
TAU 1450 N	7.4							●																															●		●	●
	7.4																●																							●		●	●
	7.4																					●									●									●	●
	7.4																										●				●		●							●	●
TAU 1750 N	8.4								●																																●	●
	8.4																	●																							●	●
	8.4																						●								●									●	●
	8.4																											●			●			●							●	●

Description	Back-pressure in combustion chamber (mbar)	Gas burner																												Burner accessory					Burner flange				Control panels	
		Blue flame (Low NOx)																																						
		Modulating																																						
		Mechanical cam										Electronic cam																												
		-																	O_2 control							O_2 control + Inverter													
		BS3/M	RS 25/M BLU TC	RS 35/M BLU TC	RS 55/M BLU TC	RS 68/M BLU TC	RS 120/M BLU TC	RS 160/M BLU TC	RS 200/M BLU TL	RS 310/M BLU FS1	RS 410/M BLU FS1	RS 25/E BLU	RS 35/E BLU	RS 55/E BLU	RS 68/E BLU	RS 120/E BLU	RS 160/E BLU	RS 200/E BLU	RS 310/E BLU FS1	RS 410/E BLU FS1	RS 120/E O2 BLU TC	RS 160/E O2 BLU TL	RS 200/E O2 BLU TL	RS 310/E O2 BLU TC	RS 410/E O2 BLU TC	RS 120/EV O2 BLU TC	RS 160/EV O2 BLU TC	RS 200/EV O2 BLU TL	RS 310/EV O2 BLU TC	RS 410/EV O2 BLU TC	Oxygen Control kit	Variable speed drive 3,0 kW	Variable speed drive 5,5 kW	Variable speed drive 7,5 kW	Variable speed drive 11 kW	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Clima Comfort	3-point modulation kit
		3762350	3910510	3910610	20038484	3897406	3897606	3788006	3899711	20068219	20068270	3910710	3910810	20038491	3897432	3897632	3788032	3899810	20068261	20068294	20165996	20164535	20166368	20166002	20179072	20154943	20158956	20156077	20166004	20174935	20045187	20163064	20163071	20163074	20163093	4031196	20178757	20178775	20163867	4031069	20013035
TAU 2100 N	9.6									●																					●								●	●	●
	9.6																		●												●								●	●	●
	9.6																							●							●								●	●	●
	9.6																													●	●			●					●	●	●
TAU 2600 N	11.5																								●						●									●	●
	11.5																													●	●			●					●	●
TAU 3000 N	11.6										●																													●	●
	11.6																			●																				●	●	●
	11.6																								●						●									●	●
	11.6																													●	●			●					●	●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Condensing three flue gas passes stainless steel jet burners boilers

Tau N Premix


Tau N combined with RX premixed gas burners




ERP

- In conformity with Directive 2009/125/EC
- Condensing boilers made of stainless steel with three flue gas passes, with a high water content
- Low emissions RX premix gas burner
- RIELLOtech Clima Comfort electronic control panel


TAU 115-1250 N PREMIX

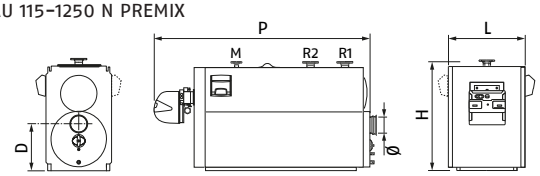

TAU 1450 N PREMIX

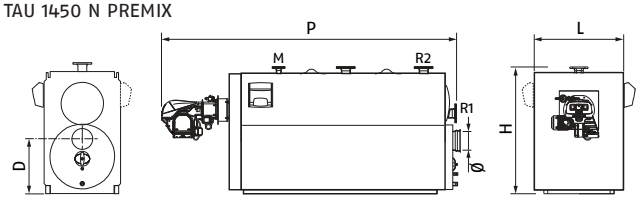

TAU 1750-3000 N PREMIX

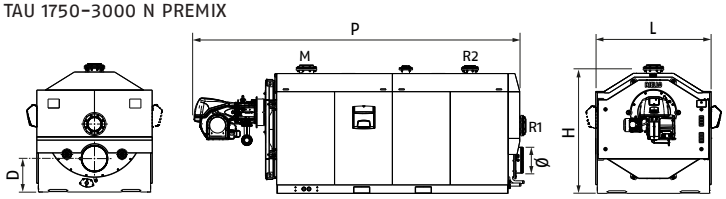

Description	H mm	L mm	P mm	D mm	Ø mm	M DN	R1 DN	R2 DN	Net weight kg
TAU 115 N PREMIX	1315	740	1960	505	160	65	65	50	582
TAU 150 N PREMIX	1315	740	1960	505	200	65	65	50	582
TAU 210 N PREMIX	1315	740	1960	505	200	65	65	50	617
TAU 270 N PREMIX	1450	850	2140	545	250	65	65	50	774
TAU 270 N PREMIX LPG	1450	850	2140	545	250	65	65	50	774
TAU 350 N PREMIX	1450	850	2380	545	250	80	80	65	865
TAU 450 N PREMIX	1630	900	2590	645	300	100	100	80	1233
TAU 600 N PREMIX	1630	900	2760	645	300	100	100	80	1426
TAU 800 N PREMIX	1910	1060	3080	680	350	125	125	80	2107
TAU 1000 N PREMIX	1910	1060	3330	680	350	125	125	80	2342
TAU 1150 N PREMIX	2030	1180	3900	720	400	150	150	100	2880
TAU 1250 N PREMIX	2030	1180	3900	720	400	150	150	100	2880
TAU 1450 N PREMIX	2180	1225	4060	805	450	150	150	100	3430
TAU 1750 N PREMIX	1945	1750	4800	521	400	200	200	150	4466
TAU 2100 N PREMIX	1945	1750	5200	521	400	200	200	150	4961
TAU 2600 N PREMIX	2128	1850	5610	552	450	200	200	150	5776
TAU 3000 N PREMIX	2170	1950	5820	600	450	200	200	150	6976

M Delivery.
R1 Low temperature return system.
R2 High temperature return system.

TAU N Premix is equipped with modulating burners with total premixing combustion, which guarantee very low emissions in atmosphere and a wide turndown ratio.
The burner is equipped with gas valves with proportional opening with pneumatic control; the gas is dosed in operation of the air introduced to the combustion head which is cylindrical radiating type. The mixing of air with gas takes place inside the burner fan (the fan is variable speed) allowing correct operation too in the presence of low gas supply pressures.
The premixed flame is characterized by a compact geometry, and a low noise level, which translates into a limited sound emission to the chimney, with obvious comfort acoustic advantages.
The modulation of the flame allows to adapt the delivery temperature according to the external temperature in order to optimize the efficiency. The flame ignition is guaranteed by an intermittent pilot flame device.
- Low polluting emissions
- Easy maintenance for total accessibility to internal components avoiding to disassemble the burner
- Equipped with the RIELL0tech Clima Comfort electronic control panel to manage cascades of boilers, complex solar systems, integration of multiple types of heat generators, two mixed zones, one direct and the production of domestic hot water
- Equipped with burner plate for premix burners
- Maximum working pressure: 6 bar.

TECHNICAL DATA

Description	Power - kW			Efficiency - %			Notes	Code
	Output useful 80°/60° max	Output useful 40°/30° max	Furnace input max	Useful Pn (80°/60°)	Useful Pn (40°/30°)	Useful 30% Pn (30 °C)		
TAU 115 N PREMIX	112.1	123.1	115	97.5	107.0	108.0	(B)(D)	**20120146**
TAU 150 N PREMIX	146.3	159.7	150	97.5	106.5	108.5	(B)(D)	**20031981**
TAU 210 N PREMIX	205.2	223.6	210	97.7	106.5	109.3	(B)(D)	**20031987**
TAU 270 N PREMIX	265.1	290.2	270	98.2	107.5	109.2	(C)(D)	**20105079**
TAU 270 N PREMIX LPG	265.1	290.2	270	98.2	107.5	109.2	(A)(D)	**20105081**
TAU 350 N PREMIX	344.1	375.2	349	98.3	107.5	108.5	(B)(D)	**20105082**
TAU 450 N PREMIX	442.4	481.5	450	98.3	107.0	108.5	(B)(D)	**20105083**
TAU 600 N PREMIX	589.8	642.0	600	98.3	107.0	108.5	(B)(D)	**20105085**
TAU 800 N PREMIX	786.4	860.0	800	98.3	107.0	108.5	(B)(D)(T)	**20105086**
TAU 1000 N PREMIX	983.0	1070.0	1000	98.3	107.0	108.5	(B)(D)(T)	**20105089**
TAU 1150 N PREMIX	1129.3	1230.5	1150	98.3	107.0	108.5	(B)(D)(T)	**20166024**
TAU 1250 N PREMIX	1229.7	1337.5	1250	98.3	107.0	108.5	(B)(D)(T)	**20166025**
TAU 1450 N PREMIX	1425.6	1551.5	1450	98.3	107.0	108.5	(B)(D)(T)	**20166026**
TAU 1750 N PREMIX	1718.5	1881.2	1750	98.3	107.5	108.7	(B)(D)(T)	**20166039**
TAU 2100 N PREMIX	2062.2	2258.7	2100	98.3	107.5	108.7	(B)(D)(T)	**20166027**
TAU 2600 N PREMIX	2553.2	2796.5	2600	98.3	107.5	108.7	(B)(D)(T)	**20166030**
TAU 3000 N PREMIX	2946.0	3226.8	3000	98.3	107.5	108.7	(B)(D)(T)	**20166041**

(A) LPG.
(B) Natural gas-LPG.
(C) Natural gas.
(D) Availability of the material at our warehouse: 25 working days from the date of the order's validation.
(T) Product not subject to standard transport rates. For transport enhancement contact the Order Management Office.
Maximum operating pressure 6 bar.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

ACCESSORIES


Description	Notes	Code
HYDRAULIC ACCESSORIES		
N2 neutralisation kit (up to 450 kW)		**4031810**
N3 neutraliser kit (450-1500 kW)		**4031812**
HN2 neutralisation kit (up to 280 kW)	(1)	**4031811**
HN3 neutraliser kit (280-750 kW)	(1)(D)	**4031813**

(1) Equipped with extraction pumps.
(D) Availability of the material at our warehouse: 30 working days from the date of the order's validation.

Condensing three flue gas passes Low-sulphur oil and gas steel boilers

Tau N Oil



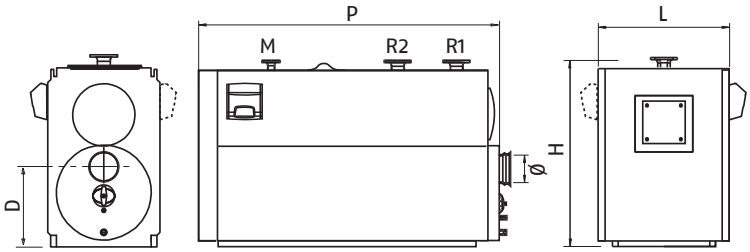

ERP

- In conformity with Directive 2009/125/EC
- Condensing boilers made of stainless steel with three flue gas passes, with high water content, suitable for the operation with oil and gas jet burners
- Suitable for the operation with oil for heating according to UNI 6579 (sulphur content < 50 ppm)

Description	H mm	L mm	P mm	D mm	M Ø-DN	R1 low temp. Ø-DN	R2 high temp. Ø-DN	Ø mm	Net weight kg
TAU 115 N OIL	1315	740	1455	505	65	65	50	160	530
TAU 150 N OIL	1315	740	1455	505	65	65	50	200	560
TAU 210 N OIL	1315	740	1455	505	65	65	50	200	580
TAU 270 N OIL	1450	850	1630	545	65	65	50	250	737
TAU 350 N OIL	1450	850	1830	545	80	80	65	250	823
TAU 450 N OIL	1630	900	2035	645	300	100	100	80	1185
TAU 600 N OIL	1630	900	2235	645	300	100	100	80	1370

The boiler has been designed to operate with heating standard oil, with sulphur content < 50 ppm, thanks to the construction made of stainless steel AISI 316Ti. The boiler is based on the principle of heat stratification: in the upper part there is high temperature water, while in the lower part, where condensing take place, remains a large quantity of cold water in order to ensure the condensation. The generator structure has been studied to contain thermal expansion.
Particular care was given to ensure thermal insulation of the boiler body, casing and door by using high-density mineral wool and ceramic fibre. The control panel must be ordered separately.

- Low polluting emissions
- Reduced average temperature of the body and quick start-up time
- Several solutions thanks to the combination with Riellotech control panels
- Built-in condensate drain
- Maximum operating pressure: 6 bar.

TECHNICAL DATA

Description	Power - kW			Efficiency - %			Back pressure in the chamber mbar	Notes	Code
	Output useful 80°/60° max	Output useful 50°/30° max	Furnace input max	Useful Pn (80°/60°)	Useful Pn (50°/30°)	Useful 30% Pn (30 °C)			
TAU 115 N OIL	112.2	119.6	115	97.6	104.0	104.8	2.2	(D)	**20124406**
TAU 150 N OIL	146.4	156.0	150	97.6	104.0	104.7	2.0	(D)	**20124407**
TAU 210 N OIL	205.2	218.2	210	97.7	103.9	104.6	2.7	(1)(D)	**20124408**
TAU 270 N OIL	264.3	280.3	270	97.9	103.8	104.4	3.2	(1)(D)	**20124409**
TAU 350 N OIL	343.7	361.9	350	98.2	103.4	104.1	4.6	(1)(D)	**20124410**
TAU 450 N OIL	441.9	465.3	450	98.2	103.4	104.1	5.0	(1)(D)	**20124418**
TAU 600 N OIL	589.2	620.4	600	98.2	103.4	104.1	5.5	(1)(D)	**20124419**

(1) The product could benefit from tax deductions for energy redevelopment if combined with a Modulating type burner (see recommended combinations table).
(D) Availability of the material at our warehouse: 30 working days from the order receipt date.

ACCESSORIES

Description	Notes	Code
HYDRAULIC ACCESSORIES		
Neutralizer kit DN0 2 (up to 300 kW)		**20182661**
Neutralizer kit DN0 3 (up to 1000 kW)		**20182663**
Neutralizer kit HN0 1.6 (up to 200 kW)	(1)	**20182664**
Neutralizer kit HN0 3 (up to 1000 kW)	(1)(2)(D)	**20182665**
MECHANICAL ACCESSORIES		
Burner flange		**4031196**

(1) Equipped with extraction pumps.
(2) Contact pre-sales service.
(3) On request.
(D) Availability of the material at our warehouse: 30 working days from the order receipt date.

CONTROL PANELS

Description	Installation	Boiler model	Code
RIELLOtech CLIMA COMFORT	Vertical	ALL MODELS	**4031069**

NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS

For combination with GAS BURNER use correspondence tables provided for similar models of the TAU N range on page 284.


Description	Back-pressure in combustion chamber (mbar)	Light oil burner					Dual fuel burner			Burner flange		Control panels	Panel board accessory
		Low NOx					Standard		Low NOx				
		Two stage				Modulating	Two stage						
		Mechanical cam											
		BG7.1D	RL 22 BLU	RL 32 BLU	RL 42 BLU	RL 55/M BLU	RLS 50	RLS 70	RLS 68/M MX TL	Burner flange		Clima Comfort	3-point modulation kit
		20015696	20027479	20027481	20027567	20208592	20208939	20208897	20205707	4031196	4031395	4031069	20013035
TAU 115 N OIL	2.2	●										●	
TAU 150 N OIL	2.0	●										●	
TAU 210 N OIL	2.7		●									●	
TAU 270 N OIL	3.2			●								●	
TAU 350 N OIL	4.6				●							●	
TAU 450 N OIL	5.0				●							●	
						●				●		●	●
							●				●	●	
										●		●	
TAU 600 N OIL	5.5					●						●	●
								●				●	
									●			●	

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Condensing three flue gas passes oil and gas steel boilers

Tau N Oil Pro



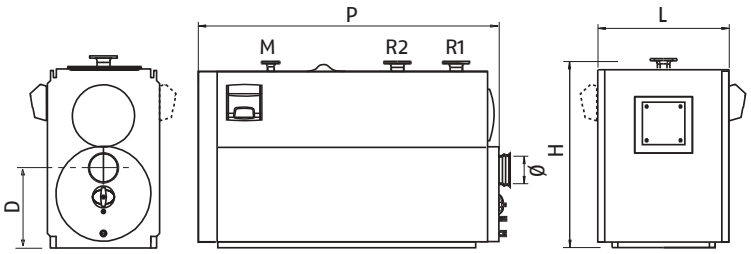

ERP

- In conformity with Directive 2009/125/EC
- Condensing boilers made of stainless steel with three flue gas passes, with high water content, suitable for the operation with oil and gas jet burners
- Suitable for the operation with oil for heating according to UNI 6579 (sulphur content < 1000 ppm)

Description	H mm	L mm	P mm	D mm	M Ø-DN	R1 low temp. Ø-DN	R2 high temp. Ø-DN	Ø mm	Net weight kg
TAU 100 N OIL PRO	1315	740	1455	505	65	65	50	160	530
TAU 115 N OIL PRO	1315	740	1455	505	65	65	50	160	530
TAU 150 N OIL PRO	1315	740	1455	505	65	65	50	200	560
TAU 210 N OIL PRO	1315	740	1455	505	65	65	50	200	580
TAU 270 N OIL PRO	1450	850	1630	545	65	65	50	250	737
TAU 350 N OIL PRO	1450	850	1830	545	80	80	65	250	823
TAU 450 N OIL PRO	1630	900	2035	645	300	100	100	80	1185
TAU 600 N OIL PRO	1630	900	2235	645	300	100	100	80	1370
TAU 800 N OIL PRO	1910	1060	2560	680	350	125	125	80	2010
TAU 1000 N OIL PRO	1910	1060	2810	680	350	125	125	80	2245

The boiler has been designed to operate with heating standard oil, with sulphur content < 1000 ppm, thanks to the construction made of stainless steel AISI 316Ti and AISI 904 L. The boiler is based on the principle of heat stratification: in the upper part there is high temperature water, while in the lower part, where condensing take place, remains a large quantity of cold water in order to ensure the condensation.
The generator structure has been studied to contain thermal expansion.
Particular care was given to ensure thermal insulation of the boiler body, casing and door by using high-density mineral wool and ceramic fibre. The control panel must be ordered separately.

- Low polluting emissions
- Reduced average temperature of the body and quick start-up time
- Several solutions thanks to the combination with Riellotech control panels
- Built-in condensate drain
- Maximum operating pressure: 6 bar.

TECHNICAL DATA

Description	Power - kW			Efficiency - %			Back pressure in the chamber mbar	Notes	Code
	Output useful 80°/60° max	Output useful 40°/30° max	Furnace input max	Useful Pn (80°/60°)	Useful Pn (40°/30°)	Useful 30% Pn (30 °C)			
TAU 100 N OIL PRO	96.6	102.9	99	97.6	104.7	104.7	1.6	(D)	**20217365**
TAU 115 N OIL PRO	112.2	120.6	115	97.6	104.9	104.8	2.2	(D)	**20124420**
TAU 150 N OIL PRO	146.4	157.4	150	97.6	104.8	104.7	2.0	(D)	**20124421**
TAU 210 N OIL PRO	205.2	220.1	210	97.7	104.7	104.6	2.7	(1)(D)	**20124423**
TAU 270 N OIL PRO	264.3	282.7	270	97.9	104.5	104.4	3.2	(1)(D)	**20124424**
TAU 350 N OIL PRO	343.7	365.8	350	98.2	104.5	104.1	4.6	(1)(D)	**20124425**
TAU 450 N OIL PRO	441.9	470.3	450	98.2	104.5	104.1	5.0	(1)(D)	**20180060**
TAU 600 N OIL PRO	589.2	627.0	600	98.2	104.5	104.1	5.5	(1)(D)	**20180061**
TAU 800 N OIL PRO	785.6	836.0	800	98.2	104.5	104.1	5.7	(1)(D)	**20164743**
TAU 1000 N OIL PRO	982.0	1045.0	1000	98.2	104.5	104.1	6.3	(1)(D)	**20164757**

(1) The product could benefit from tax deductions for energy redevelopment if combined with a Modulating type burner (see recommended combinations table).
(D) Availability of the material at our warehouse: 30 working days from the order receipt date.

ACCESSORIES

Description	Notes	Code
HYDRAULIC ACCESSORIES		
Neutralizer kit DN0 2 (up to 300 kW)		**20182661**
Neutralizer kit DN0 3 (up to 1000 kW)		**20182663**
Neutralizer kit HN0 1.6 (up to 200 kW)	(1)	**20182664**
Neutralizer kit HN0 3 (up to 1000 kW)	(1)(2)(D)	**20182665**
MECHANICAL ACCESSORIES		
Burner flange		**4031196**

(1) Equipped with extraction pumps.
(2) Contact pre-sales service.
(3) On request.
(D) Availability of the material at our warehouse: 30 working days from the order receipt date.

CONTROL PANELS

Description	Installation	Boiler model	Code
RIELLOtech CLIMA COMFORT	Vertical	ALL MODELS	**4031069**

NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS

For combination with GAS BURNER use correspondence tables provided for similar models of the TAU N range on page 284.

Description	Back-pressure in combustion chamber (mbar)	Light oil burner						Dual fuel burner		Burner flange	Control panels	Panel board accessory
		Blue flame (Low NOx)										
		Two stage				Modulating	Two stage					
		Mechanical cam										
		BG7.1D	RL 22 BLU	RL 32 BLU	RL 42 BLU	RL 55/M BLU	RL 85/M BLU	RLS 68/M MX TL	RLS 120/M MX TL	Burner flange	Clima Comfort (V)	3-point modulation kit
		20015696	20027479	20027481	20027567	20208592	20208590	20205707	20208605	4031196	4031069	20013035
TAU 100 N OIL PRO	1.6	●								●		
TAU 115 N OIL PRO	2.2	●								●		
TAU 150 N OIL PRO	2.0	●								●		
TAU 210 N OIL PRO	2.7		●							●		
TAU 270 N OIL PRO	3.2			●						●		
TAU 350 N OIL PRO	4.6				●					●		
TAU 450 N OIL PRO	5.0				●					●		
TAU 450 N OIL PRO	5.0					●			●	●	●	●
TAU 450 N OIL PRO	5.0						●		●	●		
TAU 600 N OIL PRO	5.5					●				●	●	●
TAU 600 N OIL PRO	5.5						●			●		
TAU 800 N OIL PRO	5.7						●		●	●	●	●
TAU 800 N OIL PRO	5.7							●	●	●		
TAU 1000 N OIL PRO	6.3							●	●	●		

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

STEEL JET BURNER BOILERS GAS/OIL

THREE FLUE GAS PASSES



RTS 3S

RTS 90 3S (85 kW)*
RTS 115 3S (108 kW)*
RTS 166 3S (157 kW)*
RTS 217 3S (207 kW)*
RTS 255 3S (244 kW)*
RTS 349 3S (335 kW)*

RTS 448 3S (430 kW)
RTS 511 3S (490 kW)
RTS 639 3S (613 kW)
RTS 750 3S (718 kW)
RTS 850 3S (815 kW)
RTS 1160 3S (1112 kW)
RTS 1450 3S (1391 kW)

RTS 1750 3S (1678 kW)
RTS 2100 3S (2014 kW)
RTS 2600 3S (2493 kW)
RTS 3000 3S (2877 kW)

page 301



RTS 2S

RTS 115 2S (115 kW)
RTS 150 2S (153 kW)
RTS 200 2S (201 kW)
RTS 247 2S (252 kW)
RTS 319 2S (326 kW)

RTS 410 2S (419 kW)
RTS 526 2S (538 kW)
RTS 736 2S (804 kW)
RTS 850 2S (851 kW)
RTS 1012 2S (1029 kW)
RTS 1200 2S (1201 kW)
RTS 1355 2S (1356 kW)
RTS 1500 2S (1550 kW)
RTS 1850 2S (1851 kW)
RTS 2200 2S (2197 kW)
RTS 2600 2S (2600 kW)
RTS 3200 2S (3200 kW)
RTS 3700 2S (3627 kW)

page 312



RTG

RTG 4000 (4680 kW)
RTG 4300 (5030 kW)
RTG 5000 (5830 kW)
RTG 6000 (7020 kW)
RTG 7500 (8760 kW)
RTG 9000 (10560 kW)

page 324



RTQ TK

RTQ 4000 TK
RTQ 4500 TK
RTQ 5000 TK
RTQ 6000 TK
RTQ 7000 TK
RTQ 8000 TK
RTQ 9000 TK

RTQ 10000 TK
RTQ 11000 TK
RTQ 12000 TK
RTQ 14000 TK
RTQ 16000 TK
RTQ 18000 TK
RTQ 20000 TK

page 330



RTQ T

RTQ 3000 T
RTQ 3500 T
RTQ 4000 T
RTQ 5000 T
RTQ 6000 T
RTQ 7000 T
RTQ 8000 T

RTQ 9000 T
RTQ 10000 T
RTQ 11000 T
RTQ 12000 T
RTQ 14000 T
RTQ 16000 T
RTQ 18000 T

page 327

REVERSE FLAME



RTQ 3S

RTQ 91 3S (87,1 kW)
RTQ 115 3S (109,7 kW)
RTQ 166 3S (158,7 kW)
RTQ 217 3S (206,8 kW)
RTQ 255 3S (243,3 kW)
RTQ 318 3S (303,4 kW)
RTQ 349 3S (332,0 kW)

RTQ 448 3S (427,4 kW)
RTQ 511 3S (487,5 kW)
RTQ 575 3S (548,6 kW)
RTQ 639 3S (609,6 kW)
RTQ 750 3S (713,8 kW)
RTQ 766 3S (730,8 kW)
RTQ 896 3S (854,8 kW)

RTQ 1100 3S (1049,4 kW)
RTQ 1300 3S (1240,2 kW)
RTQ 1600 3S (1526,4 kW)
RTQ 2100 3S (2003,4 kW)
RTQ 2400 3S (2289,6 kW)
RTQ 3000 3S (2860,0 kW)
RTQ 3500 3S (3339 kW)
RTQ 4000 3S (3816 kW)

page 333



RTQ 2S

RTQ 50 2S (50,0 kW)
RTQ 64 2S (64,0 kW)
RTQ 82 2S (82,0 kW)
RTQ 105 2S (105,0 kW)
RTQ 154 2S (154,4 kW)
RTQ 203 2S (202,7 kW)
RTQ 235 2S (235,3 kW)
RTQ 297 2S (297,0 kW)
RTQ 323 2S (322,9 kW)
RTQ 357 2S (356,7 kW)

RTQ 418 2S (418,0 kW)
RTQ 467 2S (467,0 kW)
RTQ 537 2S (537,1 kW)
RTQ 597 2S (596,8 kW)
RTQ 715 2S (715,4 kW)
RTQ 837 2S (836,9 kW)
RTQ 920 2S (920 kW)
RTQ 1020 2S (1020 kW)
RTQ 1250 2S (1250 kW)
RTQ 1500 2S (1500 kW)

RTQ 1700 2S (1700 kW)
RTQ 2020 2S (2020 kW)
RTQ 2320 2S (2320 kW)
RTQ 2620 2S (2620kW)
RTQ 2920 2S (2920 kW)
RTQ 3200 2S (3200 kW)
RTQ 3500 2S (3500 kW)
RTQ 4000 2S (4000 kW)
RTQ 4500 2S (4500 kW)
RTQ 5000 2S (5000 kW)

page 340

* Products in conformity with ErP Directive (EU Regulation Nr. 813/2013) with oil.
NOTE: The distinguish between EU and Extra EU Countries is based only on the enforcement of the ErP European Directive. The conformity to any other national Regulation must be confirmed.

Three flue gas passes steel jet burner boilers

RTS 3S


Gas products up to 400 kW only for replacement, in conformity of point 2 (G) Article 1 of EU Regulation N. 813/2013.




ERP
LIGHT OIL

- Single-piece steel boilers with three flue gas passes
- The particular geometry of the heat exchanger allows to reduce the permanence time of flue gases in the high temperature zones while decreasing in this way the formation of N0x for low polluting emissions

RTS 90-1750 3S

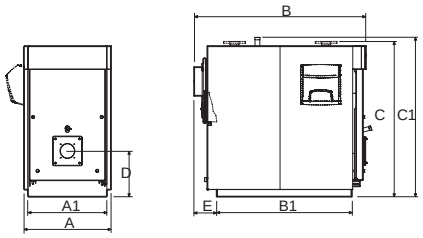

RTS 2100-3000 3S

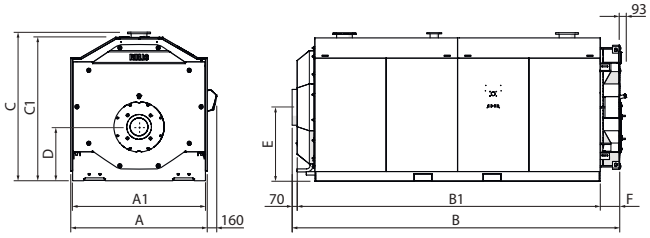

Description	A (mm)	A1 (mm)	B (mm)	B1 (mm)	C (mm)	C1 (mm)	D (mm)	E (mm)	F (mm)	Weight (inclusive of casing)	Boiler weight	Panelling Weight
RTS 90 3S	660	580	1155	860	1205	1225	380	180	-	335	-	-
RTS 115 3S	710	640	1330	1010	1285	1305	380	190	-	420	-	-
RTS 166 3S	760	690	1500	1180	1390	1390	400	200	-	515	-	-
RTS 217 3S	760	690	1500	1180	1390	1390	400	200	-	535	-	-
RTS 255 3S	820	750	1660	1296	1524	1525	468	225	-	715	-	-
RTS 349 3S	820	750	1960	1596	1490	1525	468	225	-	840	-	-
RTS 448 3S	890	790	2085	1692	1685	1730	510	250	-	1160	-	-
RTS 511 3S	890	790	2085	1692	1685	1730	510	250	-	1160	-	-
RTS 639 3S	1000	900	2375	1965	1830	1875	560	270	-	1500	-	-
RTS 750 3S	1047	980	2657	2236	1920	1960	570	270	-	2040	-	-
RTS 850 3S	1047	980	2657	2236	1920	1960	570	270	-	2040	-	-
RTS 1160 3S	1147	1070	2954	2533	2080	2120	625	270	-	2627	-	-
RTS 1450 3S	1237	1160	3173	2754	2222	2222	650	270	-	3440	-	-
RTS 1750 3S	1340	1260	3460	3020	2322	2322	670	265	-	4530	-	-
RTS 2100 3S	1800	1750	3981	3394	1980	1872	750	1000	270	-	5125	180
RTS 2600 3S	1900	1850	4171	3831	2070	1997	750	1030	270	-	5575	212
RTS 3000 3S	1900	1850	4491	3962	2070	1997	750	1030	270	-	6015	247

Its vertical design and reduced width (narrow range) allows an easy installation even in tiny plant rooms. The flue pipes are equipped with removable stainless steel turbulators, which allow to optimize the efficiency of the heat exchange without increasing head losses. The door features an ambidextrous opening and is provided with a peephole with pressure intake. Casing is made of stove-enamelled sheet. Shell and flue gas zone are easy to reach for maintenance.
The control panel must be ordered separately.

- High efficiency both punctual and seasonal
- Operation at modulating temperature (minimum allowed return temperature 50 °C)
- Several solutions thanks to the combination with RIELL0tech control panels
- Maximum operating pressure: 6 bar.

TECHNICAL DATA

Description	Power - kW		Efficiency - %		Notes	Code
	Output useful 80°/60° max	Furnace input max	Useful Pn (80°/60°)	Useful 30% Pn		
RTS 90 3S	85	90	94.5	98.5	(1)(2)	**20042418**
RTS 115 3S	108	115	94.2	98.5	(1)(2)	**20031973**
RTS 166 3S	157	166	94.8	98.5	(1)(2)	**20031974**
RTS 217 3S	207	217	95.6	98.5	(1)(2)	**20031976**
RTS 255 3S	244	255	95.7	98.5	(1)(2)	**20031977**
RTS 349 3S	335	349	95.9	98.5	(1)(2)	**20031978**
RTS 448 3S	430	448	95.9	98.5	(3)	**20031979**
RTS 511 3S	490	511	95.9	98.5	(3)	**20031980**
RTS 639 3S	613	639	95.9	98.5	(3)	**20042417**
RTS 750 3S	718	749	95.9	98.5	(3)	**20217448**
RTS 850 3S	815	850	95.9	98.5	(3)	**20044152**
RTS 1160 3S	1112	1160	95.9	98.5	(3)	**20047381**
RTS 1450 3S	1391	1450	95.9	98.5	(3)	**20047391**
RTS 1750 3S	1678	1750	95.9	98.5	(3)	**20204031**
RTS 2100 3S	2014	2100	95.9	98.5	(3)	**20204033**
RTS 2600 3S	2493	2600	95.9	98.5	(3)	**20204034**
RTS 3000 3S	2877	3000	95.9	98.5	(3)	**20204035**

Minimum temperature of water return (to the boiler): 50 °C.
(1) Gas products only for replacement, in conformity of point 2 (G) Article 1 of Regulation EU N. 813/2013.
(2) Oil products are in conformity with ErP Directive (EU Regulation Nr. 813/2013)
(3) For orders please contact Sales Department.

ACCESSORIES

Description	Code
MECHANICAL ACCESSORIES	
Burner flange	**4031188**
Burner flange	**4031196**
Burner flange	**4031197**
Burner flange	**4031198**
Burner flange	**20199147**
Burner flange	**20043900**
Burner flange	**20047680**
Burner flange	**20163867**

CONTROL PANELS

Description	Installation	Code	Boiler model
RIELLOtech CLIMA COMFORT	Vertical	**4031069**	**All models**
RIELLOtech PRIME	Vertical	**20010820**	**All models**
RIELLOtech PRIME ACS	Vertical	**20010437**	**All models**

Climate management with RIELLOtech Clima Comfort.
Thermostatic management with RIELLOtech PRIME.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS – EU COUNTRIES

Description	Back-pressure in combustion chamber (mbar)	Gas burner																					Burner flange				Control panels			
		Yellow flame (Standard)					Blue flame (Low NOx)																							
		Two stage					Modulating																							
		–					Mechanical cam					Electronic cam																		
		–					–										O_2 control		O_2 control +Inverter											
		RS 50 TC	RS 70 TC	RS 100 TC	RS 130 TC	RS 150 TC	RS 50/M MZ TC	RS 70/M TC	RS 100/M TC	RS 130/M TC	RS 150/M TC	RS 55/M BLU TC	RS 68/M BLU TC	RS 120/M BLU TC	RS 160/M BLU TC	RS 55/E BLU	RS 68/E BLU	RS 120/E BLU	RS 160/E BLU	RS 120/E O2 BLU TC	RS 160/E O2 BLU TL	RS 120/EV O2 BLU TC	RS 160/EV O2 BLU TC	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3784702	20194283	20194281	20194288	20044636	3781622	3789610	3789710	3789810	20044638	20038484	3897406	3897606	3788006	20038491	3897432	3897632	3788032	20165996	20164535	20154943	20158956	4031197	20043900	20047680	4031196	20010820	4031069	4031067	20013035
RTS 448 3S	2.9	●																									●		●	
	2.9						●																					●		●
	2.9											●															●	●		●
	2.9															●											●	●		●
RTS 511 3S	5.4	●																									●		●	
	5.4						●																					●		●
	5.4											●															●	●		●
	5.4															●											●	●		●
RTS 639 3S	5.2		●																									●		●	
	5.2							●																				●		●
	5.2												●														●	●		●
	5.2																●							●				●		●
RTS 750 3S	5.4		●																									●		●	
	5.4							●																				●		●
	5.4												●														●	●		●
	5.4																●							●				●		●
RTS 850 3S	6.7			●																								●		●	
	6.7								●																			●		●
	6.7													●														●		●
	6.7																	●										●		●
	6.7																			●								●		●
	6.7																					●						●		●
RTS 1160 3S	3.9				●																				●			●		●	
	3.9									●															●			●		●
	3.9													●														●		●
	3.9																	●										●		●
	3.9																			●								●		●
	3.9																					●						●		●
RTS 1450 3S	4.6					●																						●		●	
	4.6										●																	●		●
	4.6														●													●		●
	4.6																		●									●		●
	4.6																				●							●		●
	4.6																						●					●		●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Gas burner													Control panels			
		Yellow flame (Standard)						Blue flame (Low NOx)										
		Two stage	Modulating															
		-	Mechanical cam								Electronic cam							
		RS 190 TL	RS 190/M TL	RS 310/M MZ	RS 410/M MZ	RS 510/M MZ	RS 200/M BLU TL	RS 310/M BLU	RS 410/M BLU	RS 510/M BLU	RS 200/E BLU	RS 310/E BLU	RS 410/E BLU	RS 510/E BLU	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		20030087	20052616	20068351	20067141	20068027	3899711	20067964	20069841	20069845	3899810	20065783	20056927	20056930	20010820	4031069	4031067	20013035
RTS 1750 3S	5.9	●													●		●	
	5.9		●													●		●
	5.9						●									●		●
	5.9										●					●		●
RTS 2100 3S	9.5			●												●		●
	9.5							●								●		●
	9.5											●				●		●
RTS 2600 3S	10.8				●											●		●
	10.8								●							●		●
	10.8												●			●		●
RTS 3000 3S	12.5					●										●		●
	12.5									●						●		●
	12.5													●		●		●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Light oil burner																Dual fuel burner			Burner accessory		Burner flange					Control panels			
		Yellow flame (Standard)								Blue flame (Low NOx)																					
		Two stage				Modulating				Two stage				Modulating																	
		-				Mechanical cam				-				Mechanical cam																	
		RL 50 TC	RL 70 TC	RL 100 TC	RL 130 TC	RL 50/M TC	RL 70/M TC	RL 100/M TC	RL 130/M TC	BG6.1D	BG7.1D	RL 22 BLU	RL 32 BLU	RL 42 BLU	RL 55/M BLU	RL 85/M BLU	RLS 68/M MX TC	RLS 120/M MX TC	RLS 160/M MX TC	Kit modulation RWF 50.2	Kit modulation RWF 50.2	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3474632	3475032	3475232	3475432	20205656	20205587	20205600	20205645	20015693	20015696	20027479	20027481	20027567	20208592	20208590	20205590	20205592	20205611	20082208	20099869	20043900	4031188	20199147	4031196	4031198	20010820	4031069	4031067	20013035
RTS 90 3S	1.0									●																	●		●	
RTS 115 3S	1.4										●																●		●	
RTS 166 3S	1.8											●														●	●		●	
RTS 217 3S	2.7											●														●	●		●	
RTS 255 3S	2.9												●														●		●	
RTS 349 3S	3.6													●										●			●		●	
RTS 448 3S	2.9	●																									●		●	
	2.9					●																						●		●
	2.9													●									●				●		●	
	2.9														●										●			●		●
	2.9																●			●							●		●	
RTS 511 3S	5.4	●																									●		●	
	5.4					●																						●		●
	5.4														●										●			●		●
	5.4																●			●							●		●	
RTS 639 3S	5.2		●																								●		●	
	5.2						●																					●		●
	5.2														●										●			●		●
	5.2																●			●							●		●	
RTS 750 3S	5.4		●																								●		●	
	5.4						●																					●		●
	5.4														●										●			●		●
	5.4																●			●							●		●	
RTS 850 3S	6.7			●																							●		●	
	6.7							●																				●		●
	6.7															●									●			●		●
	6.7																	●		●							●		●	
RTS 1160 3S	3.9				●																	●					●		●	
	3.9							●																				●		●
	3.9																		●		●						●		●	
RTS 1450 3S	4.6				●																	●					●		●	
	4.6								●													●						●		●
	4.6																		●		●						●		●	

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Dual Fuel burner									Burner flange	Control panels	
		Yellow flame	Blue flame (Low NOx)										
		Modulating											
		Mechanical cam					Electronic cam						
		RLS 190/M MZ	RLS 310/M MX	RLS 310/M MX	RLS 410/M MX	RLS 510/M MX	RLS 310/E MX	RLS 310/E MX	RLS 410/E MX	RLS 510/E MX		Riellotech Clima Comfort	3-point modulation kit
		20205672	20205664	20205664	20208593	20205565	20087644	20087644	20084376	20083562	20163867	4031069	20013035
RTS 1750 3S	5.9	●										●	●
	5.9		●								●	●	●
	5.9						●				●	●	●
RTS 2100 3S	9.5			●								●	●
	9.5							●				●	●
RTS 2600 3S	10.8				●							●	●
	10.8								●			●	●
RTS 3000 3S	12.5					●						●	●
	12.5									●		●	●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

RECOMMENDED COMBINATIONS WITH BURNERS – EXTRA EU COUNTRIES

Description	Back-pressure in combustion chamber (mbar)	Gas burner														Burner flange		Control panels			
		Yellow flame (Standard)																			
		Two stage							Modulating												
		–							Mechanical cam												
		–							–												
		RS 34 MZ TC	RS 44 MZ TC	RS 50 TC	RS 70 TC	RS 100 TC	RS 130 TC	RS 150 TC	RS 34/M MZ TC	RS 44/M MZ TC	RS 50/M MZ TC	RS 70/M TC	RS 100/M TC	RS 130/M TC	RS 150/M TC	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3789010	3789110	3784702	20194283	20194281	20194288	20044636	3788710	3788810	3781622	3789610	3789710	3789810	20044638	20043900	4031197	20010820	4031069	4031067	20013035
RTS 166 3S	1.8	●																●		●	
	1.8								●										●		●
RTS 217 3S	2.7	●																●		●	
	2.7								●										●		●
RTS 255 3S	2.9	●																●		●	
	2.9								●										●		●
RTS 349 3S	3.6		●															●		●	
	3.6									●									●		●
RTS 448 3S	2.9			●														●		●	
	2.9										●								●		●
RTS 511 3S	5.4			●														●		●	
	5.4										●								●		●
RTS 639 3S	5.2				●													●		●	
	5.2											●							●		●
RTS 750 3S	5.4				●													●		●	
	5.4											●							●		●
RTS 850 3S	6.7					●											●	●		●	
	6.7												●						●		●
RTS 1160 3S	3.9						●									●		●		●	
	3.9													●		●			●		●
RTS 1450 3S	4.6							●										●		●	
	4.6														●				●		●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Gas burner																				Burner flange					Control panels			
		Blue flame (Low NOx)																												
		Monostadio	Bistadio	Modulating																										
		-	-	Mechanical cam							Electronic cam																			
		-																O_2 control		O_2 control +Inverter										
		BS3	BS3D	BS3/M	RS 25/M BLU TC	RS 35/M BLU TC	RS 55/M BLU TC	RS 68/M BLU TC	RS 120/M BLU TC	RS 160/M BLU TC	RS 25/E BLU	RS 35/E BLU	RS 45/E BLU	RS 55/E BLU	RS 68/E BLU	RS 120/E BLU	RS 160/E BLU	RS 120/E 02 BLU TC	RS 160/E 02 BLU TL	RS 120/EV 02 BLU TC	RS 160/EV 02 BLU TC	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3761316	3761716	3762350	3910510	3910610	20038484	3897406	3897606	3788006	3910710	3910810	3897332	20038491	3897432	3897632	3788032	20165996	20164535	20154943	20158956	20043900	20047680	4031196	4031198	4031197	20010820	4031069	4031067	20013035
RTS 90 3S	1.0	●																									●			
	1.0		●																								●		●	
	1.0			●																								●		●
RTS 115 3S	1.4	●																									●			
	1.4		●																								●		●	
	1.4			●																								●		●
RTS 166 3S	1.8	●																									●			
	1.8		●																								●		●	
	1.8			●																								●		●
RTS 217 3S	2.7				●																				●			●		●
	2.7										●														●			●		●
RTS 255 3S	2.9				●																							●		●
	2.9											●																●		●
RTS 349 3S	3.6					●																						●		●
	3.6											●																●		●
RTS 448 3S	2.9						●																	●				●		●
	2.9												●															●		●
RTS 511 3S	5.4						●																	●				●		●
	5.4													●										●				●		●
RTS 639 3S	5.2							●																●				●		●
RTS 750 3S	5.4							●																●				●		●
RTS 850 3S	6.7								●																			●		●
	6.7															●												●		●
	6.7																	●										●		●
	6.7																			●								●		●
RTS 1160 3S	3.9								●																			●		●
	3.9															●												●		●
	3.9																	●										●		●
	3.9																			●								●		●
RTS 1450 3S	4.6									●													●					●		●
	4.6															●												●		●
	4.6																		●									●		●
	4.6																				●							●		●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Gas burner													Control panels			
		Yellow flame (Standard)						Blue flame (Low NOx)										
		Two stage	Modulating															
		-	Mechanical cam								Electronic cam							
		RS 190 TL	RS 190/M TL	RS 310/M MZ	RS 410/M MZ	RS 510/M MZ	RS 200/M BLU TL	RS 310/M BLU	RS 410/M BLU	RS 510/M BLU	RS 200/E BLU	RS 310/E BLU	RS 410/E BLU	RS 510/E BLU	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		20030087	20052616	20068351	20067141	20068027	3899711	20067964	20069841	20069845	3899810	20065783	20056927	20056930	20010820	4031069	4031067	20013035
RTS 1750 3S	5.9	●													●		●	
	5.9		●													●		●
	5.9						●									●		●
	5.9										●					●		●
RTS 2100 3S	9.5			●												●		●
	9.5							●								●		●
	9.5											●				●		●
RTS 2600 3S	10.8				●											●		●
	10.8								●							●		●
	10.8												●			●		●
RTS 3000 3S	12.5					●										●		●
	12.5									●						●		●
	12.5													●		●		●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Light oil burner																				Burner accessory		Burner flange				Control panels			
		Yellow flame (Standard)													Blue flame (Low NOx)																
		Two stage								Modulating					Two stage					Modulating											
		-								Mechanical cam					-					Mechanical cam											
		RG3D	RG4D	RL 50 TC	RL 70 TC	RL 100 TC	RL 130 TC	RL 34 MZ TC	RL 44 MZ TC	RL 50/M TC	RL 70/M TC	RL 100/M TC	RL 130/M TC	RL 28/M TC	RL 38/M TC	BG6.1D	BG7.1D	RL 22 BLU	RL 32 BLU	RL 42 BLU	RL 55/M BLU	RL 85/M BLU	Kit modulation RWF 50.2	Kit modulation RWF 50.2	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3739450	3739750	3474632	3475032	3475232	3475432	3470210	3470310	20205656	20205587	20205600	20205645	20205675	20205653	20015693	20015696	20027479	20027481	20027567	20208592	20208590	20082208	20099869	20043900	4031188	4031196	4031198	20010820	4031069	4031067	20013035
RTS 90 3S	1.0	●																											●		●	
	1.0														●														●		●	
RTS 115 3S	1.4	●																											●		●	
	1.4															●													●		●	
RTS 166 3S	1.8		●																										●		●	
	1.8																	●										●	●		●	
RTS 217 3S	2.7							●																				●	●		●	
	2.7													●														●		●		●
	2.7																	●										●	●		●	
RTS 255 3S	2.9							●																					●		●	
	2.9													●																●		●
	2.9																		●										●		●	
RTS 349 3S	3.6								●																				●		●	
	3.6														●															●		●
	3.6																			●						●			●		●	
RTS 448 3S	2.9			●																									●		●	
	2.9									●																				●		●
	2.9																			●						●			●		●	
	2.9																				●						●			●		●
	2.9																						●						●		●	
RTS 511 3S	5.4			●																									●		●	
	5.4									●																				●		●
	5.4																				●						●			●		●
	5.4																						●						●		●	
RTS 639 3S	5.2				●																								●		●	
	5.2										●																			●		●
	5.2																				●						●			●		●
	5.2																						●						●		●	
RTS 750 3S	5.4				●																								●		●	
	5.4										●																			●		●
	5.4																				●						●			●		●
	5.4																						●						●		●	
RTS 850 3S	6.7					●																							●		●	
	6.7											●																		●		●
	6.7																					●					●			●		●
	6.7																						●						●		●	
RTS 1160 3S	3.9						●																		●				●		●	
	3.9											●																		●		●
	3.9																							●					●		●	
RTS 1450 3S	4.6						●																		●				●		●	
	4.6												●												●					●		●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Dual fuel burner									Burner accessory		Burner flange					Control panels			
		Yellow flame (Standard)					Blue flame (Low NOx)														
		Two stage					Modulating														
		-					Mechanical cam														
		RLS 28	RLS 38	RLS 50	RLS 70	RLS 100	RLS 68/M MX TC	RLS 120/M MX TC	RLS 160/M MX TC	RLS 190/M MZ	Kit modulation RWF 50.2	Kit modulation RWF 50.2	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		20208945	20208942	20208939	20208897	20208902	20205590	20205592	20205611	20205672	20082208	20099869	20043900	20047680	4031188	4031196	4031198	20010820	4031069	4031067	20013035
RTS 166 3S	1.8	●															●	●		●	
RTS 217 3S	2.7	●															●	●		●	
RTS 255 3S	2.9	●																●		●	
RTS 349 3S	3.6		●															●		●	
RTS 448 3S	2.9			●														●		●	
	2.9						●				●							●		●	
RTS 511 3S	5.4				●													●		●	
	5.4						●				●							●		●	
RTS 639 3S	5.2				●													●		●	
	5.2						●				●							●		●	
RTS 750 3S	5.4				●													●		●	
	5.4						●				●							●		●	
RTS 850 3S	6.7					●												●		●	
	6.7							●			●							●		●	
RTS 1160 3S	3.9									●	●			●				●		●	
	3.9								●			●						●		●	
RTS 1450 3S	4.6									●	●			●				●		●	
	4.6								●			●						●		●	

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Dual Fuel burner									Burner flange	Control panels	
		Yellow flame	Blue flame (Low NOx)										
		Modulating											
		Mechanical cam					Electronic cam						
		RLS 190/M MZ	RLS 310/M MX	RLS 310/M MX	RLS 410/M MX	RLS 510/M MX	RLS 310/E MX	RLS 310/E MX	RLS 410/E MX	RLS 510/E MX		Riellotech Clima Comfort	3-point modulation kit
		20205672	20205664	20205664	20208593	20205565	20087644	20087644	20084376	20083562	20163867	4031069	20013035
RTS 1750 3S	5.9	●										●	●
	5.9		●								●	●	●
	5.9						●				●	●	●
RTS 2100 3S	9.5			●								●	●
	9.5							●				●	●
RTS 2600 3S	10.8				●							●	●
	10.8								●			●	●
RTS 3000 3S	12.5					●						●	●
	12.5									●		●	●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Three flue gas passes steel jet burner boilers


RTS 2S

Products up to 400 kW only for replacement, in conformity of point 2 (G) Article 1 of Regulation EU N. 813/2013.




- Single-piece steel boilers with three flue gas passes, that can be matched with jet burners
- The particular geometry of the heat exchange allows to reduce the permanence time of flue gases in the high temperature zones while decreasing in this way the formation of N0x for low polluting emissions

RTS 115-2200 2S

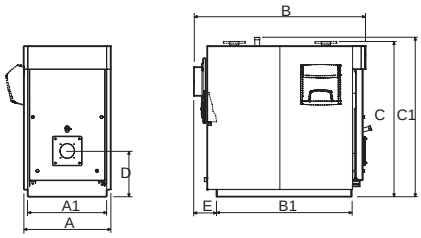

RTS 2600-3700 2S

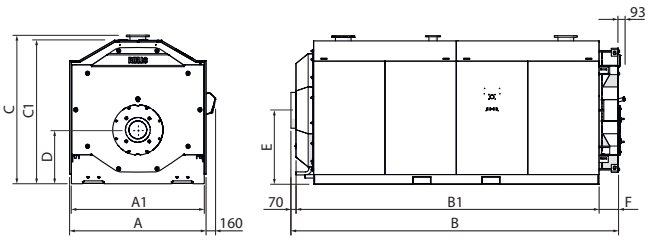

Description	A (mm)	A1 (mm)	B (mm)	B1 (mm)	C (mm)	C1 (mm)	D (mm)	E (mm)	F (mm)	Weight (inclusive of casing)	Boiler weight	Panelling Weight
RTS 115 2S	660	580	1155	860	1205	1225	380	180	-	335	-	-
RTS 150 2S	710	640	1330	1010	1285	1305	380	190	-	420	-	-
RTS 200 2S	760	690	1500	1180	1390	1390	400	200	-	515	-	-
RTS 247 2S	760	690	1500	1180	1390	1390	400	200	-	535	-	-
RTS 319 2S	820	750	1660	1296	1524	1525	468	225	-	715	-	-
RTS 410 2S	820	750	1960	1596	1490	1525	468	225	-	840	-	-
RTS 526 2S	890	790	2085	1692	1685	1730	510	250	-	1160	-	-
RTS 736 2S	1000	900	2375	1965	1830	1875	560	270	-	1500	-	-
RTS 850 2S	1000	900	2375	1965	1830	1875	560	270	-	1500	-	-
RTS 1012 2S	1047	980	2657	2236	1920	1960	570	270	-	2040	-	-
RTS 1200 2S	1047	980	2657	2236	1920	1960	570	270	-	2040	-	-
RTS 1355 2S	1147	1070	2954	2533	2080	2120	625	270	-	2627	-	-
RTS 1500 2S	1147	1070	2954	2533	2080	2120	625	270	-	2627	-	-
RTS 1850 2S	1237	1160	3173	2754	2222	2222	650	270	-	3440	-	-
RTS 2200 2S	1340	1260	3460	3020	2322	2322	670	265	-	4530	-	-
RTS 2600 2S	1800	1750	3981	3394	1980	1872	750	1000	270	-	5115	180
RTS 3200 2S	1900	1850	4171	3831	2070	1997	750	1030	270	-	5565	212
RTS 3700 2S	1900	1900	4491	3962	2070	1997	750	1030	270	-	6005	247

Pressurized steel boilers, that can be matched with any fuel jet burners. Provided with completely wet combustion chamber with free dilation and three passes flue path. The flue pipes are equipped with removable stainless steel turbulators, which allow to optimize the efficiency of the heat exchange without increasing head losses.
The door features an ambidextrous opening and is provided with a peephole with pressure intake.
Casing is made of stove-enamelled sheet. Shell and flue gas zone are easy to reach for maintenance.
The control panel must be ordered separately.

- High efficiency both punctual and seasonal
- Operation at modulating temperature (minimum allowed return temperature 50 °C)
- Several solutions thanks to the combination with RIELL0tech control panels
- Maximum operating pressure: 6 bar

TECHNICAL DATA

Description	Power - kW		Efficiency - %		Notes	Code
	Output useful 80°/60° max	Furnace input max	Useful Pn (80°/60°)	Useful 30% Pn		
RTS 115 2S	115	125	91.8	98.1		**20150418**
RTS 150 2S	153	166	92.2	97.2		**20150304**
RTS 200 2S	201	217	92.7	97.2		**20150305**
RTS 247 2S	252	270	93.5	97.2		**20150410**
RTS 319 2S	326	349	93.5	97.2		**20150412**
RTS 410 2S	419	448	93.5	97.2		**20150416**
RTS 526 2S	538	575	93.5	97.2		**20150417**
RTS 736 2S	804	860	93.5	97.2		**20150419**
RTS 850 2S	851	910	93.5	97.2	(1)	**20150434**
RTS 1012 2S	1029	1100	93.5	97.2	(1)	**20150420**
RTS 1200 2S	1201	1284	93.5	97.2	(1)	**20150435**
RTS 1355 2S	1356	1450	93.5	97.2	(1)	**20150432**
RTS 1500 2S	1550	1658	93.2	97.2	(1)	**20150437**
RTS 1850 2S	1851	1980	93.5	97.2	(1)	**20150433**
RTS 2200 2S	2197	2350	93.5	97.2	(1)	**20204041**
RTS 2600 2S	2600	2781	93.5	97.2	(1)	**20204045**
RTS 3200 2S	3200	3422	93.5	97.2	(1)	**20204048**
RTS 3700 2S	3627	3880	93.5	97.2	(1)	**20204050**

(1) For orders please contact Sales Department.

ACCESSORIES

Description	Code
MECHANICAL ACCESSORIES	
Burner flange	**4031188**
Burner flange	**4031196**
Burner flange	**4031395**
Burner flange	**4031186**
Burner flange	**4031192**
Burner flange	**4031198**
Burner flange	**20043900**
Burner flange	**20047680**
Burner flange	**20065920**
Burner flange	**20043899**
Burner flange	**20184817**
Burner flange	**20163867**

CONTROL PANELS

Description	Installation	Code	Boiler model
RIELLOTECH CLIMA COMFORT	Vertical	**4031069**	**All models**
RIELLOTECH PRIME	Vertical	**20010820**	**All models**
RIELLOTECH PRIME ACS	Vertical	**20010437**	**All models**

Climate management with RIELLOtech Clima Comfort.
Thermostatic management with RIELLOtech Prime.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS – EU COUNTRIES

Description	Back-pressure in combustion chamber (mbar)	Gas burner																						Burner flange						Control panels			
		Yellow flame (Standard)											Blue flame (Low NOx)																				
		One stage	Two stage					Modulating																									
		-	-					Mechanical cam									Electronic cam																	
		RS 44/1 MZ TC	RS 100 TC	RS 130 TC	RS 190 TC	RS 44 MZ TC	RS 50 TC	RS 100/M TC	RS 130/M TC	RS 190/M TC	RS 44/M MZ TC	RS 50/M MZ TC	RS 120/M BLU TC	RS 160/M BLU TC	RS 200/M BLU TC	RS 45/M BLU TC	RS 68/M BLU TC	RS 120/E BLU	RS 160/E BLU	RS 200/E BLU	RS 45/E BLU	RS 68/E BLU	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3788610	20194281	20194288	3785813	3789110	3784702	3789710	3789810	3787623	3788810	3781622	3897606	3788006	3899710	3897306	3897406	3897632	3788032	3899810	3897332	3897432	20043900	20047680	20065920	4031188	4031196	4031395	20010820	4031069	4031067	20013035
RTS 410 2S	3.70	●																										●	●			
	3.70					●																						●	●		●	
	3.70										●																	●		●		●
	3.70															●												●		●		●
	3.70																				●							●		●		●
RTS 526 2S	2.20						●																					●	●		●	
	2.20											●																●		●		●
	2.20																●										●			●		●
	2.20																					●					●			●		●
RTS 739 2S	4.80		●																							●			●		●	
	4.80							●																		●				●		●
	4.80												●														●			●		●
	4.80																	●									●			●		●
RTS 850 2S	6.80		●																							●			●		●	
	6.80							●																		●				●		●
	6.80												●														●			●		●
	6.80																	●									●			●		●
RTS 1012 2S	6.10		●																				●						●		●	
	6.10								●														●							●		●
	6.10												●										●							●		●
	6.10																	●					●							●		●
RTS 1200 2S	9.80			●																			●						●		●	
	9.80								●														●							●		●
	9.80													●											●					●		●
	9.80																		●						●					●		●
RTS 1355 2S	5.10				●																				●				●		●	
	5.10									●															●					●		●
	5.10													●											●					●		●
	5.10																		●						●					●		●
RTS 1500 2S	7.00				●																				●				●		●	
	7.00									●															●					●		●
	7.00													●											●					●		●
	7.00																		●						●					●		●
RTS 1850 2S	7.20				●																			●					●		●	
	7.20									●														●						●		●
	7.20														●									●						●		●
	7.20																			●				●						●		●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Gas burner											Burner flange	Control panels	
		Yellow flame (Standard)					Blue flame (Low NOx)								
		Modulating													
		Mechanical cam							Electronic cam						
		RS 410/M MZ	RS 510/M MZ	RS 610/M MZ	RS 310/M BLU	RS 410/M BLU	RS 510/M BLU	RS 610/M BLU	RS 310/E BLU	RS 410/E BLU	RS 510/E BLU	RS 610/E BLU		Riellotech Clima Comfort	3-point modulation kit
		20067141	20068027	20066706	20067964	20069841	20069845	20069847	20065783	20056927	20056930	20056932	20163867	4031069	20013035
RTS 2200 2S	10.4				●								●	●	●
	10.4								●				●	●	●
RTS 2600 2S	12	●											●	●	●
	12					●							●	●	●
	12									●			●	●	●
RTS 3200 2S	12		●										●	●	●
	12						●						●	●	●
	12										●		●	●	●
RTS 3700 2S	15			●									●	●	●
	15							●					●	●	●
	15											●	●	●	●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Light oil burner												Dual Fuel burner									Burner accessory	Burner flange						Control panels			
		Yellow flame (Standard)								Blue flame (Low NOx)				Yellow flame (Standard)			Blue flame (Low NOx)																
		Two stage				Modulating				Two stage	Modulating			Two stage			Modulating																
		-				Mechanical cam				-	Mechanical cam			-			Mechanical cam																
		RL 50 TC	RL 100 TC	RL 130 TC	RL 190 TC	RL 38/M TC	RL 50/M TC	RL 100/M TC	RL 130/M TC	RL 190/M TC	RL 42 BLU	RL 55/M BLU	RL 85/M BLU	RLS 50	RLS 70	RLS 100	RLS 190/M MZ	RLS 250/M MZ	RLS 68/M MX TC	RLS 120/M MX TC	RLS 160/M MX TC	RLS 310/M MX	Kit modulation RWF 50.2	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3474632	3475232	3475432	3475613	20205653	20205656	20205600	20205645	20205588	20027567	20208592	20208590	20208939	20208897	20208902	20205672	20205746	20205590	20205592	20205611	20147806	20082208	20043900	20047680	20065920	4031188	4031196	4031395	20010820	4031069	4031067	20013035
RTS 410 2S	3.70	●																											●	●		●	
	3.70					●																							●		●		●
	3.70										●																●			●		●	
	3.70													●															●	●		●	
	3.70																		●				●							●		●	
RTS 526 2S	2.20	●																											●	●		●	
	2.20						●																						●		●		●
	2.20											●																●			●		●
	2.20														●												●			●		●	
	2.20																		●				●							●		●	
RTS 739 2S	4.80		●																								●			●		●	
	4.80							●																			●				●		●
	4.80												●															●			●		●
	4.80														●												●			●		●	
	4.80																		●				●							●		●	
RTS 850 2S	6.80		●																								●			●		●	
	6.80							●																			●				●		●
	6.80															●												●			●		
	6.80																			●			●							●		●	
RTS 1012 2S	6.10		●																				●							●		●	
	6.10							●															●								●		●
	6.10															●							●							●		●	
	6.10																			●			●							●		●	
RTS 1200 2S	9.80			●																			●							●		●	
	9.80								●														●								●		●
	9.80																●						●			●				●		●	
	9.80																				●		●							●		●	
RTS 1355 2S	5.10			●																			●							●		●	
	5.10								●														●								●		●
	5.10																●						●			●				●		●	
	5.10																				●		●							●		●	
RTS 1500 2S	7.00				●																					●				●		●	
	7.00									●																●					●		●
	7.00																●						●			●				●		●	
	7.00																				●		●							●		●	
RTS 1850 2S	7.20				●																				●					●		●	
	7.20									●															●						●		●
	7.20																	●					●		●					●		●	
	7.20																					●	●							●		●	

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Dual Fuel burner								Burner flange	Control panels	
		Blue flame (Low NOx)										
		Modulating										
		Mechanical cam				Electronic cam						
		RLS 310/M MX	RLS 410/M MX	RLS 410/M MX	RLS 510/M MX	RLS 310/E MX	RLS 410/E MX	RLS 410/E MX	RLS 510/E MX		Riellotech Clima Comfort	3-point modulation kit
		20205664	20208593	20208593	20205565	20087644	20084376	20084376	20083562	20163867	4031069	20013035
RTS 2200 2S	10.4	●								●	●	●
	10.4					●				●	●	●
RTS 2600 2S	12		●							●	●	●
	12					●				●	●	●
RTS 3200 2S	12			●						●	●	●
	12							●		●	●	●
RTS 3700 2S	15				●					●	●	●
	15								●	●	●	●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

RECOMMENDED COMBINATIONS WITH BURNERS – EXTRA EU COUNTRIES

Description	Back-pressure in combustion chamber (mbar)	Gas burner														Burner flange								Control panels			
		Yellow flame (Standard)																									
		One stage		Two stage						Modulating																	
		–		–						Mechanical cam																	
		RS 34/1 MZ TC	RS 44/1 MZ TC	RS 100 TC	RS 130 TC	RS 190 TC	RS 44 MZ TC	RS 50 TC	RS5D	RS 100/M TC	RS 130/M TC	RS 190/M TC	RS 34/M MZ TC	RS 44/M MZ TC	RS 50/M MZ TC	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3788510	3788610	20194281	20194288	3785813	3789110	3784702	3762016	3789710	3789810	3787623	3788710	3788810	3781622	20043900	20047680	20065920	4031186	4031188	4031192	4031198	4031395	20010820	4031069	4031067	20013035
RTS 247 2S	3.00	●																				●		●			
	3.00								●										●					●		●	
	3.00												●									●			●		●
RTS 319 2S	2.40	●																			●			●			
	2.40						●														●			●		●	
	2.40												●									●			●		●
RTS 410 2S	3.70		●																				●	●			
	3.70						●																●	●		●	
	3.70													●									●		●		●
RTS 526 2S	2.20							●															●	●		●	
	2.20														●								●		●		●
RTS 739 2S	4.80			●																●				●		●	
	4.80									●										●					●		●
RTS 850 2S	6.80			●																●				●		●	
	6.80									●										●					●		●
RTS 1012 2S	6.10			●												●								●		●	
	6.10										●					●									●		●
RTS 1200 2S	9.80				●											●								●		●	
	9.80										●					●									●		●
RTS 1355 2S	5.10					●												●						●		●	
	5.10											●						●							●		●
RTS 1500 2S	7.00					●												●						●		●	
	7.00											●						●							●		●
RTS 1850 2S	7.20					●											●							●		●	
	7.20											●					●								●		●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Gas burner																								Burner flange										Control panels			
		Blue flame (Low NOx)																																					
		One stage		Two stage		Modulating																																		
		–		–		Mechanical cam										Electronic cam																								
		BS3	BS4	BS3D	BS4D	BS3/M	BS4/M	RS 120/M BLU TC	RS 160/M BLU TC	RS 200/M BLU TC	RS 25/M BLU TC	RS 35/M BLU TC	RS 45/M BLU TC	RS 68/M BLU TC	RS 120/E BLU	RS 160/E BLU	RS 200/E BLU	RS 25/E BLU	RS 35/E BLU	RS 45/E BLU	RS 68/E BLU	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3761316	3761416	3761716	3761816	3762350	3762450	3897606	3788006	3899710	3910510	3910610	3897306	3897406	3897632	3788032	3899810	3910710	3910810	3897332	3897432	20043899	20043900	20047680	20065920	4031186	4031192	4031196	4031198	4031395	20184817	20010820	4031069	4031067	20013035
RTS 115 2S	1.20	●																				●										●			
	1.20			●																		●										●		●	
	1.20					●																●											●		●
RTS 150 2S	1.60	●																												●	●			
	1.60			●																										●	●		●	
	1.60						●																			●						●		●
RTS 200 2S	1.80		●																							●					●			
	1.80				●																					●						●		●	
	1.80										●																		●			●		●
	1.80																	●											●			●		●
RTS 247 2S	3.00										●																		●			●		●
	3.00																	●											●			●		●
RTS 319 2S	2.40											●																●				●		●
	2.40																		●									●				●		●
RTS 410 2S	3.70												●																	●		●		●
	3.70																			●										●		●		●
RTS 526 2S	2.20													●														●				●		●
	2.20																				●							●				●		●
RTS 739 2S	4.80							●																				●				●		●
	4.80														●													●				●		●
RTS 850 2S	6.80							●																				●				●		●
	6.80														●													●				●		●
RTS 1012 2S	6.10							●															●									●		●
	6.10														●								●									●		●
RTS 1200 2S	9.80								●																●							●		●
	9.80															●									●							●		●
RTS 1355 2S	5.10								●																●							●		●
	5.10															●									●							●		●
RTS 1500 2S	7.00								●																●							●		●
	7.00															●									●							●		●
RTS 1850 2S	7.20									●														●								●		●
	7.20																●							●								●		●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Gas burner											Burner flange	Control panels	
		Yellow flame (Standard)					Blue flame (Low NOx)								
		Modulating													
		Mechanical cam							Electronic cam						
		RS 410/M MZ	RS 510/M MZ	RS 610/M MZ	RS 310/M BLU	RS 410/M BLU	RS 510/M BLU	RS 610/M BLU	RS 310/E BLU	RS 410/E BLU	RS 510/E BLU	RS 610/E BLU		Riellotech Clima Comfort	3-point modulation kit
		20067141	20068027	20066706	20067964	20069841	20069845	20069847	20065783	20056927	20056930	20056932	20163867	4031069	20013035
RTS 2200 2S	10.4				●								●	●	●
	10.4								●				●	●	●
RTS 2600 2S	12	●											●	●	●
	12					●							●	●	●
	12									●			●	●	●
RTS 3200 2S	12		●										●	●	●
	12						●						●	●	●
	12										●		●	●	●
RTS 3700 2S	15			●									●	●	●
	15							●					●	●	●
	15											●	●	●	●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Light oil burner																								Burner flange											Control panels			
		Yellow flame (Standard)																				Blue flame (Low NOx)																		
		One stage				Two stage									Modulating							Two stage				Modulating															
		–				–									Mechanical cam							–				Mechanical cam															
		RG3	RG4S	RG5S	RL 34/1 MZ TC	RG3D	RG4D	RG5D	RL 100 TC	RL 130 TC	RL 190 TC	RL 34 MZ TC	RL 44 MZ TC	RL 50 TC	RL 64 MZ TC	RL 100/M TC	RL 130/M TC	RL 190/M TC	RL 28/M TC	RL 38/M TC	RL 50/M TC	BG7.1D	RL 22 BLU	RL 32 BLU	RL 42 BLU	RL 55/M BLU	RL 85/M BLU	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3739300	3739650	3739950	3470110	3739450	3739750	3739850	3475232	3475432	3475613	3470210	3470310	3474632	3470410	20205600	20205645	20205588	20205675	20205653	20205656	20015696	20027479	20027481	20027567	20208592	20208590	20043899	20043900	20047680	20065920	4031186	4031188	4031192	4031196	4031198	4031395	20184817	20010820	4031069	4031067	20013035
	1.20	●																										●											●			
RTS 115 2S	1.20				●																							●											●		●	
	1.20																					●						●											●		●	
	1.60		●																																			●	●			
RTS 150 2S	1.60						●																															●	●		●	
	1.60																						●													●			●		●	
	1.80			●																												●							●			
RTS 200 2S	1.80							●																								●							●			
	1.80																		●																	●			●		●	
	1.80																						●													●			●			
	3.00				●																															●			●			
RTS 247 2S	3.00											●																								●			●		●	
	3.00																		●																	●			●			●
	3.00																						●													●			●		●	
	2.40												●																				●						●		●	
RTS 319 2S	2.40																		●														●							●		●
	2.40																						●										●						●		●	
	3.70														●																			●						●		●	
RTS 410 2S	3.70																			●																●			●			●
	3.70																								●								●						●		●	
	2.20													●																							●			●		●	
RTS 526 2S	2.20																				●															●			●			●
	2.20																									●											●			●			●
	4.80								●																								●						●		●	
RTS 739 2S	4.80															●																	●							●		●
	4.80																										●									●				●		●
RTS 850 2S	6.80								●																								●						●		●	
	6.80															●																	●							●		●
RTS 1012 2S	6.10								●																			●											●		●	
	6.10															●													●												●		●
RTS 1200 2S	9.80									●																			●											●		●	
	9.80																●												●												●		●
RTS 1355 2S	5.10									●																			●											●		●	
	5.10																●												●												●		●
RTS 1500 2S	7.00										●																				●									●		●	
	7.00																	●													●										●		●
RTS 1850 2S	7.20										●																				●									●		●	
	7.20																	●													●										●		●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Description	Back-pressure in combustion chamber (mbar)	Dual fuel burner											Burner accessory	Burner flange								Control panels	
		Yellow flame (Standard)							Blue flame (Low NOx)														
		Two stage					Modulating		Modulating														
		-					Mechanical cam		Mechanical cam														
		RLS 28	RLS 38	RLS 50	RLS 70	RLS 100	RLS 190/M MZ	RLS 250/M MZ	RLS 68/M MX TC	RLS 120/M MX TC	RLS 160/M MX TC	RLS 310/M MX	Kit modulation RWF 50.2	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Two stage burner management kit
		20208945	20208942	20208939	20208897	20208902	20205672	20205746	20205590	20205592	20205611	20147806	20082208	20043900	20047680	20065920	4031188	4031192	4031196	4031198	4031395	20010820	4031067
RTS 150 2S	1,60	●																		●		●	●
RTS 200 2S	1,80	●																		●		●	●
RTS 247 2S	3,00	●																		●		●	●
RTS 319 2S	2,40		●															●				●	●
RTS 410 2S	3,70			●																	●	●	●
	3,70								●				●									●	●
RTS 526 2S	2,20				●												●					●	●
	2,20								●				●									●	●
RTS 739 2S	4,80				●												●					●	●
	4,80								●				●									●	●
RTS 850 2S	6,80					●													●			●	●
	6,80									●			●									●	●
RTS 1012 2S	6,10					●								●								●	●
	6,10									●			●									●	●
RTS 1200 2S	9,80						●						●			●						●	●
	9,80										●		●									●	●
RTS 1355 2S	5,10						●						●			●						●	●
	5,10										●		●									●	●
RTS 1500 2S	7,00						●						●			●						●	●
	7,00										●		●									●	●
RTS 1850 2S	7,20							●					●		●							●	●
	7,20											●	●									●	●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.


Description	Back-pressure in combustion chamber (mbar)	Dual Fuel burner								Burner flange	Control panels	
		Blue flame (Low NOx)										
		Modulating										
		Mechanical cam				Electronic cam						
		RLS 310/M MX	RLS 410/M MX	RLS 410/M MX	RLS 510/M MX	RLS 310/E MX	RLS 410/E MX	RLS 410/E MX	RLS 510/E MX		Riellotech Clima Comfort	3-point modulation kit
		20205664	20208593	20208593	20205565	20087644	20084376	20084376	20083562	20163867	4031069	20013035
RTS 2200 2S	10.4	●								●	●	●
	10.4					●				●	●	●
RTS 2600 2S	12		●							●	●	●
	12					●				●	●	●
RTS 3200 2S	12			●						●	●	●
	12							●		●	●	●
RTS 3700 2S	15				●					●	●	●
	15								●	●	●	●

NOTE
The gas burners must be completed with the gas train.
For specific accessories, connection MODBUS and more details on control panels, please refer to page 349.
The list of burners is not intended to be exhaustive.
The combination between boiler and burner must always be verified according to the system design specifications.

Three flue gas passes steel jet burner boilers

RTG



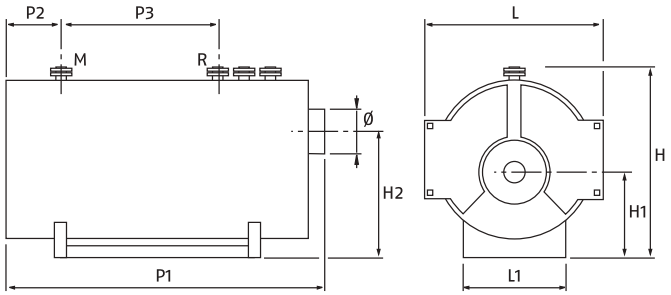

- Single-piece steel boilers with three flue gas passes
- The particular geometry of the heat exchanger allows to reduce the permanence time of flue gases in the high temperature zones while decreasing in this way the formation of N0x for low polluting emissions

Description	L mm	H mm	P1 mm	L1 mm	H1 mm	H2 mm	P2 mm	P3 mm	Ø mm	Net weight kg	
										5 bar	8bar
RTG 4000	2260	2660	5550	1500	1070	1780	860	2800	600	10050	11350
RTG 4300	2260	2660	5550	1500	1070	1780	860	2800	600	10200	11500
RTG 5000	2500	2950	6070	1620	1225	1955	922	3000	700	13300	14950
RTG 6000	2500	2950	6570	1620	1225	1955	922	3450	700	14200	5950
RTG 7500	2750	3200	7020	1800	1305	2110	1022	3600	800	19200	19950
RTG 9000	2910	3360	7320	1900	1355	2210	1022	3900	900	23000	23500

Monobloc steel boilers with possibility of using gas or oil burners. They are equipped with pressurized furnace with three actual fume paths, passing flame and horizontal development mounted on steel base. The exterior of the body is equipped with hydraulic connections, rings for lifting rods, handrails and manhole (models from 5000 to 9000).
The particular geometry of the heat exchanger allows reducing the presence of fumes in the high temperature zones, thus reducing the formation of N0x. Front access is ensured by two doors insulated with refractory materials and a containment braid. The fume box is equipped with condensate drain and doors for easy cleaning and maintenance.
The body is thermally insulated with high density stone wool and protected by an aluminium sheet.
These boilers are available in 6 models with useful output from 4,680 to 10,560 kW.
The optional control panel must be ordered separately.

- High point yields and intermediate seasons
- Reduced polluting emissions
- Robust construction
- Can be combined with Riello monobloc burners
- Easy to transport (lifting rings)
- Easy maintenance: front access to the combustion chamber, fume tubes, fume chamber and inside the body
- Easy to assemble: easy coupling and standardised connections
- Installation flexibility: a number of installation solutions is possible by combining Riello burners.

TECHNICAL DATA

Description	Power - kW		Efficiency - %		Code
	Output useful 80°/60° max	Furnace input max	Useful Pn (80°/60°)	Useful 30% Pn	
RTG 4000	4680	5050	92.7	93.3	**4031411**
RTG 4300	5030	5450	92.3	92.8	**4031889**
RTG 5000	5830	6310	92.4	93.0	**4031413**
RTG 6000	7020	7590	92.5	93.1	**4031415**
RTG 7500	8760	9460	92.6	93.2	**4031417**
RTG 9000	10560	11400	92.6	93.2	**4031419**

The product codes above refer to 5-bar models. Maximum operating pressure 5 bar (8 bar on request).

CONTROL PANELS

Description	Installation	Code	Boiler model
RIELLOtech CLIMA COMFORT	Vertical	**4031069**	**All models**
RIELLOtech PRIME	Vertical	**20010820**	**All models**
RIELLOtech PRIME ACS	Vertical	**20010437**	**All models**

Climate management with RIELLOtech Clima Comfort.
Thermostatic management with RIELLOtech PRIME.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS

Description	Back-pressure in combustion chamber (mbar)	Gas burner																										Control panels			
		Yellow flame (Standard)												Blue flame (Low NOx)																	
		Two stage	Modulating																												
		–	Mechanical cam																		Electronic cam										
		RS 130 TC	RS 190 TC	RS 190/M TC	RS 250/M MZ TC	RS 310/M MZ FS1	RS 410/M MZ FS1	RS 510/M MZ FS1	RS 610/M MZ FS1	RS 1000/M C01	RS 1200/M C01	RS 160/M BLU TC	RS 200/M BLU TC	RS 310/M BLU FS1	RS 410/M BLU FS1	RS 510/M BLU FS1	RS 610/M BLU FS1	RS 810/M BLU FS1	RS 1000/M BLU	RS 1200/M BLU	RS 160/E BLU	RS 200/E BLU	RS 310/E BLU FS1	RS 410/E BLU FS1	RS 510/E BLU FS1	RS 610/E BLU FS1	RS 810/E BLU FS1	RS 1000/E BLU	Riellotech Prime	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		20194288	3785813	3787623	3788410	20068351	20068361	20068027	20066706	20212532	20212531	3788006	3899710	20067964	20069841	20069845	20069847	20155846	20205814	20208727	3788032	3899810	20065783	20056927	20056930	20056932	20160126	20057514	20010820	4031069	4031067	20013035
	7.0								●																					●		●
RTG 4000	7.0																●													●		●
	7.0																									●				●		●
	8.2								●																					●		●
RTG 4300	8.2																	●												●		●
	8.2																										●			●		●
	5.6									●																				●		●
RTG 5000	5.6																	●												●		●
	5.6																										●			●		●
	8.4									●																				●		●
RTG 6000	8.4																		●											●		●
	8.4																											●		●		●
RTG 7500	8.1										●																			●		●
	8.1																			●										●		●

NOTE: the gas burners must be completed with the gas train.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.


Description	Back-pressure in combustion chamber (mbar)	Light oil burner					Dual fuel burner											Control panels			
		Yellow flame (Standard)																			
		Two stage			Modulating		Two stage	Modulating													
		–			Mechanical cam		–	Mechanical cam													
		RL 130 TC	RL 190 TC	RL 250 MZ TC	RL 130/M TC	RL 190/M TC	RLS 130	RLS 190/M MZ	RLS 250/M MZ	RLS 160/M MX TC	RLS 310/M MX	RLS 410/M MX	RLS 510/M MX	RLS 610/M MX	RLS 800/M MX	RLS 1000/M C13	RLS 1200/M C13	Riellotech Clima Comfort	Riellotech Prime	Two stage burner management kit	3-point modulation kit
		3475432	3475613	20204865	20205645	20205588	20208905	20205672	20205746	20205611	20147806	20208594	20205565	20205563	20160295	20206345	20212536	4031069	20010820	4031067	20013035
RTG 4000	7.0													●				●		●	
RTG 4300	8.2													●				●		●	
RTG 5000	5.6														●			●		●	
RTG 6000	8.4															●		●		●	
RTG 7500	8.1																●	●		●	
RTG 9000	8.7																	●		●	

NOTE: the light oil burners must be completed with the light oil nozzles.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Three flue gas passes steel jet burner boilers

RTQ T



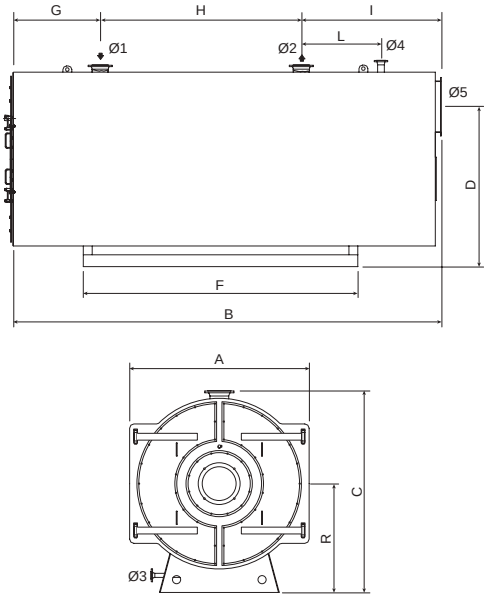

ERP
LIGHT OIL

- Single-piece steel boilers with three flue gas passes, that can be matched with jet burners
- The particular geometry of the heat exchange allows to reduce the permanence time of flue gases in the high temperature zones while decreasing in this way the formation of N0x for low polluting emissions

Description		3000	3500	4000	5000	6000	7000	8000	9000	10000	11000	12000	14000	16000	18000
A	mm	2010	2050	2100	2350	2400	2480	2580	2800	2800	2900	3000	3080	3280	3370
B	mm	5164	5310	5425	6115	6332	6415	6432	6452	6732	6732	7332	8102	8492	8902
C	mm	2370	2400	2450	2700	2750	2830	3000	3300	3300	3400	3500	3700	3900	4000
D	mm	1790	1820	1795	2050	2095	2115	2300	2400	2400	2500	2600	2800	3000	3100
F	mm	2800	3000	3000	3800	3500	4000	3700	4000	4000	4250	4400	4500	5000	5200
G	mm	801	801	881	851	791	851	800	800	800	800	800	800	800	800
	mm	2900	3080	2800	3600	3600	3900	3700	3700	4000	4000	4600	5200	5800	6200
I	mm	1463	1429	1741	1658	1941	1663	1932	1952	1932	1932	1932	2102	1892	1902
L	mm	800	800	1050	1000	1050	1000	1050	1050	1050	1050	1050	1050	1050	1050
R	mm	1240	1250	1275	1400	1425	1465	1515	1625	1625	1675	1725	1765	1865	1910
Ø1 - straight pipeline (*)		DN 200	DN 200	DN 200	DN 250	DN 250	DN 250	DN 250	DN 250	DN 300	DN 300	DN 350	DN 400	DN 450	DN 450
Ø2 - return pipeline (*)		DN 200	DN 200	DN 200	DN 250	DN 250	DN 250	DN 250	DN 250	DN 300	DN 300	DN 350	DN 400	DN 450	DN 450
Ø3 - drain from the boiler (**)		DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40
Ø4 - joining a security group (*)		DN 80	DN 80	DN 80	DN 100	DN 100	DN 100	DN 100	DN 100	DN 125	DN 125	DN 125	DN 125	DN 125	DN 125
Ø5 - flue gas outlet	mm	600	600	700	700	700	800	800	900	900	900	1000	1100	1100	1200

(*) PN16
(**) PN40

Monobloc steel boilers with possibility of using gas or oil burners. They are equipped with pressurized furnace with three actual fume paths, passing flame and horizontal development mounted on steel base. The exterior of the body is equipped with hydraulic connections, rings for lifting rods, handrails and manhole. The particular geometry of the heat exchanger allows reducing the presence of fumes in the high temperature zones, thus reducing
e formation of NOx. Front access is ensured by two doors insulated with refractory materials and a containment braid. The fume box is equipped with condensate drain and doors for easy cleaning and maintenance.
The body is thermally insulated with high density stone wool and protected by an aluminium sheet.
These boilers are available in 14 models with useful output from 3,000 to 18,000 kW.
- High point yields and intermediate seasons
- Reduced polluting emissions
- Robust construction
- Can be combined with Riello burners
- Easy to transport (lifting rings)
- Easy maintenance: front access to the combustion chamber, fume tubes, fume chamber and inside the body
- Easy to assemble: easy coupling and standardised connections
- Installation flexibility: a number of installation solutions is possible by combining Riello burners.

RTQ T models can be equipped with control panels of the RIELLO 5000 series with various functional contents:
TMR2 - thermostatic panel for controlling a single-circuit boiler with one or two-stage burners;ÜL-M is an electronic climate control panel for controlling a modulating, one- or two-stage burner, built-in or free-standing storage ank or a DHW flow-through heat exchanger. Cascade control of a group of up to four boilers. Possibility to control 6 separate heating circuits (when ordering additional control units). Üontrol panels can be installed both on the top and on the side of the boiler.
To install the control panel on the side panel of the boiler, a special bracket is required (article no. 4031059).
The control panel is not included in the boiler delivery set and must be ordered separately!

TECHNICAL DATA

Description	Power - kW		Efficiency - %		Code
	Output useful 80°/60° max	Furnace input max	Useful Pn (80°/60°)	Useful 30% Pn	
RTQ 3000 T	3000	3226	93.0	94.0	**20069409**
RTQ 3500 T	3500	3763	93.0	94.0	**20069418**
RTQ 4000 T	4000	4301	93.0	94.0	**20069419**
RTQ 5000 T	5000	5376	93.0	94.0	**20069420**
RTQ 6000 T	6000	6452	93.0	94.0	**20069424**
RTQ 7000 T	7000	7527	93.0	94.0	**20149276**
RTQ 8000 T	8000	8602	93.0	94.0	**20069429**
RTQ 9000 T	9000	9677	93.0	94.0	**20069433**
RTQ 10000 T	10000	10753	93.0	94.0	**20069439**
RTQ 11000 T	11000	11828	93.0	94.0	**20069441**
RTQ 12000 T	12000	12903	93.0	94.0	**20069443**
RTQ 14000 T	14000	15054	93.0	94.0	**20069444**
RTQ 16000 T	16000	17204	93.0	94.0	**20069445**
RTQ 18000 T	18000	19355	93.0	94.0	**20069446**

CONTROL PANELS

Description	Code	Boiler model
Riello 5000 TMR2	**07200123**	All models
Riello 5000 CL-M	**20020036**	All models

RECOMMENDED COMBINATIONS WITH BURNERS


Description	Back-pressure in combustion chamber (mbar)	Gas burner												Dual fuel burner								Control panels	
		Blue flame (Low NOx)												Blue flame (Low NOx)									
		Modulating												Modulating									
		Mechanical cam						Electronic cam						Mechanical cam									
		RS 310/M BLU FS1	RS 410/M BLU FS1	RS 510/M BLU FS1	RS 610/M BLU FS1	RS 810/M BLU FS1	(1)	RS 310/E BLU FS1	RS 410/E BLU FS1	RS 510/E BLU FS1	RS 610/E BLU FS1	RS 810/E BLU FS1	(1)	RLS 310/M MX	RLS 410/M MX	RLS 510/M MX	RLS 610/M MX	RLS 800/M MX	RLS 1000/M C13	RLS 1200/M C13	(1)	Riello 5000 CL-M	Riello 5000 TMR2
		20068245	20068284	20069845	20069847	20155846	(1)	20068261	20068294	20056930	20056932	20160126	(1)	20205568	20205742	20205565	20205563	20160295	20206345	20212536	(1)	20020036	07200123
RTQ 3000 T	6	●																				●	
	6							●														●	
	6													●									●
RTQ 3500 T	8		●																			●	
	8								●													●	
	8														●								●
RTQ 4000 T	8			●																		●	
	8									●												●	
	8															●							●
RTQ 5000 T	8				●																	●	
	8										●											●	
	8																●						●
RTQ 6000 T	9					●																●	
	9											●										●	
	9																	●					●
RTQ 7000 T	9						●															●	
	9												●									●	
	9																		●				●
RTQ 8000 T	8						●															●	
	8												●									●	
	8																		●				●
RTQ 9000 T	8						●															●	
	8												●									●	
	8																			●			●
RTQ 10000 T	9						●															●	
	9												●									●	
	9																				●		●
RTQ 11000 T	9						●															●	
	9												●									●	
	9																				●		●
RTQ 12000 T	11						●															●	
	11												●									●	
	11																				●		●
RTQ 14000 T	11						●															●	
	11												●									●	
	11																				●		●
RTQ 16000 T	12						●															●	
	12												●									●	
	12																				●		●
RTQ 18000 T	13						●															●	
	13												●									●	
	13																				●		●

(1) For combination with large burners, please contact the pre-sales service. Note: the gas burners must be completed with the gas train.
Note: light oil burners are equipped with light oil injectors.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Three flue gas passes steel jet burner boilers

RTQ TK



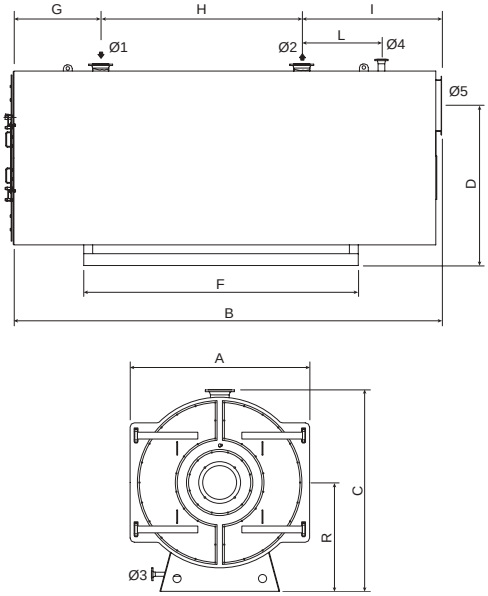

ERP
LIGHT OIL

- Single-piece steel boilers with three flue gas passes, that can be matched with jet burners

Description		4000	4500	5000	6000	7000	8000	9000	10000	11000	12000	14000	16000	18000	20000
A	mm	2010	2050	2100	2350	2400	2480	2580	2750	2800	2900	3000	3080	3280	3370
B	mm	5164	5310	5425	6115	6332	6415	6432	6466	6732	6732	7332	8102	8492	8902
C	mm	2370	2400	2450	2700	2750	2830	3000	3150	3300	3400	3500	3700	3900	4000
D	mm	1790	1820	1795	2050	2095	2115	2300	2400	2400	2500	2600	2800	3000	3100
F	mm	2800	3000	3000	3800	3500	4000	3700	4020	4000	4250	4400	4500	5000	5200
G	mm	801	801	881	851	791	851	800	755	800	800	800	800	800	800
H	mm	2900	3080	2800	3600	3600	3900	3700	3920	4000	4000	4600	5200	5800	6200
I	mm	1463	1429	1741	1658	1941	1663	1932	1658	1932	1932	1932	2102	1892	1902
L	mm	800	800	1050	1000	1050	1000	1050	1000	1050	1050	1050	1050	1050	1050
R	mm	1240	1250	1275	1400	1425	1465	1515	1625	1625	1675	1725	1765	1865	1910
Ø1 - straight pipeline (*)		DN 200	DN 200	DN 200	DN 250	DN 250	DN 250	DN 250	DN 250	DN 300	DN 300	DN 350	DN 400	DN 450	DN 450
Ø2 - return pipeline (*)		DN 200	DN 200	DN 200	DN 250	DN 250	DN 250	DN 250	DN 250	DN 300	DN 300	DN 350	DN 400	DN 450	DN 450
Ø3 - drain from the boiler (**)		DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40	DN 40
Ø4 - joining a security group (*)		DN 80	DN 80	DN 80	DN 100	DN 100	DN 100	DN 100	DN 100	DN 125	DN 125	DN 125	DN 125	DN 125	DN 125
Ø5 - flue gas outlet	mm	600	600	700	700	700	800	800	900	900	900	1000	1100	1100	1200

(*) PN16
(**) PN40

Monobloc steel boilers with possibility of using gas or oil burners. They are equipped with pressurized furnace with three actual fume paths, passing flame and horizontal development mounted on steel base. The exterior of the body is equipped with hydraulic connections, rings for lifting rods, handrails and manhole.
Front access is ensured by two doors insulated with refractory materials and a containment braid. The fume box is equipped with condensate drain and doors for easy cleaning and maintenance.
The body is thermally insulated with high density stone wool and protected by an aluminium sheet.
These boilers are available in 14 models with useful output from 4000 to 20,000 kW.

- High point yields and intermediate seasons
- Reduced polluting emissions
- Robust construction
- Can be combined with Riello burners
- Easy to transport (lifting rings)
- Easy maintenance: front access to the combustion chamber, fume tubes, fume chamber and inside the body
- Easy to assemble: easy coupling and standardised connections
- Installation flexibility: a number of installation solutions is possible by combining Riello burners.

RTQ TK models can be equipped with control panels of the RIELLO 5000 series with various functional contents:
MR2 - thermostatic panel for controlling a single-circuit boiler with one or two-stage burners;ÜL-M is an electronic climate control panel for controlling a modulating, one- or two-stage burner, built-in or free-standing storage ank or a DHW flow-through heat exchanger. Cascade control of a group of up to four boilers. Possibility to control 6 separate heating circuits (when ordering additional control units).
Control panels can be installed both on the top and on the side of the boiler.
To install the control panel on the side panel of the boiler, a special bracket is required (article no. 4031059).
The control panel is not included in the boiler delivery set and must be ordered separately!

TECHNICAL DATA

Description	Power - kW		Efficiency - %		Code
	Output useful 80°/60° max	Furnace input max	Useful Pn (80°/60°)	Useful 30% Pn	
RTQ 4000 TK	4000	4348	92.0	93.0	**20149272**
RTQ 4500 TK	4500	4891	92.0	93.0	**20149273**
RTQ 5000 TK	5000	5435	92.0	93.0	**20149274**
RTQ 6000 TK	6000	6522	92.0	93.0	**20149275**
RTQ 7000 TK	7000	7609	92.0	93.0	**20065060**
RTQ 8000 TK	8000	8696	92.0	93.0	**20065062**
RTQ 9000 TK	9000	9783	92.0	93.0	**20065063**
RTQ 10000 TK	10000	10870	92.0	93.0	**20065064**
RTQ 11000 TK	11000	11957	92.0	93.0	**20065065**
RTQ 12000 TK	12000	13043	92.0	93.0	**20065066**
RTQ 14000 TK	14000	15217	92.0	93.0	**20065067**
RTQ 16000 TK	16000	17391	92.0	93.0	**20065068**
RTQ 18000 TK	18000	19565	92.0	93.0	**20065069**
RTQ 20000 TK	20000	21739	92.0	93.0	**20065070**

CONTROL PANELS

Description	Code	Boiler model
Riello 5000 TMR2	**07200123**	All models
Riello 5000 CL-M	**20020036**	All models

NOTE: for specific accessories and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS

Description	Back-pressure in combustion chamber (mbar)	Gas burner					Dual fuel burner		Control panels	
		Yellow Flame (Standard)								
		Modulating					Two-stage	Modulating		
		Mechanical cam					-			
		RS 510/M MZ FS1	RS 610/M MZ FS1	RS 1000/M C01	RS 1200/M C01	(1)	(1)	(1)	Riello 5000 CL-M	Riello 5000 TMR2
		20068027	20066706	20212532	20212531	(1)	(1)	(1)	20020036	07200123
RTQ 4000 TK	8	●							●	
	8						●	●		●
RTQ 4500 TK	10		●						●	
	10						●	●		●
RTQ 5000 TK	10			●					●	
	10						●	●		●
RTQ 6000 TK	10			●					●	
	10						●	●		●
RTQ 7000 TK	12			●					●	
	12						●	●		●
RTQ 8000 TK	12				●				●	
	12						●	●		●
RTQ 9000 TK	11				●				●	
	11						●	●		●
RTQ 10000 TK	11					●			●	
	11						●	●		●
RTQ 11000 TK	12					●			●	
	12						●	●		●
RTQ 12000 TK	12					●			●	
	12						●	●		●
RTQ 14000 TK	14					●			●	
	14						●	●		●
RTQ 16000 TK	14					●			●	
	14						●	●		●
RTQ 18000 TK	16					●			●	
	16						●	●		●
RTQ 20000 TK	17					●			●	
	17						●	●		●

(1) For combination with large burners, please contact the pre-sales service.
Note: the gas burners must be completed with the gas train.
Note: light oil burners are equipped with light oil injectors.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Two flue gas passes steel jet burner boilers


RTQ 3S

Products up to 400 kW only for replacement, in conformity of point 2 (G) Article 1 of Regulation EU N. 813/2013.




- Single-piece steel boilers
- Provided with completely wet combustion chamber with free dilation and flame-inversion (square range)

RTQ 3S 35-166

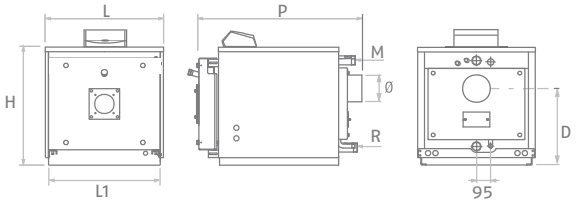

RTQ 3S 217-4000 (*) From RTQ 1100 3S to RTQ 4000 3S model

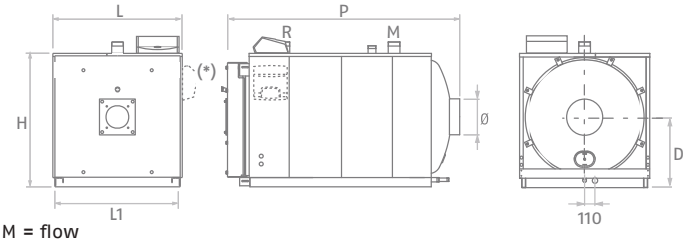

M = flow
R = return

Description	H mm	L mm	P mm	L1 mm	D mm	M Ø	R Ø	Ø mm	Net weight kg
RTQ 35 3S	605	605	880	560	310	1" ¼	1" ¼	139	137
RTQ 55 3S	605	605	1030	560	310	1" ¼	1" ¼	139	160
RTQ 70 3S	740	705	970	660	384	1" ½	1" ½	179	199
RTQ 91 3S	740	705	1120	660	384	1" ½	1" ½	179	225
RTQ 115 3S	905	805	1230	753	500	G2"	G2"	180	283
RTQ 166 3S	955	853	1405	803	525	G2"	G2"	180	355
RTQ 217 3S	1060	925	1580	875	525	G2"½	G2"½	200	455
RTQ 255 3S	1060	925	1580	875	525	G2"½	G2"½	200	473
RTQ 318 3S	1110	975	1810	925	550	G2"½	G2"½	250	610
RTQ 349 3S	1110	975	1810	925	550	G2"½	G2"½	250	610
RTQ 448 3S	1275	1150	2140	1100	655	DN80	DN80	300	970
RTQ 511 3S	1275	1150	2140	1100	655	DN80	DN80	300	970
RTQ 575 3S	1385	1220	2410	1170	690	DN100	DN100	300	1189
RTQ 639 3S	1385	1220	2410	1170	690	DN100	DN100	300	1189
RTQ 750 3S	1440	1285	2550	1235	715	DN100	DN100	350	1406
RTQ 766 3S	1440	1285	2550	1235	715	DN100	DN100	350	1406
RTQ 896 3S	1530	1360	2865	1310	755	DN125	DN125	400	1817
RTQ 1100 3S	1630	1450	3130	1400	820	DN125	DN125	400	2280
RTQ 1300 3S	1725	1535	3155	1485	865	DN125	DN125	450	2780
RTQ 1600 3S	1822	1610	3235	1555	900	DN150	DN150	500	3160
RTQ 2100 3S	1972	1715	3515	1660	1000	DN175	DN175	500	4170
RTQ 2400 3S	1972	1715	3515	1660	1000	DN175	DN175	500	4180
RTQ 2700 3S	2090	1865	3560	1895	1050	DN175	DN175	500	4826
RTQ 3000 3S	2162	1935	3670	1885	1080	DN175	DN175	500	5346
RTQ 3500 3S	2240	2040	4010	1990	1155	DN200	DN200	550	6195
RTQ 4000 3S	2270	2070	4260	2020	1170	DN200	DN200	600	6790

Provided with high-performance stainless steel turbulators ensuring wide exchange surface, in order to optimize the heat exchange and allow a homogeneous thermal load. The front door features an ambidextrous opening and is provided with a highly-insulating mineral-wool double seal. Casing is made of stove-enamelled sheet. The control panel must be ordered separately.

- High efficiency both punctual and seasonal
- Operation at modulating temperature (minimum allowed return temperature 55 °C)
- Several solutions thanks to the combination with RIELLOtech control panels.

TECHNICAL DATA

Description	Power - kW		Efficiency - %		Notes	Code
	Output useful 80°/60° max	Furnace input max	Useful Pn (80°/60°)	Useful 30% Pn		
RTQ 35 3S	33.8	34.8	94.2	95.9	(1)	**20025617**
RTQ 55 3S	53.2	55.0	93.8	95.5	(1)	**20025618**
RTQ 70 3S	67.8	69.0	94.2	95.9	(1)	**20025619**
RTQ 91 3S	87.1	90.0	94.2	95.9	(1)(2)	**20024200**
RTQ 115 3S	109.7	115.0	95.8	95.1	(1)(2)	**4032606.0**
RTQ 166 3S	158.7	166.0	95.6	95.6	(1)(2)	**4032607.0**
RTQ 217 3S	206.8	217.0	95.3	96.3	(1)(2)	**4032608.0**
RTQ 255 3S	243.3	255.0	95.8	96.5	(1)(2)	**4032609.0**
RTQ 318 3S	303.4	318.0	95.6	96.5	(1)(2)	**4032610.0**
RTQ 349 3S	332.0	348.0	95.4	96.7	(1)(2)	**4032611.0**
RTQ 448 3S	427.4	448.0	95.4	96.7		**4032613.0**
RTQ 511 3S	487.5	511.0	95.4	96.7		**4032614.0**
RTQ 575 3S	548.6	575.0	95.4	96.7		**4032615.0**
RTQ 639 3S	609.6	639.0	95.4	96.7		**4032616.0**
RTQ 750 3S	713.8	749.0	95.4	96.7		**20217457**
RTQ 766 3S	730.8	766.0	95.4	96.7		**4032617.0**
RTQ 896 3S	854.8	896.0	95.4	96.7		**20008436**
RTQ 1100 3S	1049.4	1100.0	95.4	96.7		**20012427**
RTQ 1300 3S	1240.2	1300.0	95.4	96.7		**20008435**
RTQ 1600 3S	1526.4	1600.0	95.4	96.7		**20016656**
RTQ 2100 3S	2003.4	2100.0	95.4	96.7		**20016657**
RTQ 2400 3S	2289.6	2400.0	95.4	96.7		**20018817**
RTQ 2700 3S	2576.0	2700.0	95.4	96.7		**20106515**
RTQ 3000 3S	2860.0	3000.0	95.4	96.7		**20106514**
RTQ 3500 3S	3339.0	3500.0	95.4	96.7		**20107462**
RTQ 4000 3S	3816.0	4000.0	95.4	96.7		**20107467**

Maximum operating pressure 5 bar for RTQ 35 3S - RTQ 766 3S models.
Maximum operating pressure 6 bar for RTQ 896 3S - RTQ 4000 3S models.
(1) Gas products and oil products (models 35, 55 and 70) are only for replacement, till 1st January 2018, in conformity of point 2 (G) Article 1 of Regulation EU N. 813/2013.
(2) Oil products are in conformity with ErP Directive (EU Regulation Nr. 813/2013).

ACCESSORIES

Description	Code
MECHANICAL ACCESSORIES	
Burner flange	**4031395**
Burner flange	**20076596**
Burner flange	**20076618**
Burner flange	**4031198**
Burner flange	**4031391**

CONTROL PANELS

Description	Installation	Boiler models	Code
RIELLOtech CLIMA COMFORT	Horizontal	RTQ 3S 90-2400	**4031064**
RIELLOtech CLIMA COMFORT	Vertical	RTQ 3S 448-4000	**4031069**
RIELLOtech PRIME	Horizontal / Vertical	All models	**20010820**
RIELLOtech PRIME ACS	Horizontal / Vertical	All models	**20010437**

NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS – EU COUNTRIES

Description	Back-pressure in combustion chamber (mbar)	Gas burner														Burner accessory	Control panels				
		Yellow flame (Standard)																			
		Two stage						Modulating													
								Mechanical cam													
		RS 44 MZ TL	RS 50 TL	RS 70 TL	RS 100 TL	RS 130 TL	RS 190 TC	RS 50/M MZ TL	RS 70/M TL	RS 100/M TL	RS 130/M TL	RS 190/M TC	RS 250/M MZ TL	RS 310/M MZ FS1	RS 410/M MZ FS1	Extended head	Riellotech Prime	Riellotech Clima Comfort	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3789111	3784703	20194356	20194293	20194295	3785813	3781623	3789611	3789711	3789811	3787623	3788411	20068343	20068356	3010443	20010820	4031069	4031064	4031067	20013035
RTQ 448 3S	3.5	●															●			●	
	3.5							●											●		●
RTQ 511 3S	4.2		●														●			●	
	4.2							●											●		●
RTQ 575 3S	3.4			●													●			●	
	3.4								●										●		●
RTQ 639 3S	4.5			●													●			●	
	4.5								●										●		●
RTQ 750 3S	5.0				●												●			●	
	5.0									●									●		●
RTQ 766 3S	5.3				●												●			●	
	5.3									●									●		●
RTQ 896 3S	6.0				●												●			●	
	6.0									●									●		●
RTQ 1100 3S	3.3					●											●			●	
	3.3										●								●		●
RTQ 1300 3S	5.3					●											●			●	
	5.3										●								●		●
RTQ 1600 3S	4.7						●									●	●			●	
	4.7											●				●			●		●
RTQ 2100 3S	5.1												●						●		●
RTQ 2400 3S	7.6													●					●		●
RTQ 2700 3S	8.0													●				●			●
RTQ 3000 3S	6.5													●				●			●
RTQ 3500 3S	7.1														●			●			●
RTQ 4000 3S	8.0														●			●			●

NOTE: the gas burners must be completed with the gas train.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Description	Back-pressure in combustion chamber (mbar)	Light oil burner												Dual fuel burner												Burner accessory	Burner flange			Control panels				
		Yellow flame (Standard)																																
		Two stage						Modulating						Two stage				Modulating																
		-						Mechanical cam						-				Mechanical cam																
		RL 50 TL	RL 70 TL	RL 100 TL	RL 130 TL	RL 190 TC	RL 250 MZ TC	RL 50/M TL	RL 70/M TL	RL 100/M TL	RL 130/M TL	RL 190/M TL		RLS 50	RLS 70	RLS 100	RLS 130	RLS 190/M MZ	RLS 250/M MZ	RLS 310/M MX	RLS 410/M MX	RLS 510/M MX		Extended head	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3474633	3475033	3475233	3475433	3475613	20204865	20208625	20205576	20205603	20205765	20208601		20208939	20208897	20208902	20208905	20205672	20205746	20147806	20208594	20205565		20097869	4031395	20076596	20076618	20010820	4031069	4031064	4031067	20013035
RTQ 448 3S	3.5	●																										●			●	
	3.5							●																	●					●		●
	3.5													●										●				●			●	
RTQ 511 3S	4.2	●																										●			●	
	4.2							●																	●					●		●
	4.2														●													●			●	
RTQ 575 3S	3.4	●																							●			●			●	
	3.4								●																					●			●
	3.4														●													●			●	
RTQ 639 3S	4.5		●																									●			●	
	4.5								●																					●			●
	4.5														●													●			●	
RTQ 750 3S	5.0			●																								●			●	
	5.0									●																				●			●
	5.0														●													●			●	
RTQ 766 3S	5.3			●																								●			●	
	5.3									●																				●			●
	5.3														●													●			●	
RTQ 896 3S	6.0			●																								●			●	
	6.0									●																				●			●
	6.0															●												●			●	
RTQ 1100 3S	3.3				●																							●			●	
	3.3										●																			●			●
	3.3															●												●			●	
RTQ 1300 3S	5.3				●																							●			●	
	5.3										●																			●			●
	5.3																●											●			●	
RTQ 1600 3S	4.7					●																						●			●	
	4.7											●																			●			●
	4.7																	●										●			●	
RTQ 2100 3S	5.1						●																					●			●	
	5.1											●																			●			●
	5.1																		●									●			●	
RTQ 2400 3S	7.6																											●			●	
	7.6																																	
	7.6																			●						●		●			●	
RTQ 2700 3S	8.0																											●			●	
	8.0																												●					●
	8.0																			●						●		●			●	
RTQ 3000 3S	6.5																											●			●	
	6.5																												●					●
	6.5																			●						●		●			●	
RTQ 3500 3S	7.1																											●			●	
	7.1																												●					●
	7.1																				●						●	●			●	
RTQ 4000 3S	8.0																											●			●	
	8.0																												●					●
	8.0																					●					●	●			●	

NOTE: the light oil burners must be completed with the light oil nozzles.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS – EXTRA EU COUNTRIES

Description	Back-pressure in combustion chamber (mbar)	Gas burner																					Burner accessory	Burner accessory		Control panels				
		Yellow flame (Standard)																Blue flame (Low NOx)												
		Two stage							Modulating									One stage		Two stage										
		-							Mechanical cam									-		-										
		RS 34 MZ TL	RS 44 MZ TL	RS 50 TL	RS 70 TL	RS 100 TL	RS 130 TL	RS 190 TC	RS 34/M MZ TL	RS 44/M MZ TL	RS 50/M MZ TL	RS 70/M TL	RS 100/M TL	RS 130/M TL	RS 190/M TC	RS 250/M MZ TL	RS 310/M MZ FS1	RS 410/M MZ FS1	BS1	BS2	BS3	BS1D	BS2D	BS3D	Extended head	Extended head	Extended head	Riellotech Prime	Riellotech Clima Comfort	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3789011	3789111	3784703	20194356	20194293	20194295	3785813	3788711	3788811	3781623	3789611	3789711	3789811	3787623	3788411	20068343	20068356	3761158	3761258	3761316	3761558	3761658	3761716	3010443	3001007	3001009	20010820	4031069	4031064	4031067	20013035
RTQ 35 3S	0.4																		●									●				
	0.4																					●						●			●	
RTQ 55 3S	0.9																			●						●		●				
	0.9																						●			●		●			●	
RTQ 70 3S	0.6																			●						●		●				
	0.6																						●			●		●			●	
RTQ 91 3S	2.0																				●						●	●				
	2.0																							●			●	●			●	
RTQ 115 3S	1.5																				●						●	●				
	1.5																							●			●	●			●	
RTQ 166 3S	1.3																				●						●	●				
	1.3																							●			●	●			●	
RTQ 217 3S	2.2	●																										●			●	
	2.2								●																				●			●
RTQ 255 3S	2.8	●																										●			●	
	2.8								●																				●			●
RTQ 318 3S	3.2	●																										●			●	
	3.2									●																			●			●
RTQ 349 3S	3.9		●																									●			●	
	3.9									●																			●			●
RTQ 448 3S	3.5		●																									●			●	
	3.5										●																		●			●
RTQ 511 3S	4.2			●																								●			●	
	4.2										●																		●			●
RTQ 575 3S	3.4				●																							●			●	
	3.4											●																		●			●
RTQ 639 3S	4.5				●																							●			●	
	4.5											●																		●			●
RTQ 750 3S	5.0					●																						●			●	
	5.0												●																	●			●
RTQ 766 3S	5.3					●																						●			●	
	5.3												●																	●			●
RTQ 896 3S	6.0					●																						●			●	
	6.0												●																	●			●
RTQ 1100 3S	3.3						●																					●			●	
	3.3													●																●			●
RTQ 1300 3S	5.3						●																					●			●	
	5.3													●																●			●
RTQ 1600 3S	4.7							●																	●			●			●	
	4.7														●										●					●			●
RTQ 2100 3S	5.1															●														●			●
RTQ 2400 3S	7.6																●														●			●
RTQ 2700 3S	8.0																●												●					●
RTQ 3000 3S	6.5																●												●					●
RTQ 3500 3S	7.1																	●											●					●
RTQ 4000 3S	8.0																	●											●					●

NOTE: the gas burners must be completed with the gas train.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Description	Back-pressure in combustion chamber (mbar)	Light oil burner																						Burner accessory								Burner flange			Control panels				
		Yellow flame (Standard)																																					
		One stage					Two stage											Modulating																						
		-					-											Mechanical cam																						
		RG1NR	RG2	RG3	RG5S	RL 34/1 MZ TL	RG2KD	RG3D	RG4D	RG5D	RL 34 MZ TL	RL 44 MZ TL	RL 50 TL	RL 70 TL	RL 100 TL	RL 130 TL	RL 190 TC	RL 250 MZ TC	RL 28/M TL	RL 38/M TL	RL 50/M TL	RL 70/M TL	RL 100/M TL	RL 130/M TL	RL 190/M TL	Extended head	Extended head	Extended head	Extended head	Extended head	Extended head	Extended head	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3736405	3737750	3739300	3739950	3470111	3738100	3739450	3739750	3739850	3470211	3470311	3474633	3475033	3475233	3475433	3475613	20204865	2206107	20206288	20208625	20205576	20205603	20205765	20208601	3000964	3000965	3000963	3000969	3001068	3000981	3010426	4031198	4031395	4031391	20010820	4031069	4031064	4031067	20013035
RTQ 35 3S	0.4	●																																	●				
RTQ 55 3S	0.9		●																						●										●				
	0.9						●																												●			●	
RTQ 70 3S	0.6						●																												●			●	
RTQ 91 3S	2			●																						●									●				
	2							●																		●									●			●	
RTQ 115 3S	1.5							●																											●			●	
RTQ 166 3S	1.3				●																														●				
	1.3								●																						●				●			●	
	1.3																		●														●				●		●
RTQ 217 3S	2.2				●																									●				●	●				
	2.2									●																					●				●	●		●		
	2.2																		●																		●		●
RTQ 255 3S	2.8				●																									●				●	●				
	2.8										●																					●				●		●		
	2.8																		●																		●		●
RTQ 318 3S	3.2					●																														●				
	3.2										●																					●				●		●		
	3.2																			●																		●		●
RTQ 349 3S	3.9											●																								●			●	
	3.9																			●																		●		●
RTQ 448 3S	3.5												●																								●		●	
	3.5																				●													●				●		●
RTQ 511 3S	4.2												●																								●		●	
	4.2																				●													●				●		●
RTQ 575 3S	3.4												●																					●			●		●	
	3.4																					●																●		●
RTQ 639 3S	4.5													●																							●		●	
	4.5																					●																●		●
RTQ 750 3S	5.0														●																						●		●	
	5.0																						●																●		●
RTQ 766 3S	5.3														●																						●		●	
	5.3																						●																●		●
RTQ 896 3S	6														●																						●		●	
	6																						●																●		●
RTQ 1100 3S	3.3															●																						●		●	
	3.3																							●																●		●
RTQ 1300 3S	5.3															●																						●		●	
	5.3																							●																●		●
RTQ 1600 3S	4.7																●																						●		●	
	4.7																								●																●		●
RTQ 2100 3S	5.1																	●																						●		●	
	5.1																								●																●		●

NOTE: the light oil burners must be completed with the light oil nozzles.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Description	Back-pressure in combustion chamber (mbar)	Dual fuel burner											Burner accessory			Burner flange		Control panels	
		Yellow flame (Standard)										Blue flame (Low N0x)							
		Two stage						Modulating											
		-						Mechanical cam											
		RLS 28	RLS 38	RLS 50	RLS 70	RLS 100	RLS 130	RLS 190/M MZ	RLS 250/M MZ	RLS 310/M MX	RLS 410/M MX	RLS 510/M MX	Extended head	Extended head	Extended head	Burner flange	Burner flange	Riellotech Prime	Two stage burner management kit
		20208945	20208942	20208939	20208897	20208902	20208905	20205672	20205746	20147806	20208594	20205565	20097868	20097869	20097840	20076596	20076618	20010820	4031067
RTQ 217 3S	2.2	●													●			●	●
RTQ 255 3S	2.8	●													●			●	●
RTQ 318 3S	3.2		●										●					●	●
RTQ 349 3S	3.9		●										●					●	●
RTQ 448 3S	3.5			●										●				●	●
RTQ 511 3S	4.2				●													●	●
RTQ 575 3S	3.4				●													●	●
RTQ 639 3S	4.5				●													●	●
RTQ 750 3S	5.0				●													●	●
RTQ 766 3S	5.3				●													●	●
RTQ 896 3S	6.0					●												●	●
RTQ 1100 3S	3.3					●												●	●
RTQ 1300 3S	5.3						●											●	●
RTQ 1600 3S	4.7							●										●	●
RTQ 2100 3S	5.1								●									●	●
RTQ 2400 3S	7.6									●						●		●	●
RTQ 2700 3S	8.0									●						●		●	●
RTQ 3000 3S	6.5									●						●		●	●
RTQ 3500 3S	7.1										●						●	●	●
RTQ 4000 3S	8.0											●					●	●	●

NOTE: the light oil burners must be completed with the light oil nozzles.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Two flue gas passes steel jet burner boilers

RTQ 2S


Products up to 400 kW only for replacement, in conformity of point 2 (G) Article 1 of Regulation EU N. 813/2013.




ERP
LIGHT OIL

- Single-piece steel boilers, that can be matched with any fuel jet burners
- Provided with completely wet combustion chamber with free dilation and flame-inversion (square range).

RTQ 2S 50-235

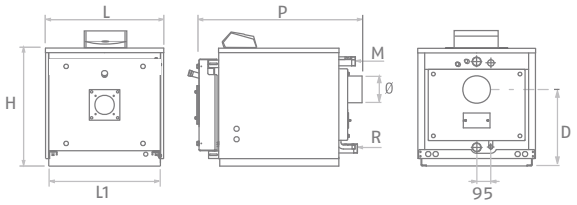

RTQ 2S 297-5000

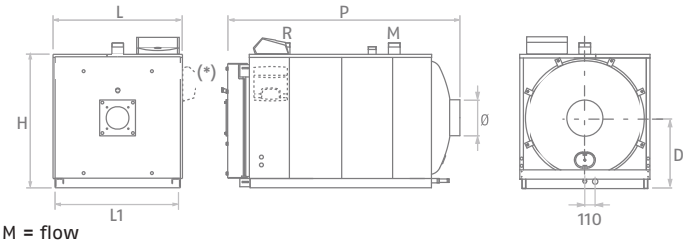

M = flow
R = return

Description	H mm	L mm	L1 mm	P mm	D mm	Ø mm	Net weight kg
RTQ 50 2S	605	605	560	885	325	139	127
RTQ 64 2S	605	605	560	1035	325	139	160
RTQ 82 2S	740	705	660	970	384	179	199
RTQ 105 2S	740	705	660	1120	384	179	225
RTQ 154 2S	790	805	753	1220	500	180	288
RTQ 203 2S	840	853	803	1400	525	180	382
RTQ 235 2S	840	853	803	1400	525	180	382
RTQ 297 2S	980	925	875	1550	525	200	458
RTQ 323 2S	980	925	875	1550	525	200	458
RTQ 357 2S	980	925	875	1550	525	200	478
RTQ 418 2S	1030	975	925	1770	550	250	630
RTQ 467 2S	1030	975	925	1770	550	250	630
RTQ 537 2S	1030	975	925	1945	550	250	731
RTQ 597 2S	1030	975	925	1945	550	250	726
RTQ 715 2S	1210	1150	1100	2115	655	300	953
RTQ 837 2S	1210	1150	1100	2210	655	300	1037
RTQ 920 2S	1280	1220	1170	2380	690	300	1237
RTQ 1020 2S	1335	1285	1235	2515	715	450	1530
RTQ 1250 2S	1430	1360	1310	2835	755	400	2257
RTQ 1500 2S	1530	1450	1400	2965	820	400	2570
RTQ 1700 2S	1610	1535	1485	3125	865	450	2841
RTQ 2020 2S	1680	1605	1555	3115	900	450	3340
RTQ 2320 2S	1750	1655	1605	3210	925	450	3725
RTQ 2620 2S	1925	1800	1750	3455	1015	450	4667
RTQ 2920 2S	1995	1865	1815	3560	1050	500	4826
RTQ 3200 2S	1996	1865	1815	3611	1050	500	4905
RTQ 3500 2S	2055	1935	1885	3670	1080	500	5346
RTQ 4000 2S	2140	2040	1990	4004	1155	550	6195
RTQ 4500 2S	2170	2070	2020	4254	1170	600	6790
RTQ 5000 2S	2355	2230	2180	4521	1250	650	7965

Pressurized steel boilers, that can be matched with any fuel jet burners. Provided with completely wet combustion chamber with free dilation and flame-inversion. Equipped with removable high-efficiency stainless steel turbulators ensuring an optimized heat exchange and a homogeneous thermal load.
The front door features an ambidextrous opening and is provided with a mineral-wool double seal. Casing is made of stove-enamelled sheet.
The control panel must be ordered separately.

- Operation at modulating temperature (minimum allowed return temperature 55 °C)
- Several solutions thanks to the combination with RIELLOtech control boards.

TECHNICAL DATA

Description	Power - kW		Efficiency - %		Code
	Output useful 80°/60° max	Furnace input max	Useful Pn (80°/60°)	Useful 30% Pn	
RTQ 50 2S	50	54.2	92.2	95.1	**20136573**
RTQ 64 2S	64	69.3	92.3	95.3	**20136574**
RTQ 82 2S	82	88.8	92.3	95.4	**20136575**
RTQ 105 2S	105	113.6	92.4	95.7	**20136577**
RTQ 154 2S	154	166	92.9	91.4	**20136578**
RTQ 203 2S	203	217	93.4	-	**20136579**
RTQ 235 2S	235	255	92.3	92.8	**20136580**
RTQ 297 2S	297	318	93.4	-	**20136581**
RTQ 323 2S	323	348	92.8	93.3	**20136582**
RTQ 357 2S	357	384	92.9	93.3	**20136583**
RTQ 418 2S	418	448	93.3	-	**20136584**
RTQ 467 2S	467	500	93.4	93.3	**20136585**
RTQ 537 2S	537	575	93.4	-	**20136587**
RTQ 597 2S	597	639	93.4	93.3	**20136588**
RTQ 715 2S	715	766	93.4	-	**20136589**
RTQ 837 2S	837	896	93.4	93.3	**20136590**
RTQ 920 2S	920	990	92.9	93	**20136592**
RTQ 1020 2S	1020	1100	92.7	92.9	**20136594**
RTQ 1250 2S	1250	1338	93.4	93.3	**20136595**
RTQ 1500 2S	1500	1606	93.4	93.3	**20136598**
RTQ 1700 2S	1700	1820	93.4	93.3	**20136599**
RTQ 2020 2S	2020	2162	93.4	93.3	**20136600**
RTQ 2320 2S	2320	2485	93.4	93.3	**20136601**
RTQ 2620 2S	2620	2830	92.5	92.8	**20136602**
RTQ 2920 2S	2920	3150	92.7	92.9	**20136603**
RTQ 3200 2S	3200	3450	92.7	92.9	**20136605**
RTQ 3500 2S	3500	3780	92.7	92.9	**20136606**
RTQ 4000 2S	4000	4315	92.7	92.9	**20136607**
RTQ 4500 2S	4500	4854	92.7	92.9	**20136608**
RTQ 5000 2S	5000	5394	92.7	92.9	**20136609**

ACCESSORIES

Description	Code
MECHANICAL ACCESSORIES	
Burner flange	**20043900**
Burner flange	**20047680**
Burner flange	**4031188**
Burner flange	**4031395**
Burner flange	**20076596**
Burner flange	**20076618**
Burner flange	**20067631**
Burner flange	**4031196**
Burner flange	**20043899**
Burner flange	**4031186**
Burner flange	**4031192**
Burner flange	**4031198**

CONTROL PANELS

Description	Installation	Boiler models	Code
RIELLOtech CLIMA COMFORT	Horizontal	RTQ 2S 50-2620	**4031064**
RIELLOtech CLIMA COMFORT	Vertical	RTQ 2S 715-5000	**4031069**
RIELLOtech PRIME	Horizontal / Vertical	All models	**20010820**
RIELLOtech PRIME ACS	Horizontal / Vertical	All models	**20010437**

NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS – EU COUNTRIES

Description	Back-pressure in combustion chamber (mbar)	Gas burner																				Burner flange							Control panels				
		Yellow flame (Standard)																															
		One stage	Two stage							Modulating																							
		-	-							Mechanical cam																							
		RS 44/1 M Z TL	RS 44 M Z TL	RS 50 TL	RS 70 TL	RS 100 TL	RS 130 TL	RS 150 TL	RS 190 TL	RS 44/M M Z TL	RS 50/M M Z TL	RS 70/M TL	RS 100/M TL	RS 150/M TL	RS 190/M TL	RS 250/M M Z TL	RS 310/M M Z FS1	RS 410/M M Z FS1	RS 510/M M Z FS1	RS 610/M M Z FS1	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3788611	3789111	3784703	20194356	20194293	20194295	20044637	20030087	3788811	3781623	3789611	3789711	20044639	20052616	3788411	20068343	20068356	20068027	20066706	20043900	20047680	4031188	4031395	20076596	20076618	20067631	20010820	4031069	4031064	4031067	20013035
RTQ 418 2S	2.9	●																						●				●				
	2.9		●																					●				●			●	
	2.9									●														●						●		●
RTQ 467 2S	3.3			●																				●				●			●	
	3.3										●													●						●		●
RTQ 537 2S	3.0				●																		●					●			●	
	3.0											●											●							●		●
RTQ 597 2S	5.1				●																		●					●			●	
	5.1											●											●							●		●
RTQ 715 2S	4.7				●																		●					●			●	
	4.7												●										●							●		●
RTQ 837 2S	8.1					●																	●					●			●	
	8.1												●										●							●		●
RTQ 920 2S	4.6					●																	●					●			●	
	4.6												●										●							●		●
RTQ 1020 2S	4.6					●															●							●			●	
	4.6												●								●									●		●
RTQ 1250 2S	5.8						●														●							●			●	
	5.8													●							●									●		●
RTQ 1500 2S	5.4							●													●							●			●	
	5.4													●							●									●		●
RTQ 1700 2S	7.2								●													●						●			●	
	7.2														●							●								●		●
RTQ 2020 2S	4.8								●																		●	●			●	
	4.8														●												●			●		●
RTQ 2320 2S	4.2															●											●			●		●
RTQ 2620 2S	6.0																●								●					●		●
RTQ 2920 2S	6.3																●								●				●			●
RTQ 3200 2S	7.9																	●							●				●			●
RTQ 3500 2S	7.9																	●							●				●			●
RTQ 4000 2S	7.7																		●							●			●			●
RTQ 4500 2S	8.0																			●						●			●			●
RTQ 5000 2S	7.9																			●						●			●			●

NOTE: the gas burners must be completed with the gas train.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Description	Back-pressure in combustion chamber (mbar)	Light oil burner												Dual fuel burner								Burner accessory			Burner flange							Control panels				
		Yellow flame (Standard)																																		
		Two stage						Modulating						Two stage						Modulating																
		–						Mechanical cam						–						Mechanical cam																
		RL 50 TL	RL 70 TL	RL 100 TL	RL 130 TL	RL 190 TC	RL 250 MZ TC	RL 38/M TL	RL 50/M TL	RL 70/M TL	RL 100/M TL	RL 130/M TL	RL 190/M TL	RLS 38	RLS 50	RLS 70	RLS 100	RLS 130	RLS 190/M MZ	RLS 250/M MZ	Extended head	Extended head	Extended head	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3474633	3475033	3475233	3475433	20011008	20204865	20206288	20208625	20205576	20205603	20205765	20208601	20208942	20208939	20208897	20208902	20208905	20205672	20205746	20097868	20097869	3010422	20043900	20047680	4031188	4031196	4031395	20076596	20067631	20010820	4031069	4031064	4031067	20013035
	2.9	●																										●			●			●	
RTQ 418 2S	2.9							●																				●					●		●
	2.9													●							●							●			●			●	
	3.3	●																										●			●			●	
RTQ 467 2S	3.3								●																			●					●		●
	3.3														●							●						●			●			●	
	3	●																										●			●			●	
RTQ 537 2S	3								●																			●					●		●
	3															●										●					●			●	
	5.1		●																							●					●			●	
RTQ 597 2S	5.1									●																●							●		●
	5.1															●										●					●			●	
	4.7		●																							●					●			●	
RTQ 715 2S	4.7									●																●							●		●
	4.7															●										●					●			●	
	8.1			●																						●					●			●	
RTQ 837 2S	8.1										●															●							●		●
	8.1																●										●				●			●	
	4.6			●																						●					●			●	
RTQ 920 2S	4.6										●															●							●		●
	4.6																●										●				●			●	
	4.6			●																				●							●			●	
RTQ 1020 2S	4.6										●													●									●		●
	4.6																●							●							●			●	
	5.8				●																			●							●			●	
RTQ 1250 2S	5.8											●												●									●		●
	5.8																	●						●							●			●	
	5.4					●																			●						●			●	
RTQ 1500 2S	5.4											●												●									●		●
	5.4																		●						●						●			●	
	7.2					●																			●						●			●	
RTQ 1700 2S	7.2												●												●								●		●
	7.2																		●						●						●			●	
	4.8					●																								●	●			●	
RTQ 2020 2S	4.8												●																	●			●		●
	4.8																			●										●	●			●	
	4.2						●																●							●	●			●	
RTQ 2320 2S	4.2																																●			●
RTQ 2620 2S	6.0						●																						●		●			●	

NOTE: the light oil burners must be completed with the light oil nozzles.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

RECOMMENDED COMBINATIONS WITH BURNERS – EXTRA EU COUNTRIES

Description	Back-pressure in combustion chamber (mbar)	Gas burner																												Burner flange										Control panels				
		Yellow flame (Standard)																										Blue flame (Low NOx)															
		One stage		Two stage								Modulating																One stage		Two stage															
		–		–								Mechanical cam																–		–															
		RS 34/1 MZ TL	RS 44/1 MZ TL	RS 34 MZ TL	RS 44 MZ TL	RS 50 TL	RS 70 TL	RS 100 TL	RS 130 TL	RS 150 TL	RS 190 TL	RS 34/M MZ TL	RS 44/M MZ TL	RS 50/M MZ TL	RS 70/M TL	RS 100/M TL	RS 150/M TL	RS 190/M TL	RS 250/M MZ TL	RS 310/M MZ FS1	RS 410/M MZ FS1	RS 510/M MZ FS1	RS 610/M MZ FS1	BS2	BS3	BS2D	BS3D	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3788511	3788611	3789011	3789111	3784703	20194356	20194293	20194295	20044637	20030087	3788711	3788811	3781623	3789611	3789711	20044639	20052616	3788411	20068343	20068356	20068027	20066706	3761258	3761316	3761658	3761716	20043899	20043900	20047680	4031186	4031188	4031192	4031198	4031395	20076596	20076618	20067631	20010820	4031069	4031064	4031067	20013035
RTQ 50 2S	0.3																							●															●				
	0.3																									●													●			●	
RTQ 64 2S	0.8																							●															●				
	0.8																									●													●			●	
RTQ 82 2S	0.8																								●			●											●				
	0.8																										●	●											●			●	
RTQ 105 2S	1.4																								●			●											●				
	1.4																										●	●											●			●	
RTQ 154 2S	1.6																								●						●								●				
	1.6																										●				●								●			●	
RTQ 203 2S	1.8	●																														●							●				
	1.8			●																												●							●			●	
	1.8											●																												●			●	
RTQ 235 2S	2.7	●																														●							●				
	2.7			●																												●							●			●	
	2.7												●																												●			●
RTQ 297 2S	3.5	●																															●						●				
	3.5			●																													●						●			●	
	3.5													●																				●							●			●
RTQ 323 2S	3.9		●																															●						●				
	3.9			●																															●						●			●	
	3.9												●																						●							●			●
RTQ 357 2S	4.1		●																																	●				●				
	4.1			●																																	●				●			●	
	4.1												●																								●					●			●
RTQ 418 2S	2.9		●																																	●				●				
	2.9			●																																	●				●			●	
	2.9												●																								●					●			●
RTQ 467 2S	3.3				●																															●				●				
	3.3													●																							●					●			●
RTQ 537 2S	3.0					●																											●						●			●	
	3.0														●																		●							●			●
RTQ 597 2S	5.1					●																											●						●			●	
	5.1														●																		●							●			●
RTQ 715 2S	4.7					●																											●						●			●	
	4.7															●																	●							●			●
RTQ 837 2S	8.1						●																											●						●			●	
	8.1															●																	●							●			●
RTQ 920 2S	4.6						●																											●						●			●	
	4.6															●																	●							●			●
RTQ 1020 2S	4.6						●																						●										●			●	
	4.6															●													●											●			●
RTQ 1250 2S	5.8							●																					●										●			●	
	5.8																●												●												●		●

NOTE: the gas burners must be completed with the gas train.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Description	Back-pressure in combustion chamber (mbar)	Gas burner																													Burner flange										Control panels				
		Yellow flame (Standard)																											Blue flame (Low NOx)																
		One stage		Two stage									Modulating																One stage		Two stage																
		-		-									Mechanical cam																-		-																
		RS 34/1 MZ TL	RS 44/1 MZ TL	RS 34 MZ TL	RS 44 MZ TL	RS 50 TL	RS 70 TL	RS 100 TL	RS 130 TL	RS 150 TL	RS 190 TL	RS 34/M MZ TL	RS 44/M MZ TL	RS 50/M MZ TL	RS 70/M TL	RS 100/M TL	RS 150/M TL	RS 190/M TL	RS 250/M MZ TL	RS 310/M MZ FS1	RS 410/M MZ FS1	RS 510/M MZ FS1	RS 610/M MZ FS1	BS2	BS3	BS2D	BS3D	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3788511	3788611	3789011	3789111	3784703	20194356	20194293	20194295	20044637	20030087	3788711	3788811	3781623	3789611	3789711	20044639	20052616	3788411	20068343	20068356	20068027	20066706	3761258	3761316	3761658	3761716	20043899	20043900	20047680	4031186	4031188	4031192	4031198	4031395	20076596	20076618	20067631	20010820	4031069	4031064	4031067	20013035
RTQ 1500 2S	5.4									●																			●										●			●	
	5.4																●												●													●	●
RTQ 1700 2S	7.2										●																			●										●			●	
	7.2																	●												●												●	●
RTQ 2020 2S	4.8										●																												●	●		●	
	4.8																	●																					●			●	●
RTQ 2320 2S	4.2																		●																			●			●	●
RTQ 2620 2S	6.0																			●																●					●	●
RTQ 2920 2S	6.3																			●																●			●			●
RTQ 3200 2S	7.9																				●															●			●			●
RTQ 3500 2S	7.9																				●															●			●			●
RTQ 4000 2S	7.7																					●															●			●			●
RTQ 4500 2S	8.0																						●														●			●			●
RTQ 5000 2S	7.9																						●														●			●			●

NOTE: the gas burners must be completed with the gas train.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Description	Back-pressure in combustion chamber (mbar)	Light oil burner																						Burner accessory			Burner flange										Control panels				
		Yellow flame (Standard)																																						
		One stage				Two stage										Modulating																										
		-														Mechanical cam																										
		RG2	RG3	RG4S	RL 34/1 MZ TL	RG3D	RG4D	RL 34 MZ TL	RL 44 MZ TL	RL 50 TL	RL 70 TL	RL 100 TL	RL 130 TL	RL 190 TC	RL 250 MZ TC	RL 28/M TL	RL 38/M TL	RL 50/M TL	RL 70/M TL	RL 100/M TL	RL 130/M TL	RL 190/M TL	Extended head	Extended head	Extended head	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Riellotech Clima Comfort	Riellotech Clima Comfort	Two stage burner management kit	3-point modulation kit
		3737750	3739300	3739650	3470111	3739450	3739750	3470211	3470311	3474633	3475033	3475233	3475433	20011008	20204865	2206107	20206288	20208625	20205576	20205603	20205765	20208601	3000964	3000965	3010422	20043900	20047680	4031186	4031188	4031192	4031196	4031198	4031395	20076596	20067631	20010820	4031069	4031064	4031067	20013035
RTQ 50 2S	0.3	●																					●													●				
RTQ 64 2S	0.8	●																					●													●				
RTQ 82 2S	0.8		●																					●												●				
RTQ 82 2S	0.8					●																		●												●		●		
RTQ 105 2S	1.4		●																																	●				
	1.4					●																		●												●		●		
RTQ 154 2S	1.6			●																								●								●				
	1.6						●																					●								●		●		
RTQ 203 2S	1.8				●																										●				●				
	1.8							●																				●								●		●		
	1.8															●															●					●		●	
RTQ 235 2S	2.7				●																										●				●				
	2.7							●																							●				●			●	
	2.7															●															●					●		●	
RTQ 297 2S	3.5				●																								●						●				
	3.5							●																					●						●			●	
	3.5																●												●								●		●
RTQ 323 2S	3.9								●																				●						●				
	3.9																●												●								●		●
RTQ 357 2S	4.1									●																						●			●			●	
	4.1																●															●					●		●
RTQ 418 2S	2.9									●																						●			●			●	
	2.9																●															●					●		●
RTQ 467 2S	3.3									●																						●			●			●	
	3.3																	●														●					●		●
RTQ 537 2S	3.0									●																						●			●			●	
	3.0																	●														●					●		●
RTQ 597 2S	5.1										●																		●						●			●	
	5.1																		●										●								●		●
RTQ 715 2S	4.7										●																		●						●			●	
	4.7																		●										●								●		●
RTQ 837 2S	8.1											●																	●						●			●	
	8.1																			●									●								●		●
RTQ 920 2S	4.6											●																	●						●			●	
	4.6																			●									●								●		●
RTQ 1020 2S	4.6											●														●									●			●	
	4.6																			●						●												●		●
RTQ 1250 2S	5.8												●													●									●			●	
	5.8																				●					●												●		●
RTQ 1500 2S	5.4													●													●									●			●	
	5.4																				●					●												●		●
RTQ 1700 2S	7.2													●													●									●			●	
	7.2																					●					●												●		●
RTQ 2020 2S	4.8													●																				●	●			●	
	4.8																					●												●				●		●
RTQ 2320 2S	4.2														●										●									●	●			●	
RTQ 2620 2S	6.0														●																		●		●			●	

NOTE: the light oil burners must be completed with the light oil nozzles.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

Description	Back-pressure in combustion chamber (mbar)	Dual fuel burner								Burner accessory		Burner flange								Control panels	
		Yellow flame (Standard)																			
		Two stage						Modulating													
		-						Mechanical cam													
		RLS 28	RLS 38	RLS 50	RLS 70	RLS 100	RLS 130	RLS 190/M MZ	RLS 250/M MZ	Extended head	Extended head	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Burner flange	Riellotech Prime	Two stage burner management kit
		20208945	20208942	20208939	20208897	20208902	20208905	20205672	20205746	20097868	20097869	20043900	20047680	4031188	4031192	4031196	4031198	4031395	20067631	20010820	4031067
RTQ 203 2S	1.8	●															●			●	●
RTQ 235 2S	2.7	●															●			●	●
RTQ 297 2S	3.5		●												●					●	●
RTQ 323 2S	3.9		●												●					●	●
RTQ 357 2S	4.1		●															●		●	●
RTQ 418 2S	2.9		●							●								●		●	●
RTQ 467 2S	3.3			●							●							●		●	●
RTQ 537 2S	3.0				●									●						●	●
RTQ 597 2S	5.1				●									●						●	●
RTQ 715 2S	4.7				●									●						●	●
RTQ 837 2S	8.1					●										●				●	●
RTQ 920 2S	4.6					●										●				●	●
RTQ 1020 2S	4.6					●						●								●	●
RTQ 1250 2S	5.8						●					●								●	●
RTQ 1500 2S	5.4							●					●							●	●
RTQ 1700 2S	7.2							●					●							●	●
RTQ 2020 2S	4.8								●										●	●	●

NOTE: the light oil burners must be completed with the light oil nozzles.
NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 349.

CONTROL PANELS AND THERMOREGULATIONS

	APPLICATION	
ELECTRONIC	 RIELLOTECH CLIMA COMFORT RIELLOTECH CLIMA MIX page 351	 RIELLO 5000 CL-M page 353
THERMOSTATIC	 RIELLOTECH PRIME RIELLOTECH PRIME ACS page 355	 RIELLO 5000 TMR2 page 357

Please verify with Sales the availability of the product in the destination Country before ordering

APPLICATION	ELECTRONIC			THERMOSTATIC		
	CLIMA COMFORT	**CLIMA MIX**	**RIELLO 5000 CL-M**	**PRIME**	**PRIME ACS**	**RIELLO 5000 TMR2**
HORIZONTAL	•		•	•	•	•
VERTICAL	•	•				
FOR ELECTRICAL CABINET	•	•				
BURNER	Modulating*		Modulating	One stage/two stage (with kit code 4031067)	One stage/two stage (with kit code 4031067)	One stage/two stage
CASCADE APPLICATION	• Immersion or clip probe		•			
SOLAR SYSTEM	• Probes 2 x 20010103 1 x 4031913					
DHW TANK	○ Probe 1 x 20010103		•		• Probe included	•
DIRECT ZONE	•		•	•	•	•
1st MIXED ZONE	• Immersion or clip probe	• Immersion or clip probe	With kit 20022775			
	Optional: indoor probe or remote control RC3					
2nd MIXED ZONE	• With kit 20102310, immersion or clip probe	• With kit 20011194, immersion or clip probe	With kit 20022775			
	Optional: indoor probe or remote control RC3					
ALTERNATIVE SOURCE GENERATOR	• For biomass: immersion probe					


* For modulating burner matched with cabinet installation control panel, add kit code 20013035.

USE OF RIELLOTECH REGULATION SYSTEMS
RIELLOTECH regulation systems are specifically designed for the following ranges: TAU N, RTS 3S, RTQ and RTQ 3S. Besides they allow the addition of more functions concerning the thermoregulations integrated in the model TAU UNIT OIL.
The complete compositions and the communication kits are to be checked on the specific accessories tables in the sections concerning boilers and thermal groups.

Control panels and thermoregulations

RIELLOtech Clima Comfort
RIELLOtech Clima Mix



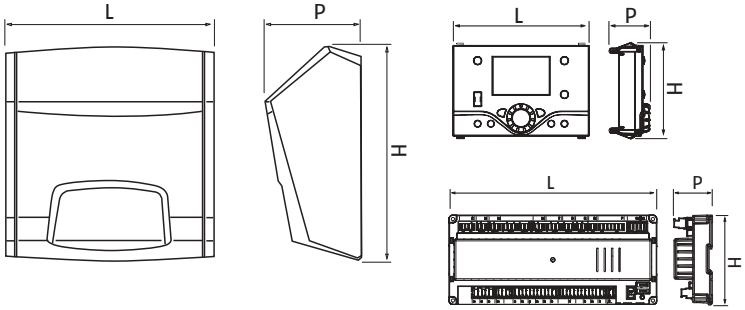

- RIELLOtech is Riello range of control systems designed to control any kind of installations

Description	H mm	L mm	P mm	Net weight kg
RIELLOtech CLIMA COMFORT/MIX	360	350	165	3
CLIMA COMFORT	360	350	165	3
CLIMA MIX	120	180	50	1
CLIMA DISPLAY	95	140	50	1

RIELLOtech is an electronic control panel for the climatic management of a furnace with single-stage, two-stage or modulating burner. Ideal for complex systems as well as for the management of simpler installations. The range includes:

RIELLOtech Climate Comfort: it is the climatic regulation of even complex systems in single- or multi-family installations. It manages modulating burners, cascades of boilers, solar systems and the integration of several types of heat generators. The system side manages a mixed area (expandable to 2 with a special dedicated kit), one direct and the production of domestic hot water. Clima Comfort also offers the possibility to control modulating circulators (0-10V and PWM) with the specific expansion.

RIELLOtech Clima Mix: this is the system regulation that can manage 1 mixed area expandable to 2 with a special kit.
The RIELLOtech Clima Comfort versions include a boiler probe and an external probe.
All RIELLOtech Clima regulations can be integrated via BUS.
RIELLOtech features IP X4D protection level.

- It is possible to personalise the control panel through programmable inputs and outputs (e.g. 0/10V input, generator anti-condensation pump)
- Frost protection, anti-blocking pump function and anti-legionnaires' disease protection
- Energy saving thanks to the system thermoregulation according to the external weather conditions
- Easy to program thanks to a user-friendly menu and a large display
- Quick to install: terminals and connectors, identifiable through silk-screen prints, are included in the supply
- Great flexibility of installation: they can be horizontally or vertically installed on the boilers or wall-mounted by means of a specific kit
- A specific version as main control panel for boiler-room is also available (in combination with Clima Display).

TECHNICAL DATA

Description	Functional description	Installation type	Notes	Code
RIELLOTECH CLIMA COMFORT	Control panel with climatic regulation	Horizontal	(1)	**4031064**
RIELLOTECH CLIMA COMFORT	Control panel with climatic regulation	Vertical	(1)	**4031069**
RIELLOTECH CLIMA MIX	Electrical panel with zone regulator	Vertical		**20010428**
CLIMA DISPLAY	User interface for adjustments CLIMA COMFORT			**20010906**
CLIMA MIX	Zone regulator			**20010904**
CLIMA COMFORT	Climatic regulation			**20010903**

(1) Supplied as standard 1 immersion probe and 1 external sensor.

Deductible products only within a system refurbishment and building energy redevelopment. Therefore, please always check the specific procedures for accessing the incentive.

ACCESSORIES

Description	Code
Programmable expansion kit (CLIMA COMFORT)	**20102310**
Programmable expansion kit (CLIMA MIX)	**20011194**
Relay kit for modulating burner (CLIMA COMFORT)	**20013035**
RIELLOtech wall-hung installation kit (to be used only for vertical installation)	**20010056**
RC3 remote control kit	**20155028**
MODBUS connection kit	**20185704**
Indoor probe	**20012456**
NTC immersion probe (10kΩ) - 5 metres	**20010068**
NTC DHW-tank probe (10kΩ) - 5 metres	**20010103**
Solar collector probe NTC (10 k ohm)	**4031913**
NTC O-ring probe (10kΩ)	**20168680**
NTC external probe (1k ohm)	**20164230**

APPLICATION CHART


Description	Burner	Boiler in cascade	Biomass boiler	Solar system	DHW storage cylinder	Direct zone	1st mixed zone	2nd mixed zone
RIELLOtech CLIMA COMFORT *								With specific additional mixed zone control kit
RIELLOtech CLIMA MIX								With additional mixed zone control kit
Compulsory accessories		1 NTC clip probe		2 NTC DHW-tank probes and 1 NTC immersion probe solar collector	1 NTC DHW-tank probe		1 NTC clip probe or 1 NTC immersion probe	1 NTC clip probe or 1 NTC immersion probe
Optional accessories			1 NTC immersion probe (only for biomass boiler)				1 indoor probe or RC3 remote control	1 indoor probe or RC3 remote control

* For modulating burner adjustment, order the relay kit accessory.

Control panels and thermoregulations

RIELLO 5000 CL-M



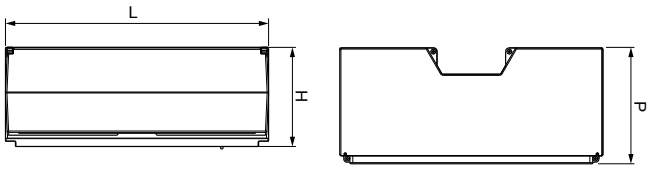

- RIELLO 5000 CL-M range of control systems designed to control any kind of installations

Description	H mm	L mm	P mm	Net weight kg
RIELLO 5000 CL-M	165	451	207	3

The RIELLO 5000 CL-M control panel is designed for climatic management of a one or two-circuit boiler equipped with a modulating, single or two-stage ventilated burner, built-in or free-standing boiler and pump heating system circulation.
Two to four boilers with CL-M control panels can be connected to the cascade control system.
At the same time, up to 6 additional control modules can be connected to each control panel for a separate heating circuit or a continuous flow heat exchanger of the DHW system (modules are supplied as accessories, see section "Accessories".
Installation on the side of the boiler is allowed, using the support bracket available as an accessory.

TECHNICAL DATA


Description	Functional description	Installation type	Notes	Code
RIELLO 5000 CL-M	Control panel with climatic regulation	Horizontal	(1)	**20020036**

(1) Supplied as standard 1 immersion probe and 1 external sensor.


ACCESSORIES

Drawing	Description	Code
	CDHW accessory module	**20022775**
	Lateral adapter kit	**4031059**

APPLICATION CHART

Description	Burner	Boiler in cascade	Solar system	DHW storage cylinder	Direct zone	1st mixed zone	2nd mixed zone
RIELLO 5000 CL-M							With specific additional mixed zone control kit
Compulsory accessories		1 NTC clip probe	2 NTC DHW-tank probes and 1 NTC immersion probe solar collector	1 NTC DHW-tank probe		1 CDHW	1 CDHW

* For modulating burner adjustment, order the relay kit accessory.

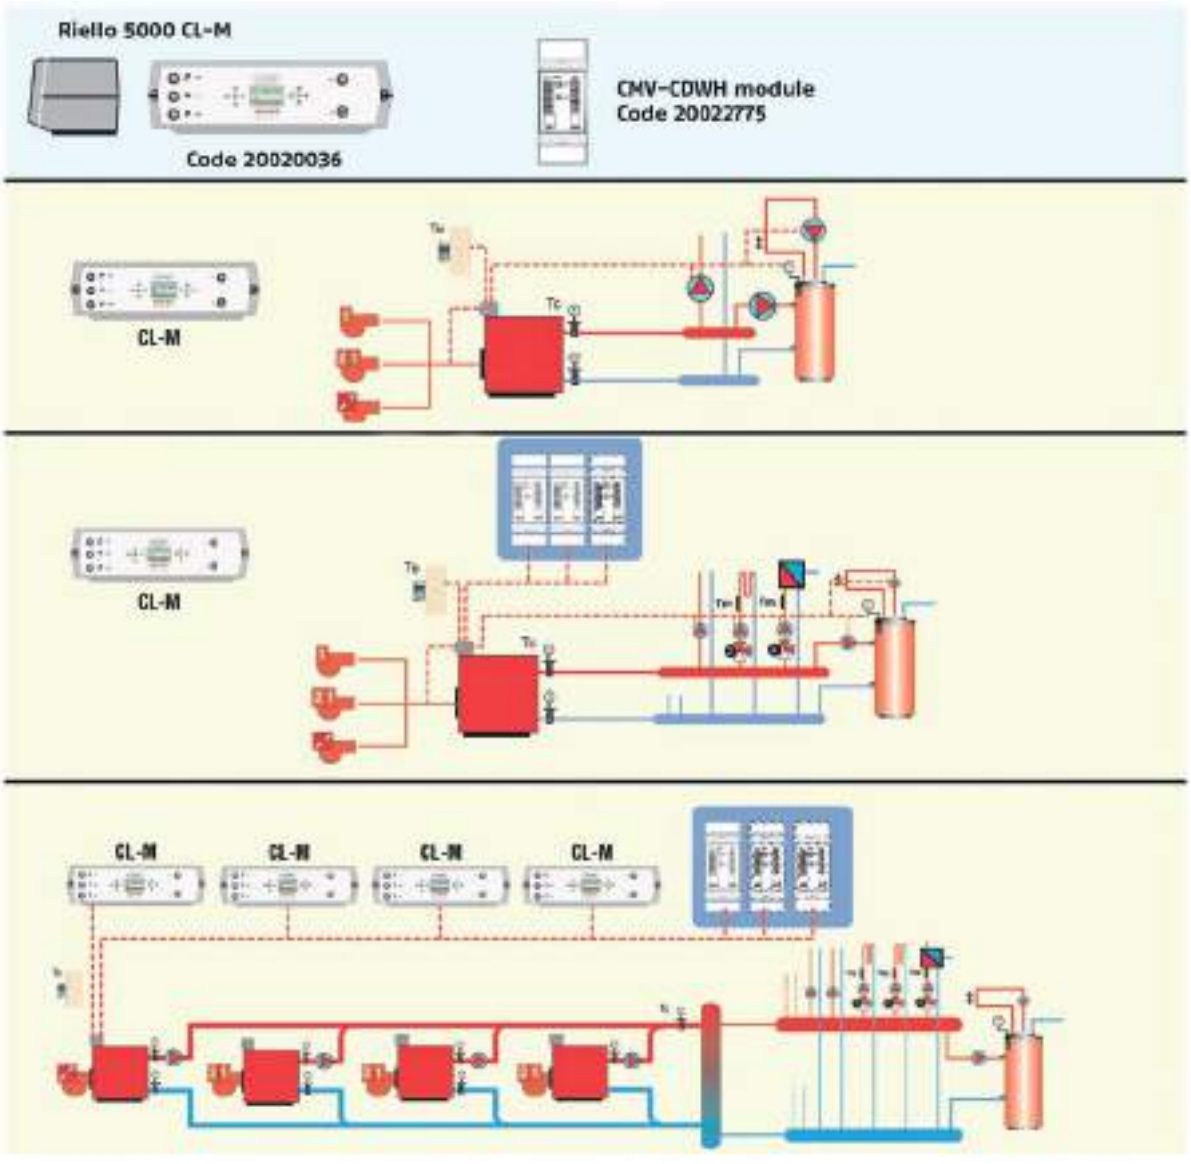


RECOMMENDATIONS FOR THE USE OF CONTROL PANELS WITH RIELLO BOILERS

Description	RTQ T (K)
RIELLO 5000 CL-M	•

Control panels and thermoregulations

RIELLOtech Prime
RIELLOtech Prime ACS



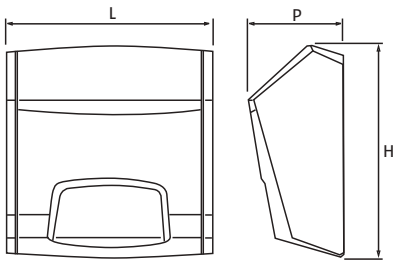

- RIELLOtech is Riello range of control systems designed to control any kind of installations

Description	H mm	L mm	P mm	Net weight kg
RIELLOtech Prime	360	350	165	3
RIELLOtech Prime ACS	360	350	165	3

RIELLOtech Prime is the thermostatic product line for the control of 1-stage and 2-stage burners (by means of a specific kit) and one direct zone. RIELLOtech Prime ACS is the thermostatic product line for the control of 1-stage and 2-stage burners (by means of a specific kit), the production of DHW and one direct zone.
IPX4D electrical protection.

- Easy to use and install
- Safety thermostat with manual-reset
- Over-temperature disposal function
- Adjustable anti-condensation function on heating and DHW production
- These control panels feature a wide internal space and allow maximum ease of connections
- These control panels are available as horizontal version; for the vertical installation you just have to rotate the front panel by 180°.

TECHNICAL DATA

Description	Type	Code
RIELLOTECH PRIME	Thermostatic control panel heating-only single stage (1) - horizontal installation (2)	**20010820**
RIELLOTECH PRIME ACS	Thermostatic control panel heating and DHW production single stage (1) - horizontal installation (2)	**20010437**

(1) Two stage burner controlled by kit code 4031067.
(2) For vertical installation turn the frontal panel by 180°.

ACCESSORIES

Description	Code
Two stage burner management kit (to install in Riellotech Prime and Riellotech Prime ACS)	**4031067**
RIELLOtech wall-hung installation kit (to be used only for vertical installation models)	**20010056**


APPLICATION CHART

Description	Burner	Boiler in cascade	Biomass boiler	Solar system	DHW storage cylinder	Direct zone	1st mixed zone	2nd mixed zone
RIELLOtech PRIME	 Two-stage with special kit							
RIELLOtech PRIME ACS	 Two-stage with special kit							
Compulsory accessories					1 storage tank probe NTC			

Control panels and thermoregulations

RIELLO 5000 TMR2



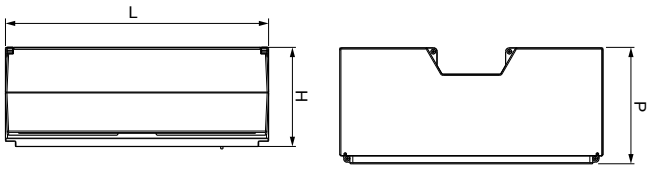

- RIELLO 5000 TMR2 range of control systems designed to control any kind of installations

Description	H mm	L mm	P mm	Net weight kg
RIELLO 5000 TMR2	165	451	207	3

RIELLO 5000 TMR2 is the thermostatic product line for the control of 1-stage and 2-stage burners, the production of DHW and one direct zone. IPX4D electrical protection.
- Easy to use and install
- Safety thermostat with manual-reset
- Over-temperature disposal function
- Adjustable anti-condensation function on heating and DHW production
- These control panels feature a wide internal space and allow maximum ease of connections
- These control panels are available as horizontal installation.

TECHNICAL DATA

Description	Functional description	Installation type	Code
RIELLO 5000 TMR2	Control panel with climatic regulation	Horizontal	**07200123**

APPLICATION CHART

Description	Burner	Boiler in cascade	Biomass boiler	Solar system	DHW storage cylinder	Direct zone	1st mixed zone	2nd mixed zone
RIELLO 5000 TMR2	 Two-stage with special kit							
Compulsory accessories					1 storage tank probe NTC			







RECOMMENDATIONS FOR THE USE OF CONTROL PANELS WITH RIELLO BOILERS

Description	RTQ T (K)
RIELLO 5000 TMR2	•

FLUE OPTIONS SYSTEM

SINGLE FLUE GAS EXHAUST SYSTEM OR DOUBLE SUCTION/DISCHARGE Ø80 mm





Drawing	Description	Material (*)	Condexa HPR 35-45	Condexa HPR 55-70	Condexa Pro 35-70P	TAU UNIT 35-70	Notes	Code
	Adjustable splitter device kit from Ø60/100 mm to Ø80/80 mm	PP	•					**20134830**
	Compact adjustable splitter device kit from Ø60/100 mm to Ø80/80 mm	PP	•					**20190475**
	Fixed twin system Ø80 mm kit	PP	•	•				**20129765**
	Vertical flue adapter kit from ø60/100 to ø80 (for type B23 installation)	PP	•	•				**20129769**
	Adapter from ø 80/125 mm to ø 80/80 mm	PP	•					**20196312**
	Ø80/80 - Rainproof vertical adapter	PP						**20196315**
	45° bend Ø80 mm	PP			•	•	(1)	**20137503**
	90° bend Ø80 mm	PP			•	•	(1)	**20137506**
	Extension Ø80 mm, L=500	PP			•	•	(1)	**20137508**
	Extension Ø80 mm L=1000	PP			•	•	(1)	**20137509**
	Extension Ø80 mm L=2000	PP			•	•	(1)	**20137511**
	Flexible extension 12.5 m with 8 spacers Ø80 mm	PP			•	•	(1)	**20132509**
	Horizontal terminal Ø80 mm	PP			•	•	(1)	**20137517**
	Air suction terminal Ø80 mm	PP			•	•	(1)	**20137515**
	T-junction kit Ø80 mm with support bracket	PP			•	•	(1)	**20132504**
	Pipe spacers in the flue gases pipe	PP			•	•		**20132505**
	Straight inspection manifold Ø80 mm	PP			•	•	(1)	**20132506**
	Flue cover Ø80 mm	PP			•	•	(1)	**20132508**
	Flue cover Ø80 for rigid/flexible system	PP			•	•	(1)	**20131271**
	Ø80 mm T-junction kit	PP			•	•	(1)	**20132513**
	Rigid-flexible fitting Ø80 mm	PP			•	•	(1)	**20132510**
	Flexible-flexible fitting Ø80 mm	PP			•	•	(1)	**20132511**
	Flexible-rigid-fitting Ø80 mm	PP			•	•	(1)	**20132512**
	Drain pipe kit	PP			•	•		**20132518**

Drawing	Description	Material (*)	Condexa HPR 35-45	Condexa HPR 55-70	Condexa Pro 35-70P	TAU UNIT 35-70	Notes	Code
	Flue support shelf kit	Met			•	•		**20145888**
	Ø80 mm T-junction closure kit for condensate drain	Met			•	•	(1)	**20132514**
	Flue cover panel kit		•	•				**20145889**

(*) PP material: colour may change over time because of sun's rays exposure.
(1) H1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.

Deductible products only in the context of the refurbishment of the system or the energy-efficient retrofitting of the building. Therefore please always check the specific ways of accessing the incentive.






Ø60/100 MM CONCENTRIC FLUE GAS EXHAUST SUCTION/DISCHARGE SYSTEM (TYPE C GAS-TIGHT COMBUSTION KIT REQUIRED)

Drawing	Description	Material (*)	Condexa HPR 35-45	Condexa Pro 35-70P	Notes	Code
	Double adaptor Ø80/80 mm - concentric Ø60/100 mm	PP/Met		•	(1)(2)	**20137535**
	45° Ø60/100 mm concentric bend	PP/Met	•	•	(1)	**20142823**
	90° Ø60/100 mm concentric bend	PP/Met	•	•	(1)	**20142825**
	Concentric extension 50 cm, Ø60/100 mm	PP/Met	•	•	(1)	**20142829**
	Concentric extension 100 cm, Ø60/100 mm	PP/Met	•	•	(1)	**20142830**
	Concentric extension 200 cm, Ø60/100 mm	PP/Met	•	•	(1)	**20142831**
	Ø60/100 mm horizontal flue terminal	PP/Met	•	•	(1)	**20142836**
	Ø60/100 mm vertical flue terminal	PP/Met	•	•	(1)	**20142839**
	Ø60/100 mm inspection extension	PP/Met	•	•	(1)	**20142835**
	90° bend with inspection door Ø60/100 mm	PP/Met	•	•	(1)	**20142828**

(*) PP material: colour may change over time because of sun's rays exposure
(1) H1 pressure level according to EN 1443
(2) Check the maximum equivalent lengths by consulting the technical data sheet and / or by contacting the pre-sales service.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443)
NOTE: please, refer to boiler installation manual for maximum flue line length

Deductible products only in the context of the refurbishment of the system or the energy-efficient retrofitting of the building. Therefore please always check the specific ways of accessing the incentive.

CONCENTRIC FLUE DISCHARGE SYSTEM Ø60/100 mm FOR CONDENSATION BOILERS (TYPE C GAS-TIGHT COMBUSTION KIT REQUIRED)




Drawing	Description	Material (*)	Condexa HPR 35-45	Condexa Pro 57P-70P	Notes	Code
	45° Ø60/100 mm concentric bend	PP/PPU	•	•	(1)	**20132012**
	90° boiler start bend kit Ø60/100 mm	PP/PPU	•		(1)	**20129172**
	90° Ø60/100 mm concentric bend	PP/PPU	•		(1)	**20132013**
	Concentric extension 50 cm, Ø60/100 mm	PP/PPU	•		(1)	**20132043**
	Concentric extension 100 cm, Ø60/100 mm	PP/PPU	•		(1)	**20132044**
	Concentric extension 200 cm, Ø60/100 mm	PP/PPU	•		(1)	**20132045**
	Wall collector Ø60/100 mm	PP/PPU	•		(1)	**20129175**
	Telescopic wall collector Ø60/100 mm	PP/PPU	•		(1)	**20129176**
	Ø60/100 mm horizontal flue terminal	PP/PPU	•		(1)	**20132018**
	Vertical collector Ø60/100 mm	PP/PPU	•		(1)	**20129177**
	Ø60/100 mm vertical flue terminal - Ø125 mm external straight pipe	PP/PPU	•		(1)	**20132020**
	Vertical connection Ø60/100 mm	PP/PPU	•		(1)	**20129174**
	Inspection extension Ø60/100 mm	PP/PPU	•		(1)	**20132015**
	Kit curva 45° con griglia Ø60 mm	PP/PPU	•		(1)(2)	**20142841**
	Wall flue outlet kit Ø60 mm	PP/PPU	•		(1)(2)	**20142842**
	Flat roof tile	Nylon	•			**20135579**
	Pitched roof tile	Nylon	•			**20132050**


(*) PP material: colour may change over time because of sun's rays exposure.
(1) H1 pressure level according to EN 1443.
(2) To be connected to the terminal.

NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443)

Deductible products only in the context of the refurbishment of the system or the energy-efficient retrofitting of the building. Therefore please always check the specific ways of accessing the incentive.

CONCENTRIC FLUE DISCHARGE SYSTEM Ø80/125 mm FOR CONDENSATION BOILERS (TYPE C GAS-TIGHT COMBUSTION KIT REQUIRED)



Drawing	Description	Material (*)	Condexa HPR 55-70	Condexa Pro 35-70P	TAU UNIT 35-70	Notes	Code
	45° Ø80/125 mm concentric bend	PP/Met	•	•	•	(1)	**20164651**
	87° Ø80/125 mm concentric bend	PP/Met	•	•	•	(1)	**20164653**
	Concentric extension 50 cm, Ø80/125 mm	PP/Met	•	•	•	(1)	**20164657**
	Concentric extension 100 cm, Ø80/125 mm	PP/Met	•	•	•	(1)	**20164659**
	Concentric extension 200 cm, Ø80/125 mm	PP/Met	•	•	•	(1)	**20164660**

Drawing	Description	Material (*)	Condexa HPR 55-70	Condexa Pro 35-70P	TAU UNIT 35-70	Notes	Code
	87° concentric bend with inspection door Ø80/125 mm	PP/Met	•	•	•	(1)	**20164655**
	Concentric extension with inspection door Ø80/125 mm	PP/Met	•	•	•	(1)	**20164661**
	Vertical terminal Ø80/125 mm	PP/ABS	•	•	•	(1)	**20131113**
	Ø80/125 mm horizontal flue terminal	PP/ABS	•			(1)	**20164673**
	Flue adapter from Ø60/100 mm to 80/125 mm	PP/Met	•	•	•	(1)	**20164666**
	Spacers Ø80-125 mm (5 pcs)	Met	•	•	•		**20164665**

(*) PP material: colour may change over time because of sun's rays exposure.
(1) H1 pressure level according to EN 1443.

Deductible products only in the context of the refurbishment of the system or the energy-efficient retrofitting of the building. Therefore please always check the specific ways of accessing the incentive.



Ø80/125 mm CONCENTRIC FLUE GAS EXHAUST SUCTION/DISCHARGE SYSTEM (TYPE C GAS-TIGHT COMBUSTION KIT REQUIRED)

Drawing	Description	Material (*)	Condexa HPR 55-70	Condexa Pro 57-70P	TAU UNIT 35-70	Notes	Code
	45° bend Ø80/125 mm	PP/ABS	•	•	•	(1)	**20131054**
	90° bend Ø80/125 mm	PP/ABS	•	•	•	(1)	**20131083**
	90° bend with inspection Ø80/125 mm	PP/ABS	•	•	•	(1)	**20131095**
	Double adaptor Ø80/80 mm - concentric Ø80/125 mm	PP/ABS	•	•	•	(1)	**20131055**
	Extension Ø80/125 mm, L=500 mm	PP/ABS	•	•	•	(1)	**20131084**
	Extension Ø80/125 mm, L=1000 mm	PP/ABS	•	•	•	(1)	**20131085**
	Vertical terminal Ø80/125 mm	PP/ABS	•	•	•	(1)	**20131113**
	Wall discharge terminal Ø80/125 mm	PP/ABS	•	•	•	(1)	**20131098**
	Flat roof tile	Nylon	•	•	•		**20135579**
	Universal tile for sloping roofs	Nylon	•	•	•		**20132050**
	Element kit Ø80/125 mm connection to flue	PP	•	•	•	(1)	**20132520**

(*) PP material: colour may change over time because of sun's rays exposure.
(1) H1 pressure level according to EN 1443.
NOTE: please, refer to boiler installation manual for maximum flue line length.

Deductible products only in the context of the refurbishment of the system or the energy-efficient retrofitting of the building. Therefore please always check the specific ways of accessing the incentive.

SINGLE FLUE GAS EXHAUST SYSTEM OR DOUBLE SUCTION/DISCHARGE Ø110 mm

Drawing	Description	Material (*)	Condexa Pro 90-135	TAU UNIT 100-115	TAU UNIT 140	Notes	Code
	45° bend Ø110 mm	PP	•		•	(1)	**20131205**
	90° bend Ø110 mm with inspection	PP	•		•	(1)	**20131202**
	90° bend Ø110 mm	PP	•		•	(1)	**20131208**
	Adaptor Ø80/Ø110 mm	PP		•		(1)	**20131238**
	Extension Ø110 mm, L=145 mm	PP		•	•	(1)	**20144853**
	Extension Ø110 mm, L=1000 mm	PP	•		•	(1)	**20131210**
	Ø110 T-junction kit with condensate drain	PP	•		•	(1)	**20131218**
	Ø110 mm T-junction kit with stack support condensate drain	PP	•		•	(1)	**20131221**
	Ø110 mm T-junction kit	PP	•		•	(1)	**20131222**
	Flue cover Ø110 mm with terminal	PP	•		•	(1)	**20131225**

(*) PP material: colour may change over time because of sun's rays exposure.
(1) H1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.

Deductible products only in the context of the refurbishment of the system or the energy-efficient retrofitting of the building. Therefore please always check the specific ways of accessing the incentive.

Ø110/160 mm CONCENTRIC FLUE GAS EXHAUST SUCTION/DISCHARGE SYSTEM (TYPE C GAS-TIGHT COMBUSTION KIT REQUIRED)

Drawing	Description	Material (*)	Condexa Pro 90-135	TAU UNIT 100-115	TAU UNIT 140	Notes	Code
	45° bend Ø110/160 mm	PP/Met	•	•	•	(1)	**20131036**
	90° bend Ø110/160 mm	PP/Met	•	•	•	(1)	**20131040**
	90° bend with inspection Ø110/160 mm	PP/Met	•	•	•	(1)	**20131147**
	Double adaptor Ø110/110 mm - concentric Ø110/160 mm	PP/Met	•	•	•	(1)	**20131059**
	Extension Ø110/160 mm, L=500 mm	PP/Met	•	•	•	(1)	**20131046**
	Extension Ø110/160 mm, L=1000 mm	PP/Met	•	•	•	(1)	**20131050**
	Outlet on roof Ø110/160 mm	PP/PE	•	•	•	(1)	**20225183**
	Tile Ø160 mm 25-45% slope	-	•	•	•		**20131145**
	Adaptor Ø80/Ø110 mm	PP		•		(1)	**20131238**
	Extension Ø110 mm, L=145 mm	PP		•		(1)	**20144853**
	Ø110/160 concentric horizontal flue terminal	PP/Met	•	•		(1)	**20131149**

(*) PP material: colour may change over time because of sun's rays exposure.
(1) H1 pressure level according to EN 1443.
NOTE: if in the flue line there is a component with P1 pressure level (according to EN 1443), all the line has P1 pressure level even if all the other components are in H1 pressure level (according to EN 1443).
NOTE: please, refer to boiler installation manual for maximum flue line length.

Deductible products only in the context of the refurbishment of the system or the energy-efficient retrofitting of the building. Therefore please always check the specific ways of accessing the incentive.

PLASTIC FLUE SYSTEM Ø160 mm FOR CONDENSING BOILERS

Drawing	Description	Material	Code
	30° bend Ø160 mm	PP	**20062445**
	45° bend Ø160 mm	PP	**20032646**
	90° bend Ø160 mm	PP	**20032644**
	Inspection bend Ø160 mm	PP	**20062446**
	Extension Ø160 mm, L=500 mm	PP	**20060940**
	Extension Ø160 mm, L =1000 mm	PP	**20060941**
	Extension Ø160 mm, L=2000 mm	PP	**20060942**
	Inspection extension Ø160 mm	PP	**20060945**
	Chimney support Ø160 mm	PP	**20062703**
	Chimney cover Ø160 mm (stainless steel)	PP	**20060953**
	Condensate drain pipe Ø160 mm	PP	**20062447**
	T connection Ø160 mm with condensate drain and chimney support	PP	**20063419**
	T connection Ø160 mm with condensate drain	PP	**20062448**

PLASTIC FLUE SYSTEM Ø200 mm FOR CONDENSING BOILERS

Drawing	Description	Material	Code
	Concentric adapter Ø200-160 mm	PP	**20062567**
	30° bend Ø200 mm	PP	**20062539**
	45° bend Ø200 mm	PP	**20062542**
	90° bend Ø200 mm	PP	**20062543**
	Inspection bend Ø200 mm	PP	**20062545**
	Extension Ø200 mm L =500 mm	PP	**20062527**
	Extension Ø200 mm L =1000 mm	PP	**20062530**
	Extension Ø200 mm L =2000 mm	PP	**20062532**
	Inspection extension Ø200 mm	PP	**20062534**
	Chimney support Ø200 mm	PP	**20062548**
	Chimney cover Ø200 mm (stainless steel)	PP	**20062547**
	Condensate drain pipe Ø200 mm	PP	**20062537**
	T connection Ø200 mm with condensate drain and chimney support	PP	**20063420**
	T connection Ø200 mm with condensate drain	PP	**20062550**




PLASTIC FLUE SYSTEM Ø250 mm FOR CONDENSING BOILERS

Drawing	Description	Material	Code
	Eccentric adapter Ø250-160 mm	PP	**20062606**
	Concentric adapter Ø250-200 mm	PP	**20062607**
	Eccentric adapter Ø250-200 mm	PP	**20132393**
	30° bend Ø250 mm	PP	**20062593**
	45° bend Ø250 mm	PP	**20062594**
	90° bend Ø250 mm	PP	**20062595**
	Inspection bend Ø250 mm	PP	**20062598**
	Extension Ø250 mm, L=500 mm	PP	**20062576**
	Extension Ø250 mm, L=1000 mm	PP	**20062577**
	Extension Ø250 mm, L=2000 mm	PP	**20062578**
	Inspection extension Ø250 mm	PP	**20062591**
	Chimney support Ø250 mm	PP	**20062600**
	Chimney cover Ø250 mm (stainless steel)	PP	**20062599**
	Condensate drain pipe Ø250 mm	PP	**20062592**
	T connection Ø250 mm with condensate drain and chimney support	PP	**20063421**
	T connection Ø250 mm with condensate drain	PP	**20062601**


PLASTIC FLUE SYSTEM Ø300 mm FOR CONDENSING BOILERS

Drawing	Description	Material	Code
	Eccentric adapter Ø300-160 mm	PP	**20158581**
	Eccentric adapter Ø300-250 mm	PP	**20158580**
	45° bend Ø300 mm	PP	**20145293**
	90° bend Ø300 mm	PP	**20145294**
	Inspection bend Ø300 mm	PP	**20158567**
	Extension Ø300 mm, L=500 mm	PP	**20145292**
	Extension Ø300 mm, L=1000 mm	PP	**20145295**
	Extension Ø300 mm, L=2000 mm	PP	**20145296**
	Inspection extension Ø300 mm	PP	**20145290**
	Chimney support Ø300 mm	PP	**20158569**
	Condensate drain pipe Ø300 mm	PP	**20158566**
	T connection Ø300 mm with condensate drain and chimney support	PP	**20158572**
	T connection Ø300 mm with condensate drain	PP	**20158571**



DOUBLE WALL PLASTIC/INOX FLUE SYSTEM Ø160-225 mm FOR CONDENSING BOILERS

Drawing	Description	Material	Code
	30° bend Ø160-225 mm	PP/Met	**20062658**
	45° bend Ø160-225 mm	PP/Met	**20062659**
	90° bend Ø160-225 mm	PP/Met	**20062660**
	Extension Ø160-225 mm, L=500 mm	PP/Met	**20062655**
	Extension Ø160-225 mm, L=1000 mm	PP/Met	**20062656**
	Inspection extension Ø160-225 mm, L=1000 mm	PP/Met	**20062657**
	Pipe for terminal Ø160-225 mm	PP/Met	**20062662**
	Terminal Ø160-225 mm	PP/Met	**20062663**
	Chimney support Ø160-225 mm	PP/Met	**20062661**




DOUBLE WALL PLASTIC/INOX FLUE SYSTEM Ø200-300 mm FOR CONDENSING BOILERS

Drawing	Description	Material	Code
	30° bend Ø200-300 mm	PP/Met	**20062669**
	45° bend Ø200-300 mm	PP/Met	**20062670**
	90° bend Ø200-300 mm	PP/Met	**20062671**
	Extension Ø200-300 mm, L=500 mm	PP/Met	**20062666**
	Extension Ø200-300 mm, L=1000 mm	PP/Met	**20062667**
	Inspection extension Ø200-300 mm	PP/Met	**20062668**
	Pipe for terminal Ø200-300 mm	PP/Met	**20062673**
	Terminal Ø200-300 mm	PP/Met	**20062674**
	Chimney support Ø200-300 mm	PP/Met	**20062672**

DOUBLE WALL PLASTIC/INOX FLUE SYSTEM Ø250-350 mm FOR CONDENSING BOILERS

Drawing	Description	Material	Code
	45° bend Ø250-350 mm	PP/Met	**20062689**
	Extension Ø250-350 mm, L=500 mm	PP/Met	**20062676**
	Extension Ø250-350 mm, L=1000 mm	PP/Met	**20062677**
	Inspection extension Ø250-350 mm	PP/Met	**20062688**
	Pipe for terminal Ø250-350 mm	PP/Met	**20062691**
	Terminal Ø250-350 mm	PP/Met	**20062692**
	Chimney support Ø250-350 mm	PP/Met	**20062690**

DOUBLE WALL PLASTIC/INOX FLUE SYSTEM Ø300-350 mm FOR CONDENSING BOILERS

Drawing	Description	Material	Code
	Eccentric adapter Ø300/350 mm - 250/350 mm	PP/Met	**20158598**
	45° bend Ø300-350 mm	PP/Met	**20158600**
	Extension Ø300-350 mm, L=500 mm	PP/Met	**20158601**
	Extension Ø300-350 mm, L=1000 mm	PP/Met	**20158602**
	Inspection extension Ø300-350 mm	PP/Met	**20158603**
	Pipe for terminal Ø300-350 mm	PP/Met	**20158604**
	Terminal Ø300-350 mm	PP/Met	**20158605**
	Chimney support Ø300-350 mm	PP/Met	**20158606**
	Boiler connection Ø300-350 mm (STEEL PRO POWER)	PP/Met	**20158607**
	Condensate drain pipe Ø300-350 mm	PP/Met	**20158594**

FLUE SYSTEM ACCESSORIES

Drawing	Description	Code
	Siphon Long John	**20062443**
	Tool Ø160 mm	**20062510**
	Tool Ø200 mm	**20062563**
	Tool Ø250 mm	**20062604**
	Spacers Ø300-500 mm	**20158577**
	Spacers Ø160 mm	**20062444**
	Spacers Ø160 mm (5pcs)	**20060948**
	Spacers Ø200 mm	**20062564**
	Spacers Ø225 mm	**20062664**
	Spacers Ø250 mm	**20062605**
	Grid Ø160 mm	**20062513**
	Grid Ø200 mm	**20062575**
	Grid Ø250 mm	**20062636**
	Grid Ø300 mm	**20158576**
	Wall cover Ø160 mm	**20062512**
	Wall cover Ø200 mm	**20062574**
	Wall cover Ø225 mm	**20062665**
	Wall cover Ø250 mm	**20062635**
	Wall cover Ø300 mm	**20062675**
	Wall cover Ø350 mm	**20062693**
	Wall feeder Ø160-225 mm	**20062449**
	Wall feeder Ø200-300 mm	**20062556**
	Wall feeder Ø250-350 mm	**20062602**



AIR CONDITIONING

AIR CONDITIONERS 373

PROFESSIONAL AIR CONDITIONERS 386

AIR CONDITIONERS

AIR CONDITIONERS FOR SMALL- AND MEDIUM-SIZED ROOMS


	WALL-MOUNTED	CEILING/FLOOR	CASSETTE	DUCTED
MONO INVERTER	AARIA MONO PLUS I-AMW PI AARIA AMW 25 PLUS I SET AARIA AMW 35 PLUS I SET AARIA AMW 50 PLUS I SET page 374	 AARIA MONO PLUS I-AMS AARIA AMS 35 PI SET AARIA AMS 50 PI SET page 376	 AARIA MONO PLUS I-AMK AARIA AMK 25 PI SET AARIA AMK 35 PI SET AARIA AMK 50 PI SET page 378	 AARIA MONO PLUS AMD AARIA AMD 25 PAI SET AARIA AMD 35 PAI SET AARIA AMD 50 PA SET page 380
		 AARIA MONO PLUS I-AMC AARIA AMC 25 PI SET AARIA AMC 35 PI SET page 377		
	AARIA START N-AMW ST N AARIA AMW START 25 N SET AARIA AMW START 35 N SET AARIA AMW START 50 N SET AARIA AMW START 70 N SET page 381			
MULTI INVERTER	AARIA MULTI PLUS I-AMW PI AMW 20 PI AMW 25 PI AMW 35 PI AMW 50 PI AMW 70 PI page 383	 AARIA MULTI PLUS I-AMS AMS 35 P AMS 50 P AMS 70 P page 383	 AARIA MULTI PLUS I-AMK AMK 25 P AMK 35 P AMK 50 P AMK 70 P page 383	 AARIA MULTI PLUS I-AMD AMD 25 PAI AMD 35 PAI AMD 50 PA AMD 70 PA AMD 70 PB page 383
	AARIA MULTI PLUS I-AMW ST N AMW 25 ST N AMW 35 ST N page 381	 AARIA MULTI PLUS I-AMC AMC 25 P AMC 35 P AMC 42 P page 383		

Please verify with Sales the availability of the product in the destination Country before ordering

Wall-mounted mono inverter air conditioners

AARIA MONO PLUS I-AMW PI



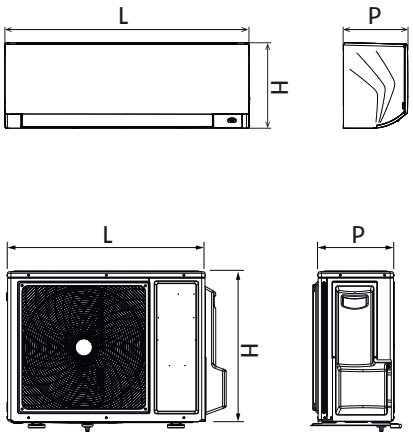

ERP

- R32 heat pump, low environmental impact
- Monosplit wall-mounted Inverter, paired with AARIA MULTI PLUS I
- High energy efficiency class A+++/A++ Infrared remote control with temperature sensor
- Integrated Wi-Fi module supplied as standard"

Description	Unit type	H mm	L mm	P mm	Net weight kg
AMW 25 PI	Indoor	313	895	236	11,3
AARIA MONO 25 PLUS I	Outdoor	553	800	275	27,6
AMW 35 PI	Indoor	313	895	236	11,3
AARIA MONO 35 PLUS I	Outdoor	553	800	275	30,0
AMW 50 PI	Indoor	313	895	236	11,6
AARIA MONO 50 PLUS I	Outdoor	643	820	305	35,7

AARIA MONO PLUS I-AMW PI air conditioners for monosplit installation on a wall, the Riello range for small and medium sized homes and commercial environments.
The range is available in three output ratings, from 2.5 to 5.0 kW in cooling mode, and reaches A++/A++ energy efficiency class.
The indoor units can be paired with AARIA MULTI PLUS I outdoor units to cool and/or heat up to five rooms simultaneously.
The outdoor unit with low environmental impact R32 refrigerant gas is equipped with a high-efficiency rotary compressor with soundproof insulation.
The wall-mounted indoor unit four-speed fan enables excellent low noise levels of up to 16 dB(A) at the super-low speed.
The AMW PI indoor units come standard with an integrated and completely invisible WI-FI module to adjust home climate control at any time even from outside the home via a dedicated app.
The hidden display on the indoor unit shows the temperature.
The infrared remote control is equipped with a temperature sensor for improved comfort close to the user.
The distinctive design aesthetics, in matt white and with raised wave decorations on the side panels, makes the indoor unit elegant, to be perfectly integrated in any living context.

- ECO SEN SOR to detect the presence of human activity up to a maximum distance of 8 metres, to adjust the airflow and avoid or follow body movements, and to put the unit into energy-saving mode when the room is empty.
- HEALTH to sterilise the air using ultraviolet radiation from the UV lamp placed in the indoor unit.
- FULL SWING for automatic horizontal and vertical airflow control.
- I-FEEL to adjust temperature according to the temperature perceived by the remote control.
- AUTOMATIC CLEANING and STERILISATION AT 56°C to ensure healthier air at the output of the air conditioner.

TECHNICAL DATA


Description	Output in cooling (T=+35 °C) kW	Annual consumption kWh/year	Output in heating (T=+7°C) kW	Annual consumption kWh/year	Unit type	Liquid attachments mm	Gas attachments mm	L/H max m	Energy efficiency class (D → A+++)* SEER	Energy efficiency class (D → A+++)* SCOP	Code
AMW 25 PI	2,8	111	3,2	737	Indoor				A+++	A++	**20206314**
AARIA MONO 25 PLUS I					Outdoor						**20206332**
AARIA AMW 25 PLUS I SET						6,35	9,52	20/1			**20211065**
AMW 35 PI	3,5	144	4,2	825	Indoor				A+++	A++	**20206315**
AARIA MONO 35 PLUS I					Outdoor						**20206333**
AARIA AMW 35 PLUS I SET						6,35	9,52	20/1			**20211068**
AMW 50 PI	5,0	265	6,0	1400	Indoor				A+++	A++	**20206317**
AARIA MONO 50 PLUS I					Outdoor						**20206335**
AARIA AMW 50 PLUS I SET						6,35	12,7	25/1			**20211069**

(*) The range of energy efficiency class of this products category is between D and A+++
The data and the efficiency classes are declared in conformity with EN 14825 for a temperate climate zone.
The performances refer to the following conditions:
- Cooling: indoor unit input air temperature 27 °C Tb.s., 19 °C Tb.u.
- Heating: indoor unit input air temperature 20 °C Tb.s.

Ceiling/floor-standing mono inverter air conditioners

AARIA MONO PLUS I-AMS



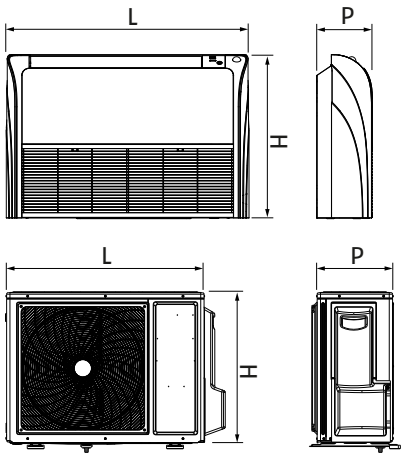

ERP

- Low environmental impact R32 heat pump
- Ceiling/floor-standing inverter monosplit air conditioner range
- A+++/A++ high energy efficiency class for low consumption
- Infrared control"

Description	Unit type	H mm	L mm	P mm	Net weight kg
AMD 25 PAI	Indoor	185	850	420	16
AARIA MONO 25 PLUS I	Outdoor	553	800	275	27,6
AMS 35 P	Indoor	185	850	420	16
AARIA MONO 35 PLUS I	Outdoor	553	800	275	30,0
AMS 50 P	Indoor	185	1170	420	21,5
AARIA MONO 50 PLUS I	Outdoor	643	820	305	35,7

The AARIA MONO PLUS I-AMS air conditioners, for ceiling/floor-standing installation, are suitable for medium and small environments, to allow high energy efficient and functionally designed solutions. The unit with low environmental impact R32 refrigerant achieves A+++/A+ energy efficiency classes.
Outdoor unit equipped with ROTARY inverter compressor, to ensure maximum comfort during operation, and an indoor unit, with 4 fan speeds.
The AARIA MONO PLUS I-AMS range is available in two output ratings, 3.5 kW and 5.0 kW.
The offer is completed by an infrared remote control supplied as a standard, through which it is possible to manage all the unit functions.

- Indoor unit with on-board DISPLAY.
- SMART mode for automatic operation.
- QUIET function for ultra quiet operation.
- AUTORESTART function in case of blackout.
- Outdoor unit complete with connection covers.
- Wired control on demand."

TECHNICAL DATA


Description	Output in cooling (T=+35 °C) kW	Annual consumption kWh/year	Output in heating (T=+7°C) kW	Annual consumption kWh/year	Unit type	Liquid attachments mm	Gas attachments mm	L/H max m	Energy efficiency class (D → A+++)* SEER	SCOP	Code
AMD 25 PAI	2,5	210	3,2	1398							**20200993**
AARIA MONO 25 PLUS I											**20206332**
AARIA MONO AMD 25 PAI SET						6,35	9,52	20/10			**20216664**
AMD 35 PAI	3,5	241	4,0	1427	Indoor				A+++	A+	**20200994**
AARIA MONO 35 PLUS I					Outdoor						**20206333**
AARIA MONO AMD 35 PAI SET						6,35	9,52	20/10			**20216030**
AMD 50 PA	5,0	315	5,5	1961	Indoor				A+++	A+	**20151425**
AARIA MONO 50 PLUS I					Outdoor						**20206335**
AARIA MONO AMD 50 PAI SET						6,35	12,70	25/15			**20216032**

(*) The range of energy efficiency class of this products category is between D and A+++
Data and efficiency classes are declared in compliance with standard EN 14825 for temperate climate zone.
Performance refers to the following conditions:
- cooling: indoor unit air inlet temperature 27°C Tb.s., 19°C Tb.u.
- heating: indoor unit air inlet temperature 20°C Tb.s.

Floor-standing mono inverter air conditioners

AARIA MONO PLUS I-AMC



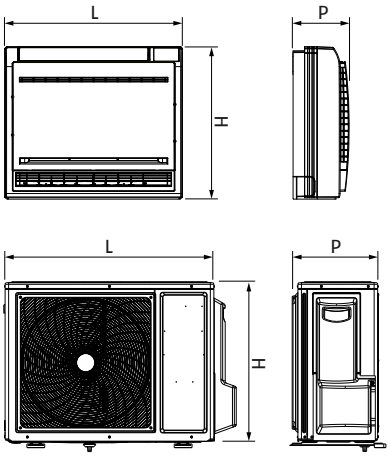

ERP

- Low environmental impact R32 heat pump
- Range of monosplit DC air conditioners
- Floor inverter
- A+++/A++ energy efficiency class for low consumption
- Infrared control"

Description	Unit type	H mm	L mm	P mm	Net weight kg
AMC 25 P	Indoor	600	700	210	16,5
AARIA MONO 25 PLUS I	Outdoor	553	800	275	27,6
AMC 35 P	Indoor	600	700	210	16,5
AARIA MONO 35 PLUS I	Outdoor	553	800	275	30,0

The AARIA MONO PLUS-AMC air conditioners, for floor-standing installation, are suitable for medium and small environments, to allow high energy efficient and functionally designed solutions.
The unit with low environmental impact R32 refrigerant achieves A++/A + energy efficiency classes.
Outdoor unit equipped with ROTARY inverter compressor, to ensure maximum comfort during operation, and an indoor unit, with 4 fan speeds.
The range AARIA MONO PLUS I-AMC is available in two output ratings, 2.5 kW and 3.5 kW.
The offer is completed by an infrared remote control supplied as a standard, through which it is possible to manage all the unit functions.

- Indoor unit with on-board DISPLAY.
- Managing indirect flow.
- SMART mode for automatic operation.
- DRY function for dehumidification mode.
- QUIET function for ultra quiet operation.
- AUTORESTART function in case of blackout.
- Outdoor unit complete with connection covers.

TECHNICAL DATA

Description	Output in cooling (T=+35 °C) kW	Annual consumption kWh/year	Output in heating (T=+7°C) kW	Annual consumption kWh/year	Unit type	Liquid attachments mm	Gas attachments mm	L/H max m	Energy efficiency class (D → A+++)* SEER	Energy efficiency class (D → A+++)* SCOP	Code
AMC 25 P	2,5	107	3,0	798	Indoor				A++	A+	**20151549**
AARIA MONO 25 PLUS I					Outdoor						**20206332**
AARIA MONO AMC 25 PI SET						6,35	9,52	20/10			**20216023**
AMC 35 P	3,4	157	3,5	962	Indoor				A++	A+	**20151550**
AARIA MONO 35 PLUS I					Outdoor						**20206333**
AARIA MONO AMC 35 PI SET						6,35	9,52	20/10			**20216024**


(*) The range of energy efficiency class of this products category is between D and A+++
Data and efficiency classes are declared in compliance with standard EN 14825 for temperate climate zone.
Performance refers to the following conditions:
- cooling: indoor unit air inlet temperature 27°C Tb.s., 19°C Tb.u.
- heating: indoor unit air inlet temperature 20°C Tb.s.

Cassette mono inverter air conditioners

AARIA MONO PLUS I-AMK



ERP

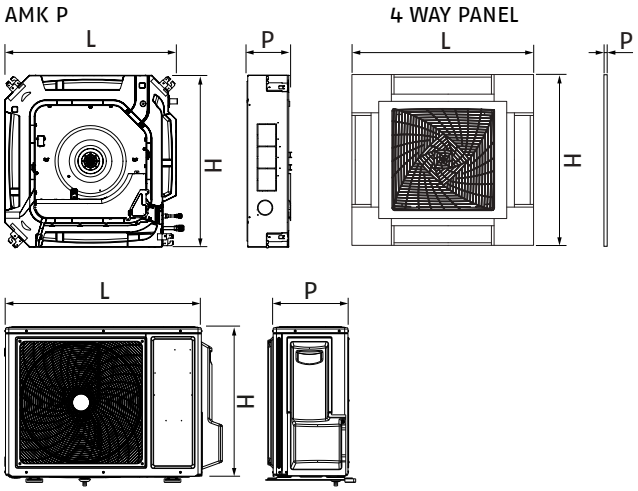

- Low environmental impact R32 heat pump
- Range of monosplit DC Inverter cassette air conditioners
- Up to A++/A+ energy efficiency class for low consumption
- Infrared control

Description	Unit type	H mm	L mm	P mm	Net weight kg
AMK 25 P	Indoor	570	570	260	18,5
AARIA MONO 25 PLUS I	Outdoor	553	800	275	27,6
4 WAY PANEL AMK 25-35-50 P	Panel	700	700	60	2
AMK 35 P	Indoor	570	570	260	19
AARIA MONO 35 PLUS I	Outdoor	553	800	275	30,0
4 WAY PANEL AMK 25-35-50 P	Panel	700	700	60	2
AMK 50 P	Indoor	570	570	260	19
AARIA MONO 50 PLUS I	Outdoor	643	820	305	35,7
4 WAY PANEL AMK 25-35-50 P	Panel	700	700	60	2

The AARIA MONO PLUS-AMK air conditioners, for cassette installation, are suitable for medium and small environments, to allow high energy efficient and functionally designed solutions.
The unit with low environmental impact R32 refrigerant achieves A++/A + energy efficiency classes.
Outdoor unit equipped with ROTARY inverter compressor, to ensure maximum comfort during operation, minimising vibrations and guaranteeing perfect soundproofing.
Super compact indoor unit (only 260 mm in depth), with 700x700 mm cover panel and 3-speed centrifugal fan to enable excellent low noise levels.
The range AARIA MONO PLUS I-AMK is available in three output ratings, from 2.5 kW to 5.0 kW.
The offer is completed by an infrared remote control supplied as a standard, through which it is possible to manage all the unit functions.

- QUIET function for ultra quiet operation.
- DRY function for dehumidification mode.
- AUTORESTART function in case of power failure.
- POWER mode allowing the desired temperature to be achieved quickly.
- Outdoor unit complete with connection covers.

TECHNICAL DATA


Description	Output in cooling (T=+35 °C) kW	Annual consumption kWh/year	Output in heating (T=+7°C) kW	Annual consumption kWh/year	Unit type	Liquid attachments mm	Gas attachments mm	L/H max m	Energy efficiency class (D → A+++)* SEER	SCOP	Code
AMK 25 P	2,5	210	3,2	1398	Indoor				A++	A+	**20151428**
AARIA MONO 25 PLUS I					Outdoor						**20206332**
4 WAY PANEL AMK 25-35-50 P											**20151431**
AARIA MONO AMK 25 PI SET						6,35	9,52	20/10			**20216665**
AMK 35 P	3,5	222	4,0	1427	Indoor				A++	A	**20151429**
AARIA MONO 35 PLUS I					Outdoor						**20206333**
4 WAY PANEL AMK 25-35-50 P											**20151431**
AARIA MONO AMK 35 PI SET						6,35	9,52	20/10			**20216028**
AMK 50 P	5,0	363	5,5	1932	Indoor				A++	A+	**20151430**
AARIA MONO 50 PLUS I					Outdoor						**20206335**
4 WAY PANEL AMK 25-35-50 P											**20151431**
AARIA MONO AMK 50 PI SET						6,35	12,70	25/15			**20216029**

(*) The range of energy efficiency class of this products category is between D and A+++
The data and the efficiency classes are declared in conformity with EN 14825 for a temperate climate zone.
The performances refer to the following conditions:
- Cooling: indoor unit input air temperature 27 °C Tb.s., 19 °C Tb.u.
- Heating: indoor unit input air temperature 20 °C Tb.s.

Duct-connected mono inverter air conditioners

AARIA MONO PLUS I-AMD



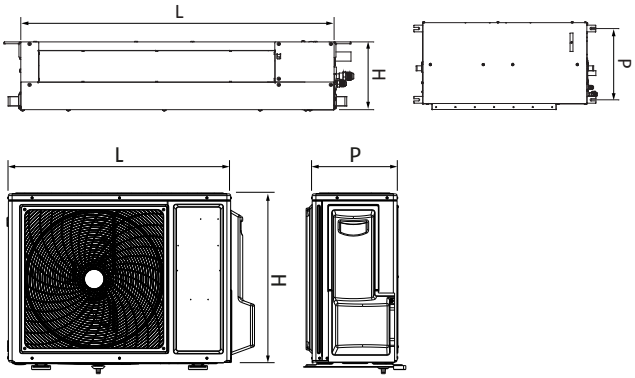

ERP

- Low environmental impact R32 heat pump
- Range of monosplit DC air conditioners
- Ducted inverters
- Wired remote control
- Up to A++/A+ energy efficiency class for low consumption

Description	Unit type	H mm	L mm	P mm	Net weight kg
AMD 25 PAI	Indoor	185	850	420	16
AARIA MONO 25 PLUS I	Outdoor	553	800	275	27,6
AMD 35 PA	Indoor	185	850	420	16
AARIA MONO 35 PLUS	Outdoor	553	800	275	30,0
AMD 50 PA	Indoor	185	1170	420	21,5
AARIA MONO 50 PLUS	Outdoor	643	820	305	35,7

The AARIA MONO PLUS-AMD air conditioners for ducted installation are proposed for medium and small environments, to allow high energy efficient and functionally designed solutions.
The unit with low environmental impact R32 refrigerant achieves A++/A + energy efficiency classes.
Outdoor unit equipped with ROTARY inverter compressor, to ensure maximum comfort during operation, minimising vibrations and guaranteeing perfect soundproofing.
One of the most compact indoor units in its category (only 185 mm in height), with a 3-speed ducted fan for low levels of noise.
The range AARIA MONO PLUS I-AMD is available in three output ratings, from 2.5 kW to 5.0 kW.
The offer is completed by a wired control supplied as a standard, through which it is possible to manage all the unit functions.

- Motorised horizontal and vertical flaps to control airflow in both directions.
- DEHUMIDIFICATION operation
- AUTORESTART function in case of power failure.
- POWER mode allowing the desired temperature to be achieved quickly.
- Outdoor unit complete with connection covers.

TECHNICAL DATA


Description	Output in cooling (T=+35 °C) kW	Annual consumption kWh/year	Output in heating (T=+7°C) kW	Annual consumption kWh/year	Unit type	Liquid attach-ments mm	Gas attach-ments mm	L/H max m	Energy efficiency class (D → A+++)* SEER	Energy efficiency class (D → A+++)* SCOP	Code
AMD 25 PAI	2,5	210	3,2	1398					A++	A+	**20200993**
AARIA MONO 25 PLUS I											**20206332**
AARIA MONO AMD 25 PAI SET						6,35	9,52	20/10			**20216664**
AMD 35 PAI	3,5	241	4,0	1427	Indoor				A++	A	**20200994**
AARIA MONO 35 PLUS I					Outdoor						**20206333**
AARIA MONO AMD 35 PAI SET						6,35	9,52	20/10			**20216030**
AMD 50 PA	5,0	315	5,5	1961	Indoor				A++	A+	**20151425**
AARIA MONO 50 PLUS I					Outdoor						**20206335**
AARIA MONO AMD 50 PAI SET						6,35	12,70	25/15			**20216032**

(*) The range of energy efficiency class of this products category is between D and A+++
The data and the efficiency classes are declared in conformity with EN 14825 for a temperate climate zone.
The performances refer to the following conditions:
- Cooling: indoor unit input air temperature 27 °C Tb.s., 19 °C Tb.u.
- Heating: indoor unit input air temperature 20 °C Tb.s.



Wall-mounted mono inverter air conditioners

AARIA START N-AMW ST N

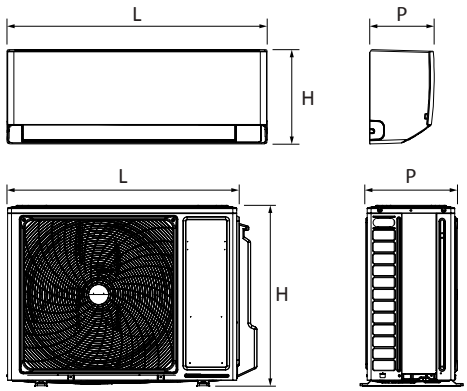

ERP

- R32 heat pump, low environmental impact
- Monosplit wall-mounted Inverter 2.5 and 3.5 kW indoor units, also multisplit, paired with AARIA MULTI 250 PI
- High energy efficiency class A++/A+
- Infrared remote control with temperature sensor

Description	Unit type	H mm	L mm	P mm	Net weight kg
MONOSPLIT					
AMW 25 ST	Indoor	290	805	200	8
AARIA START 25	Outdoor	544	700	245	23
AMW 35 ST	Indoor	290	805	200	8
AARIA START 35	Outdoor	544	700	245	24
AMW 50 ST	Indoor	320	975	220	12
AARIA START 50	Outdoor	553	800	275	33
AMW 70 ST	Indoor	320	975	220	12
AARIA START 70	Outdoor	705	890	340	14
DUALSPLIT					
AMW 25 ST N	Indoor	290	805	200	8
AMW 35 ST N	Indoor	290	805	200	8
AARIA MULTI 250 PI	Outdoor	553	800	275	36

AARIA START N is the range of Riello air conditioners for monosplit and dualsplit wall-mounted installation, for small and medium sized homes and commercial environments. The range is available in four output ratings, from 2.5 to 7.0 kW in cooling mode, and reaches A++/A+ energy efficiency class. The 2.5 and 3.5 kW indoor units can be paired with AARIA MULTI 250 PI outdoor unit to cool and/or heat up to two domestic rooms simultaneously.
The outdoor unit with low environmental impact R32 refrigerant gas is equipped with a high-efficiency rotary compressor with soundproof insulation.
The wall-mounted indoor unit four-speed fan enables excellent low noise levels of up to 18 dB(A) at the super-low speed.
AARIA START N air conditioners can be equipped with an optional Wi-Fi kit for complete home comfort management, also remotely via dedicated APP.
The hidden display on the indoor unit shows the active operating mode, the temperature and any alarms. The infrared remote control is equipped with a temperature sensor for improved comfort close to the user. Thanks to the simple but elegant aesthetics, the machine can be installed in any living context.
- I-FEEL to adjust temperature according to the temperature perceived by the remote control.
- AUTOMATIC CLEANING and STERILISATION AT 56°C to ensure healthier air at the output of the air conditioner.
- QUIET for ultra-low level of noise at super-low ventilation speed.
- COMFORT SLEEP for optimised comfort during sleeping hours.
- MAXIMUM POWER to quickly achieve the desired room comfort.

TECHNICAL DATA – MONOSPLIT

Description	Output in cooling (T=+35 °C) kW	Annual consumption kWh/year	Output in heating (T=+7°C) kW	Annual consumption kWh/year	Unit type	Liquid attachments mm	Gas attachments mm	L/H max m	Energy efficiency class (D → A+++)* SEER	SCOP	Code
AMW 25 ST N	2,6	149	2,8	840	Indoor				A++	A+	**20206307**
AARIA START 25 N					Outdoor						**20206326**
AARIA AMW 25 START N SET						6,35	9,52	15/10			**20211070**
AMW 35 ST N	3,2	184	3,4	980	Indoor				A++	A+	**20206309**
AARIA START 35 N					Outdoor						**20206327**
AARIA AMW 35 START N SET						6,35	9,52	20/1			**20211071**
AMW 50 ST N	5,0	287	5,2	1610	Indoor				A++	A+	**20206310**
AARIA START 50 N					Outdoor						**20206328**
AARIA AMW 50 START N SET						6,3,5	12,7	25/1			**20211072**
AMW 70 ST N	6,8	350	6,8	1960	Indoor				A++	A+	**20206311**
AARIA START 70 N					Outdoor						**20206330**
AARIA AMW 70 START N SET						6,35	12,7	25/1			**20211074**

(*) The range of energy efficiency class of this products category is between D and A+++

TECHNICAL DATA – DUALSPLIT

Description	Output in cooling (T=+35 °C) kW	Annual consumption kWh/year	Output in heating (T=+7°C) kW	Annual consumption kWh/year	Unit type	Liquid attachments mm	Gas attachments mm	L/H max m	Energy efficiency class (D → A+++)* SEER	SCOP	Code
AARIA MULTI 250 PI (1)					Outdoor	6,35	12,7	25/10			**20206346**
COMPATIBLE WITH:											
AMW 25 ST N	2,6	149	2,8	840	Indoor				A++	A+	**20206307**
AMW 35 ST N	3,2	184	3,4	980	Indoor				A++	A+	**20206309**

(*) The range of energy efficiency class of this products category is between D and A+++
(1) For information on possible combinations, refer to the installation manual.

The data and the efficiency classes are declared in conformity with EN 14825 for a temperate climate zone.
The performances refer to the following conditions:
- Cooling: indoor unit input air temperature 27 °C Tb.s., 19 °C Tb.u.
- Heating: indoor unit input air temperature 20 °C Tb.s.


ACCESSORIES

Drawing	Description	Code
	Air conditioner Wi-Fi interface kit	**20194065**

Multi inverter air conditioners

AARIA MULTI PLUS I



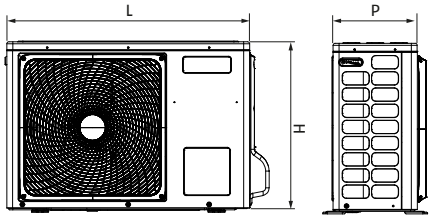

ERP

- Multisplit DC inverter air conditioner
- Multi range of up to 5 indoor units
- R32 heat pump with low environmental impact

Description	Unit type	H mm	L mm	P mm	Net weight kg
AARIA MULTI 250 PI	Outdoor	553	800	275	36
AARIA MULTI 355 PI	Outdoor	700	890	340	51
AARIA MULTI 370 PI	Outdoor	700	890	340	54
AARIA MULTI 475 PI	Outdoor	700	890	340	61
AARIA MULTI 485 PI	Outdoor	700	890	340	61
AARIA MULTI 590 PI	Outdoor	760	920	372	66

The AARIA MULTI PLUS I range has been designed to serve several rooms using just one outdoor unit.
The main feature is the flexibility to choose indoor units among wall-mounted, cassette and duct-connected models.
AARIA MULTI PLUS I is available in six versions, from 5 kW up to 9 kW of cooling capacity, and guarantees state-of-the-art energy performance. The units AARIA MULTI PLUS with low environmental impact R32 refrigerant achieve A++/A+ energy efficiency classes thanks to the Inverter technology.
The external unit is made of pre-painted weather-resistant metal and is equipped with attachment covers and plastic front grille.
The compressor is of the high-efficiency twin rotary type and minimises vibration.

- Condensing unit with up to 5 connections for indoor units.
- Wide range of indoor units: wall-mounted, cassette and duct-connected.
- DC Inverter technology
- High SCOP and SEE R
- Up to 80 m ducting length.
- Outdoor unit operating limit: down to -25°C in heating and +43°C in cooling.
- Small size.
- High energy class, for low consumption.

TECHNICAL DATA

Description	Unit type	Indoor unit combination	Output in cooling (T=+35°C) kW	Output in heating (T=+7°C) kW	Liquid attachments mm	Gas attachments mm	Energy efficiency class (D → A+++)* SEER	Energy efficiency class (D → A+++)* SCOP	Code
AARIA MULTI 250 PI	DUAL (1:2)	2 x 3,5	5,0	5,2	2 x 6,35	2 x 9,52	A++	A+	**20206346**
AARIA MULTI 355 PI	TRIAL (1:3)	3 x 2,5	5,5	4,7	3 x 6,35	3 x 9,52	A++	A+	**20200997**
AARIA MULTI 370 PI	TRIAL (1:3)	3 x 2,5	7,0	6,0	3 x 6,35	3 x 9,52	A++	A+	**20200998**
AARIA MULTI 475 PI	QUADRI (1:4)	4 x 2,5	7,5	6,3	4 x 6,35	3 x 9,52 + 1 x 12,7	A++	A+	**20200999**
AARIA MULTI 485 PI	QUADRI (1:4)	4 x 2,5	8,5	7,0	4 x 6,35	3 x 9,52 + 1 x 12,7	A++	A+	**20201000**
AARIA MULTI 590 PI	PENTA (1:5)	5 x 2,5	9,0	7,2	5 x 6,35	3 x 9,52 + 2 x 12,7	A++	A+	**20201001**

(*) The range of energy efficiency class of this products category is between D and A+++
The data and the efficiency classes are declared in conformity with EN 14825 for a temperate climate zone.
The performances refer to the following conditions:
- Cooling: indoor unit input air temperature 27 °C Tb.s., 19 °C Tb.u.

- Heating: indoor unit input air temperature 20 °C Tb.s.

TECHNICAL DATA OF WALL-MOUNT INDOOR UNITS - AMW PI



Description	Output in cooling kW	Output in heating kW	Absorbed power W	Power supply V/Ph/Hz	Maximum treated air volume m³/h	Dimensions (H/L/P) mm	Liquid piping Ømm	Gas piping Ømm	Code
AMW 20 PI	2,0	2,3	30	230/1/50	730	313/895/236	6,35	9,52	**20206313**
AMW 25 PI	2,8	3,2,	30	230/1/50	730	313/895/236	6,35	9,52	**20206314**
AMW 35 PI	3,5	4,2	30	230/1/50	800	313/895/236	6,35	9,52	**20206315**
AMW 50 PI	5,0	6,0	30	230/1/50	880	313/895/236	6,35	12,70	**20206317**
AMW 70 PI	7,0	8,1	30	230/1/50	880	313/895/236	6,35	12,70	**20206319**

TECHNICAL DATA OF CEILING/FLOOR INDOOR UNITS



Description	Output in cooling kW	Output in heating kW	Absorbed power W	Power supply V/Ph/Hz	Maximum treated air volume m³/h	Dimensions (H/L/P) mm	Liquid piping Ømm	Gas piping Ømm	Code
AMS 35 P	3,5	4,0	30	230/1/50	750	680/1000/230	6,35	9,52	**20151552**
AMS 50 P	5,0	5,8	30	230/1/50	880	680/1000/230	6,35	12,70	**20151553**
AMS 70 P	7,0	7,5	120	230/1/50	1250	680/1325/230	9,52	15,88	**20151554**

TECHNICAL DATA OF FLOOR INDOOR UNITS



Description	Output in cooling kW	Output in heating kW	Absorbed power W	Power supply V/Ph/Hz	Maximum treated air volume m³/h	Dimensions (H/L/P) mm	Liquid piping Ømm	Gas piping Ømm	Code
AMC 25 P	2,5	2,8	40	230/1/50	400	600/700/210	6,35	9,52	**20151549**
AMC 35 P	3,4	3,5	40	230/1/50	450	600/700/210	6,35	9,52	**20151550**
AMC 42 P	4,2	4,7	40	230/1/50	530	600/700/210	6,35	9,52	**20151551**

TECHNICAL DATA OF INDOOR CASSETTE UNITS



Description	Output in cooling kW	Output in heating (Pdesign) kW	Absorbed power W	Power supply V/Ph/Hz	Maximum treated air volume m³/h	Dimensions (H/L/P) mm	Liquid piping Ømm	Gas piping Ømm	Code
AMK 25 P	2,6	3,2	33	230/1/50	510	570/570/260	6,35	9,52	**20151428**
4 WAY PANEL AMK 25-35-50 P						60/700/700			**20151431**
SET AMK 25 P									**20154918**
AMK 35 P	3,5	4,0	35	230/1/50	620	570/570/260	6,35	9,52	**20151429**
4 WAY PANEL AMK 25-35-50 P						60/700/700			**20151431**
SET AMK 35 P									**20154921**
AMK 50 P	5,0	5,5	38	230/1/50	700	570/570/260	6,35	12,70	**20151430**
4 WAY PANEL AMK 25-35-50 P						60/700/700			**20151431**
SET AMK 50 P									**20154920**
AMK 70 P	7,1	8,0	50	230/1/50	1260	840/840/204	9,52	15,88	**20151432**

4 WAY PANEL AMK 70 P						50/950/950			**20151433**
SET AMK 70 P									**20155179**

TECHNICAL DATA OF DUCTED INDOOR UNITS



Description	Output in cooling kW	Output in heating (Pdesign) kW	Absorbed power W	Power supply V/Ph/Hz	Maximum treated air volume m³/h	Dimensions (H/L/P) mm	Liquid piping Ømm	Gas piping Ømm	Code
AMD 25 PAI	2,5	3,0	15	230/1/50	530	185/850/420	6,35	9,52	**20200993**
AMD 35 PAI	3,5	4,0	21	230/1/50	600	185/850/420	6,35	9,52	**20200994**
AMD 50 PA	5,0	5,5	55	230/1/50	900	185/1170/420	6,35	12,70	**20151425**
AMD 70 PA	7,1	7,5	65	230/1/50	1000	185/1170/420	9,52	15,88	**20151426**
AMD 70 PB	7,1	8,0	200	230/1/50	1440	248/1100/700	9,52	15,88	**20151427**

ACCESSORIES

Drawing	Description	Code
	IR remote control	**20192803**
	IR remote control receiver panel	**20160625**
	Wired remote control for AMK P models	**20187243**
	Centralised touch screen control N (compatible with models from AARIA MULTI 355 PI)	**20133642**

The data and the efficiency classes are declared in conformity with EN 14825:
- Cooling: Input air temperature 27 °C Tb.s., 19 °C Tb.u.; Outdoor air temperature 35 °C Tb.s.
- Heating: Input air temperature 20 °C Tb.s., outdoor air temperature 7 °C Tb.s./6 °C Tb.u.

For system configurations, see the technical data sheet.

PROFESSIONAL AIR CONDITIONERS

AIR CONDITIONERS FOR COMMERCIAL ENVIRONMENTS

MONO INVERTER MATCHING


CEILING/FLOOR	CASSETTE	DUCTED
 AARIA PRO AMS 70-170 P page 387	 AARIA PRO AMK 70-170 P page 389	 AARIA PRO AMD 70-170 P page 391

Please verify with Sales the availability of the product in the destination Country before ordering

Ceiling/floor-standing mono inverter air conditioners

AARIA PRO P-AMS P



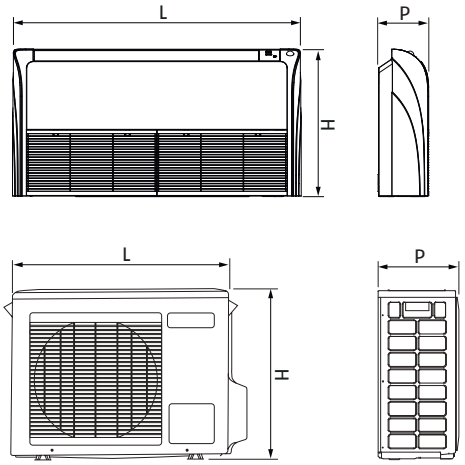

- Ceiling/floor-standing Inverter Monosplit
- Heat pump in R32 with low environmental impact
- Energy class up to A++/A+

Description	Unit type	H mm	W mm	D mm	Net weight Kg
AMS 70 P	Indoor	680	1325	230	26,0
AARIA PRO P 1070 MI	Outdoor	697	890	353	45
AMS 100 P	Indoor	680	1325	230	33,5
AARIA PRO P 1100 MI	Outdoor	760	920	372	60
AMS 125 P	Indoor	680	1650	230	43,0
AARIA PRO P 1125 MI	Outdoor	965	950	370	83
AMS 125 P	Indoor	680	1650	230	43,0
AARIA PRO P 1125 TI	Outdoor	965	950	370	85
AMS 140 P	Indoor	680	1650	230	43
AARIA PRO P 1140 TI	Outdoor	1350	950	370	105

The AARIA PRO D-AMS P series is the ideal ceiling solution for air conditioning medium/large commercial premises such as shops, offices, and public buildings. AARIA PRO offers cooling capacities ranging from 7.1 (kW) to 13.6 (kW), with single-phase power supply for sizes 1070 to 1125 and three-phase power supply for sizes 1125 to 1140.
The high operating limits (down to -15 °C) ensure effective use for both summer cooling and winter heating, with high seasonal efficiency.
The ceiling-mounted indoor units offer high airflow control in both horizontal and vertical directions thanks to the five-step motorized fins. All units can be connected to supply fresh air from outside to the indoor environment.
The ranges are supplied complete with infrared control.

- AUTORESTART function in case of blackout.
- Indoor unit with fan suitable for quiet operation.
- Easy filter maintenance and accessibility.
- Possible intake of outdoor fresh air.
- Infrared control included.

TECHNICAL DATA

Description	Unit type	Electrical supply V/Ph/Hz	Liquid connections mm	Gas connections mm	L/H max m	Output in cooling mode (T=+35 °C)		Output in heating mode (T=+7 °C)		Energy efficiency class (D → A+++)*		Notes	Code n.
						kW	SEER	kW	SCOP	SEER	SCOP		
AARIA PRO P 1070 MI	Outdoor	230/1/50								A++	A		**20201002**
AMS 70 P	Indoor	230/1/50								–	–		**20151554**
AARIA PRO AMS P 70 MI SET			9,52	15,88	50/30	7,10	6,1	7,5	3,8	–	–		**20205106**
AARIA PRO P 1100 MI	Outdoor	230/1/50								A++	A		**20201003**
AMS 100 P	Indoor	230/1/50								–	–		**20159404**
AARIA PRO AMS P 100 MI SET			9,52	15,88	50/30	9,5	6,1	10,2	3,8	–	–		**20205107**
AARIA PRO P 1125 MI	Outdoor	230/1/50								A+	A		**20201004**
AMS 125 P	Indoor	230/1/50								–	–		**20159405**
AARIA PRO AMS P 125 MI SET			9,52	15,88	50/30	12,3	5,9	12,7	3,9	–	–		**20205108**
AARIA PRO P 1125 TI	Outdoor	400/3/50								A+	A		**20201005**
AMS 125 P	Indoor	230/1/50								–	–		**20159405**
AARIA PRO AMS P 125 TI SET			9,52	15,88	50/30	12,4	5,9	12,8	3,9	–	–		**20205110**
AARIA PRO P 1140 TI	Outdoor	400/3/50								A++	A+		**20201006**
AMS 140 P	Indoor	230/1/50								–	–		**20159406**
AARIA PRO AMS P 140 TI SET			9,52	15,88	70/30	13,6	6,2	15,0	4,1	–	–		**20205111**

(*) The range of energy efficiency class of this products category is between D and A+++
Data and efficiency classes are declared in compliance with standard EN 14825 for temperate climate zone. Seasonal energy rating (SEER and SCOP) is only available for units below 12 kW.
Performance refers to the following conditions:
- cooling: indoor unit air inlet temperature 27°C Tb.s., 19°C Tb.u.
- heating: indoor unit air inlet temperature 20°C Tb.s.


ACCESSORIES

Image	Description	Code n.
	Touch wire control	**20187243**

Mono inverter-case air conditioners

AARIA PRO P-AMK P



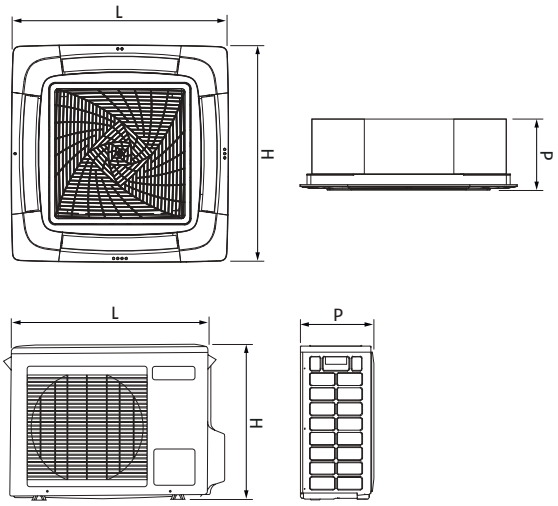

ERP

- Monosplit Inverter cassette
- Heat pump in R32 with low environmental impact
- Energy class up to A++/A

Description	Unit type	H mm	W mm	D mm	Net weight Kg
AARIA PRO P 1070 MI	Outdoor	697	890	353	45
AMK 70 P	Indoor	840	840	204	27
Lower covering panel		950	950	50	6,5
AARIA PRO P 1100 MI	Outdoor	760	920	372	60
AMK 100 P	Indoor	840	840	246	31
Lower covering panel		950	950	50	6,5
AARIA PRO P 1125 MI	Outdoor	965	950	370	84
AMK 125 P	Indoor	840	840	288	32,0
Lower covering panel		950	950	50	6,5
AARIA PRO P 1125 TI	Outdoor	965	950	370	85
AMK 125 P	Indoor	840	840	288	32,0
Lower covering panel		950	950	50	6,5
AARIA PRO P 1140 TI	Outdoor	1350	950	370	101
AMK 140 P	Indoor	840	840	288	32,0
Lower covering panel		950	950	50	6,5

The AARIA PRO P-AMK P series is the ideal cassette solution for air conditioning of medium/large commercial premises such as shops, offices and public buildings.
AARIA PRO P offers cooling power ratings from 7,1 kW to 13,6 kW, with single-phase power supply for rating from 1070 to 1125 and three-phase power supply for rating from 1025 to 1140.The high operating limits (down to -15 °C) ensure effective use for both summer cooling and winter heating, with high seasonal efficiency. The AMK-P indoor cassette units are designed for recessed ceiling installation and their dimensions are 840x840 mm.
The design features a plastic cover panel with central air intake and 4-way delivery, with individually orientable ventilation. The unit is complete with infrared control.

- AUTORESTART function in case of blackout.
- Indoor unit with fan suitable for quiet operation.
- Condensate pump on board of the unit.
- Easy filter maintenance and accessibility.
- Possible intake of additional air.
- Infrared control.

TECHNICAL DATA

Description	Unit type	Electrical supply V/Ph/Hz	Liquid connections mm	Gas connections mm	L/H max m	Output in cooling mode (T=+35 °C)		Output in heating mode (T=+7 °C)		Energy efficiency class (D → A+++)*		Notes	Code n.
										SEER	SCOP		
						kW	SEER	kW	SCOP				
AARIA PRO P 1070 MI	Outdoor	230/1/50								A++	A		**20201002**
AMK 70 P	Indoor	230/1/50								–	–		**20151432**
LOWER COVERING PANEL										–	–		**20151433**
AARIA PRO AMK P 70 MI SET			9,52	15,88	50/30	7,1	6,1	8,0	3,8	–	–		**20205113**
AARIA PRO P 1100 MI	Outdoor	230/1/50								A+	A		**20201003**
AMK 100 P	Indoor	230/1/50								–	–		**20158940**
LOWER COVERING PANEL										–	–		**20151433**
AARIA PRO AMK P 100 MI SET			9,52	15,88	50/30	9,2	5,9	10,1	3,8	–	–		**20205114**
AARIA PRO P 1125 MI	Outdoor	230/1/50								A+	A		**20201004**
AMK 125 P	Indoor	230/1/50								–	–		**20158941**
LOWER COVERING PANEL										–	–		**20151433**
AARIA PRO AMK P 125 MI SET			9,52	15,88	50/30	12,3	5,7	12,7	3,9	–	–		**20205115**
AARIA PRO P 1125 TI	Outdoor	400/3/50								A+	A		**20201005**
AMK 125 P	Indoor	230/1/50								–	–		**20158941**
LOWER COVERING PANEL										–	–		**20151433**
AARIA PRO AMK P 125 TI SET			9,52	15,88	50/30	12,4	5,7	12,8	3,9	–	–		**20205116**
AARIA PRO P 1140 TI	Outdoor	400/3/50								A+	A		**20201006**
AMK 140 P	Indoor	230/1/50								–	–		**20158942**
LOWER COVERING PANEL										–	–		**20151433**
AARIA PRO AMK P 140 TI SET			9,52	15,88	70/30	13,6	5,7	15,0	3,9	–	–		**20205117**

(*) The range of energy efficiency class of this products category is between D and A+++
Data and efficiency classes are declared in compliance with standard EN 14825 for temperate climate zone. Seasonal energy rating (SEER and SCOP) is only available for units below 12 kW.
Performance refers to the following conditions:
- cooling: indoor unit air inlet temperature 27°C Tb.s., 19°C Tb.u.
- heating: indoor unit air inlet temperature 20°C Tb.s.


ACCESSORIES

Image	Description	Code n.
	Touch wire control	**20187243**

Mono inverter air conditioners-ductable

AARIA PRO P-AMD P



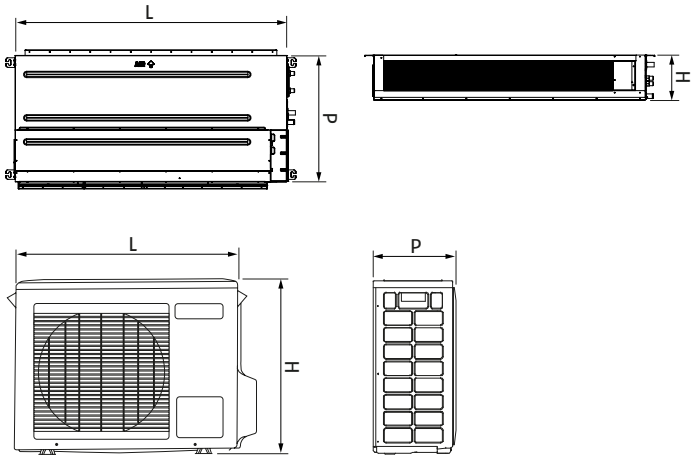

ERP

- Ducted Inverter Monosplit
- Heat pump in R32 with low environmental impact
- Energy class up to A++/A

Description	Unit type	H mm	W mm	D mm	Net weight Kg
AARIA PRO P 1070 MI	Outdoor	697	890	535	45
AMD 70 PA	Indoor	185	1170	420	21,5
AARIA PRO P 1070 MI	Outdoor	697	890	353	45
AMD 70 PB	Indoor	248	1100	700	36
AARIA PRO P 1100 MI	Outdoor	760	920	372	60
AMD 100 PB	Indoor	248	1500	700	35
AARIA PRO P 1125 MI	Outdoor	965	950	370	84
AMD 125 PBI	Indoor	248	1500	700	48
AARIA PRO P 1125 MI	Outdoor	965	950	370	84
AMD 125 PC	Indoor	425	1350	490	61
AARIA PRO P 1125 TI	Outdoor	965	950	370	85
AMD 125 PB	Indoor	248	1500	700	48
AARIA PRO P 1125 TI	Outdoor	965	950	370	85
AMD 125 PC	Indoor	425	1350	490	61
AARIA PRO P 1140 TI	Outdoor	1350	950	370	101
AMD 140 PBI	Indoor	248	1500	700	48
AARIA PRO P 1140 TI	Outdoor	1350	950	370	101
AMD 140 PC	Indoor	425	1350	490	61,0

The AARIA PRO P-AMD P series is the ideal ductable solution for air conditioning of medium/large commercial premises such as shops, offices and public buildings.
AARIA PRO P-AMD offers cooling power ratings from 7,1 kW to 13,6 kW, with single-phase power supply for rating from 1070 to 1125 and three-phase power supply for rating from 1125 to 1140. The high operating limits (down to -15 °C) ensure effective use for both summer cooling and winter heating, with seasonal efficiency among the highest on the market. AMD indoor units are preset for installations requiring air ducting.
The compact size and the versatility of the range, with heads up to 250 Pa, allow a high variety of installations. The offer is complete with the wired control.

- AUTORESTART function in case of blackout.
- Easy filter maintenance and accessibility.
- Wired control included.

TECHNICAL DATA

Description	Unit type	Electrical supply V/Ph/Hz	Liquid connections mm	Gas connections mm	L/H max m	Head Pa	Output in cooling mode (T=+35 °C)		Output in heating mode (T=+7 °C)		Energy efficiency class (D → A+++)*		Notes	Code n.
							kW	SEER	kW	SCOP	SEER	SCOP		
AARIA PRO P 1070 MI	Outdoor	230/1/50									A++	A		**20201002**
AMD 70 PA	Indoor	230/1/50									–	–		**20151426**
AARIA PRO AMD P 70 MI SET A			9,52	15,88	50/30	0/40	7,1	6,1	7,5	3,8	–	–		**20205119**
AARIA PRO P 1070 MI	Outdoor	230/1/50									A++	A		**20201002**
AMD 70 PB	Indoor	230/1/50									–	–		**20151427**
AARIA PRO AMD P 70 MI SET B			9,52	15,88	50/30	25/150	7,1	6,1	7,5	3,8	–	–		**20205123**
AARIA PRO P 1100 MI	Outdoor	230/1/50									A++	A		**20201003**
AMD 100 PB	Indoor	230/1/50									–	–		**20158936**
AARIA PRO AMD P 100 MI SET B			9,52	15,88	50/30	25/150	9,5	6,1	10,2	3,8	–	–		**20205124**
AARIA PRO P 1125 MI	Outdoor	230/1/50									A+	A		**20201004**
AMD 125 PBI	Indoor	230/1/50									–	–	(A)	**20200995**
AARIA PRO AMD P 125 MI SET B			9,52	15,88	50/30	25/150	12,3	5,7	12,7	3,9	–	–	(A)	**20205126**
AARIA PRO P 1125 MI	Outdoor	230/1/50									A+	A		**20201004**
AMD 125 PC	Indoor	230/1/50									–	–		**20159407**
AARIA PRO AMD P 125 MI SET C			9,52	15,88	50/30	40/250	12,3	5,8	12,7	3,9	–	–		**20205128**
AARIA PRO P 1125 TI	Outdoor	400/3/50									A+	A		**20201005**
AMD 125 PBI	Indoor	230/1/50									–	–	(A)	**20200995**
AARIA PRO AMD P 125 TI SET B			9,52	15,88	50/30	25/150	12,4	5,9	12,8	3,9	–	–	(A)	**20205129**
AARIA PRO P 1125 TI	Outdoor	400/3/50									A+	A		**20201005**
AMD 125 PC	Indoor	230/1/50									–	–		**20159407**
AARIA PRO AMD P 125 TI SET C			9,52	15,88	50/30	40/250	12,4	5,9	12,8	3,9	–	–		**20205131**
AARIA PRO P 1140 TI	Outdoor	400/3/50									A++	A+		**20201006**
AMD 140 PBI	Indoor	230/1/50									–	–	(A)	**20200996**
AARIA PRO AMD P 140 TI SET B			9,52	15,88	70/30	25/150	13,4	6,2	15	4,1	–	–	(A)	**20205132**
AARIA PRO P 1140 TI	Outdoor	400/3/50									A++	A+		**20201006**
AMD 140 PC	Indoor	230/1/50									–	–		**20159408**
AARIA PRO AMD P 140 TI SET C			9,52	15,88	70/30	40/250	13,6	6,2	15	4,1	–	–		**20205133**

(*) The range of energy efficiency class of this products category is between D and A+++
Data and efficiency classes are declared in compliance with standard EN 14825 for temperate climate zone. Seasonal energy rating (SEER and SCOP) is only available for units below 12 kW.
Performance refers to the following conditions:
- cooling: indoor unit air inlet temperature 27°C Tb.s., 19°C Tb.u.
- heating: indoor unit air inlet temperature 20°C Tb.s.

(A) The new codes will be made available for sale on the market once the previous ones have been exhausted.

ACCESSORIES

Image	Description	Code n.
	IR remote control	**20192803**
	IR remote control receiver panel	**20160625**



TERMINAL UNITS

FAN COILS 396

DUCTABLE FAN COILS 422

WATER AIR HEATERS 425

FAN COILS

	FAN COILS	FAN COILS WITH RADIANT PLATE
WALL-MOUNTED FAN COILS	 HELIOTERM DESIGN WALL 11-23 page 403 INSTALLATION VERTICAL R	
FAN COILS WITH PANELS	 HELIOTERM DESIGN INVERTER 11-46 page 403 INSTALLATION VERTICAL HORIZONTAL L R  HELIOTERM DESIGN S INVERTER 6-32 page 406 INSTALLATION VERTICAL L	 HELIOTERM DESIGN INVERTER PLUS 11-46 page 400 INSTALLATION VERTICAL L
FAN COILS FOR RECESSED INSTALLATION	 HELIOTERM IN INVERTER 11-46 page 417 INSTALLATION VERTICAL HORIZONTAL L R	 HELIOTERM IN INVERTER PLUS 11-46 page 417 INSTALLATION VERTICAL L
FAN COILS FOR RECESSED INSTALLATION IN BOX	 HELIOTERM INVISIBLE INVERTER 11-46 page 408 INSTALLATION VERTICAL L R  HELIOTERM INVISIBLE INVERTER CEILING 11-46 page 414 INSTALLATION HORIZONTAL L R	 HELIOTERM INVISIBLE INVERTER PLUS 11-46 page 411 INSTALLATION VERTICAL L

Please verify with Sales the availability of the product in the destination Country before ordering

FAN COILS

COMMERCIAL

WALL-MOUNTED FAN COILS



NUOVO ACU
NUOVO ACU F

ACU 12-93

page 425

"CASSETTE" FAN COILS



RK N HYDROLINE

RK 24N-96N


page 420

Please verify with Sales the availability of the product in the destination Country before ordering

Wall-mounted Fan coils

Design Wall



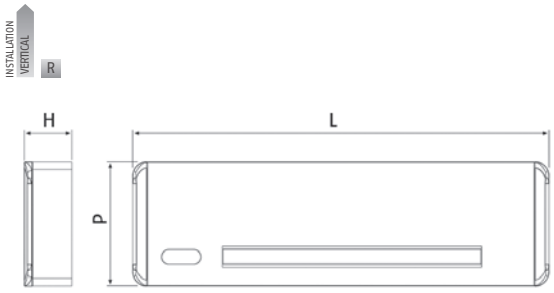

- Wall-mounted fan coils with Brushless Inverter motor

Description	H mm	L mm	P mm
DESIGN WALL 11	335	902	128
DESIGN WALL 17	335	1102	128
DESIGN WALL 23	335	1302	128

DESIGN WALL is the new Riello wall-mounted fan coils range suitable for residential and small commercial applications.
Thanks to the DC-Brushless motor, the DESIGN WALL fan coils are able to operate with an high modulation of air flow rate, from 0 up to 100%, in order to keep a comfortable temperature inside the room and to ensure the minimum-noise operation.
The range is characterized by an ultra slim aesthetic, with a depth of only 128 mm, to guarantee a perfect integration within the spaces.
Motorized flaps distribute air uniformly throughout the room.
The DESIGN WALL is available in two versions: equipped with remote control and on board touch display or in combination with control panel wall mounted TOP (Design Wall 11-23P).
Three models are available, with power from 1140 W up to 2340 W in cooling mode from 1610 W to 3250 W in heating mode.
All three are available in the two versions with remote control or control panel wall mounted TOP.

- Ultra slim design
- 128 mm of depth, also with 2-3 way valve on board
- Motorized flaps for a comfortable air distribution
- Touch display control

TECHNICAL DATA

Description	Power cooling 7 °C-12 °C (1) Watt	Power heating 50 °C (2) Watt	Power heating 70 °C-60 °C (3) Watt	Maximum air flow rate (4) m^3/h	Sound pressure irradiation max-min (5) dB(A)	Notes	Code
WITH REMOTE CONTROL							
DESIGN WALL 11	1140	1610	2780	320	39.7-24.9		**20186360**
DESIGN WALL 17	1620	2350	4120	430	42.4-25.2		**20186361**
DESIGN WALL 23	2340	3250	5720	540	42.6-25.8		**20186362**
IN COMBINATION WITH CONTROL PANEL WALL MOUNTED TOP							
DESIGN WALL 11 P	1140	1610	2780	320	39.7-24.9	(A)	**20186363**
DESIGN WALL 17 P	1620	2350	4120	430	42.4-25.2	(A)	**20186364**
DESIGN WALL 23 P	2340	3250	5720	540	42.6-25.8	(A)	**20186365**

Performance refer to the following conditions:
(1) Room air temperature 27 °C Tb.s. and 19 °C Tb.u.
(2) Air temperature 20 °C Tb.s. and the same water flow rate achieved in cooling mode.
(3) Air temperature 20 °C Tb.s.
(4) Air flow rate measured with cleaned filters.
(5) According to UNI EN ISO 7779:2001.
(A) Mandatory accessory.

ACCESSORIES


Drawing	Description	Notes	Code
	**Control panel wall mounted TOP (MASTER).** TOUCH LCD wall-hung electronic control panel with room probe and ModBus RTU communication protocol. The control panel allows to manage the room temperature through its temperature probe or though the on board probe of the fan coil. The panel allows to control one or more (up to max 30) fan-coils thanks to the on board electronic for control panel wall mounted TOP.	(1)	**20181383**
	Motorized 3 – ways valve kit.		**20099251**
	Motorized 2 – ways valve kit.		**20099250**
	2 - ways taps kit.		**20117090**

(1) Mandatory accessory for Design Wall 11P-23P.

Fan coil

Design Inverter Plus



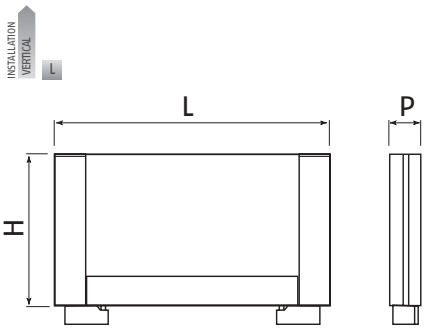

- Tangential fan coils with radiant plate and Brushless inverter motor

Description	H mm	L mm	P mm
DESIGN INVERTER PLUS 11	580	760	130
DESIGN INVERTER PLUS 21	580	960	130
DESIGN INVERTER PLUS 33	580	1160	130
DESIGN INVERTER PLUS 40	580	1360	130
DESIGN INVERTER PLUS 46	580	1560	130

DESIGN INVERTER PLUS is the TOP of what Riello has to offer for fan coils. It is ideal for providing superior comfort in heating mode.
DESIGN INVERTER PLUS unites, thanks to its exclusive operating principle, the convective and ventilating effect with the radiant effect of the front panel, thereby increasing the wellness of the room.
In addition to the radiating effect, the entire range is equipped with the DC Brushless Inverter motors. This technological solution provides a continuous variation from 0 to 100% of the air flow rate and as a result the heating and cooling capacity.
The DESIGN INVERTER PLUS very quickly heat and cool any area, with the possibility of selecting between two dedicated functions: PERFORMANCE for commercial needs, when high efficiency and high effectiveness are required, and COMFORT for residential needs, to ensure always maximum low-noise operation.
Thanks to the use of the DC Brushless motors, the DESIGN INVERTER PLUS save up to 50% on electricity compared to the fan coils with traditional motors (type ON/OFF). Just like the entire HELIOTERM range, the DESIGN INVERTER PLUS range has an ULTRA FLAT appearance, with a depth of just 13 cm and an automatic suction system.
The range is available in 5 models with outputs in cooling mode from 830 W up to 4560 W and in heating mode from 1150 W up to 4860 W.
The vast range of accessories and controls with touch DISPLAY support a wide range of applications. The versions that can be installed vertically with connections on the left.
The structure is made of galvanised sheet metal with sides made of ABS; the front delivery grille is made of aluminium.

- FULL FLAT with an automatic suction system
- Depth of 13 cm
- Terminal with radiating effect
- Easy to remove and clean the filters
- Touch Display commands


TECHNICAL DATA

Description	Power cooling 7°C-12°C (1) W		Power heating 50°C (2) W		Maximum air flow rate (4) m³/h		Sound pressure irradiation max-min (5) dB(A)		Code
	Performance	Comfort	Performance	Comfort	Performance	Comfort	Performance	Comfort	
WHITE FAN COIL WITH RADIANT HEAT PLATE AND AUTOMATIC AIR VENTILATION									
DESIGN INVERTER PLUS 11B	1095	830	1515	1150	197	162	42.2-24.2	39.4-24.2	**20116258**
DESIGN INVERTER PLUS 21B	2120	1760	2885	2460	389	320	43.1-25.3	40.2-25.3	**20116260**
DESIGN INVERTER PLUS 33B	3310	2650	4140	3410	560	461	45.5-25.6	42.2-25.6	**20116261**
DESIGN INVERTER PLUS 40B	3875	3340	5015	4400	699	576	45.9-26.3	42.5-26.3	**20116263**
DESIGN INVERTER PLUS 46B	4560	3800	5910	5200	787	648	47.2-27.6	43.9-27.6	**20116264**

Performance refer to the following conditions:
(1) Room air temperature 27 °C d.b. and 19 °C w.b.
(2) Air temperature 20 °C and the same water flow rate achieved in cooling mode.
(3) Air temperature 20 °C
(4) Air temperature 20 °C; main fan in "off".
(5) Air flow rate measured with cleaned filters.
(6) According to UNI EN ISO 7779:2001
NOTE: the performance setting is recommended for commercial spaces, while the comfort setting is recommended for residential spaces.

ACCESSORIES

Drawing	Description	Notes	Code
	**Control panel on board BASIC.** TOUCH LCD onboard panel, of amber colour, that works as: ON/OFF, room thermostat with temperature range from 5 to 40 °C, summer-winter selector, fan control with water temperature probe. Fan speed can be regulated according to four operation modes: AUTO, NIGHT, MIN e MAX. Provided with 230 V output to control of an electronic valve.		**20116484**
	**Control panel on board TOP.** TOUCH LCD electronic on board control panel with continuous modulation and ModBus RTU communication protocol. It makes the room temperature regulation fully automatic, through the programs AUTO, SILENT, NIGHT and MAX by means of a probe located in the lower part of the appliance. Communication protocol ModBus RTU.		**20181365**
	**Control panel wall mounted TOP (MASTER).** TOUCH LCD wall-hung electronic control panel with room probe and ModBus RTU communication protocol. The control panel allows to manage the room temperature through its temperature probe or though the on board probe of the fan coil. The panel allows to control one or more (up to max 30) fan-coils thanks to the on board electronic for control panel wall mounted TOP.	(1)	**20181383**
	**Electronic board for wall mounted control panel TOP (SLAVE).** Electronic remoting board with continuous modulation for remote connection with the wall mounted control panel TOP. It is possible to connect max 30 electronic board with one wall mounted control panel TOP.	(1)(2)	**20181395**
	Control panel for recessed installation.	(1)	**20147241**
	**Remote control interface.** Electronic remoting board for 3-speed thermostat.	(1)(2)	**20116481**
	**Remote control interface 0-10V.** Electronic remoting board with input 0-10V.		**20116413**
	**3-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fancoil from the system if combined with a control panel allowing the management. The holder valve allows to balance the head losses of the system. This kit is an alternative to the two-ways valve.		**20101063**
	**2-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fan coil from the system if combined with a control panel allowing the management; the second one allows to balance the head losses of the system. This kit is compulsory in the versions Plus, except for the case when we mount the 3-ways valve or when we have a collector with thermo-electric heads.		**4013453**
	2-ways taps kit.		**4013450**

Drawing	Description	Notes	Code
	**White-feet kit.** The kit is composed by two supporting feet that allow to place the panel fan coil on the floor.		**4013458**
	Spacer fitting kit for 2-way valve unit for connecting the pipes to the valves with outlet on the floor and for 3-way valves unit for connecting the pipes to the valves with outlet on the wall.		**20069423**
	90°-connection kit, to allow an easy connection of the pipes to the valves for the exit from wall.		**4013452**
	**White mounting bracket kit.** This kit is used to fix the panel fan coil to the floor, in case of installation in front of shop windows or wherever there is no possibility to fix it to the wall.		**20069422**

(1) Both codes are necessary for the first fan coil.
(2) It must be installed 1 piece for every remoted fan coil.

MATCHING ACCESSORIES

Drawing	Description	Size					Notes	Code
		11	21	33	40	46		
	Back-cover panel kit for the models Design Inverter and Design Inverter Plus	•					(D)	**20116460**
			•				(D)	**20116461**
				•			(D)	**20116462**
					•		(D)	**20116463**
						•	(D)	**20116464**


(D) Availability of the material at our warehouse: 25 working days from the order validation date.

Fan coil

Design Inverter





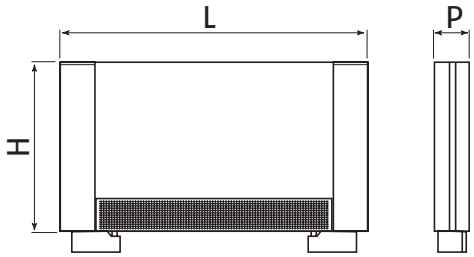

- Tangential fan coils
- Vertical or horizontal installation (with accessory)

Description	H mm	L mm	P mm
DESIGN INVERTER 11	580	760	130
DESIGN INVERTER 21	580	960	130
DESIGN INVERTER 33	580	1160	130
DESIGN INVERTER 40	580	1360	130
DESIGN INVERTER 46	580	1560	130

The DESIGN INVERTER are the Riello fan coils with DC Brushless Inverter motors, for a continuous variation from 0 to 100% of the air flow and consequently the heating and cooling capacity. The DESIGN INVERTER quickly heat and cool any area, and it is possible to choose between two dedicated functions: PERFORMANCE for commercial needs, when high efficiency and high effectiveness are required, and COMFORT for residential needs, to ensure always maximum low-noise operation. Thanks to the DC Brushless motors, the DESIGN INVERTER save up to 50% in electricity compared to the fan coils with traditional motors (ON/OFF). Just like the whole HELIOTERM family, the DESIGN INVERTER range is extremely thin, with a depth of just 13 cm.
The range comes in 5 models with a cooling capacity from 830 W up to 4560 W and a heating capacity from 1090 W up to 4860 W. The wide range of accessories and e controls with a touch DISPLAY support a wide application range.
All versions can be installed vertically or horizontally (using a specific accessory), with connections on the left. The structure is made of zinc-coated sheet with ABS side parts; the front delivery grille is made of aluminium.



- Extremely thin
- Depth of 13 cm
- Units can be installed both vertically and horizontally
- Ease of installation with left connections
- Easy to remove and clean the filters
- Touch Display commands

TECHNICAL DATA

Description	Power cooling 7°C-12°C (1) W		Power heating 50°C (2) W		Maximum air flow rate (4) m³/h		Sound pressure irradiation max-min (5) dB(A)		Code
	Performance	Comfort	Performance	Comfort	Performance	Comfort	Performance	Comfort	
WHITE FAN COIL									
DESIGN INVERTER 11B	1095	830	1415	1090	197	162	42.2-24.2	39.4-24.2	**20116254**
DESIGN INVERTER 21B	2120	1760	2775	2350	389	320	43.1-25.3	40.2-25.3	**20116244**
DESIGN INVERTER 33B	3310	2650	3905	3190	560	461	45.5-25.6	42.2-25.6	**20116246**
DESIGN INVERTER 40B	3875	3340	4665	4100	699	576	45.9-26.3	42.5-26.3	**20116250**
DESIGN INVERTER 46B	4560	3800	5705	4860	787	648	47.2-27.6	43.9-27.6	**20116252**

Performance refer to the following conditions:
(1) Room air temperature 27 °C d.b. and 19 °C w.b.
(2) Air temperature 20 °C and the same water flow rate achieved in cooling mode
(3) Air temperature 20 °C
(4) Air flow rate measured with cleaned filters
(5) According to UNI EN ISO 7779:2001
NOTE: the performance setting is recommended for commercial spaces, while the comfort setting is recommended for residential spaces.

ACCESSORIES

Drawing	Description	Notes	Code
	**Control panel on board BASIC.** TOUCH LCD onboard panel, of amber colour, that works as: ON/OFF, room thermostat with temperature range from 5 to 40 °C, summer-winter selector, fan control with water temperature probe. Fan speed can be regulated according to four operation modes: AUTO, NIGHT, MIN e MAX. Provided with 230 V output to control of an electronic valve.		**20116484**
	**Control panel on board TOP.** TOUCH LCD electronic on board control panel with continuous modulation and ModBus RTU communication protocol. It makes the room temperature regulation fully automatic, through the programs AUTO, SILENT, NIGHT and MAX by means of a probe located in the lower part of the appliance. Communication protocol ModBus RTU.		**20181365**
	**Control panel wall mounted TOP (MASTER).** TOUCH LCD wall-hung electronic control panel with room probe and ModBus RTU communication protocol. The control panel allows to manage the room temperature through its temperature probe or though the on board probe of the fan coil. The panel allows to control one or more (up to max 30) fan-coils thanks to the on board electronic for control panel wall mounted TOP.	(1)	**20181383**
	**Electronic board for wall mounted control panel TOP (SLAVE).** Electronic remoting board with continuous modulation for remote connection with the wall mounted control panel TOP. It is possible to connect max 30 electronic board with one wall mounted control panel TOP.	(1)(2)	**20181395**
	Control panel for recessed installation.	(1)	**20147241**
	**Remote control interface.** Electronic remoting board for 3-speed thermostat.	(1)(2)	**20116481**
	**Remote control interface 0-10V.** Electronic remoting board with input 0-10V.		**20116413**
	**3-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fancoil from the system if combined with a control panel allowing the management. The holder valve allows to balance the head losses of the system. This kit is an alternative to the two-ways valve.		**20101063**
	**2-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fan coil from the system if combined with a control panel allowing the management; the second one allows to balance the head losses of the system. This kit is compulsory in the versions Plus, except for the case when we mount the 3-ways valve or when we have a collector with thermo-electric heads.		**4013453**
	2-ways taps kit.		**4013450**
	**White-feet kit.** The kit is composed by two supporting feet that allow to place the panel fan coil on the floor.		**4013458**
	Spacer fitting kit for 2-way valve unit for connecting the pipes to the valves with outlet on the floor and for 3-way valves unit for connecting the pipes to the valves with outlet on the wall.		**20069423**
	90°-connection kit, to allow an easy connection of the pipes to the valves for the exit from wall.		**4013452**
	**White mounting bracket kit.** This kit is used to fix the panel fan coil to the floor, in case of installation in front of shop windows or wherever there is no possibility to fix it to the wall.		**20069422**
	Condensate drain 11 for horizontal installation.	(3)	**20025185**
	Condensate drain 21 for horizontal installation.	(3)	**20025186**
	Condensate drain 33 for horizontal installation.	(3)	**20025187**
	Condensate drain 40 for horizontal installation.	(3)	**20025188**
	Condensate drain 46 for horizontal installation.	(3)	**20025189**

Drawing	Description	Notes	Code
	Cables kit for right-side connections. It is compulsory for the connections reversal.		**20069415**

(1) Both codes are necessary for the first fan coil.
(2) It must be installed 1 piece for every remoted fan coil.
(3) The accessory is necessary for the horizontal installation of fan coil.

MATCHING ACCESSORIES


Drawing	Description	Size					Notes	Code
		11	21	33	40	46		
	Back-cover panel kit for the models Design Inverter and Design Inverter Plus	•					(D)	**20116460**
			•				(D)	**20116461**
				•			(D)	**20116462**
					•		(D)	**20116463**
						•	(D)	**20116464**

(D) Availability of the material at our warehouse: 25 working days from the order validation date.

Fan coil

Design S Inverter



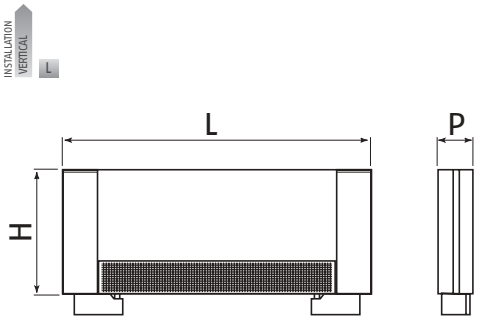

- Tangential fan coils with Brushless inverter motor

Description	H mm	L mm	P mm
DESIGN INVERTER 6BS	379	760	130
DESIGN INVERTER 11BS	379	960	130
DESIGN INVERTER 17BS	379	1160	130
DESIGN INVERTER 23BS	379	1360	130
DESIGN INVERTER 32BS	379	1560	130

The DESIGN S INVERTER have a height of 379 mm and are lower than traditional fan coils. This feature allow their installation in limited spaces.
The whole range is provided with DC Brushless Inverter motors, allowing a continuous modulation from 0 to 100% of the air flow and consequently of the heating and cooling capacity, heating and cooling any room very rapidly.
Thanks to the DC Brushless motors, the DESIGN S INVERTER have an electrical consumption that is 50% lower than the fan coils with traditional motors. The DESIGN S INVERTER range features an ultra flat design, thanks to a depth of just 13 cm.
The structure is made of zinc-coated sheet with the frontal grille made of aluminium. The range comes in 5 models with a cooling capacity from 560 W to 3140 W and a heating capacity from 780 W till 3910 W.
The wide range of accessories and controls with a touch DISPLAY support a wide application range.


- Extremely thin
- Height 379 mm
- Easy to remove and clean the filters
- Touch Display commands

TECHNICAL DATA

Description	Power cooling 7 °C-12 °C (1) Watt	Power heating 50 °C (2) Watt	Power heating 70 °C-60 °C (3) Watt	Maximum air flow rate (4) m³/h	Sound pressure irradiation max-min (5) dB(A)	Code
WHITE FAN COIL						
DESIGN INVERTER 6BS	560	780	1390	140	38.8-23.8	**20116265**
DESIGN INVERTER 11BS	1040	1570	2730	250	39.5-24.9	**20116267**
DESIGN INVERTER 17BS	1640	2380	4140	390	41.4-25.1	**20116271**
DESIGN INVERTER 23BS	2310	3250	5650	540	41.6-25.7	**20116272**
DESIGN INVERTER 32BS	3140	3910	6620	600	42.6-26.8	**20116273**

Performance refer to the following conditions:
(1) Room air temperature 27 °C d.b. and 19 °C w.b.
(2) Air temperature 20 °C and the same water flow rate achieved in cooling mode
(3) Air temperature 20 °C
(4) Air flow rate measured with cleaned filters
(5) According to UNI EN ISO 7779:2001

ACCESSORIES


Drawing	Description	Notes	Code
	**Control panel on board BASIC.** TOUCH LCD onboard panel, of amber colour, that works as: ON/OFF, room thermostat with temperature range from 5 to 40 °C, summer-winter selector, fan control with water temperature probe. Fan speed can be regulated according to four operation modes: AUTO, NIGHT, MIN e MAX. Provided with 230 V output to control of an electronic valve.		**20116484**
	**Control panel on board TOP.** TOUCH LCD electronic on board control panel with continuous modulation and ModBus RTU communication protocol. It makes the room temperature regulation fully automatic, through the programs AUTO, SILENT, NIGHT and MAX by means of a probe located in the lower part of the appliance. Communication protocol ModBus RTU.		**20181365**
	**Control panel wall mounted TOP (MASTER).** TOUCH LCD wall-hung electronic control panel with room probe and ModBus RTU communication protocol. The control panel allows to manage the room temperature through its temperature probe or though the on board probe of the fan coil. The panel allows to control one or more (up to max 30) fan-coils thanks to the on board electronic for control panel wall mounted TOP.	(1)	**20181383**
	**Electronic board for wall mounted control panel TOP (SLAVE).** Electronic remoting board with continuous modulation for remote connection with the wall mounted control panel TOP. It is possible to connect max 30 electronic board with one wall mounted control panel TOP.	(1)(2)	**20181395**
	Control panel for recessed installation.	(1)	**20147241**
	**Remote control interface.** Electronic remoting board for 3-speed thermostat.	(1)(2)	**20116481**
	**Remote control interface 0-10V.** Electronic remoting board with input 0-10V.		**20116413**
	**3-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fancoil from the system if combined with a control panel allowing the management. The holder valve allows to balance the head losses of the system. This kit is an alternative to the two-ways valve.		**20076544**
	**2-ways valve kit.** The kit is composed by a valve with thermo-electric head, it allows to exclude automatically the panel fan coil from the system if combined with a control panel allowing the management.		**20076590**
	2-ways taps kit.		**4013450**
	**White-feet kit.** The kit is composed by two supporting feet that allow to place the panel fan coil on the floor.		**4013458**
	Spacer fitting kit for 2-way valve unit for connecting the pipes to the valves with outlet on the floor and for 3-way valves unit for connecting the pipes to the valves with outlet on the wall.		**20069423**
	90°-connection kit, to allow an easy connection of the pipes to the valves for the exit from wall.		**4013452**
	**White mounting bracket kit.** This kit is used to fix the panel fan coil to the floor, in case of installation in front of shop windows or wherever there is no possibility to fix it to the wall.		**20069422**

(1) Both codes are necessary for the first fan coil
(2) It must be installed 1 piece for every remoted fan coil

Fan coil

Invisible Inverter



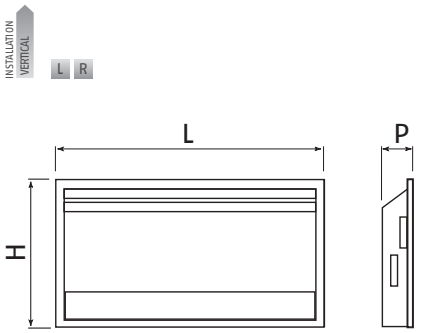

- Tangential fan coils with Brushless inverter motor for recessed installation in the wall (with template)

Description	H mm	L mm	P mm
INVISIBLE INVERTER 11	750	770	152
INVISIBLE INVERTER 21	750	970	152
INVISIBLE INVERTER 33	750	1170	152
INVISIBLE INVERTER 40	750	1370	152
INVISIBLE INVERTER 46	750	1570	152

INVISIBLE INVERTER is the Riello proposal for fan coils for recessed installation, allowing you to rationalise the space according to the criteria of modern interior architecture. The unit can be recessed in walls with limited thickness, thanks to the just 14.2 cm deep box. The white front panel with a grey intake grille in the same aesthetic line as the DESIGN INVERTER fan coil. The orientation of the air expulsion wing can be adjusted manually by 160° from bottom to top to ensure optimum comfort both in heating and cooling mode. The entire range comes with DC Brushless Inverter motors. This technological solution provides a continuous variation from 0 to 100% of the air flow rate and as a result the heating and cooling capacity.
INVISIBLE INVERTER quickly heats and cools any room; with the possibility of choosing between two dedicated functions: PERFORMANCE for commercial needs, when high efficiency and high effectiveness are required, and COMFORT for residential needs, to ensure always maximum low-noise operation.
Thanks to the DC Brushless motors, the INVISIBLE INVERTER range has an electrical consumption that is 50% lower than fan coils with traditional motors (ON/OFF type).
The range comes in 5 models with a cooling capacity from 830 W to 4560 W and a heating capacity from 1090 W till 4860 W with a wide range of accessories.

- Ultra flat design
- Wings can be completely orientated
- Ultra low-noise operation
- Ease of installation thanks to the box for recessed installation
- Just 14,2 cm deep
- Wide range of accessories
- Filters easy to dismount and clean

TECHNICAL DATA

Description	Power cooling 7°C-12°C (1) W		Power heating 50°C (2) W		Maximum air flow rate (4) m³/h		Sound pressure irradiation max-min (5) dB(A)		Code
	Performance	Comfort	Performance	Comfort	Performance	Comfort	Performance	Comfort	
WHITE FAN COIL WITH TEMPLATE FOR RECESSED INSTALLATION IN THE WALL									
INVISIBLE INVERTER 11	1095	830	1415	1090	197	162	42.2-24.2	39.4-24.2	**20069349**
BOX (FOR RECESSED INSTALLATION)									**20025164**
FRONTAL PANEL AND GRID									**20116418**
INVISIBLE INVERTER 21	2120	1760	2775	2350	389	320	43.1-25.3	40.2-25.3	**20069370**
BOX (FOR RECESSED INSTALLATION)									**20025166**
FRONTAL PANEL AND GRID									**20116419**
INVISIBLE INVERTER 33	3310	2650	3905	3190	560	461	45.5-25.6	42.2-25.6	**20069371**
BOX (FOR RECESSED INSTALLATION)									**20025167**
FRONTAL PANEL AND GRID									**20116420**
INVISIBLE INVERTER 40	3875	3340	4665	4100	699	576	45.9-26.3	42.5-26.3	**20069372**
BOX (FOR RECESSED INSTALLATION)									**20025169**
FRONTAL PANEL AND GRID									**20116421**
INVISIBLE INVERTER 46	4560	3800	5705	4860	787	648	47.2-27.6	43.9-27.6	**20069373**
BOX (FOR RECESSED INSTALLATION)									**20025171**
FRONTAL PANEL AND GRID									**20116423**

Performance refer to the following conditions:
(1) Room air temperature 27 °C d.b. and 19 °C w.b.
(2) Air temperature 20 °C and the same water flow rate achieved in cooling mode
(3) Air temperature 20 °C
(4) Air flow rate measured with cleaned filters
(5) According to UNI EN ISO 7779:2001
NOTE: the performance setting is recommended for commercial spaces, while the comfort setting is recommended for residential spaces.

ACCESSORIES

Drawing	Description	Notes	Code
	**Control panel wall mounted TOP (MASTER).** TOUCH LCD wall-hung electronic control panel with room probe and ModBus RTU communication protocol. The control panel allows to manage the room temperature through its temperature probe or though the on board probe of the fan coil. The panel allows to control one or more (up to max 30) fan-coils thanks to the on board electronic for control panel wall mounted TOP.	(1)	**20181383**
	**Electronic board for wall mounted control panel TOP (SLAVE).** Electronic remoting board with continuous modulation for remote connection with the wall mounted control panel TOP. It is possible to connect max 30 electronic board with one wall mounted control panel TOP.	(1)(2)	**20181395**
	Control panel for recessed installation.	(1)	**20147241**
	**Remote control interface.** Electronic remoting board for 3-speed thermostat.	(1)(2)	**20116481**
	**Remote control interface 0-10V.** Electronic remoting board with input 0-10V.		**20116413**
	**3-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fancoil from the system if combined with a control panel allowing the management. The holder valve allows to balance the head losses of the system. This kit is an alternative to the two-ways valve.		**20101063**
	**2-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fan coil from the system if combined with a control panel allowing the management; the second one allows to balance the head losses of the system. This kit is compulsory in the versions Plus, except for the case when we mount the 3-ways valve or when we have a collector with thermo-electric heads.		**4013453**


Drawing	Description	Notes	Code
	2-ways taps kit.		**4013450**
	Spacer fitting kit for 2-way valve unit for connecting the pipes to the valves with outlet on the floor and for 3-way valves unit for connecting the pipes to the valves with outlet on the wall.		**20069423**
	90°-connection kit, to allow an easy connection of the pipes to the valves for the exit from wall.		**4013452**
	Cables kit for right-side connections. It is compulsory for the connections reversal.		**20069415**

(1) Both codes are necessary for the first fan coil
(2) It must be installed 1 piece for every remoted fan coil

Fan coil

Invisible Inverter Plus



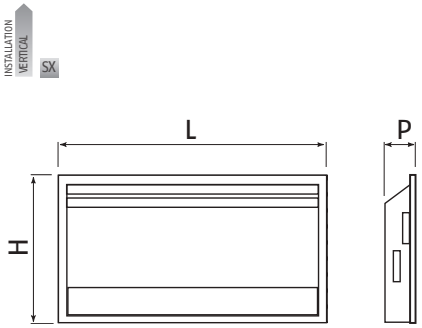

- Tangential fan coils with Brushless inverter motor, radiant heat plate effect of frontal panel for recessed installation in the wall (with template)

Description	H mm	L mm	P mm
INVISIBLE INVERTER PLUS 11	750	770	152
INVISIBLE INVERTER PLUS 21	750	970	152
INVISIBLE INVERTER PLUS 33	750	1170	152
INVISIBLE INVERTER PLUS 40	750	1370	152
INVISIBLE INVERTER PLUS 46	750	1570	152

INVISIBLE INVERTER PLUS is the Riello TOP of the range proposal for fan coils for recessed installation, allowing you to rationalise the space according to the criteria of modern interior architecture. The unit can be recessed in walls with limited thickness, thanks to the just 14.2 cm deep box.
The INVISIBLE INVERTER PLUS front panel unites, thanks to its exclusive operating principle, the convective and ventilating effect with the radiant effect of the front panel, thereby increasing the wellness of the room. The orientation of the air expulsion wing can be adjusted manually by 160° from bottom to top to ensure optimum comfort both in heating and cooling mode.
The entire range comes with DC Brushless Inverter motors. This technological solution provides a continuous variation from 0 to 100% of the air flow rate and as a result the heating and cooling capacity.
INVISIBLE INVERTER PLUS quickly heats and cools any room; with the possibility of choosing between two dedicated functions: PERFORMANCE for commercial needs, when high efficiency and high effectiveness are required, and COMFORT for residential needs, to ensure always maximum low-noise operation. Thanks to the DC Brushless motors, the INVISIBLE INVERTER PLUS range has an electrical consumption that is 50% lower than fan coils with traditional motors (ON/OFF type).
The range comes in 5 models with a cooling capacity from 830 W to 4560 W and a heating capacity from 1090 W till 1090 4860 W.

- Ultra flat design
- Radiant effect in heating mode
- Wings can be completely orientated
- Ultra low-noise operation
- Ease of installation thanks to the box for recessed installation
- Just 14,2 cm deep
- Wide range of accessories
- Filters easy to dismount and clean

TECHNICAL DATA

Description	Power cooling 7°C-12°C (1) W		Power heating 50°C (2) W		Maximum air flow rate (4) m³/h		Sound pressure irradiation max-min (5) dB(A)		Notes	Code
	Performance	Comfort	Performance	Comfort	Performance	Comfort	Performance	Comfort		
WHITE FAN COIL WITH TEMPLATE FOR RECESSED INSTALLATION IN THE WALL										
INVISIBLE INVERTER PLUS 11	1095	830	1515	1090	197	162	42.2-24.2	39.4-24.2	(D)	**20069374**
BOX (FOR RECESSED INSTALLATION)										**20025164**
FRONTAL PANEL AND GRID										**20116418**
INVISIBLE INVERTER PLUS 21	2120	1760	2885	2350	389	320	43.1-25.3	40.2-25.3	(D)	**20069375**
BOX (FOR RECESSED INSTALLATION)										**20025166**
FRONTAL PANEL AND GRID										**20116419**
INVISIBLE INVERTER PLUS 33	3310	2650	4140	3190	560	461	45.5-25.6	42.2-25.6	(D)	**20069376**
BOX (FOR RECESSED INSTALLATION)										**20025167**
FRONTAL PANEL AND GRID										**20116420**
INVISIBLE INVERTER PLUS 40	3875	3340	5015	4100	699	576	45.9-26.3	42.5-26.3	(D)	**20069377**
BOX (FOR RECESSED INSTALLATION)										**20025169**
FRONTAL PANEL AND GRID										**20116421**
INVISIBLE INVERTER PLUS 46	4560	3800	5910	4860	787	648	47.2-27.6	43.9-27.6	(D)	**20069378**
BOX (FOR RECESSED INSTALLATION)										**20025171**
FRONTAL PANEL AND GRID										**20116423**

Performance refer to the following conditions:
(1) Room air temperature 27 °C d.b. and 19 °C w.b.
(2) Air temperature 20 °C and the same water flow rate achieved in cooling mode
(3) Air temperature 20 °C
(4) Air temperature 20 °C; Main fan in "off"
(5) Air flow rate measured with cleaned filters
(6) According to UNI EN ISO 7779:2001
(D) Availability of the material at our warehouse: 25 working days from the order validation date.
NOTE: the performance setting is recommended for commercial spaces, while the comfort setting is recommended for residential spaces.

ACCESSORIES

Drawing	Description	Notes	Code
	**Control panel wall mounted TOP (MASTER).** TOUCH LCD wall-hung electronic control panel with room probe and ModBus RTU communication protocol. The control panel allows to manage the room temperature through its temperature probe or though the on board probe of the fan coil. The panel allows to control one or more (up to max 30) fan-coils thanks to the on board electronic for control panel wall mounted TOP.	(1)	**20181383**
	**Electronic board for wall mounted control panel TOP (SLAVE).** Electronic remoting board with continuous modulation for remote connection with the wall mounted control panel TOP. It is possible to connect max 30 electronic board with one wall mounted control panel TOP.	(1)(2)	**20181395**
	Control panel for recessed installation.	(1)	**20147241**
	**Remote control interface.** Electronic remoting board for 3-speed thermostat.	(1)(2)	**20116481**
	**Remote control interface 0-10V.** Electronic remoting board with input 0-10V.		**20116413**
	**3-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fancoil from the system if combined with a control panel allowing the management. The holder valve allows to balance the head losses of the system. This kit is an alternative to the two-ways valve.		**20101063**


Drawing	Description	Notes	Code
	**2-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fan coil from the system if combined with a control panel allowing the management; the second one allows to balance the head losses of the system. This kit is compulsory in the versions Plus, except for the case when we mount the 3-ways valve or when we have a collector with thermo-electric heads.		**4013453**
	2-ways taps kit.		**4013450**
	Spacer fitting kit for 2-way valve unit for connecting the pipes to the valves with outlet on the floor and for 3-way valves unit for connecting the pipes to the valves with outlet on the wall.		**20069423**
	90°-connection kit, to allow an easy connection of the pipes to the valves for the exit from wall.		**4013452**

(1) Both codes are necessary for the first fan coil.
(2) It must be installed 1 piece for every remoted fan coil.

Ceiling-mounted fan coil units with formwork

Invisible Inverter Ceiling



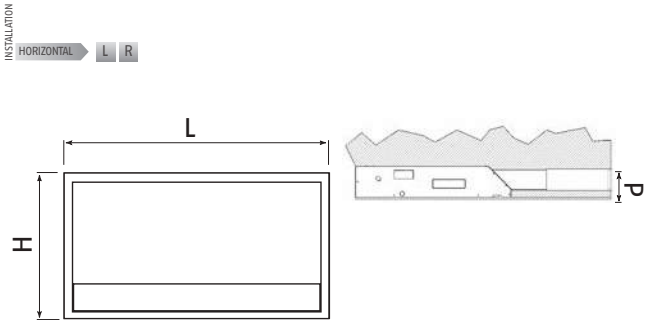

- Fan coil unit with a built-in Brushless Inverter motor complete with template for ceiling installation.

Description	H mm	L mm	P mm
INVISIBLE INVERTER 11	750	770	152
INVISIBLE INVERTER 21	750	970	152
INVISIBLE INVERTER 33	750	1170	152
INVISIBLE INVERTER 40	750	1370	152
INVISIBLE INVERTER 46	750	1570	152

The INVISIBLE INVERTER ceiling-mounted unit is ideally designed for installation in false ceilings, such as in hotel rooms, where direct air intake, via a grille (not included), and air supply, via a distribution duct, are required. This unit can be fitted in false ceilings with limited thickness thanks to the unit's depth of only 14.2 cm.
The cover panel is white and equipped with an intake grille. The telescopic duct allows combination with any type of air outlet grille available on the market. INVISIBLE INVERTER is equipped with DC Brushless Inverter motors.
The DC Brushless motor allows a continuous variation from 0 to 100% of the air flow rate and therefore of the heating and cooling capacity. The INVISIBLE INVERTER heats and cools any room very quickly, with a choice of two dedicated mappings: PERFORMANCE for commercial environments, which require high performance and efficiency, and COMFORT for quiet residential environments. Thanks to the use of DC Brushless motors the INVISIBLE INVERTERs save up to 50% electricity compared to fan coil units with traditional motors (ON/OFF type).
The range is available in 5 models, with cooling capacities from 830 W up to 4560 W and heating capacities from 1090 W up to 4860 W with a wide range of accessories.

- Installation in false ceilings
- Particularly low noise level
- Reduced depth of 14.2 cm
- Wide range of accessories

TECHNICAL DATA

Description	Cooling power 7°C–12°C W (1)		Thermal output 50°C W (2)		Maximum air flow m³/h (4)		Sound pressure max-min dB(A) (5)		Notes	Code
	Performance	Comfort	Performance	Comfort	Performance	Comfort	Performance	Comfort		
WHITE FAN COIL UNIT COMPLETE WITH CEILING INSTALLATION TEMPLATE										
INVISIBLE INVERTER 11	1095	830	1415	1090	197	162	42.2-24.2	39.4-24.2		**20069349**
Built-in unit										**20025164**
Ceiling panel and suction grille									(D)	**20116425**
Telescopic air outlet duct									(D)	**4013486**
INVISIBLE INVERTER 21	2120	1760	2775	2350	389	320	43.1-25.3	40.2-25.3		**20069370**
Built-in unit										**20025166**
Ceiling panel and suction grille									(D)	**20116426**
Telescopic air outlet duct									(D)	**4013487**
INVISIBLE INVERTER 33	3310	2650	3905	3190	560	461	45.5-25.6	42.2-25.6		**20069371**
Built-in unit										**20025167**
Ceiling panel and suction grille									(D)	**20116427**
Telescopic air outlet duct									(D)	**4013488**
INVISIBLE INVERTER 40	3875	3340	4665	4100	699	576	45.9-26.3	42.5-26.3		**20069372**
Built-in unit										**20025169**
Ceiling panel and suction grille									(D)	**20116428**
Telescopic air outlet duct									(D)	**4013489**
INVISIBLE INVERTER 46	4560	3800	5705	4860	787	648	47.2-27.6	43.9-27.6		**20069373**
Built-in unit										**20025171**
Ceiling panel and suction grille									(D)	**20116429**
Telescopic air outlet duct									(D)	**4013490**

Performance refers to the following services:
(1) Ambient air temperature 27°C Tb.s. and 19°C Tb.u.
(2) Air temperature 20°C and same water flow rate as in cooling mode.
(3) Air temperature 20°C.
(4) Air flow rate measured with clean filters.
(5) According to UNI EN ISO 7779:2001.
(D) Availability of the material at our warehouse: 25 working days from the order validation date.
NOTA: the performance setting is recommended for commercial spaces, while the comfort setting is recommended for residential spaces.

ACCESSORIES

Drawing	Description	Notes	Code
	**Control panel wall mounted TOP (MASTER).** TOUCH LCD wall-hung electronic control panel with room probe and ModBus RTU communication protocol. The control panel allows to manage the room temperature through its temperature probe or though the on board probe of the fan coil. The panel allows to control one or more (up to max 30) fan-coils thanks to the on board electronic for control panel wall mounted TOP.	(1)	**20181383**
	**Electronic board for wall mounted control panel TOP (SLAVE).** Electronic remoting board with continuous modulation for remote connection with the wall mounted control panel TOP. It is possible to connect max 30 electronic board with one wall mounted control panel TOP.	(1)(2)	**20181395**
	Control panel for recessed installation.	(1)	**20147241**
	**Remote control interface.** Electronic remoting board for 3-speed thermostat.	(1)(2)	**20116481**
	**Remote control interface 0-10V.** Electronic remoting board with input 0-10V.		**20116413**
	**3-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fancoil from the system if combined with a control panel allowing the management. The holder valve allows to balance the head losses of the system. This kit is an alternative to the two-ways valve.		**20101063**
	**2-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fan coil from the system if combined with a control panel allowing the management; the second one allows to balance the head losses of the system. This kit is compulsory in the versions Plus, except for the case when we mount the 3-ways valve or when we have a collector with thermo-electric heads.		**4013453**
	2-ways taps kit.		**4013450**
	Spacer fitting kit for 2-way valve unit for connecting the pipes to the valves with outlet on the floor and for 3-way valves unit for connecting the pipes to the valves with outlet on the wall.		**20069423**
	90°-connection kit, to allow an easy connection of the pipes to the valves for the exit from wall.		**4013452**

(1) Both codes are necessary for the first fan coil
(2) It must be installed 1 piece for every remoted fan coil


RIELLO

Fan coil for recessed installation

In Inverter
In Inverter Plus





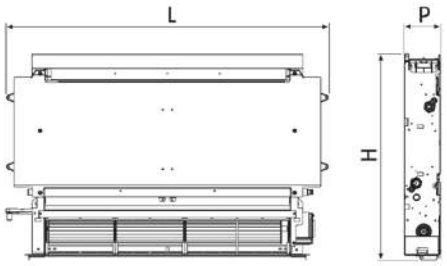

- Fan coils with Brushless inverter motor for recessed installation in the wall

Description	H mm	L mm	P mm
IN INVERTER 11	576	525	126
IN INVERTER 21	576	725	126
IN INVERTER 33	576	925	126
IN INVERTER 40	576	1125	126
IN INVERTER 46	576	1325	126
IN INVERTER PLUS 11	576	525	126
IN INVERTER PLUS 21	576	725	126
IN INVERTER PLUS 33	576	925	126
IN INVERTER PLUS 40	576	1125	126
IN INVERTER PLUS 46	576	1325	126

IN INVERTER is the Riello proposal for fan coils for recessed installation, allowing you to rationalise the space according to the criteria of modern interior architecture. The unit can be recessed in walls that are relatively thin, thanks to the just 12.6 cm deep box.
The entire range comes with DC Brushless Inverter motors. This technological solution provides a continuous variation from 0 to 100% of the air flow rate and as a result the heating and cooling capacity.
IN INVERTER quickly heats and cools any room; with the possibility of choosing between two dedicated functions: PERFORMANCE for commercial needs, when high efficiency and high effectiveness are required, and COMFORT for residential needs, to ensure always maximum low-noise operation.
Thanks to the DC Brushless motors, the IN INVERTER range has an electrical consumption that is 50% lower than fan coils with traditional motors (ON/OFF type). The range comes in 5 models with (PLUS model) and without radiant effect, with a cooling capacity from 830 W up to 4560 W and a heating capacity from 1090 W up to 4860 W.
The vast range of accessories and controls with DISPLAY support a wide range of applications.
All IN INVERTER versions can be installed vertically or horizontally (using a specific accessory), with standard connections on the left (on the right with the relative accessory).
The IN INVERTER PLUS versions can be installed vertically with connections on the left.
The structure is made of zinc-coated sheet metal.

- Ultra low-noise operation
- Just 12,6 cm deep
- Wide range of accessories
- Filters easy to dismount and clean

TECHNICAL DATA

Description	Power cooling 7°C-12°C (1) W		Power heating 50°C (2) W		Maximum air flow rate (4) m³/h		Sound pressure irradiation max-min (5) dB(A)		Notes	Code
	Performance	Comfort	Performance	Comfort	Performance	Comfort	Performance	Comfort		
FAN COIL FOR RECESSED INSTALLATION										
IN INVERTER 11	1095	830	1515	1090	197	162	42.2-24.2	39.4-24.2		**20069349**
IN INVERTER 21	2120	1760	2885	2350	389	320	43.1-25.3	40.2-25.3		**20069370**
IN INVERTER 33	3310	2650	4140	3190	560	461	45.5-25.6	42.2-25.6		**20069371**
IN INVERTER 40	3875	3340	5015	4100	699	576	45.9-26.3	42.5-26.3		**20069372**
IN INVERTER 46	4560	3800	5910	4860	787	648	47.2-27.6	43.9-27.6		**20069373**
FAN COIL WITH RADIANT HEAT PLATE FOR RECESSED INSTALLATION										
IN INVERTER PLUS 11	1095	830	1515	1090	197	162	42.2-24.2	39.4-24.2	(D)	**20069374**
IN INVERTER PLUS 21	2120	1760	2885	2350	389	320	43.1-25.3	40.2-25.3	(D)	**20069375**
IN INVERTER PLUS 33	3310	2650	4140	3190	560	461	45.5-25.6	42.2-25.6	(D)	**20069376**
IN INVERTER PLUS 40	3875	3340	5015	4100	699	576	45.9-26.3	42.5-26.3	(D)	**20069377**
IN INVERTER PLUS 46	4560	3800	5910	4860	787	648	47.2-27.6	43.9-27.6	(D)	**20069378**

Performance refer to the following conditions:
(1) Room air temperature 27 °C d.b. and 19 °C w.b.
(2) Air temperature 20 °C and the same water flow rate achieved in cooling mode
(3) Air temperature 20 °C
(4) Air temperature 20 °C; main fan in "off"
(5) Air flow rate measured with cleaned filters
(6) According to UNI EN ISO 7779:2001
(D) Availability of the material at our warehouse: 25 working days from the order validation date.
NOTE: the performance setting is recommended for commercial spaces, while the comfort setting is recommended for residential spaces.


ACCESSORIES

Drawing	Description	Notes	Code
	**Control panel wall mounted TOP (MASTER).** TOUCH LCD wall-hung electronic control panel with room probe and ModBus RTU communication protocol. The control panel allows to manage the room temperature through its temperature probe or though the on board probe of the fan coil. The panel allows to control one or more (up to max 30) fan-coils thanks to the on board electronic for control panel wall mounted TOP.	(1)	**20181383**
	**Electronic board for wall mounted control panel TOP (SLAVE).** Electronic remoting board with continuous modulation for remote connection with the wall mounted control panel TOP. It is possible to connect max 30 electronic board with one wall mounted control panel TOP.	(1)(2)	**20181395**
	Control panel for recessed installation.	(1)	**20147241**
	**Remote control interface.** Electronic remoting board for 3-speed thermostat.	(1)(2)	**20116481**
	**Remote control interface 0-10V.** Electronic remoting board with input 0-10V.		**20116413**
	**3-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fancoil from the system if combined with a control panel allowing the management. The holder valve allows to balance the head losses of the system. This kit is an alternative to the two-ways valve.		**20101063**
	**2-ways valve kit.** The kit is composed by a valve with thermo-electric head and a holder valve. The first one allows to exclude automatically the panel fan coil from the system if combined with a control panel allowing the management; the second one allows to balance the head losses of the system. This kit is compulsory in the versions Plus, except for the case when we mount the 3-ways valve or when we have a collector with thermo-electric heads.		**4013453**
	2-ways taps kit.		**4013450**

Drawing	Description	Notes	Code
	Spacer fitting kit for 2-way valve unit for connecting the pipes to the valves with outlet on the floor and for 3-way valves unit for connecting the pipes to the valves with outlet on the wall.		**20069423**
	90°-connection kit, to allow an easy connection of the pipes to the valves for the exit from wall.		**4013452**
	Cables kit for right-side connections for IN model (not for PLUS model). It is compulsory for the connections reversal.		**20069415**

(1) Both codes are necessary for the first fan coil
(2) It must be installed 1 piece for every remoted fan coil.

MATCHING ACCESSORIES


Drawing	Description	Size					Notes	Code
		11	21	33	40	46		
	90° air-inlet kit for recessed models IN Inverter (not for Plus models)	●					(D)	**4013481**
			●				(D)	**4013482**
				●			(D)	**4013483**
					●		(D)	**4013484**
						●	(D)	**4013485**
	Upper inlet kit for recessed models IN Inverter	●					(D)	**4013486**
			●				(D)	**4013487**
				●			(D)	**4013488**
					●		(D)	**4013489**
						●	(D)	**4013490**
	Suction kit for recessed models IN Inverter (not for Plus model)	●					(D)	**4013491**
			●				(D)	**4013492**
				●			(D)	**4013493**
					●		(D)	**4013494**
						●	(D)	**4013495**

(D) Availability of the material at our warehouse: 25 working days from the order validation date.

Fan coils - Cassette

RK N Hydroline



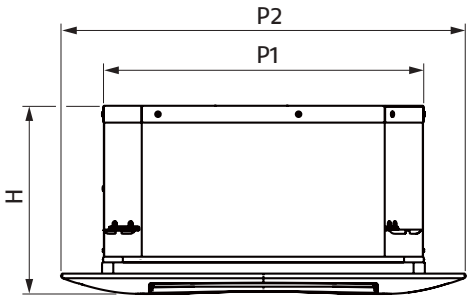

- "Cassette" fan coils

Description	H mm	L1 mm	L2 mm
RK 24 N SET	298	720	569
RK 40 N SET	298	720	569
RK 47 N SET	298	720	569
RK 63 N SET	298	960	825
RK 72 N SET	298	960	825
RK 96 N SET	298	960	825

The RK N cassette fan coil range is designed for heating and/or cooling solutions both for residential or commercial applications wherever a ceiling installation is required in order to meet specific architectural needs.
Thanks to the pleasant aesthetic, the accurate design and the 4-ways adjustable air outlet, the RK N cassette fan coils are Riello's ideal solution for any setting. For a user-friendly interface, the whole range of RK N fan coils can be matched with the wall-hung control panels of Hydrocontrol line:

- TermoComfortPlus and TermoComfort.
- Extremely low noise level
- Washable air filter
- Condensate drain pump supplied as standard
- Ease of installation
- Excellent air distribution through 4 manual wings
- Filters easy to disassemble and clean.

TECHNICAL DATA

	Description	Power cooling kW	Power heating kW	Air flow rate m^3/h	Notes	Code
RK 24 N SET	RK 24 N	2.400	3.200	660	(1)(2)	**20051794**
	Grid panel				(2)	**4012190**
	Summer/Winter automatic switch kit				(2)	**20225028**
RK 40 N SET	RK 40 N	4.000	5.000	735	(1)(2)	**20051795**
	Grid panel				(2)	**4012190**
	Summer/Winter automatic switch kit				(2)	**20225028**
RK 47 N SET	RK 47 N	4.700	6.200	900	(1)(2)	**20051796**
	Grid panel				(2)	**4012190**
	Summer/Winter automatic switch kit				(2)	**20225028**
RK 63 N SET	RK 63 N	6.300	8.110	980	(1)(2)	**20051797**
	Grid panel				(2)	**20051800**
	Summer/Winter automatic switch kit				(2)	**20225028**
RK 72 N SET	RK 72 N	7.200	10.000	1160	(1)(2)	**20051798**
	Grid panel				(2)	**20051800**
	Summer/Winter automatic switch kit				(2)	**20225028**
RK 96 N SET	RK 96 N	9.600	13.000	1.600	(1)(2)	**20051799**
	Grid panel				(2)	**20051800**
	Summer/Winter automatic switch kit				(2)	**20225028**

(*) **TO PURCHASE THE COMPLETE PRODUCT, PLEASE REMEMBER TO ORDER ALL THE CODES** (RK N, GRID PANEL AND SUMMER/WINTER AUTOMATIC SWITCH KIT).
(1) The fan coil must be matched with an electrovalve that manages the functioning.
(2) Accessories "Grid panel" and "Summer/Winter automatic switch kit" must be ordered together with the base unit.
Performance refer to the following conditions:
- fan speed: maximum;
- cooling: flow water 7 °C; inlet air temperature 27 °C Td.b./ 19 °C Tw.b.; (Δt 5 °C);
- heating: flow water 50 °C; inlet air temperature 20 °C Td.b; same water flow rate reached in cooling mode;
- maximum flow water 80 °C.

ACCESSORIES

Description	Code
2-pipes valve kit (24-47 models)	**20035945**
2-pipes valve kit (63-96 models)	**20086595**
Primary air kit	**4012192**
Air lock kit	**4012225**

CONTROLS

Description	Notes	Code
2 pipes "Plus" control (wall-mounted)	(1)	**20081464**
Air probe kit	(2)	**20083816**
Water probe kit		**20083809**
Multiple kit	(3)	**20081499**


(1) Not included the water probe kit code 20083809.
(2) Sensor for remote reading.
(3) One control for each fan coil.

Ductable fan coils


FCU N



FCU

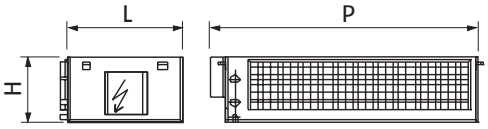

FCU V

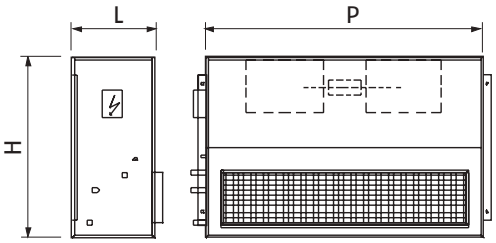

- Fan coils for horizontal and vertical installation

Description	H mm	L mm	P mm
FCU 09 N	296	520	645
FCU 15 N-17 N	296	520	1000
FCU 21 N	325	600	1100
FCU 24 N	325	600	1345
FCU 36 N-43 N	375	600	1345

FCU duct-connected fan coils are designed to provide a preliminary air treatment both for small-sized centralized installations and for installations with fun-coils unists. They are available in 7 models with an air flow rate ranging from 930 to 4.300 m3/h. The possibility to combine FCU units with a series of accessories, both on the outlet and on the intake side, makes them suitable for different uses, starting from the simple functions of cooling and/or heating up to treatments such as filtering, mixing, external air suction, re-heating both through water and electrical.
It is available in two basic versions: one for horizontal installation, having a reduced length, and one for vertical installation. These units consist of an aluzinc casing, provided with a thermal insulation layer made of polyethylene and polyester. All units are equipped with: a synthetic eff. EU3 filter, removable on guide rails, a heat-exchange coil with copper pipes and aluminium wings, a stainless steel AISI 304 condensate trap and double-suction fans with direct coupled motor. All units (except for 09 size because of its reduced electrical absorption) are also equipped with an electrical connection box with connectors protected by a relay.

- Compact dimensions
- Stainless steel AISI 304 condensate trap
- Motorized fan group, that can be inspected from the bottom
- Wide range of accessories enabling the units to be more flexible and suit different application needs.

TECHNICAL DATA

Description	Power cooling kW	Power heating kW	Maximum air loss m³/h	External static pressure Pa	Maximum power input W	Code
MODELS FOR HORIZONTAL INSTALLATION						
FCU 09 N	4.6	9.8	930	90	195	**20095872**
FCU 15 N	7.5	15.5	1.500	100	299	**20095873**
FCU 17 N	9.1	19.7	1.600	85	302	**20095874**
FCU 21 N	10.5	21.6	2.050	115	430	**20095876**
FCU 24 N	13.1	25.9	2.400	105	430	**20095877**
FCU 36 N	15.7	35.5	3.600	120	750	**20095878**
FCU 43 N	20.7	46.3	4.200	115	950	**20095879**

(1) Availability of the material in our warehouse: 20 working days of receipt of the order.
Performance refer to the following conditions:
- Cooling: inlet air temperature 26 °C with 50% r.h.; flow water 7 °C (Δt 5 °C at the nominal air flow)
- Heating: inlet air temperature 20 °C with 50% r.h.; flow water 70 °C (Δt 10 °C at the nominal air flow)


ACCESSORIES

Description	Notes	Code
CP-Basic Speed selector with OFF/cooling/heating button and 3-positions speed switch	(A)	**20083633**
CP-Comfort/R Wall-hung electronic control panel for winter/summer room temperature control, activation or exclusion of the electrical resistance and fan speed selection (minimum, medium, maximum), for models with electrical resistance	(A)	**20083635**
CP-Comfort/V Wall-hung electronic control panel for winter/summer room temperature control, activation or exclusion of water coil (0-10 V control) and fan speed selection (minimum, medium, maximum), for models with water coil	(A)	**20083637**

(A) The accessory cannot be ordered separately but only together with the unit. Anyway it will have be mounted because it is not pre-installed on the product.

OUTLET PLENUM FOR ROUND DUCTS


Destination	Description	Code
Model 09	Outlet plenum for round ducts for FCU 09	**4015962**
Models 15-17	Outlet plenum for round ducts for FCU 15-17	**4015963**
Model 21	Outlet plenum for round ducts for FCU 21	**4015964**
Model 24	Outlet plenum for round ducts for FCU 24	**4015965**
Models 36-43	Outlet plenum for round ducts for FCU 36-43	**4015966**

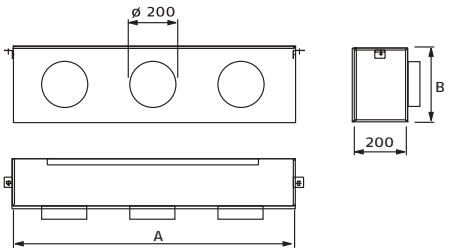

Model	Round ducts		Dimensions mm	
	Number	Diameter mm	A	B
Model 09	2	200	614	295
Models 15-17	3	200	974	295
Model 21	3	200	1074	322
Model 24	4	200	1314	322
Models 36-43	4	200	1314	372

INTAKE PLENUM 90°


Destination	Description	Code
Model 09	Intake plenum 90° for FCU 09	**4015967**
Models 15-17	Intake plenum 90° for FCU 15-17	**4015968**
Model 21	Intake plenum 90° for FCU 21	**4015969**
Model 24	Intake plenum 90° for FCU 24	**4015970**
Models 36-43	Intake plenum 90° for FCU 36-43	**4015971**

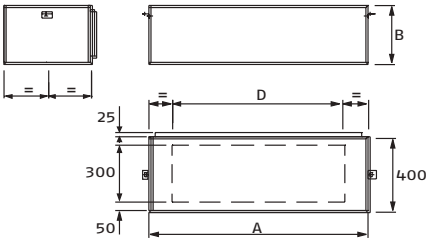

Model	Dimensions mm		
	A	B	D
Model 09	550	278	500
Models 15-17	910	278	800
Model 21	1010	302	800
Model 24	1250	302	1200
Models 36-43	1250	328	1200

INTAKE GRID WITH FIXED WINGS (FOR INTAKE PLENUM)


Destination	Description	Code
Model 09	Intake grid for FCU 09	**4015972**
Models 15-17-21	Intake grid for FCU 15-17-21	**4015973**
Models 24-36-43	Intake grid for FCU 24-36-43	**4015974**

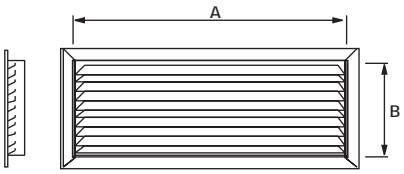

Model	Dimensions mm	
	A	B
Model 09	500	300
Models 15-17-21	800	300
Models 24-36-43	1200	300

ADAPTER FRAME FOR RECTANGULAR DUCTS

Destination	Description	Code
Model 09	Adapter frame for FCU 09	**4015978**
Models 15-17	Adapter frame for FCU 15-17	**4015979**
Model 21	Adapter frame for FCU 21	**4015980**
Model 24	Adapter frame for FCU 24	**4015981**
Models 36-43	Adapter frame for FCU 36-43	**4015982**

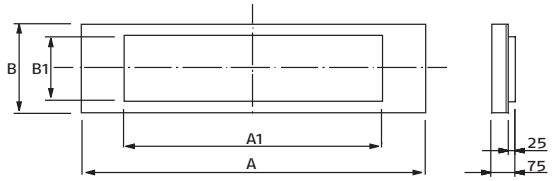


Model	Dimensions mm			
	A	A1	B	B1
Model 09	614	440	295	235
Models 15-17	974	800	295	235
Model 21	1074	800	322	235
Model 24	1314	1070	322	280
Models 36-43	1314	1070	372	280

Water hot air generators

Nuovo Acu-Nuovo Acu F



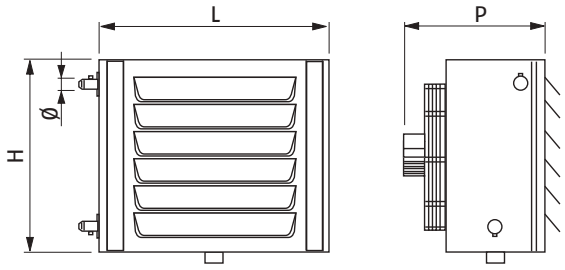

- Heating and cooling versions
- Helicoidal fan

Description	H mm	L mm	P mm	Ø mm	Net weight kg
NUOVO ACU 13 M	390	555	370	1"	15
NUOVO ACU 23 M	440	605	396	1"	18
NUOVO ACU 33 M	490	655	402	1"	21
NUOVO ACU 43 M	540	705	402	1"	24
NUOVO ACU 53 M	590	755	402	1"	28
NUOVO ACU 63 M	640	805	402	1"¼	32
NUOVO ACU 73 T	690	855	460	1"¼	43
NUOVO ACU 23 F	440	605	396	1"	18
NUOVO ACU 33 F	490	655	402	1"	21
NUOVO ACU 43 F	540	705	402	1"	24
NUOVO ACU 63 F	640	805	402	1" ¼	32

NUOVO ACU and NUOVO ACU F are water air-heaters designed for the heating and cooling of small and medium-sized areas, such as warehouses, storehouses, laboratories, sports centres.
The NUOVO ACU consists of 3-ranks coils for applications with low temperature warm water. The NUOVO ACU F is specifically designed for cooling and consists of 3-ranks copper coils with condensate trap.

- Low noise level
- Reduced dimensions
- Coil with coupling provided with vent
- Reversible hydraulic connections
- Possibility of ceiling installation with specific accessory kit (only heating version, not for F versions)
- Available as single-phase (16 models) and three-phase (1 model)
- 10 models
- Wide range of accessories
- The range consists of 4 models for cooling with 3 row coils with output from 19,6 to 42,2 kW.
- Range consists of:
  7 models with 3 row coils with output from 17,3 to 63 kW
  4 models for cooling with 3 row coils with output from 19,6 to 42,2 kWa.

TECHNICAL DATA (HEATING VERSION)

Description	Power heating (*) kW	Air flow rate (**) m³/h	Motor	Nr. revs/min (***)	Code
WATER HOT AIR GENERATOR WITH COPPER 3 ROW COILS					
NUOVO ACU 13M	17.3	1.550	Single-phase	1400-900-700	**4152422**
NUOVO ACU 23M	23.7	2.300	Single-phase	1400-900-700	**4152424**
NUOVO ACU 33M	28.5	2.550	Single-phase	1400-900-700	**4152426**
NUOVO ACU 43M	37.5	3.400	Single-phase	1400-900-700	**4152428**
NUOVO ACU 53M	44.0	3.850	Single-phase	1400-900-700	**4152430**
NUOVO ACU 63M	54.1	4.900	Single-phase	1400-900-700	**4152432**
NUOVO ACU 73T	61.2	6.150	Three-phase	900-700	**4152414**

(*) Performance refer to the following conditions: ΔT water 85-70 °C, inlet air temparature +15 °C, 50% r.h., 1013 mbar, fan at the maximum speed.
(**) Performance refer to fan at the maximum speed.
(***) The variation of revolutions number can be obtained by applying specific accessories.


TECHNICAL DATA (COOLING VERSION)

Description	Power heating (*) kW	Power cooling (**) kW	Air flow rate m³/h	Motor	Nr. revs/min	Notes	Code
WATER HOT AIR GENERATOR WITH COPPER 3 ROW COILS FOR COOLING							
NUOVO ACU 23F	19,6	10,2	1.520	Single-phase	900	(D)	**4152501**
NUOVO ACU 33F	24,5	12,9	1.900	Single-phase	900	(D)	**4152502**
NUOVO ACU 43F	27,9	15,1	2.000	Single-phase	900	(D)	**4152503**
NUOVO ACU 63F	42,2	21,5	3.150	Single-phase	900	(D)	**4152504**

(*) Performance refer to the following conditions: ΔT water 85-70 °C, inlet air temparature +15 °C, 50% r.h., 1013 mbar.
(**) Performance refer to the following conditions: ΔT water 7-12 °C, inlet air termperature +30 °C, 60% r.h., 1013 mbar.
(D) Availability of the material at our warehouse: 30 working days from the date of the order's validation.

ACCESSORIES

Description	Destination	Code
Single-phase 4-position speed regulator kit	NUOVO ACU 13-63 M NUOVO ACU 23-63 F	**20092637**
Three-phase control panel kit	NUOVO ACU 73 T	**4155602**
Three-phase speed manual selector kit	NUOVO ACU 73 T	**4155604**
Support brackets	All models	**4155606**
Ceiling installation kit	NUOVO ACU 13 M	**4155609**
Ceiling installation kit	NUOVO ACU 23 M	**4155611**
Ceiling installation kit	NUOVO ACU 33 M	**4155613**
Ceiling installation kit	NUOVO ACU 43 M	**4155615**
Ceiling installation kit	NUOVO ACU 53 M	**4155617**
Ceiling installation kit	NUOVO ACU 63 M	**4155619**
Ceiling installation kit	NUOVO ACU 73 T	**4155620**
Vertical dampers kit	NUOVO ACU 13 M	**4155626**
Vertical dampers kit	NUOVO ACU 23 M - 23 F	**4155628**
Vertical dampers kit	NUOVO ACU 33 M - 33 F	**4155630**
Vertical dampers kit	NUOVO ACU 43 M - 43 F	**4155632**
Vertical dampers kit	NUOVO ACU 53 M	**4155634**
Vertical dampers kit	NUOVO ACU 63 M - 63 F	**4155636**
Vertical dampers kit	NUOVO ACU 73 T	**4155638**



SYSTEM COMPLEMENTARY ITEMS

THERMOSTAT AND CHRONOTERMOSTAT 431

HEAT-EXCHANGERS 436

WATER CIRCULATORS 455

Overview of T300 and T200 configurations, T300-Hy and T300-I

			BOILER			HEAT PUMP				IOT
		FULL GAS	 FAMILY HM	 RESIDENCE HM						✓
T300 T200	 	FULL ELECTRIC				 NXHP	 NXHM	 FAMILY SPRINT		✓
		HYBRID	 FAMILY HM	 RESIDENCE HM		 NXHP	 NXHM	 FAMILY SPRINT		✓
T300-Hy		HYBRID			 START				 RIELLO ADAPTO HYBRID(*)	✓
T300-I		FULL ELECTRIC						 DOMUS M		✓

(*) Available only in the Hybrid Systems section with split heat pump

THERMOSTAT AND CHRONOTERMOSTAT

ENVIRONMENT MANAGEMENT

SMART REMOTE CONTROL & ENERGY MANAGEMENT SYSTEM



HI, COMFORT T300

page 432

SMART REMOTE CONTROL



HI, COMFORT T100 WI-FI

page 433

THERMOSTAT AND CHRONOTERMOSTAT



CHRONORIELLO


page 435

Smart remote control


Hi, Comfort T300



T300

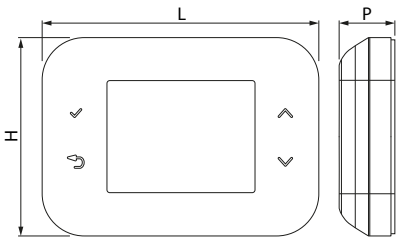

T200



- Multiple manageable energy sources (gas, electric, hybrid)
- Latest generation APP
- Cooling and heating efficiency

Description	H mm	L mm	P mm
Hi, Comfort T300	95	132	95
Hi, Comfort T200	96	71,8	26

Hi, Comfort T300 combines the functions of thermostat for the first zone of the home, system manager for heating and cooling generation systems, and gateway for internet access, allowing the use of Hi, Comfort app.
With Hi, comfort T200 also allows multi-zone control. Hi, Comfort T300, in fact, communicates via ModBUS with the heating and cooling generation section (boiler and heat pump) and in wireless communication (radio) with any Hi, Comfort T200 for local control. With the integrated gateway it then connects to the home router to guarantee access to the Internet and the use of the Hi, Comfort app.

TECHNICAL DATA

Description	Code
Hi, Comfort T300	**20205322**

RANGE DESCRIPTION

Drawing	Description	Code
	**Environment control Hi, Comfort T200** To be used in combination with a controller via RF communication. Advanced environment sensor, equipped with LCD display, allowing to view and adjust the temperature and the environment set, and the operating mode of the system and the zone it is associated with. Powered by 2 AA batteries. Supplied with plastic support for shelf installation. Class-ErP Contribution: VI-4% (*); I-1% (**).	**20211852**


(*) With connection via OTBus.
(**) In on/off connection.

NOTE:
The following versions are also available:
Hi, Comfort T300-Hy, only for Riello Adapto Hybrid
Hi, Comfort T300-I, only for Domus M

Smart remote control

Hi, Comfort T100 Wi-Fi





- Modulating room controls
- Remote interface for boiler
- Remote management through APP

Description	H mm	L mm	P mm
Hi, Comfort T100 Wi-Fi	89	135	28

Hi, Comfort is the smart and easy solution by Riello to manage your domestic comfort both through the traditional wall control and the new app Hi, Comfort, freely downloadable for iOS and Android systems, that permits to easy control the boiler and the temperature inside the house, making a fantastic user experience for end user a real thing. Hi, Comfort app, in fact, meets and respect all the standards that current market requires in terms of simplicity of usage, wide compatibility and highest security.
Hi, Comfort is available for OT connection to better exploit modulation capability of the boiler (reaching A+ standard, according to EU Delegated Regulation No. 811/2013) or with On/Off to reach maximum simplicity.
It is possible to control up to 8 heating zones, each one controlled by its own Hi, Comfort to independently set temperature and time windows.
Installing Hi, Comfort is easy and in case of replacement of an old thermostat no renovation of the electric wiring is required. Hi, Comfort is powered by batteries, thus allowing a truly wireless installation: Hi, Comfort can be installed anywhere in the house and connected to the boiler through Hi, Comfort G100-W or radio base station Hi, Comfort G100-R. All procedures that with a traditional thermostat might look complicated, such as daily/weekly programming, are now easily within everyone's means thanks to touch screen technology.

TECHNICAL DATA

Description	Notes	Code
Hi, Comfort T100 Wi-Fi		**20193354**
Hi, Comfort T100		**20193352**
Hi, Comfort G100-W		**20193355**
Hi, Comfort G100-R		**20193356**
ITRF11 interface board	(1)	**20164477**

(1) Only for "old model" Family Condens.

RANGE DESCRIPTION

Drawing	Description	Code
	**Hi, Comfort T100 Wi-Fi** Complete KIT for wi-fi installation, containing a room control Hi, Comfort T100 and gateway Hi, Comfort G100-W. Package includes batteries, wires, transformer, screws, anchors, double-sided tape, magnetic tape and technical instructions. Class-ErP grant: VI-4% (*); I-1% (**).	**20193354**
	**Hi, Comfort T100** Room thermostat Hi, Comfort T100 ideal for replacement and new buildings, both for single zone and for multi-zones application. Hi, Comfort T100 can be connected to the internet coupled with Hi, Comfort G100-W (optional). Package includes batteries, screws, anchors, double-sided tape and technical instructions. Class-ErP grant: V-3% (*); I-1% (**).	**20193352**
	**Hi, Comfort G100-W** Hi, Comfort G100-W is the device permitting internet connection through domestic Wi-Fi net. It allows as well OT connection with the boiler for remote advanced control. Package includes wires, transformer, double-sided tape.	**20193355**
	**Hi, Comfort G100-R** Radio-frequency based device allowing wireless connection of control Hi, Comfort T100 to the boiler (both ON/OFF and through OTBus). It can be used as well when weakness of Wi-Fi signal preclude to install Hi, Comfort G100-W close to the boiler.	**20193356**
	**ITRF11 interface board** (Only for Family Condens "former version"). To be used according to the kind of boiler (consult dedicated section) in OTBus operation. For operation in ON/OFF mode it is not required.	**20164477**


(*) With connection via OTBus.
(**) In on/off connection.

Thermostats and chronostats


ChronoRiello



CHRONORIELLO 7D



TERMORIELLO DGT



- The ChronoRiello are digital programmable thermostats for programming both daily and weekly temperature, in heating mode and allow optimal management of the system

Description	H mm	L mm	P mm
TERMORIELLO DGT	86	86	20
TERMORIELLO DGT WIRELESS	86	86	20
CHRONORIELLO 7D	86	86	20
CHRONORIELLO 7D WIRELESS	86	86	20

TERMORIELLO DGT
Room thermostat with digital display.

TERMORIELLO DGT WIRELESS
Room thermostat with digital display.

CHRONORIELLO 7D
Digital weekly programmable thermostat. Three selectable temperature levels (Comfort-Economy-Antifreeze).
Personalized weekly programming. Cooling function (it is necessary for this function to install an external separation relay).
Party function (always warm up request and programmed time slots ignored). Daily band with time division in 60 minute segments.

CHRONORIELLO 7D WIRELESS
Digital weekly chronothermostat digital display in radio frequency.
Digital weekly programmable thermostat. Three selectable temperature levels (Comfort-Economy-Antifreeze).
Personalized weekly programming. Party function (heating request always active at programmed time slots ignored). Daily band with time division in 60 minute segments.

- Simplicity of installation
- Ease of use
- Temperature selection knob on thermostat front
- Calibration probe on all models
- Series batteries on all models
- The wireless models work in radio frequency allowing the connection to the boiler without the use of electric cables
- On / off hysteresis can be calibrated on all models.

TECHNICAL DATA

Description	Type	Code
Termoriello dgt	Thermostat	**20059640**
Termoriello dgt Wireless	Radio frequency thermostat	**20063871**
ChronoRiello 7D	Weekly programmable thermostat	**20063873**
ChronoRiello 7D Wireless	Digital weekly chronothermostat digital display in radio frequency	**20101747**


HEAT-EXCHANGERS



Plate heat-exchanger

Riello HEATgate



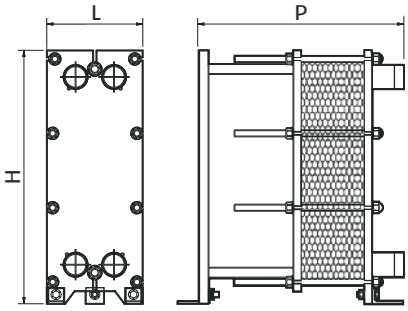

- Plate heat-exchangers for heat generators, heat pumps and solar applications

Description	Plates Nr. from - to	H mm	L mm	P mm
SP 20	11-29	470	200	252
	41-49	470	200	352
SP 30	17-27	755	200	252
	37	755	200	352
	53-69	755	200	552
SP 35	21-41	678	310	408
	49-71	678	310	548
	81-117	678	310	688
SP 40	17-41	729	385	408
SP 45	21-39	1008	310	408
	45-61	1008	310	548
	73	1008	310	688
SP 50	35-41	992	385	408
	45-71	992	385	548
	79-101	992	385	688
SP 60	41-101	1124	509	790
	109-201	1124	509	1290

RIELLO HEATgate is a range of inspectable plates heat-exchangers created by RIELLO to suit as many applications as possible. Its technical features make it a high-quality, long-lasting product, while ensuring the highest efficiency and reliability during the product life.
The RIELLO HEATgate range consists of heat-exchangers with plates made of stainless steel AISI316, NBR or EPDM peroxide gaskets (according to the application), and is equipped with threaded couplings made of AISI316.
The heat-exchanger structure ensure tightness up to 10 bars. The different sizes perfectly meet the thermal programmes and applications shown in the table, thus ensuring high efficiency and reduced pressure drops.
Ease of maintenance thanks to the quality of materials.

TECHNICAL DATA

Description	Plates Nr.	DN	MIX (*) %	Weight kg	Kit type (**)		Code
					Insulation	Feet	
HEAT-EXCHANGER AISI 316 L, WITH EPDM PEROXIDE GASKETS							
SP 20-DN32 29 (29A) E	29	Rp 1" 1/4 (Gas - M)	100%	31,3	Kit C1	Kit P1	**20200581**
SP 20-DN32 41 (41A) E	41	Rp 1" 1/4 (Gas - M)	100%	34,7	Kit C2	Kit P1	**20200583**
SP 30-DN32 17 (17A) E	17	Rp 1" 1/4 (Gas - M)	100%	45	Kit C3	Kit P1	**20200584**
SP 30-DN32 27 (27A) E	27	Rp 1" 1/4 (Gas - M)	100%	48,7	Kit C3	Kit P1	**20200585**
SP 30-DN32 37 (37A) E	37	Rp 1" 1/4 (Gas - M)	100%	53,4	Kit C4	Kit P1	**20200586**
SP 30-DN32 53 (53A) E	53	Rp 1" 1/4 (Gas - M)	100%	61,5	Kit C5	Kit P1	**20200587**
SP 30-DN32 69 (69A) E	69	Rp 1" 1/4 (Gas - M)	100%	67,4	Kit C5	Kit P1	**20200588**
SP 45-DN50 21 (11) E	21	Rp 2" (Gas - M)	50%	119,7	Kit C10	Kit P2	**20200589**
SP 45-DN50 29 (15) E	29	Rp 2" (Gas - M)	50%	125,2	Kit C10	Kit P2	**20200590**
SP 45-DN50 33 (17) E	33	Rp 2" (Gas - M)	50%	128	Kit C10	Kit P2	**20200591**
SP 45-DN50 39 (20) E	39	Rp 2" (Gas - M)	50%	132,2	Kit C10	Kit P2	**20200592**
SP 45-DN50 45 (23) E	45	Rp 2" (Gas - M)	50%	140,6	Kit C11	Kit P2	**20200593**
SP 45-DN50 51 (26) E	51	Rp 2" (Gas - M)	50%	144,7	Kit C11	Kit P2	**20200594**
SP 45-DN50 61 (31) E	61	Rp 2" (Gas - M)	50%	151,6	Kit C11	Kit P2	**20200595**
SP 45-DN50 73 (37) E	73	Rp 2" (Gas - M)	50%	164,2	Kit C12	Kit P2	**20200596**
SP 50-DN65 69 (52) E	69	Rp 2" 1/2 (Gas - M)	75%	217,7	Kit C15	Kit P2	**20200598**
SP 50-DN65 87 (66) E	87	Rp 2" 1/2 (Gas - M)	75%	238,1	Kit C16	Kit P2	**20200599**
SP 50-DN65 101 (76) E	101	Rp 2" 1/2 (Gas - M)	75%	250,1	Kit C16	Kit P2	**20200600**
SP 60-DN100 87 (87) E	87	DN100 - PN16	100%	375,7	Kit C17	Kit P3	**20200601**
SP 60-DN100 101 (101) E	101	DN100 - PN16	100%	391,7	Kit C17	Kit P3	**20200602**
SP 60-DN100 115 (115) E	115	DN100 - PN16	100%	431,2	Kit C18	Kit P3	**20200603**
SP 60-DN100 129 (129) E	129	DN100 - PN16	100%	447,1	Kit C18	Kit P3	**20200604**
PLATE HEAT-EXCHANGER AISI 316 L, WITH NBR GASKETS							
SP 20-DN32 11 (11) N	11	Rp 1" 1/4 (Gas - M)	100%	27,1	Kit C1	Kit P1	**20200606**
SP 20-DN32 21 (21) N	21	Rp 1" 1/4 (Gas - M)	100%	29,4	Kit C1	Kit P1	**20200607**
SP 20-DN32 29 (29) N	29	Rp 1" 1/4 (Gas - M)	100%	31,2	Kit C1	Kit P1	**20200608**
SP 20-DN32 41 (41) N	41	Rp 1" 1/4 (Gas - M)	100%	34,8	Kit C2	Kit P1	**20200609**
SP 20-DN32 49 (49) N	49	Rp 1" 1/4 (Gas - M)	100%	36,6	Kit C2	Kit P1	**20200610**
SP 35-DN50 21 (21) N	21	Rp 2" (Gas - M)	100%	79,2	Kit C6	Kit P2	**20200611**
SP 35-DN50 27 (27) N	27	Rp 2" (Gas - M)	100%	81,7	Kit C6	Kit P2	**20200613**
SP 35-DN50 33 (33) N	33	Rp 2" (Gas - M)	100%	84,3	Kit C6	Kit P2	**20200614**
SP 35-DN50 41 (41) N	41	Rp 2" (Gas - M)	100%	87,7	Kit C6	Kit P2	**20200615**
SP 35-DN50 49 (49) N	49	Rp 2" (Gas - M)	100%	94,7	Kit C7	Kit P2	**20200616**
SP 35-DN50 53 (53) N	53	Rp 2" (Gas - M)	100%	96,4	Kit C7	Kit P2	**20200618**
SP 35-DN50 61 (61) N	61	Rp 2" (Gas - M)	100%	99,8	Kit C7	Kit P2	**20200619**
SP 35-DN50 71 (71) N	71	Rp 2" (Gas - M)	100%	104,1	Kit C7	Kit P2	**20200620**
SP 35-DN50 81 (81) N	81	Rp 2" (Gas - M)	100%	111,9	Kit C8	Kit P2	**20200621**
SP 35-DN50 89 (89) N	89	Rp 2" (Gas - M)	100%	115,3	Kit C8	Kit P2	**20200622**
SP 35-DN50 101 (101) N	101	Rp 2" (Gas - M)	100%	120,4	Kit C8	Kit P2	**20200623**
SP 35-DN50 117 (117) N	117	Rp 2" (Gas - M)	100%	124,1	Kit C8	Kit P2	**20209452**
SP 40-DN65 17 (17) N	17	Rp 2" 1/2 (Gas - M)	100%	102,3	Kit C13	Kit P2	**20200624**
SP 40-DN65 21 (21) N	21	Rp 2" 1/2 (Gas - M)	100%	104,7	Kit C13	Kit P2	**20200626**
SP 40-DN65 25 (25) N	25	Rp 2" 1/2 (Gas - M)	100%	107	Kit C13	Kit P2	**20200628**
SP 40-DN65 33 (33) N	33	Rp 2" 1/2 (Gas - M)	100%	111,7	Kit C13	Kit P2	**20200631**
SP 40-DN65 41 (41) N	41	Rp 2" 1/2 (Gas - M)	100%	116,4	Kit C13	Kit P2	**20200633**
SP 50-DN65 35 (14) N	35	Rp 2" 1/2 (Gas - M)	40%	183,6	Kit C14	Kit P2	**20200635**
SP 50-DN65 41 (17) N	41	Rp 2" 1/2 (Gas - M)	40%	188,7	Kit C14	Kit P2	**20200637**
SP 50-DN65 45 (18) N	45	Rp 2" 1/2 (Gas - M)	40%	197,1	Kit C15	Kit P2	**20200638**
SP 50-DN65 51 (21) N	51	Rp 2" 1/2 (Gas - M)	40%	202,2	Kit C15	Kit P2	**20200640**
SP 50-DN65 55 (22) N	55	Rp 2" 1/2 (Gas - M)	40%	205,7	Kit C15	Kit P2	**20200642**
SP 50-DN65 61 (25) N	61	Rp 2" 1/2 (Gas - M)	40%	210,8	Kit C15	Kit P2	**20200644**
SP 50-DN65 65 (26) N	65	Rp 2" 1/2 (Gas - M)	40%	214,3	Kit C15	Kit P2	**20200645**
SP 50-DN65 71 (29) N	71	Rp 2" 1/2 (Gas - M)	40%	219,4	Kit C15	Kit P2	**20200646**
SP 50-DN65 79 (32) N	79	Rp 2" 1/2 (Gas - M)	40%	231,2	Kit C16	Kit P2	**20200647**
SP 60-DN100 41 (33) N	41	DN100 - PN16	80%	323,7	Kit C17	Kit P3	**20200648**
SP 60-DN100 45 (36) N	45	DN100 - PN16	80%	328,3	Kit C17	Kit P3	**20200658**
SP 60-DN100 51 (41) N	51	DN100 - PN16	80%	335,2	Kit C17	Kit P3	**20200659**
SP 60-DN100 61 (49) N	61	DN100 - PN16	80%	346,8	Kit C17	Kit P3	**20200663**
SP 60-DN100 67 (54) N	67	DN100 - PN16	80%	353,7	Kit C17	Kit P3	**20200665**
SP 60-DN100 77 (62) N	77	DN100 - PN16	80%	365,3	Kit C17	Kit P3	**20200667**
SP 60-DN100 87 (70) N	87	DN100 - PN16	80%	376,8	Kit C17	Kit P3	**20200670**
SP 60-DN100 97 (78) N	97	DN100 - PN16	80%	388,4	Kit C17	Kit P3	**20200672**
SP 60-DN100 109 (88) N	109	DN100 - PN16	80%	425,7	Kit C18	Kit P3	**20200673**
SP 60-DN100 119 (96) N	119	DN100 - PN16	80%	437,3	Kit C18	Kit P3	**20200674**
SP 60-DN100 139 (112) N	139	DN100 - PN16	80%	460,4	Kit C18	Kit P3	**20200675**
SP 60-DN100 169 (136) N	169	DN100 - PN16	80%	495	Kit C18	Kit P3	**20200676**
SP 60-DN100 201 (161) N	201	DN100 - PN16	80%	532	Kit C18	Kit P3	**20200677**

(*) % of high efficiency plates on the total
(**) See matching table with insulation kit page 439

INSULATION KITS MATCHING TABLE

Thermoformed insulation kits to combine with the heatgate plate heat exchangers for high and low temperature applications.



Description	Insulation kit type	Exchanger type	Maximum plate nr.	Code
Insulation kit SP 20 29	Kit C1	20	29	**20096860**
Insulation kit SP 20 49	Kit C2	20	49	**20096862**
Insulation kit SP 30 29	Kit C3	30	29	**20096863**
Insulation kit SP 30 49	Kit C4	30	49	**20096864**
Insulation kit SP 30 75	Kit C5	30	75	**20096865**
Insulation kit SP 35 41	Kit C6	35	41	**20140442**
Insulation kit SP 35 71	Kit C7	35	71	**20140443**
Insulation kit SP 35 101	Kit C8	35	101	**20140444**
Insulation kit SP 35 151	Kit C9	35	151	**20140445**
Insulation kit SP 45 41	Kit C10	45	41	**20201531**
Insulation kit SP 45 71	Kit C11	45	71	**20201532**
Insulation kit SP 45 101	Kit C12	45	101	**20201533**
Insulation kit SP 40 41	Kit C13	40	41	**20201534**
Insulation kit SP 50 41	Kit C14	50	41	**20201537**
Insulation kit SP 50 71	Kit C15	50	71	**20201538**
Insulation kit SP 50 101	Kit C16	50	101	**20201539**
Insulation kit SP 60 101	Kit C17	60	101	**20096918**
Insulation kit SP 60 201	Kit C18	60	201	**20116198**

FEET MATCHING TABLE

Description	Feet kit	Exchanger type	Code
Ground fixing kit SP 20-30	Kit P1	20-30	**20120281**
Ground fixing kit SP 35-40-45-50	Kit P2	35-40-45-50	**20120282**
Ground fixing kit SP 60	Kit P3	60	**20120284**



PLATE HEAT EXCHANGER COMBINATIONS FOR BOILER OPERATION WITH DIFFERENT ΔT ml

CONDEXA HPR



Description			Plate heat exchangers					
			 ΔT ml = 10 °C ΔT primary/secondary = 20 °C TAverage secondary circuit = 60 °C			 ΔT ml=7.2 °C ΔT primary = 20 °C ΔT secondary = 15 °C TAverage secondary circuit = 67,5 °C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code	Heat exchanger model	DN	Code
2	CONDEXA HPR 2x 35	70	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**
	CONDEXA HPR 2x 45	90	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**
	CONDEXA HPR 2x 55	110	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	CONDEXA HPR 2x 70	140	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
3	CONDEXA HPR 3x 35	105	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**
	CONDEXA HPR 3x 45	140	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	CONDEXA HPR 3x 55	165	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**
	CONDEXA HPR 3x 70	210	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**
4	CONDEXA HPR 4x 35	140	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	CONDEXA HPR 4x 45	180	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**
	CONDEXA HPR 4x 55	220	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**	SP 35-DN50 53 (53) N	Rp 2" (G-M)*	**20200618**
	CONDEXA HPR 4x 70	280	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**

(*) G-M: Gas - M

CONDEXA PRO



Description			Plate heat exchangers					
			 ΔT ml = 10 °C ΔT primary/secondary = 20 °C TAverage secondary circuit = 60 °C			 ΔT ml=7.2 °C ΔT primary = 20 °C ΔT secondary = 15 °C TAverage secondary circuit = 67,5 °C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code	Heat exchanger model	DN	Code
2	CONDEXA PRO 2x 57 P	114	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	CONDEXA PRO 2x 70 P	136	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	CONDEXA PRO 2x 90	180	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**
	CONDEXA PRO 2x 100	194	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**
	CONDEXA PRO 2x 115	224	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**	SP 35-DN50 53 (53) N	Rp 2" (G-M)*	**20200618**
	CONDEXA PRO 2x 135	262	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**
3	CONDEXA PRO 3x 57 P	171	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**
	CONDEXA PRO 3x 70 P	204	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**
	CONDEXA PRO 3x 90	270	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**
	CONDEXA PRO 3x 100	291	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**	SP 35-DN50 71 (71) N	Rp 2" (G-M)*	**20200620**
	CONDEXA PRO 3x 115	336	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**	SP 35-DN50 81 (81) N	Rp 2" (G-M)*	**20200621**
	CONDEXA PRO 3x 135	393	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**	SP 35-DN50 89 (89) N	Rp 2" (G-M)*	**20200622**
4	CONDEXA PRO 4x 57 P	228	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**	SP 35-DN50 53 (53) N	Rp 2" (G-M)*	**20200618**
	CONDEXA PRO 4x 70 P	272	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**
	CONDEXA PRO 4x 90	360	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**	SP 35-DN50 81 (81) N	Rp 2" (G-M)*	**20200621**
	CONDEXA PRO 4x 100	388	SP 35-DN50 53 (53) N	Rp 2" (G-M)*	**20200618**	SP 35-DN50 89 (89) N	Rp 2" (G-M)*	**20200622**
	CONDEXA PRO 4x 115	448	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**	SP 35-DN50 101 (101) N	Rp 2" (G-M)*	**20200623**
	CONDEXA PRO 4x 135	524	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**	SP 50-DN65 55 (22) N	Rp 2" 1/2 (G-M)*	**20200642**

CONDEXA PRO

Description			Plate heat exchangers					
			 ΔT ml = 10 °C ΔT primary/secondary = 20 °C T Average secondary circuit = 60 °C			 ΔT ml=7.2 °C ΔT primary = 20 °C ΔT secondary = 15 °C T Average secondary circuit = 67,5 °C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code	Heat exchanger model	DN	Code
5	CONDEXA PRO 5x 57 P	285	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**	SP 35-DN50 71 (71) N	Rp 2" (G-M)*	**20200620**
	CONDEXA PRO 5x 70 P	340	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**	SP 35-DN50 81 (81) N	Rp 2" (G-M)*	**20200621**
	CONDEXA PRO 5x 90	450	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**	SP 35-DN50 101 (101) N	Rp 2" (G-M)*	**20200623**
	CONDEXA PRO 5x 100	485	SP 35-DN50 71 (71) N	Rp 2" (G-M)*	**20200620**	SP 35-DN50 101 (101) N	Rp 2" (G-M)*	**20200623**
	CONDEXA PRO 5x 115	560	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**	SP 50-DN65 55 (22) N	Rp 2" 1/2 (G-M)*	**20200642**
	CONDEXA PRO 5x 135	655	SP 50-DN65 45 (18) N	Rp 2" 1/2 (G-M)*	**20200638**	SP 50-DN65 65 (26) N	Rp 2" 1/2 (G-M)*	**20200645**
6	CONDEXA PRO 6x 57 P	342	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**	SP 35-DN50 81 (81) N	Rp 2" (G-M)*	**20200621**
	CONDEXA PRO 6x 70 P	408	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**	SP 35-DN50 89 (89) N	Rp 2" (G-M)*	**20200622**
	CONDEXA PRO 6x 90	540	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**	SP 50-DN65 55 (22) N	Rp 2" 1/2 (G-M)*	**20200642**
	CONDEXA PRO 6x 100	582	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**	SP 50-DN65 61 (25) N	Rp 2" 1/2 (G-M)*	**20200644**
	CONDEXA PRO 6x 115	672	SP 50-DN65 45 (18) N	Rp 2" 1/2 (G-M)*	**20200638**	SP 50-DN65 65 (26) N	Rp 2" 1/2 (G-M)*	**20200645**
	CONDEXA PRO 6x 135	786	SP 50-DN65 51 (21) N	Rp 2" 1/2 (G-M)*	**20200640**	SP 50-DN65 79 (32) N	Rp 2" 1/2 (G-M)*	**20200647**
7	CONDEXA PRO 7x 57 P	399	SP 35-DN50 53 (53) N	Rp 2" (G-M)*	**20200618**	SP 35-DN50 89 (89) N	Rp 2" (G-M)*	**20200622**
	CONDEXA PRO 7x 70 P	476	SP 35-DN50 71 (71) N	Rp 2" (G-M)*	**20200620**	SP 35-DN50 101 (101) N	Rp 2" (G-M)*	**20200623**
	CONDEXA PRO 7x 90	630	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**	SP 50-DN65 65 (26) N	Rp 2" 1/2 (G-M)*	**20200645**
	CONDEXA PRO 7x 100	679	SP 50-DN65 45 (18) N	Rp 2" 1/2 (G-M)*	**20200638**	SP 50-DN65 71 (29) N	Rp 2" 1/2 (G-M)*	**20200646**
	CONDEXA PRO 7x 115	784	SP 50-DN65 51 (21) N	Rp 2" 1/2 (G-M)*	**20200640**	SP 50-DN65 79 (32) N	Rp 2" 1/2 (G-M)*	**20200647**
	CONDEXA PRO 7x 135	917	SP 60-DN100 45 (36) N	DN100 - PN16	**20200658**	SP 60-DN100 67 (54) N	DN100 - PN16	**20200665**
8	CONDEXA PRO 8x 57 P	456	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**	SP 35-DN50 101 (101) N	Rp 2" (G-M)*	**20200623**
	CONDEXA PRO 8x 70 P	544	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**	SP 50-DN65 55 (22) N	Rp 2" 1/2 (G-M)*	**20200642**
	CONDEXA PRO 8x 90	720	SP 50-DN65 51 (21) N	Rp 2" 1/2 (G-M)*	**20200640**	SP 50-DN65 71 (29) N	Rp 2" 1/2 (G-M)*	**20200646**
	CONDEXA PRO 8x 100	776	SP 50-DN65 55 (22) N	Rp 2" 1/2 (G-M)*	**20200642**	SP 50-DN65 79 (32) N	Rp 2" 1/2 (G-M)*	**20200647**
	CONDEXA PRO 8x 115	896	SP 60-DN100 45 (36) N	DN100 - PN16	**20200658**	SP 60-DN100 67 (54) N	DN100 - PN16	**20200665**
	CONDEXA PRO 8x 135	1048	SP 60-DN100 51 (41) N	DN100 - PN16	**20200659**	SP 60-DN100 77 (62) N	DN100 - PN16	**20200667**
9	CONDEXA PRO 9x 57 P	513	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**	SP 50-DN65 51 (21) N	Rp 2" 1/2 (G-M)*	**20200640**
	CONDEXA PRO 9x 70 P	612	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**	SP 50-DN65 61 (25) N	Rp 2" 1/2 (G-M)*	**20200644**
	CONDEXA PRO 9x 90	810	SP 60-DN100 41 (33) N	DN100 - PN16	**20200648**	SP 60-DN100 61 (49) N	DN100 - PN16	**20200663**
	CONDEXA PRO 9x 100	873	SP 60-DN100 45 (36) N	DN100 - PN16	**20200658**	SP 60-DN100 67 (54) N	DN100 - PN16	**20200665**
	CONDEXA PRO 9x 115	1008	SP 60-DN100 51 (41) N	DN100 - PN16	**20200659**	SP 60-DN100 77 (62) N	DN100 - PN16	**20200667**
10	CONDEXA PRO 10x 57 P	570	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**	SP 50-DN65 61 (25) N	Rp 2" 1/2 (G-M)*	**20200644**
	CONDEXA PRO 10x 70 P	680	SP 50-DN65 45 (18) N	Rp 2" 1/2 (G-M)*	**20200638**	SP 50-DN65 71 (29) N	Rp 2" 1/2 (G-M)*	**20200646**
	CONDEXA PRO 10x 90	900	SP 60-DN100 45 (36) N	DN100 - PN16	**20200658**	SP 60-DN100 67 (54) N	DN100 - PN16	**20200665**
	CONDEXA PRO 10x 100	970	SP 60-DN100 51 (41) N	DN100 - PN16	**20200659**	SP 60-DN100 77 (62) N	DN100 - PN16	**20200667**
	CONDEXA PRO 10x 115	1120	SP 60-DN100 61 (49) N	DN100 - PN16	**20200663**	SP 60-DN100 87 (70) N	DN100 - PN16	**20200670**


(*) G-M: Gas - M

STEEL PRO POWER

Description			Plate heat exchangers					
			 ΔT ml = 10 °C ΔT primary/secondary = 20 °C T Average secondary circuit = 60°C			 ΔT ml=7.2 °C ΔT primary = 20 °C ΔT secondary = 15 °C T Average secondary circuit = 67,5 °C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code	Heat exchanger model	DN	Code
1	STEEL PRO POWER 114-2	114	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	STEEL PRO POWER 140-2	136	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	STEEL PRO POWER 180-2	180	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**
	STEEL PRO POWER 230-2	224	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**	SP 35-DN50 53 (53) N	Rp 2" (G-M)*	**20200618**
	STEEL PRO POWER 270-2	262	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**
	STEEL PRO POWER 300-3	291	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**	SP 35-DN50 71 (71) N	Rp 2" (G-M)*	**20200620**
	STEEL PRO POWER 345-3	336	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**	SP 35-DN50 81 (81) N	Rp 2" (G-M)*	**20200621**
	STEEL PRO POWER 405-3	393	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**	SP 35-DN50 89 (89) N	Rp 2" (G-M)*	**20200622**
	STEEL PRO POWER 460-4	448	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**	SP 35-DN50 101 (101) N	Rp 2" (G-M)*	**20200623**
	STEEL PRO POWER 540-4	524	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**	SP 50-DN65 55 (22) N	Rp 2" 1/2 (G-M)*	**20200642**
2	STEEL PRO POWER SYSTEM 675	655	SP 50-DN65 45 (18) N	Rp 2" 1/2 (G-M)*	**20200638**	SP 50-DN65 65 (26) N	Rp 2" 1/2 (G-M)*	**20200645**
	STEEL PRO POWER SYSTEM 810	786	SP 50-DN65 51 (21) N	Rp 2" 1/2 (G-M)*	**20200640**	SP 50-DN65 79 (32) N	Rp 2" 1/2 (G-M)*	**20200647**
	STEEL PRO POWER SYSTEM 945	917	SP 60-DN100 45 (36) N	DN100 - PN16	**20200658**	SP 60-DN100 67 (54) N	DN100 - PN16	**20200665**
	STEEL PRO POWER SYSTEM 1080	1048	SP 60-DN100 51 (41) N	DN100 - PN16	**20200659**	SP 60-DN100 77 (62) N	DN100 - PN16	**20200667**
3	STEEL PRO POWER SYSTEM 1215	1179	SP 60-DN100 61 (49) N	DN100 - PN16	**20200663**	SP 60-DN100 87 (70) N	DN100 - PN16	**20200670**
	STEEL PRO POWER SYSTEM 1350	1310	SP 60-DN100 67 (54) N	DN100 - PN16	**20200665**	SP 60-DN100 97 (78) N	DN100 - PN16	**20200672**

(*) G-M: Gas - M

Plate heat exchanger combinations for boiler operation with a mixture of water and glycol (max 40%)**

Description			Plate heat exchangers		
			 ΔT ml=7.2 °C ΔT primary = 20 °C Glycol 40% ΔT secondary = 15 °C T Average secondary circuit = 67,5 °C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code
1	STEEL PRO POWER 114-2	114	SP 45-DN50 21 (11) E	Rp 2" (G-M)*	**20200589**
	STEEL PRO POWER 140-2	136	SP 45-DN50 29 (15) E	Rp 2" (G-M)*	**20200590**
	STEEL PRO POWER 180-2	180	SP 45-DN50 29 (15) E	Rp 2" (G-M)*	**20200590**
	STEEL PRO POWER 230-2	224	SP 45-DN50 33 (17) E	Rp 2" (G-M)*	**20200591**
	STEEL PRO POWER 270-2	262	SP 45-DN50 39 (20) E	Rp 2" (G-M)*	**20200592**
	STEEL PRO POWER 300-3	291	SP 45-DN50 45 (23) E	Rp 2" (G-M)*	**20200593**
	STEEL PRO POWER 345-3	336	SP 45-DN50 51 (26) E	Rp 2" (G-M)*	**20200594**
	STEEL PRO POWER 405-3	393	SP 45-DN50 61 (31) E	Rp 2" (G-M)*	**20200595**
	STEEL PRO POWER 460-4	448	SP 45-DN50 73 (37) E	Rp 2" (G-M)*	**20200596**
	STEEL PRO POWER 540-4	524	SP 50-DN65 69 (52) E	Rp 2" 1/2 (G-M)*	**20200598**
2	STEEL PRO POWER SYSTEM 675	655	SP 50-DN65 87 (66) E	Rp 2" 1/2 (G-M)*	**20200599**
	STEEL PRO POWER SYSTEM 810	786	SP 50-DN65 101 (76) E	Rp 2" 1/2 (G-M)*	**20200600**
	STEEL PRO POWER SYSTEM 945	917	SP 60-DN100 87 (87) E	DN100 - PN16	**20200601**
	STEEL PRO POWER SYSTEM 1080	1048	SP 60-DN100 101 (101) E	DN100 - PN16	**20200602**
3	STEEL PRO POWER SYSTEM 1215	1179	SP 60-DN100 115 (115) E	DN100 - PN16	**20200603**
	STEEL PRO POWER SYSTEM 1350	1310	SP 60-DN100 129 (129) E	DN100 - PN16	**20200604**

(*) G-M: Gas - M
(**) Not compatible with containment cabinets.
In case the STEEL PRO POWER will be installed OUTDOOR, the GPHE must be installed INDOOR near the Horizontal Flow & Return distribution manifolds.

ALU PRO POWER

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 15 °C

Description			Pump		
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code
1	ALU 115 PRO POWER	115	MAGNA3 40-120 F	Single \ 0-10V	**20183650**
	ALU 150 PRO POWER	150	MAGNA3 40-120 F	Single \ 0-10V	**20183650**
	ALU 225 PRO POWER	225	MAGNA3 40-120 F	Single \ 0-10V	**20183650**
	ALU 300 PRO POWER	300	MAGNA3 40-120 F	Single \ 0-10V	**20183650**
	ALU 349 PRO POWER	349	MAGNA3 65-120 F	Single \ 0-10V	**20183652**
	ALU 375 PRO POWER	375	MAGNA3 65-120 F	Single \ 0-10V	**20183652**
	ALU 450 PRO POWER	450	MAGNA3 65-120 F	Single \ 0-10V	**20183652**
	ALU 525 PRO POWER	525	MAGNA3 65-120 F	Single \ 0-10V	**20183652**
	ALU 600 PRO POWER	600	MAGNA3 65-120 F	Single \ 0-10V	**20183652**

Description			Plate heat exchangers					
			80°C 70°C 65°C 55°C ΔT ml = 10 °C ΔT primary/secondary = 15 °C T Average secondary circuit = 62,5 °C			80°C 72°C 65°C 60°C ΔT ml=6,4 °C ΔT primary = 15 °C ΔT secondary = 12 °C T Average secondary circuit = 66 °C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code	Heat exchanger model	DN	Code
1	ALU 115 PRO POWER	115	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**
	ALU 150 PRO POWER	150	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**
	ALU 225 PRO POWER	225	SP 35-DN50 41 (41) N	Rp 2" (G-M)*	**20200615**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**
	ALU 300 PRO POWER	300	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**	SP 35-DN50 71 (71) N	Rp 2" (G-M)*	**20200620**
	ALU 349 PRO POWER	349	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**	SP 35-DN50 81 (81) N	Rp 2" (G-M)*	**20200621**
	ALU 375 PRO POWER	375	SP 35-DN50 61 (61) N	Rp 2" (G-M)*	**20200619**	SP 35-DN50 89 (89) N	Rp 2" (G-M)*	**20200622**
	ALU 450 PRO POWER	450	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**	SP 50-DN65 51 (21) N	Rp 2" 1/2 (G-M)*	**20200640**
	ALU 525 PRO POWER	525	SP 50-DN65 45 (18) N	Rp 2" 1/2 (G-M)*	**20200638**	SP 50-DN65 61 (25) N	Rp 2" 1/2 (G-M)*	**20200644**
	ALU 600 PRO POWER	600	SP 50-DN65 51 (21) N	Rp 2" 1/2 (G-M)*	**20200640**	SP 50-DN65 71 (29) N	Rp 2" 1/2 (G-M)*	**20200646**

(*) G-M: Gas - M


Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 20 °C

Description			Pump			Plate heat exchangers		
						80°C 70°C 60°C 50°C ΔT ml = 10 °C ΔT primary/secondary = 20 °C T Average secondary circuit = 60 °C		
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code	Heat exchanger model	DN	Code
1	ALU 115 PRO POWER	115	MAGNA3 40-120 F	Single \ 0-10V	**20183650**	SP 35-DN50 21 (21) N	Rp 2" (G-M)*	**20200611**
	ALU 150 PRO POWER	150	MAGNA3 40-120 F	Single \ 0-10V	**20183650**	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**
	ALU 225 PRO POWER	225	MAGNA3 40-120 F	Single \ 0-10V	**20183650**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	ALU 300 PRO POWER	300	MAGNA3 40-120 F	Single \ 0-10V	**20183650**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**
	ALU 349 PRO POWER	349	MAGNA3 65-120 F	Single \ 0-10V	**20183652**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**
	ALU 375 PRO POWER	375	MAGNA3 65-120 F	Single \ 0-10V	**20183652**	SP 35-DN50 53 (53) N	Rp 2" (G-M)*	**20200618**
	ALU 450 PRO POWER	450	MAGNA3 65-120 F	Single \ 0-10V	**20183652**	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**
	ALU 525 PRO POWER	525	MAGNA3 65-120 F	Single \ 0-10V	**20183652**	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**
	ALU 600 PRO POWER	600	MAGNA3 65-120 F	Single \ 0-10V	**20183652**	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**

(*) G-M: Gas - M


INSIEME EVO COND

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 10 °C

Description			Pump			Plate heat exchangers		
						 ΔT ml = 6 °C ΔT primary/secondary = 10 °C T Average secondary circuit = 69 °C		
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code	Heat exchanger model	DN	Code
1	Insieme EVO Cond 20	19,5	–	–	–	–	–	–
	Insieme EVO Cond 25	24,2	–	–	–	–	–	–
	Insieme EVO Cond 35	33,8	–	–	–	–	–	–
	Insieme EVO Cond 45	43,7	VegA RSHE 30-60 PN10	Single \ Standard	**20182767**	SP 20-DN32 29 (29) N	Rp 1" 1/4 (G-M)*	**20200608**
	Insieme EVO Cond 55	53,4	VegA RSHE 30-60 PN10	Single \ Standard	**20182767**	SP 20-DN32 29 (29) N	Rp 1" 1/4 (G-M)*	**20200608**
	Insieme EVO Cond 70	67,7	VegA RSHE 30-60 PN10	Single \ Standard	**20182767**	SP 20-DN32 41 (41) N	Rp 1" 1/4 (G-M)*	**20200609**


(*) G-M: Gas - M

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 15 °C

Description			Pump			Plate heat exchangers		
						 ΔT ml = 10 °C ΔT primary/secondary = 15 °C T Average secondary circuit = 62,5 °C		
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code	Heat exchanger model	DN	Code
1	Insieme EVO Cond 20	19,5	–	–	–	SP 20-DN32 11 (11) N	Rp 1" 1/4 (G-M)*	**20200606**
	Insieme EVO Cond 25	24,2	–	–	–	SP 20-DN32 11 (11) N	Rp 1" 1/4 (G-M)*	**20200606**
	Insieme EVO Cond 35	33,8	–	–	–	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**
	Insieme EVO Cond 45	43,7	VegA RMXA 32-80	Single \ Standard	**20188525**	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**
	Insieme EVO Cond 55	53,4	VegA RMXA 32-80	Single \ Standard	**20188525**	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**
	Insieme EVO Cond 70	67,7	VegA RSHE 30-60 PN10	Single \ Standard	**20182767**	SP 20-DN32 29 (29) N	Rp 1" 1/4 (G-M)*	**20200608**

(*) G-M: Gas - M

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 20 °C



Description			Pump			Plate heat exchangers		
						 ΔT ml = 10 °C ΔT primary/secondary = 20 °C T Average secondary circuit = 60 °C		
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code	Heat exchanger model	DN	Code
1	Insieme EVO Cond 20	19,5	–	–	–	SP 20-DN32 11 (11) N	Rp 1" 1/4 (G-M)*	**20200606**
	Insieme EVO Cond 25	24,2	–	–	–	SP 20-DN32 11 (11) N	Rp 1" 1/4 (G-M)*	**20200606**
	Insieme EVO Cond 35	33,8	–	–	–	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**
	Insieme EVO Cond 45	43,7	VegA RMXA 32-40	Single \ Standard	**20188523**	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**
	Insieme EVO Cond 55	53,4	VegA RMXA 32-60	Single \ Standard	**20188524**	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**
	Insieme EVO Cond 70	67,7	VegA RMXA 32-80	Single \ Standard	**20188525**	SP 20-DN32 29 (29) N	Rp 1" 1/4 (G-M)*	**20200608**

(*) G-M: Gas - M

TAU UNIT

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 10 °C

Description			Pump		
					
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code
1	TAU UNIT 35	34,8	UPM3 FLEX AS 15-70 130 H6	Single \ PWM	**20147597**
	TAU UNIT 50	49	UPML 32-105/180	Single \ PWM	**20125034**
	TAU UNIT 70	69,9	STRATOS PARA 30/1-12	Single \ PWM	**20125040**
	TAU UNIT 100	100	STRATOS PARA 30/1-12	Single \ PWM	**20125040**
	TAU UNIT 115	115	STRATOS PARA 30/1-12	Single \ PWM	**20125040**
	TAU UNIT 140	140	MAGNA3 32-120 F	Single \ 0-10V	**20183636**
	TAU UNIT 190	190	MAGNA3 40-120 F	Single \ 0-10V	**20183650**



Description			Plate heat exchangers					
			 ΔT ml = 10 °C ΔT primary/secondary = 10 °C T Average secondary circuit = 65 °C			 ΔT ml=7,0 °C ΔT primary/secondary = 10 °C T Average secondary circuit = 73°C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code	Heat exchanger model	DN	Code
1	TAU UNIT 35	34,8	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**
	TAU UNIT 50	49	SP 20-DN32 29 (29) N	Rp 1" 1/4 (G-M)*	**20200608**	SP 20-DN32 29 (29) N	Rp 1" 1/4 (G-M)*	**20200608**
	TAU UNIT 70	69,9	SP 20-DN32 41 (41) N	Rp 1" 1/4 (G-M)*	**20200609**	SP 20-DN32 41 (41) N	Rp 1" 1/4 (G-M)*	**20200609**
	TAU UNIT 100	100	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**
	TAU UNIT 115	115	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**
	TAU UNIT 140	140	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	TAU UNIT 190	190	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**

(*) G-M: Gas - M

TAU UNIT

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 15 °C

Description			Pump		
					
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code
1	TAU UNIT 35	34,8	UPM3 FLEX AS 15-70 130 H6	Single \ PWM	**20147597**
	TAU UNIT 50	49	UPM3 FLEX AS 15-70 130 H6	Single \ PWM	**20147597**
	TAU UNIT 70	69,9	UPM GEO 25-85/130	Single \ PWM	**20147604**
	TAU UNIT 100	100	UPML 32-105/180	Single \ PWM	**20125034**
	TAU UNIT 115	115	STRATOS PARA 30/1-12	Single \ PWM	**20125040**
	TAU UNIT 140	140	STRATOS PARA 30/1-12	Single \ 0-10V	**20125040**
	TAU UNIT 190	190	STRATOS PARA 30/1-12	Single \ 0-10V	**20125040**



Description			Plate heat exchangers					
			 ΔT ml = 10 °C ΔT primary/secondary = 15 °C TAverage secondary circuit = 62,5 °C			 ΔT ml=7,2 °C ΔT primary = 15 °C ΔT secondary = 10 °C TAverage secondary circuit = 70°C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code	Heat exchanger model	DN	Code
1	TAU UNIT 35	34,8	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**
	TAU UNIT 50	49	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**	SP 20-DN32 29 (29) N	Rp 1" 1/4 (G-M)*	**20200608**
	TAU UNIT 70	69,9	SP 20-DN32 29 (29) N	Rp 1" 1/4 (G-M)*	**20200608**	SP 20-DN32 41 (41) N	Rp 1" 1/4 (G-M)*	**20200609**
	TAU UNIT 100	100	SP 20-DN32 41 (41) N	Rp 1" 1/4 (G-M)*	**20200609**	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**
	TAU UNIT 115	115	SP 20-DN32 41 (41) N	Rp 1" 1/4 (G-M)*	**20200609**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	TAU UNIT 140	140	SP 20-DN32 49 (49) N	Rp 1" 1/4 (G-M)*	**20200610**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	TAU UNIT 190	190	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**

(*) G-M: Gas - M

TAU UNIT

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 20 °C


Description			Pump		
					
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code
1	TAU UNIT 35	34,8	UPM3 FLEX AS 15-70 130 H6	Single \ PWM	**20147597**
	TAU UNIT 50	49	UPM3 FLEX AS 15-70 130 H6	Single \ PWM	**20147597**
	TAU UNIT 70	69,9	UPM3 FLEX AS 15-70 130 H6	Single \ PWM	**20147597**
	TAU UNIT 100	100	UPM GEO 25-85/130	Single \ PWM	**20147604**
	TAU UNIT 115	115	UPML 32-105/180	Single \ PWM	**20125034**
	TAU UNIT 140	140	STRATOS PARA 30/1-12	Single \ 0-10V	**20125040**
	TAU UNIT 190	190	STRATOS PARA 30/1-12	Single \ 0-10V	**20125040**

Description			Plate heat exchangers					
			 ΔT ml = 10 °C ΔT primary/secondary = 20 °C T Average secondary circuit = 60°C			 ΔT ml=7,2 °C ΔT primary = 20 °C ΔT secondary = 15 °C T Average secondary circuit = 67,5 °C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code	Heat exchanger model	DN	Code
1	TAU UNIT 35	34,8	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**
	TAU UNIT 50	49	SP 20-DN32 21 (21) N	Rp 1" 1/4 (G-M)*	**20200607**	SP 20-DN32 29 (29) N	Rp 1" 1/4 (G-M)*	**20200608**
	TAU UNIT 70	69,9	SP 20-DN32 29 (29) N	Rp 1" 1/4 (G-M)*	**20200608**	SP 20-DN32 41 (41) N	Rp 1" 1/4 (G-M)*	**20200609**
	TAU UNIT 100	100	SP 20-DN32 41 (41) N	Rp 1" 1/4 (G-M)*	**20200609**	SP 35-DN50 27 (27) N	Rp 2" (G-M)*	**20200613**
	TAU UNIT 115	115	SP 20-DN32 41 (41) N	Rp 1" 1/4 (G-M)*	**20200609**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	TAU UNIT 140	140	SP 20-DN32 49 (49) N	Rp 1" 1/4 (G-M)*	**20200610**	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**
	TAU UNIT 190	190	SP 35-DN50 33 (33) N	Rp 2" (G-M)*	**20200614**	SP 35-DN50 49 (49) N	Rp 2" (G-M)*	**20200616**

(*) G-M: Gas - M

TAU N-OIL

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 12 °C

Description			Pump			Plate heat exchangers		
						 ΔT ml = 6,0 °C ΔT primary/secondary = 12 °C T Average secondary circuit = 74°C		
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code	Heat exchanger model	DN	Code
1	TAU 115 N - OIL - OIL PRO	112,4	VegA RSHE 40-30 PN6/10	Single \ Standard	20182773	SP 40-DN65 21 (21) N	Rp 2" 1/2 (G-M)*	**20200626**
			VegA RTHE 40-60 PN6/10	Twin \ Standard	20182785			
	TAU 150 N - OIL - OIL PRO	146,6	VegA RSHE 40-60 PN6/10	Single \ Standard	20182774	SP 40-DN65 25 (25) N	Rp 2" 1/2 (G-M)*	**20200628**
			VegA RTHE 40-60 PN6/10	Twin \ Standard	20182785			
	TAU 210 N - OIL - OIL PRO	205,2	VegA RSHE 40-80 PN6/10	Single \ Standard	20182775	SP 40-DN65 33 (33) N	Rp 2" 1/2 (G-M)*	**20200631**
			VegA RTHE 40-80 PN6/10	Twin \ Standard	20182786			
	TAU 270 N - OIL - OIL PRO	264,3	VegA RSHE 40-80 PN6/10	Single \ Standard	20182775	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**
			VegA RTHE 40-80 PN6/10	Twin \ Standard	20182786			
	TAU 350 N - OIL - OIL PRO	342,7	VegA RSHE 65-80 PN6/10	Single \ Standard	20182778	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**
			VegA RTHE 65-90 PN6/10	Twin \ Standard	20182790			
	TAU 450 N - OIL - OIL PRO	441,9	VegA RSHE 65-90 PN6/10	Single \ Standard	20182779	SP 50-DN65 55 (22) N	Rp 2" 1/2 (G-M)*	**20200642**
			VegA RTHE 65-90 PN6/10	Twin \ Standard	20182790			
	TAU 600 N - OIL - OIL PRO	589,2	VegA RSHE 80-90 PN10	Single \ Standard	20182782	SP 50-DN65 79 (32) N	Rp 2" 1/2 (G-M)*	**20200647**
			VegA RTHE 80-90 PN10	Twin \ Standard	20182792			
	TAU 800 N - OIL - OIL PRO	785,6	-	-	-	SP 60-DN100 67 (54) N	DN100 - PN16	**20200665**
			-	-	-			
	TAU 1000 N - OIL - OIL PRO	982	-	-	-	SP 60-DN100 87 (70) N	DN100 - PN16	**20200670**
			-	-	-			
	TAU 1150 N	1129,3	-	-	-	SP 60-DN100 97 (78) N	DN100 - PN16	**20200672**
			-	-	-			
	TAU 1250 N	1227,5	-	-	-	SP 60-DN100 109 (88) N	DN100 - PN16	**20200673**
			-	-	-			
	TAU 1450 N	1423,9	-	-	-	SP 60-DN100 119 (96) N	DN100 - PN16	**20200674**
			-	-	-			
	TAU 1750 N	1718,5	-	-	-	SP 60-DN100 169 (136) N	DN100 - PN16	**20200676**
			-	-	-			
	TAU 2100 N	2062,2	-	-	-	SP 60-DN100 201 (161) N	DN100 - PN16	**20200677**
			-	-	-			
	TAU 2600 N	2553,2	-	-	-	SP 60-DN100 201 (161) N	DN100 - PN16	**20200677**
			-	-	-			
	TAU 3000 N	2946	-	-	-	SP 60-DN100 201 (161) N	DN100 - PN16	**20200677**
			-	-	-			

(*) G-M: Gas - M



TAU N-OIL

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 15 °C

Description			Pump		
					
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code
1	TAU 115 N - OIL - OIL PRO	112,4	VegA RSHE 40-30 PN6/10	Single \ Standard	**20182773**
			VegA RTHE 40-60 PN6/10	Twin \ Standard	**20182785**
	TAU 150 N - OIL - OIL PRO	146,6	VegA RSHE 40-30 PN6/10	Single \ Standard	**20182773**
			VegA RTHE 40-60 PN6/10	Twin \ Standard	**20182785**
	TAU 210 N - OIL - OIL PRO	205,2	VegA RSHE 40-60 PN6/10	Single \ Standard	**20182774**
			VegA RTHE 40-60 PN6/10	Twin \ Standard	**20182785**
	TAU 270 N - OIL - OIL PRO	264,3	VegA RSHE 40-80 PN6/10	Single \ Standard	**20182775**
			VegA RTHE 40-80 PN6/10	Twin \ Standard	**20182786**
	TAU 350 N - OIL - OIL PRO	342,7	VegA RSHE 40-80 PN6/10	Single \ Standard	**20182775**
			VegA RTHE 40-80 PN6/10	Twin \ Standard	**20182786**
	TAU 450 N - OIL - OIL PRO	441,9	VegA RSHE 65-80 PN6/10	Single \ Standard	**20182778**
			VegA RTHE 65-90 PN6/10	Twin \ Standard	**20182790**
	TAU 600 N - OIL - OIL PRO	589,2	VegA RSHE 65-90 PN6/10	Single \ Standard	**20182779**
			VegA RTHE 65-90 PN6/10	Twin \ Standard	**20182790**
	TAU 800 N - OIL - OIL PRO	785,6	VegA RSHE 80-90 PN10	Single \ Standard	**20182782**
			VegA RTHE 80-90 PN10	Twin \ Standard	**20182792**
	TAU 1000 N - OIL - OIL PRO	982	-	-	-
			-	-	-
	TAU 1150 N	1129,3	-	-	-
			-	-	-
	TAU 1250 N	1227,5	-	-	-
			-	-	-
	TAU 1450 N	1423,9	-	-	-
			-	-	-
	TAU 1750 N	1718,5	-	-	-
			-	-	-
	TAU 2100 N	2062,2	-	-	-
			-	-	-
	TAU 2600 N	2553,2	-	-	-
			-	-	-
	TAU 3000 N	2946	-	-	-
			-	-	-

TAU N-OIL

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 15 °C

Description			Plate heat exchangers					
			 ΔT ml = 10 °C ΔT primary/secondary = 15 °C TAverage secondary circuit = 62,5 °C			 ΔT ml=6,4 °C ΔT primary = 15 °C ΔT secondary = 12 °C TAverage secondary circuit = 71 °C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code	Heat exchanger model	DN	Code
1	TAU 115 N-OIL-OIL PRO	112,4	SP 40-DN65 17 (17) N	Rp 2" 1/2 (G-M)*	**20200624**	SP 40-DN65 21 (21) N	Rp 2" 1/2 (G-M)*	**20200626**
	TAU 150 N-OIL-OIL PRO	146,6	SP 40-DN65 21 (21) N	Rp 2" 1/2 (G-M)*	**20200626**	SP 40-DN65 25 (25) N	Rp 2" 1/2 (G-M)*	**20200628**
	TAU 210 N-OIL-OIL PRO	205,2	SP 40-DN65 25 (25) N	Rp 2" 1/2 (G-M)*	**20200628**	SP 40-DN65 33 (33) N	Rp 2" 1/2 (G-M)*	**20200631**
	TAU 270 N-OIL-OIL PRO	264,3	SP 40-DN65 33 (33) N	Rp 2" 1/2 (G-M)*	**20200631**	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**
	TAU 350 N-OIL-OIL PRO	342,7	SP 40-DN65 41 (41) N	Rp 2" 1/2 (G-M)*	**20200633**	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**
	TAU 450 N-OIL-OIL PRO	441,9	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**	SP 50-DN65 55 (22) N	Rp 2" 1/2 (G-M)*	**20200642**
	TAU 600 N-OIL-OIL PRO	589,2	SP 50-DN65 55 (22) N	Rp 2" 1/2 (G-M)*	**20200642**	SP 50-DN65 79 (32) N	Rp 2" 1/2 (G-M)*	**20200647**
	TAU 800 N-OIL-OIL PRO	785,6	SP 60-DN100 61 (49) N	DN100-PN16	**20200663**	SP 60-DN100 67 (54) N	DN100-PN16	**20200665**
	TAU 1000 N-OIL-OIL PRO	982	SP 60-DN100 67 (54) N	DN100-PN16	**20200665**	SP 60-DN100 87 (70) N	DN100-PN16	**20200670**
	TAU 1150 N	1129,3	SP 60-DN100 77 (62) N	DN100-PN16	**20200667**	SP 60-DN100 97 (78) N	DN100-PN16	**20200672**
	TAU 1250 N	1227,5	SP 60-DN100 87 (70) N	DN100-PN16	**20200670**	SP 60-DN100 109 (88) N	DN100-PN16	**20200673**
	TAU 1450 N	1423,9	SP 60-DN100 97 (78) N	DN100-PN16	**20200672**	SP 60-DN100 119 (96) N	DN100-PN16	**20200674**
	TAU 1750 N	1718,5	SP 60-DN100 119 (96) N	DN100-PN16	**20200674**	SP 60-DN100 169 (136) N	DN100-PN16	**20200676**
	TAU 2100 N	2062,2	SP 60-DN100 139 (112) N	DN100-PN16	**20200675**	SP 60-DN100 201 (161) N	DN100-PN16	**20200677**
	TAU 2600 N	2553,2	SP 60-DN100 169 (136) N	DN100-PN16	**20200676**	SP 60-DN100 201 (161) N	DN100-PN16	**20200677**
	TAU 3000 N	2946	SP 60-DN100 201 (161) N	DN100-PN16	**20200677**	SP 60-DN100 201 (161) N	DN100-PN16	**20200677**

(*) G-M: Gas - M



TAU N-OIL

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 20 °C

Description			Pump		
					
Nr. of generators in cascade application	Model	Useful power kW	Model	Type/Control	Code
1	TAU 115 N - OIL - OIL PRO	112,4	VegA RSHE 40-30 PN6/10	Single \ Standard	**20182773**
			VegA RTHE 40-60 PN6/10	Twin \ Standard	**20182785**
	TAU 150 N - OIL - OIL PRO	146,6	VegA RSHE 40-30 PN6/10	Single \ Standard	**20182773**
			VegA RTHE 40-60 PN6/10	Twin \ Standard	**20182785**
	TAU 210 N - OIL - OIL PRO	205,2	VegA RSHE 40-30 PN6/10	Single \ Standard	**20182773**
			VegA RTHE 40-60 PN6/10	Twin \ Standard	**20182785**
	TAU 270 N - OIL - OIL PRO	264,3	VegA RSHE 40-60 PN6/10	Single \ Standard	**20182774**
			VegA RTHE 40-60 PN6/10	Twin \ Standard	**20182785**
	TAU 350 N - OIL - OIL PRO	342,7	VegA RSHE 40-60 PN6/10	Single \ Standard	**20182774**
			VegA RTHE 40-60 PN6/10	Twin \ Standard	**20182785**
	TAU 450 N - OIL - OIL PRO	441,9	VegA RSHE 50-70 PN6/10	Single \ Standard	**20182776**
			VegA RTHE 50-70 PN6/10	Twin \ Standard	**20182787**
	TAU 600 N - OIL - OIL PRO	589,2	VegA RSHE 65-90 PN6/10	Single \ Standard	**20182779**
			VegA RTHE 65-90 PN6/10	Twin \ Standard	**20182790**
	TAU 800 N - OIL - OIL PRO	785,6	VegA RSHE 80-90 PN10	Single \ Standard	**20182782**
			VegA RTHE 80-90 PN10	Twin \ Standard	**20182792**
	TAU 1000 N - OIL - OIL PRO	982	VegA RSHE 80-90 PN10	Single \ Standard	**20182782**
			VegA RTHE 80-90 PN10	Twin \ Standard	**20182792**
	TAU 1150 N	1129,3	VegA RSHE 80-90 PN10	Single \ Standard	**20182782**
			VegA RTHE 80-90 PN10	Twin \ Standard	**20182792**
	TAU 1250 N	1227,5	-	-	-
			-	-	-
	TAU 1450 N	1423,9	-	-	-
			-	-	-
	TAU 1750 N	1718,5	-	-	-
			-	-	-
	TAU 2100 N	2062,2	-	-	-
			-	-	-
	TAU 2600 N	2553,2	-	-	-
			-	-	-
	TAU 3000 N	2946	-	-	-
			-	-	-

TAU N-OIL

Combinations of pumps and plate heat exchangers for boiler operation with primary Δt = 20 °C

Description			Plate heat exchangers					
			 ΔT ml = 10 °C ΔT primary/secondary = 20 °C T Average secondary circuit = 60 °C			 ΔT ml=7,2 °C ΔT primary = 20 °C ΔT secondary = 15 °C T Average secondary circuit = 67,5 °C		
Nr. of generators in cascade application	Model	Useful power kW	Heat exchanger model	DN	Code	Heat exchanger model	DN	Code
1	TAU 115 N-OIL-OIL PRO	112,4	SP 40-DN65 17 (17) N	Rp 2" 1/2 (G-M)*	**20200624**	SP 40-DN65 25 (25) N	Rp 2" 1/2 (G-M)*	**20200628**
	TAU 150 N-OIL-OIL PRO	146,6	SP 40-DN65 21 (21) N	Rp 2" 1/2 (G-M)*	**20200626**	SP 40-DN65 33 (33) N	Rp 2" 1/2 (G-M)*	**20200631**
	TAU 210 N-OIL-OIL PRO	205,2	SP 40-DN65 25 (25) N	Rp 2" 1/2 (G-M)*	**20200628**	SP 40-DN65 41 (41) N	Rp 2" 1/2 (G-M)*	**20200633**
	TAU 270 N-OIL-OIL PRO	264,3	SP 40-DN65 33 (33) N	Rp 2" 1/2 (G-M)*	**20200631**	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**
	TAU 350 N-OIL-OIL PRO	342,7	SP 40-DN65 41 (41) N	Rp 2" 1/2 (G-M)*	**20200633**	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**
	TAU 450 N-OIL-OIL PRO	441,9	SP 50-DN65 35 (14) N	Rp 2" 1/2 (G-M)*	**20200635**	SP 50-DN65 51 (21) N	Rp 2" 1/2 (G-M)*	**20200640**
	TAU 600 N-OIL-OIL PRO	589,2	SP 50-DN65 41 (17) N	Rp 2" 1/2 (G-M)*	**20200637**	SP 50-DN65 61 (25) N	Rp 2" 1/2 (G-M)*	**20200644**
	TAU 800 N-OIL-OIL PRO	785,6	SP 60-DN100 41 (33) N	DN100-PN16	**20200648**	SP 60-DN100 61 (49) N	DN100-PN16	**20200663**
	TAU 1000 N-OIL-OIL PRO	982	SP 60-DN100 51 (41) N	DN100-PN16	**20200659**	SP 60-DN100 77 (62) N	DN100-PN16	**20200667**
	TAU 1150 N	1129,3	SP 60-DN100 61 (49) N	DN100-PN16	**20200663**	SP 60-DN100 87 (70) N	DN100-PN16	**20200670**
	TAU 1250 N	1227,5	SP 60-DN100 61 (49) N	DN100-PN16	**20200663**	SP 60-DN100 97 (78) N	DN100-PN16	**20200672**
	TAU 1450 N	1423,9	SP 60-DN100 77 (62) N	DN100-PN16	**20200667**	SP 60-DN100 109 (88) N	DN100-PN16	**20200673**
	TAU 1750 N	1718,5	SP 60-DN100 87 (70) N	DN100-PN16	**20200670**	SP 60-DN100 139 (112) N	DN100-PN16	**20200675**
	TAU 2100 N	2062,2	SP 60-DN100 97 (78) N	DN100-PN16	**20200672**	SP 60-DN100 169 (136) N	DN100-PN16	**20200676**
	TAU 2600 N	2553,2	SP 60-DN100 119 (96) N	DN100-PN16	**20200674**	SP 60-DN100 201 (161) N	DN100-PN16	**20200677**
	TAU 3000 N	2946	SP 60-DN100 139 (112) N	DN100-PN16	**20200675**	SP 60-DN100 201 (161) N	DN100-PN16	**20200677**

(*) G-M: Gas - M

SOLAR THERMAL WITH SWIMMING POOL


Installation power

kW	Code	Model
20	20200581	**SP 20-DN32 29 (29A) E**
35	20200583	**SP 20-DN32 41 (41A) E**
50	20200589	**SP 45-DN50 21 (11) E**
75	20200590	**SP 45-DN50 29 (15) E**
100	20200591	**SP 45-DN50 33 (17) E**

NOTE: check ever the pressure drop

Thermal program

	Fluid	IN °C	OUT °C	Head loss (KPa)
Primary	Glyc. 30%	55	35	≤ 2
Secondary	H_2O	29	33	≤ 20

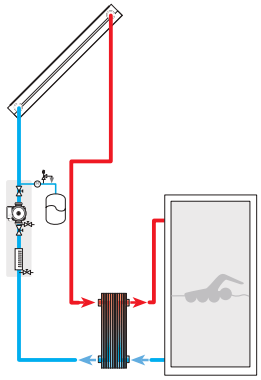

SOLAR THERMAL WITH PUFFER


Installation power

kW	Code	Model
20	20200584	**SP 30-DN32 17 (17A) E**
35	20200585	**SP 30-DN32 27 (27A) E**
50	20200586	**SP 30-DN32 37 (37A) E**
75	20200587	**SP 30-DN32 53 (53A) E**
100	20200588	**SP 30-DN32 69 (69A) E**

NOTE: check ever the pressure drop

Thermal program

	Fluid	IN °C	OUT °C	Head loss (KPa)
Primary	Glyc. 30%	60	40	≤ 5
Secondary	H_2O	35	55	≤ 5

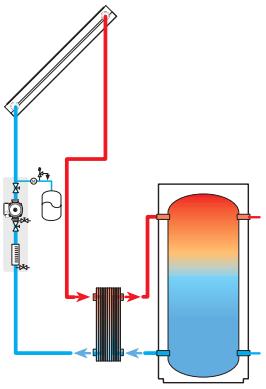

INSTANTANEOUS DHW PRODUCTION

Installation power

kW	Code	Model
50	20200584	**SP 30-DN32 17 (17A) E**
75	20200585	**SP 30-DN32 27 (27A) E**
115	20200586	**SP 30-DN32 37 (37A) E**
130	20200624	**SP 40-DN65 17 (17) N**
150	20200626	**SP 40-DN65 21 (21) N**
180	20200628	**SP 40-DN65 25 (25) N**
240	20200631	**SP 40-DN65 33 (33) N**
350	20200633	**SP 40-DN65 41 (41) N**
450	20200637	**SP 50-DN65 41 (17) N**
525	20200640	**SP 50-DN65 51 (21) N**
600	20200644	**SP 50-DN65 61 (25) N**

NOTE: check ever the pressure drop

Thermal program

	Fluid	IN °C	OUT °C	Head loss (KPa)
Primary	H_2O	50	30	≤ 20
Secondary	H_2O	10	43	≤ 20





Plate heat-exchanger

HIU 40 DHW STD



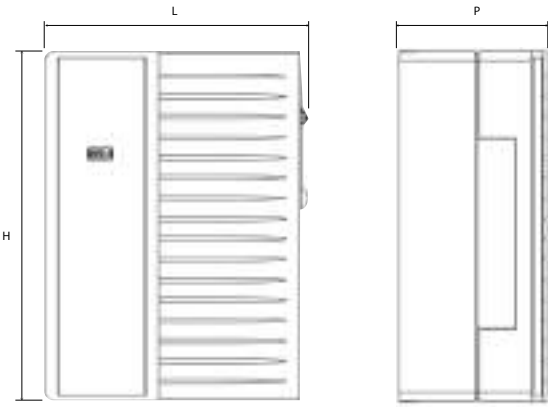

- Heat exchanger that uses the heating energy produced by the centralized heating system

Description	Plates Nr.	H mm	L mm	P mm
HIU 40 DHW STD	30	600	400	250

HIU 40 DHW STD is a domestic hot water producer that uses the heating energy produced by the centralized heating system. By the heat exchanger the module produces: hygienic, fresh and clean water and prevents the legionella bacteria formation. The module can work without electricity and the control of the flow is done by th differential valve (it control the right flow independently o the differential pressure of the primary circuit range 900 l/h – 1.700 l/h) and the temperature by the setting the thermostatic valve: temperature range 40°C to 70°C (+/-1°C).

TECHNICAL DATA


Description	Max flow rate of primary flow	Max flow rate of secondary outlet (DHW)	DHW temperature set	Max working pressure	Power supply	Exchange surface of plates exchanger	Connections (except DHW return side)	DHW return side connection	Max. temperature	Code
HIU 40 DHW STD	1.700 l/h	40 l/min	40÷70 °C	10 bar	230 V AC 50/60	1,76 m²	G 1"B - G ¾"	G ¾"B	90°C	**20166053**

NOTE: for more information refer to the technical manual

ACCESSORIES

Description	Code
Acc. Recirculation kit for HIU 40 DHW STD	**20210777**

HYDRAULIC CIRCUIT

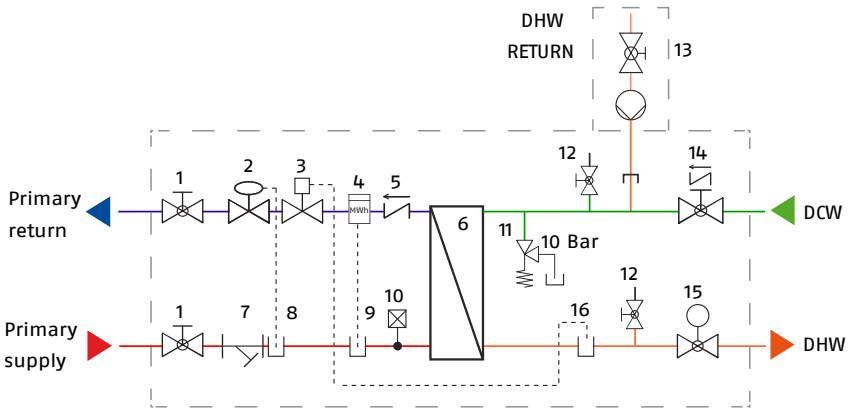

1. Ball valve
2. Differential pressure valve
3. 2- way thermostatic valve
4. Fitting piece for heat meter
5. Check valve
6. Brazed plate iron steel heat exchanger
7. Filter
8. Sensor pocket for differential valve
9. Sensor pocket for heat meter
10. Manual air vent valve
11. Safety valve
12. Load/drain tap (components)
13. DHW return kit
14. Ball valve with check valve
15. Ball valve with thermometer
16. Sensor pocket for thermostatic valve (DHW supply)

WATER CIRCULATORS

VARIABLE SPEED ELECTRONIC


SINGLE PUMP	DOUBLE PUMP
 VEGA RMXA-RMYA 4,1-7,6 H_{MAX} (mca) page 456	
 VEGA RSHE 7,4-13,5 H_{MAX} (mca) page 459	 VEGA RTHE 7,6-13,0 H_{MAX} (mca) page 469

Please verify with Sales the availability of the product in the destination Country before ordering

Water circulators

VegA RMXA-RMYA



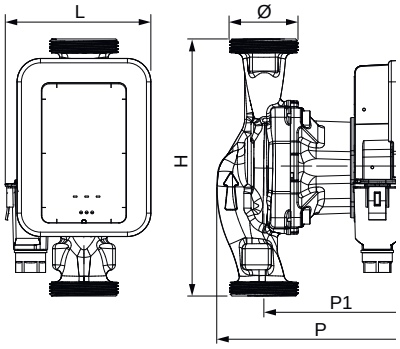

ERP

- Domestic electronic single pump
- ErP ready

Description	H mm	H1 mm	L mm	P mm	P1 mm	Ø mm	Net weight kg
VEGA RMXA 25-40	180	76.3	101.9	128.6	94.6	Rp 1"	2,0
VEGA RMXA 25-60	180	76.3	101.9	128.6	94.6	Rp 1"	2,0
VEGA RMXA 32-40	180	76.3	101.9	140.3	106.3	Rp 1" 1/4	2,3
VegA RMXA 32-60	180	76.3	101.9	140.3	106.3	Rp 1" 1/4	2,3
VegA RMXA 32-80	180	76.3	101.9	140.3	106.3	Rp 1" 1/4	2,5
VegA RMYA 25-40	130	76.3	101.9	128.6	94.6	Rp 1"	2,0
VegA RMYA 25-60	130	76.3	101.9	128.6	94.6	Rp 1"	2,0
VegA RMYA 25-80	130	76.3	101.9	128.6	94.6	Rp 1"	2,2

High efficiency single glandless circulators, ideal for domestic systems, capable of ensuring high performances and energetic saving thanks both to the self-protected motor with ECM technology and the integrated electronic control able to adapt the operation in funcion of the system requirements.
Able to operate at different speeds (min,med,max) with three different operating modes: constant differential pressure, variable differential pressure, constant speed.

Features:
- Low energetic consumptions
- Silent operation
- Three different operating modes: n=cost, Δp-c, Δp-v
- Extremely compact dimensions thanks to the electrical connector positioned laterally
- Ease of regulation: with a single regulation button performance is determined according to the needs of the installation
- Thread connections

Operating limits
- Max operating pressure: 6 bar
- Operating temperature: from -10°C up to 95°C
- Protection degree: IP X2D

TECHNICAL DATA


Description	Volume flow rate Q_{max} m^3/h	Nominal pressure bar	Hydraulic head H_{max} mca	Code
VegA RMXA 25-40	3.0	6.0	4.1	**20188521**
VegA RMXA 25-60	3.0	6.0	6.0	**20188522**
VegA RMXA 32-40	3.0	6.0	4.1	**20188523**
VegA RMXA 32-60	3.0	6.0	6.0	**20188524**
VegA RMXA 32-80	4.3	6.0	7.6	**20188525**
VegA RMYA 25-40	3.0	6.0	4.1	**20188507**
VegA RMYA 25-60	3.0	6.0	6.0	**20188517**
VegA RMYA 25-80	4.3	6.0	7.6	**20188520**


ACCESSORIES

Description	Code
BCT 25 pipe connection (DN25)	**4322904**
BCT 32 pipe connection (DN32)	**4322906**


HYDRAULIC PERFORMANCES


VegA RMXA- RMYA 25-40
VegA RMXA 32-40

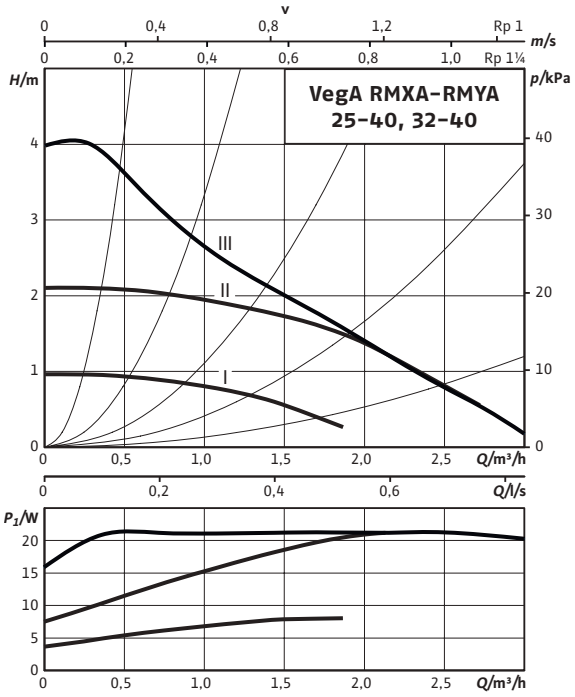

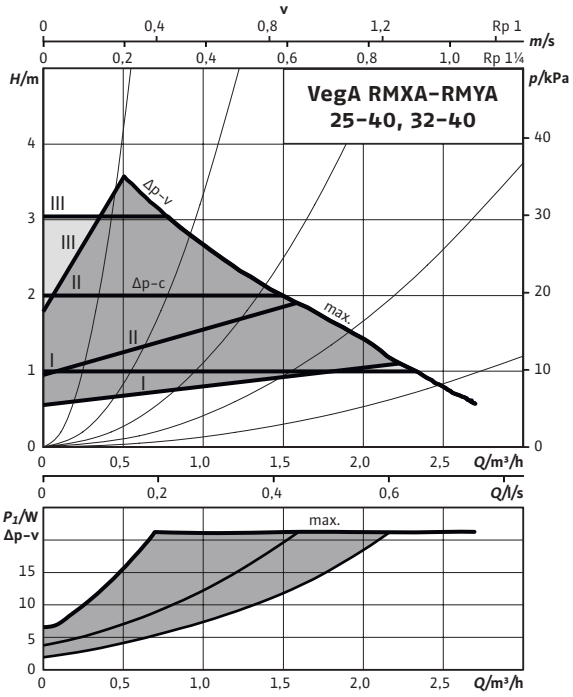



VegA RMXA-RMYA 25-60
VegA RMXA 32-60

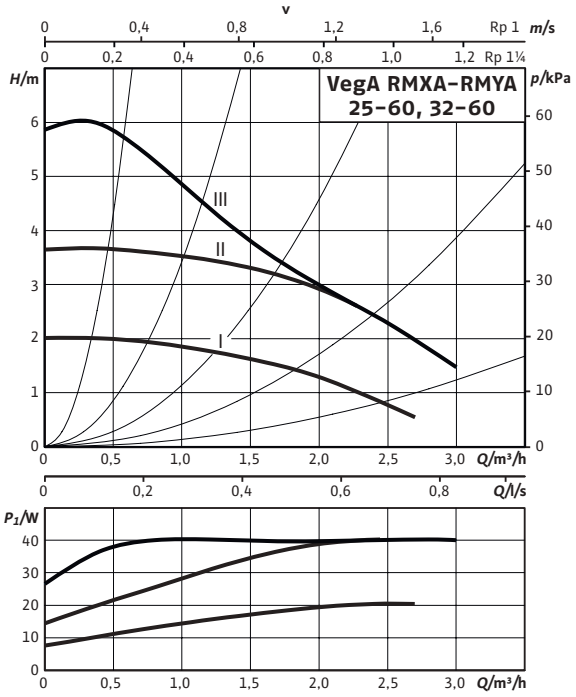

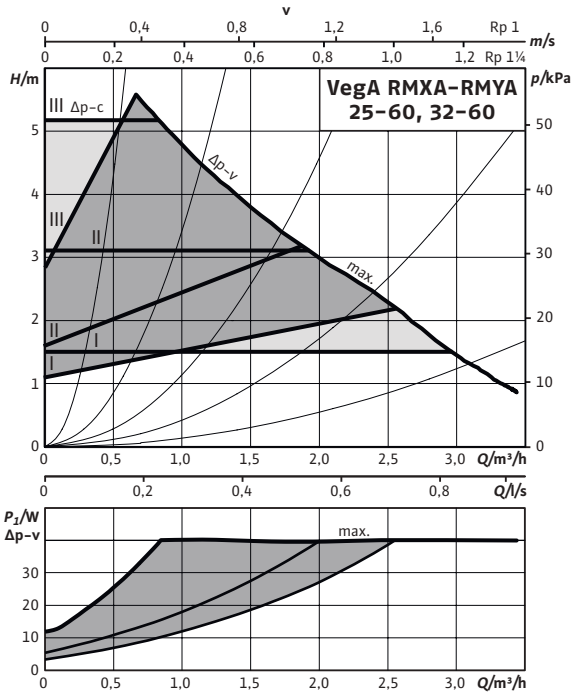

VegA RMXA-RMYA 32-80

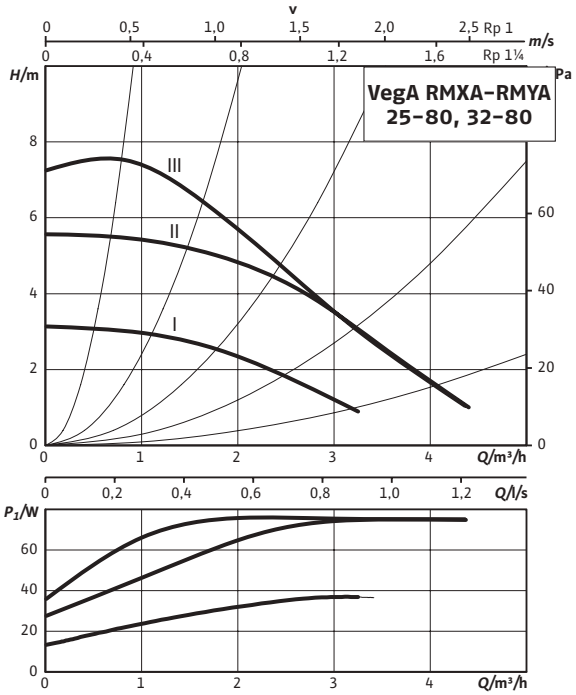


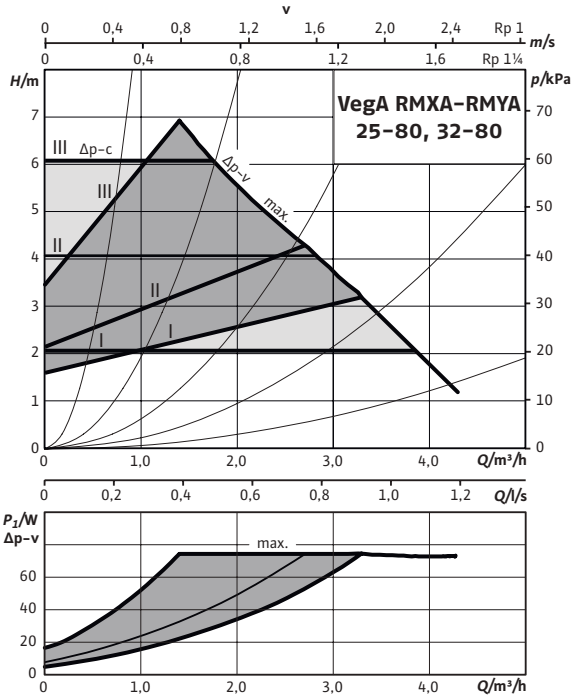

Water circulators

VegA RSHE



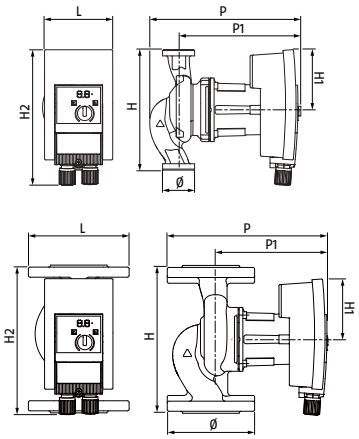

ERP

- Electronic single pumps
- ErP ready

Description	H mm	H1 mm	H2 mm	L mm	P mm	P1 mm	Ø mm	Net weight kg
VegA RSHE 25-60 PN10	180	90	203	102	224	180	Rp 1" ½ (*)	4,5
VegA RSHE 25-70 PN10	180	90	203	102	224	180	Rp 1" ½ (*)	4,5
VegA RSHE 25-90 PN10	180	98	233	128	245	198	Rp 1" ½ (*)	5,3
VegA RSHE 30-60 PN10	180	90	203	102	224	180	Rp 2" (*)	4,6
VegA RSHE 30-70 PN10	180	90	203	102	224	180	Rp 2" (*)	4,6
VegA RSHE 30-90 PN10	180	98	233	128	245	198	Rp 2" (*)	5,4
VegA RSHE 32-70 PN6/10	220	98	233	128	255	207	DN32-PN6/10	11
VegA RSHE 40-30 PN6/10	220	90	223	102	232	175	DN40-PN6/10	8,6
VegA RSHE 40-60 PN6/10	220	98	245	128	249	201	DN40-PN6/10	9,2
VegA RSHE 40-80 PN6/10	250	109	277	142	379	315	DN40-PN6/10	13
VegA RSHE 50-70 PN6/10	280	109	292	142	371	318	DN50-PN6/10	14,2
VegA RSHE 50-80 PN6/10	280	109	292	142	371	318	DN50-PN6/10	14,2
VegA RSHE 65-80 PN6/10	280	109	292	142	384	327	DN65-PN6/10	16,1
VegA RSHE 65-90 PN6/10	340	169	340	174	404	334	DN65-PN6/10	25,8
VegA RSHE 65-110 PN6/10	340	169	340	174	395	329	DN65-PN6/10	27,5
VegA RSHE 80-90 PN10	360	169	360	174	414	330	DN80-PN10	30,4

(*) NOTE: By means of the thread pipe connections the diameter is reduced from Rp 1" ½ to Rp 1" and from Rp 2" to Rp 1" ¼.

Wet rotor electronic circulators with high-performance motor that ensure high performance and energy savings related to the electronic management system that allows to vary the operating speed of the rotor, ensuring the correct input required by the system. Possibility to select the differential pressure regulation in constant or variable mode or to have the manual selection of the three speeds.
Circulators suitable for all heating, air conditioning and closed refrigeration circuits.

Features:
- Low energy consumptions
- Silent operation
- Easy wiring thanks to the front accessibility to the terminal block
- Pump body material suitable to avoid the corrosion due to the condensate
- LED indicator to set up either the hydraulic head or to display the error codes
- Power supply: 230V, 50/60 Hz

Operating limits:
- Max operating pressure: 10 bar
- Temperature range: from 20 °C up to 110 °C
- Protection degree: IP X4D

TECHNICAL DATA

Description	Volume flow rate Q_{max} m³/h	Nominal pressure bar	Maximum hydraulic head H_{max} mca	Notes	Code
VegA RSHE 25-60 PN10	8.2	10	7.4		**20182746**
VegA RSHE 25-70 PN10	9.6	10	10.8		**20182765**
VegA RSHE 25-90 PN10	11.7	10	12.1	(D)	**20182766**
VegA RSHE 30-60 PN10	8.2	10	7.4		**20182767**
VegA RSHE 30-70 PN10	9.6	10	10.8		**20182768**
VegA RSHE 30-90 PN10	11.7	10	12.1		**20182771**
VegA RSHE 32-70 PN6/10	13.0	6/10	9.0		**20182772**
VegA RSHE 40-30 PN6/10	12.7	6/10	5.4		**20182773**
VegA RSHE 40-60 PN6/10	18.2	6/10	8.5		**20182774**
VegA RSHE 40-80 PN6/10	24.8	6/10	13.0		**20182775**
VegA RSHE 50-70 PN6/10	29.0	6/10	10.2		**20182776**
VegA RSHE 50-80 PN6/10	31.2	6/10	12.8		**20182777**
VegA RSHE 65-80 PN6/10	32.0	6/10	10.1		**20182778**
VegA RSHE 65-90 PN6/10	46.2	6/10	11.6		**20182779**
VegA RSHE 65-110 PN6/10	55.5	6/10	17.1		**20182781**
VegA RSHE 80-90 PN10	64.0	10	13.5	(D)	**20182782**

(D) Availability of the material at our warehouse: 20 working days after the order validation date.

ACCESSORIES

Description	Notes	Code
COUNTER FLANGE KIT		
DN32 PN 6 counter flange	(D)	**20158976**
DN40 PN 6 counter flange	(D)	**20158977**
DN50 PN 6 counter flange	(D)	**20158979**
DN65 PN 6 counter flange	(D)	**20158980**
DN80 PN 10/16 counter flange	(D)	**20158983**
INTERMEDIATE FLANGE FOR LENGTH COMPENSATION		
DN40 intermediate flange		**20158985**
DN50 intermediate flange		**20158986**
DN65 intermediate flange		**20158987**
PIPE CONNECTIONS		
BCT 25 pipe connection (DN25)		**4322904**
BCT 32 pipe connection (DN32)		**4322906**
CONNECT MODULE		
Connect module	(1)	**20182901**


(D) Availability of the material at our warehouse: 7 working days after the order validation date.
(1) Order one for each circulator.

ACCESSORIES MATCHING TABLE


Description	Code	4322904	4322906	20158977	20158979	20158980	20158983
		BCT 25 pipe connection (DN25)	BCT 32 pipe connection (DN32)	DN40 PN6 counter flange	DN50 PN6 counter flange	DN65 PN6 counter flange	DN80 PN10/16 counter flange
VegA RSHE 25-60 PN10	**20182746**	●					
VegA RSHE 25-70 PN10	**20182765**	●					
VegA RSHE 25-90 PN10	**20182766**	●					
VegA RSHE 30-60 PN10	**20182767**		●				
VegA RSHE 30-70 PN10	**20182768**		●				
VegA RSHE 30-90 PN10	**20182771**		●				
VegA RSHE 40-30 PN6/10	**20182773**			●			
VegA RSHE 40-60 PN6/10	**20182774**			●			
VegA RSHE 40-80 PN6/10	**20182775**			●			
VegA RSHE 50-70 PN6/10	**20182776**				●		
VegA RSHE 50-80 PN6/10	**20182777**				●		
VegA RSHE 65-80 PN6/10	**20182778**					●	
VegA RSHE 65-90 PN6/10	**20182779**					●	
VegA RSHE 65-110 PN6/10	**20182781**					●	
VegA RSHE 80-90 PN10	**20182782**						●

HYDRAULIC PERFORMANCES


VegA RSHE 25-60 PN10
VegA RSHE 30-60 PN10

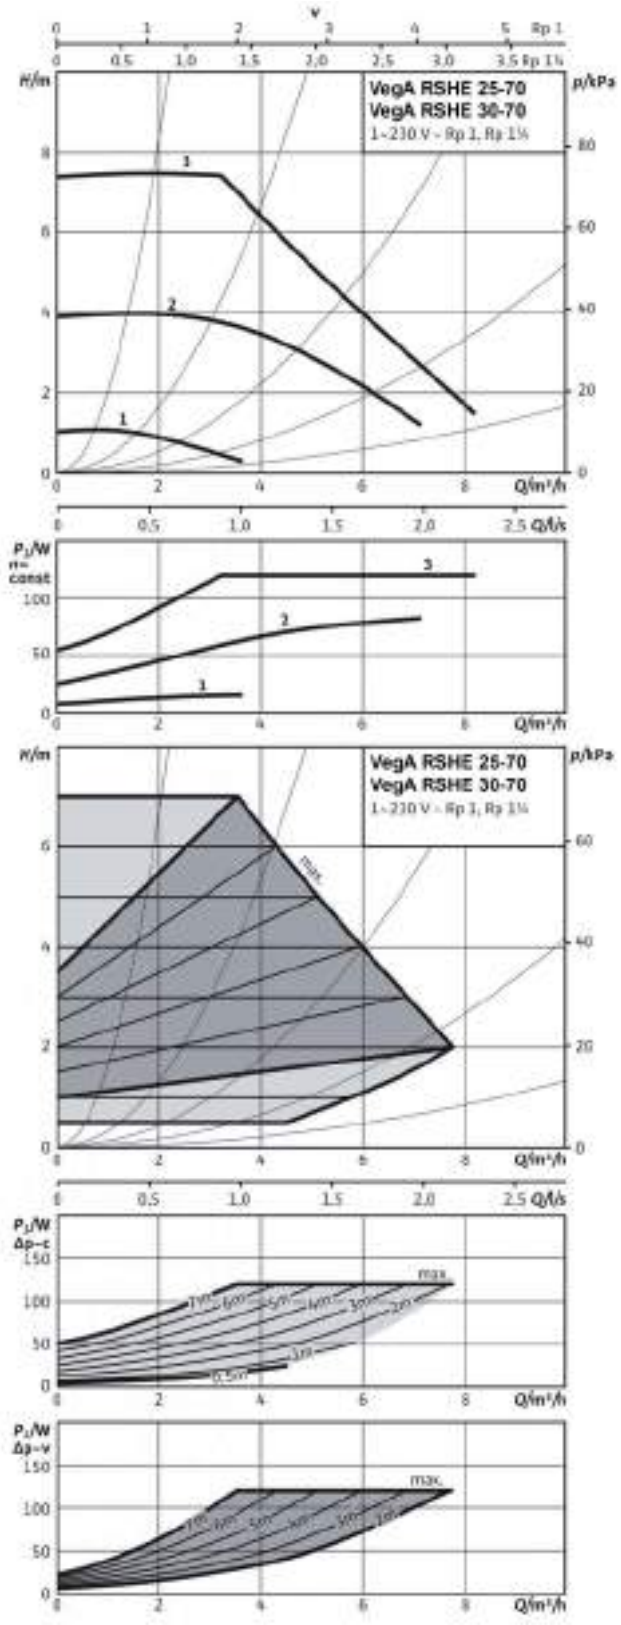


VegA RSHE 25-70 PN10
VegA RSHE 30-70 PN10

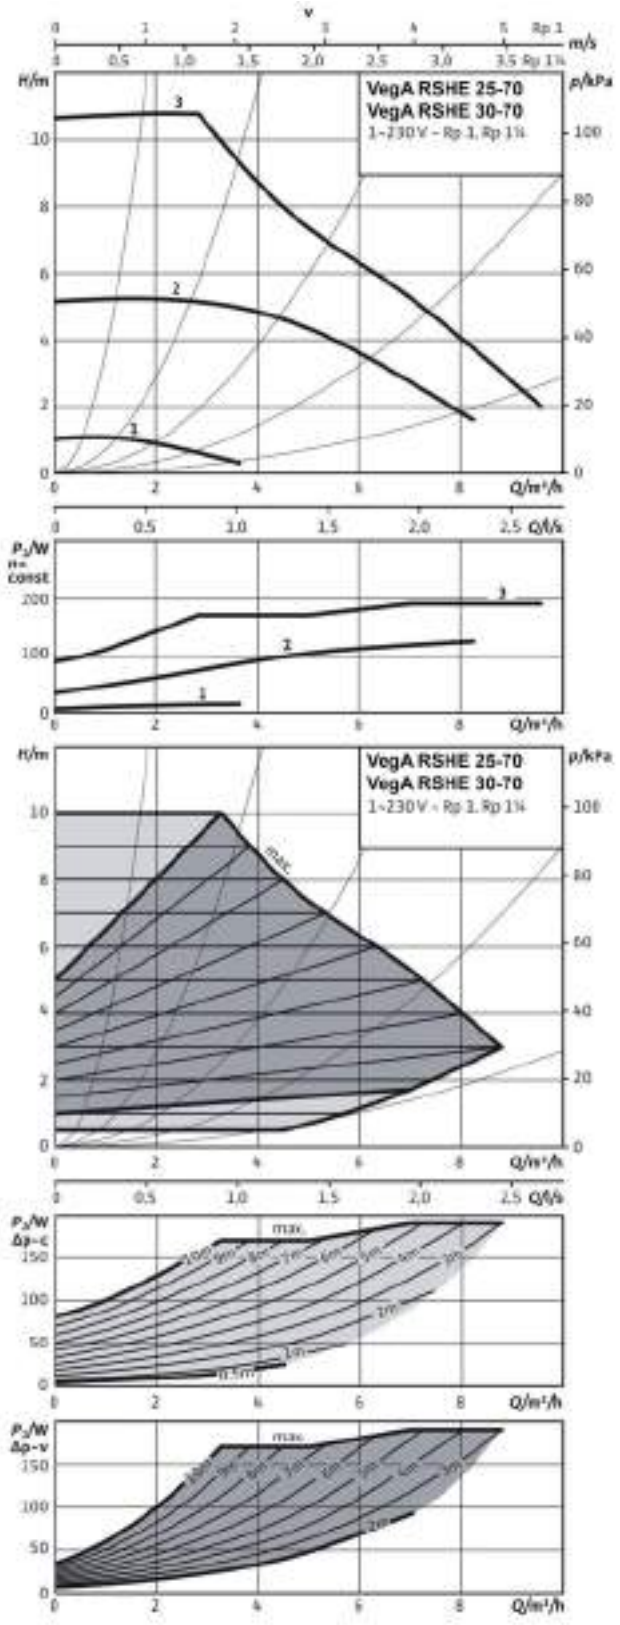


VegA RSHE 25-90 PN10
VegA RSHE 30-90 PN10

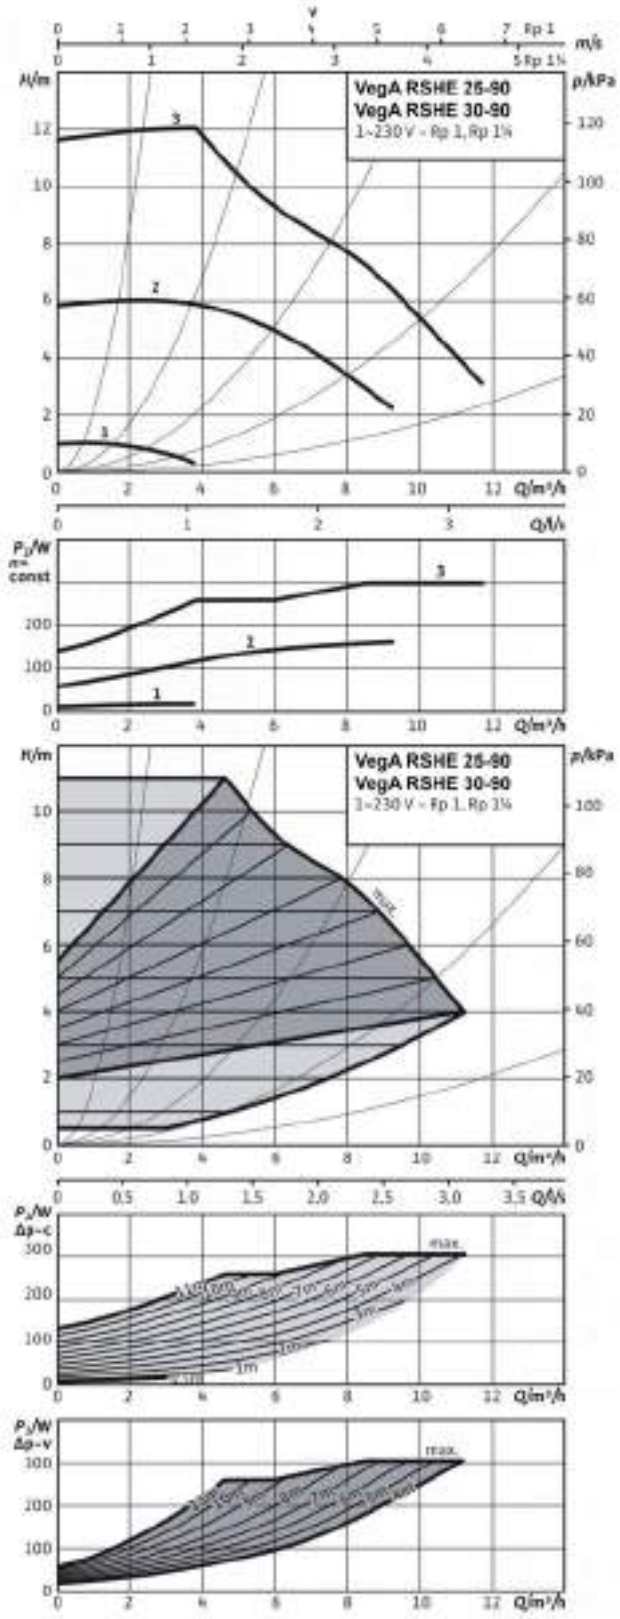


VegA RSHE 32-70 PN6/10

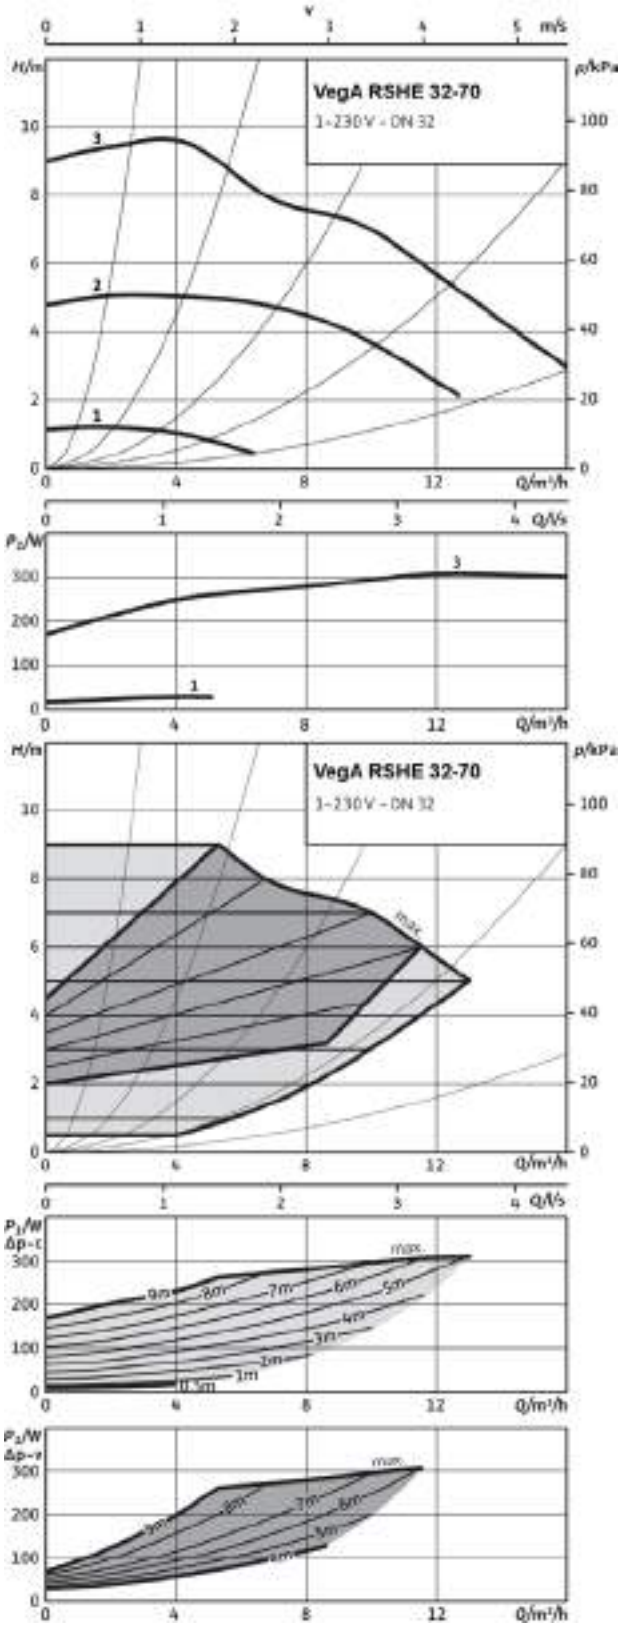


VegA RSHE 40-30 PN6/10

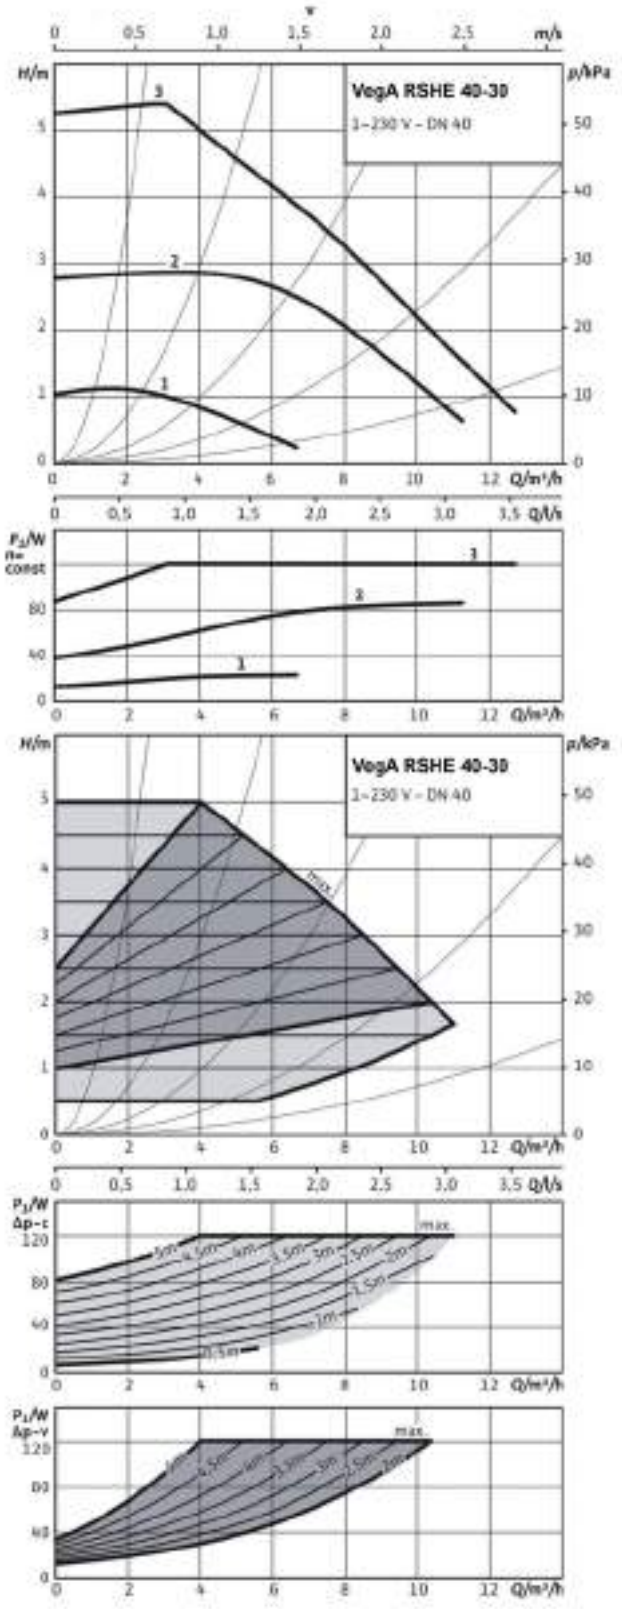


VegA RSHE 40-60 PN6/10

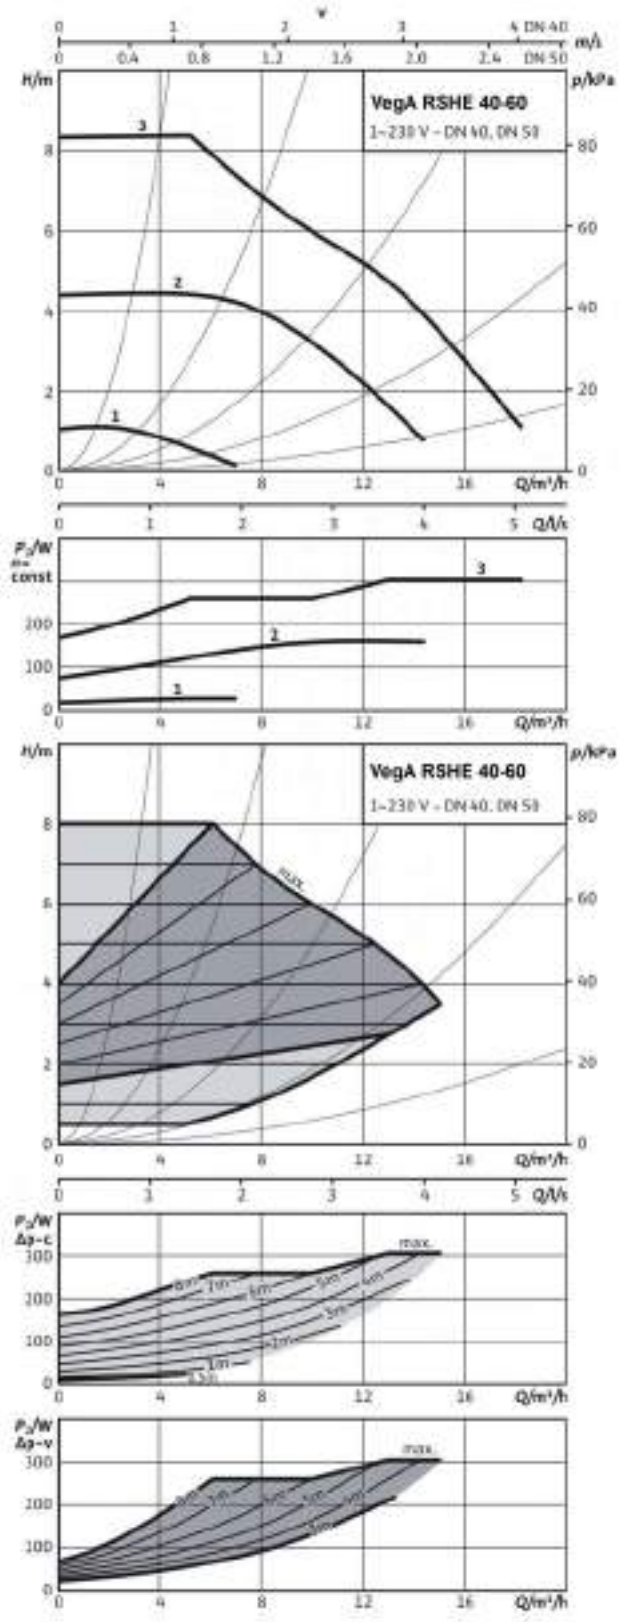


VegA RSHE 40-80 PN6/10

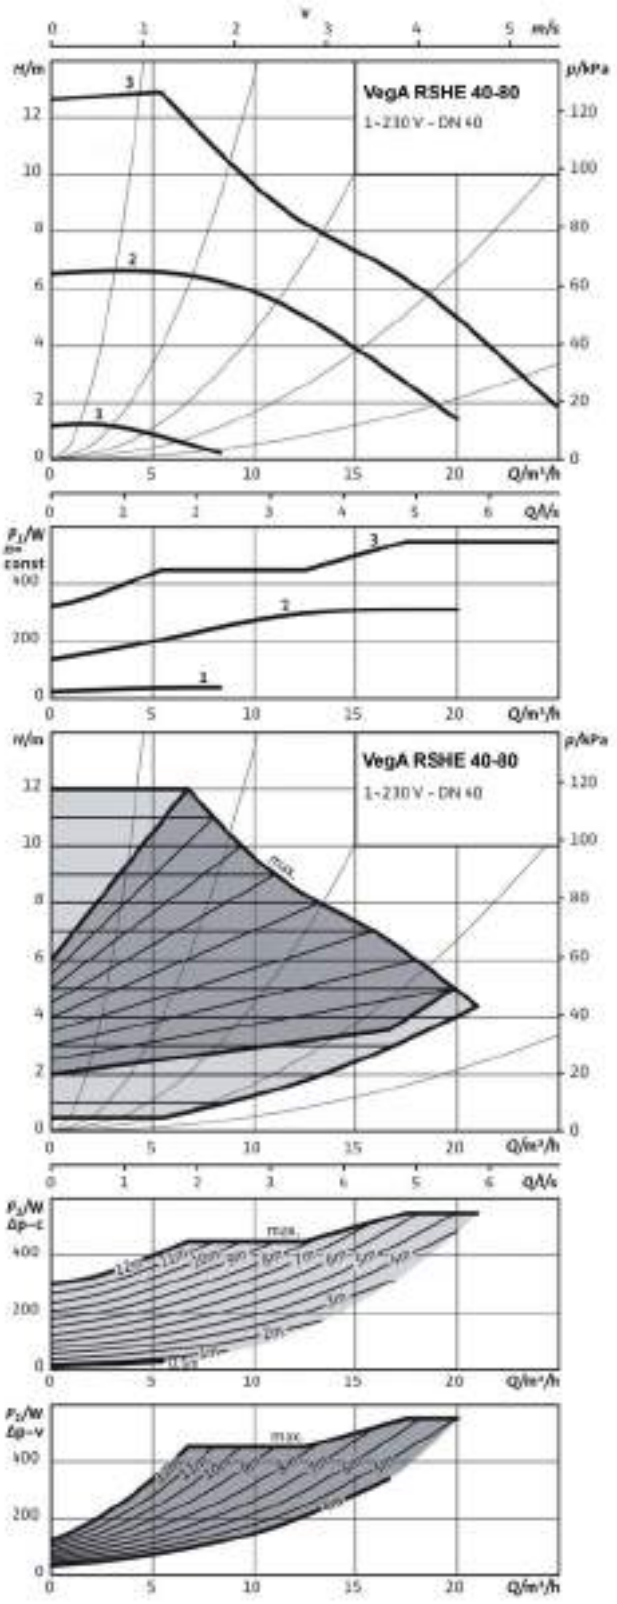


VegA RSHE 50-70 PN6/10

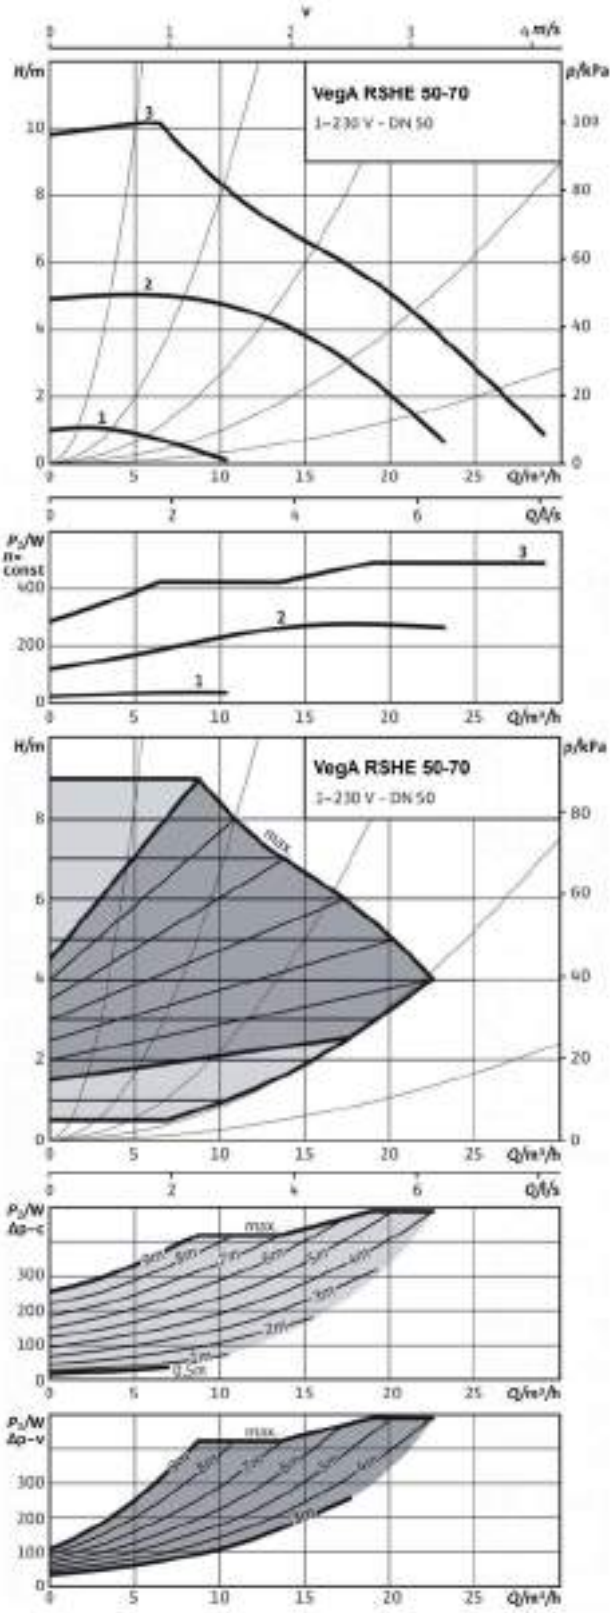


VegA RSHE 50-80 PN6/10

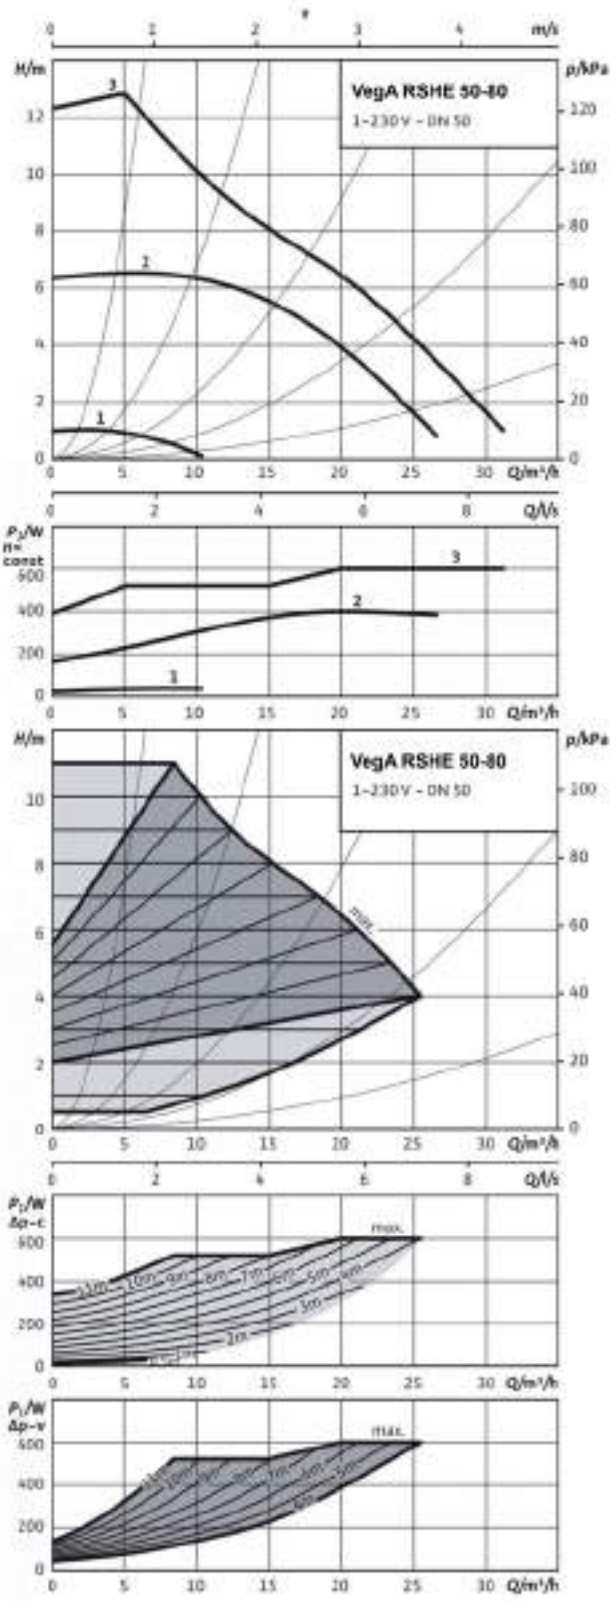


VegA RSHE 65-80 PN6/10

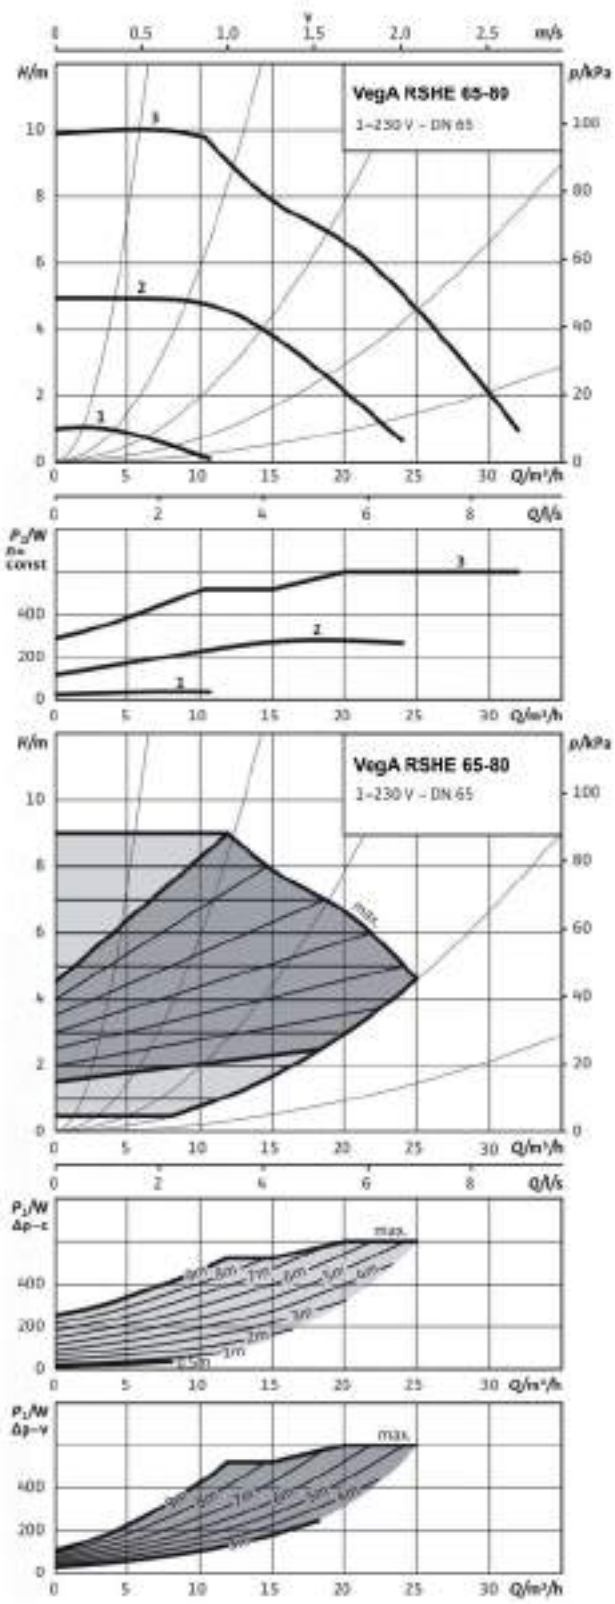


VegA RSHE 65-90 PN6/10

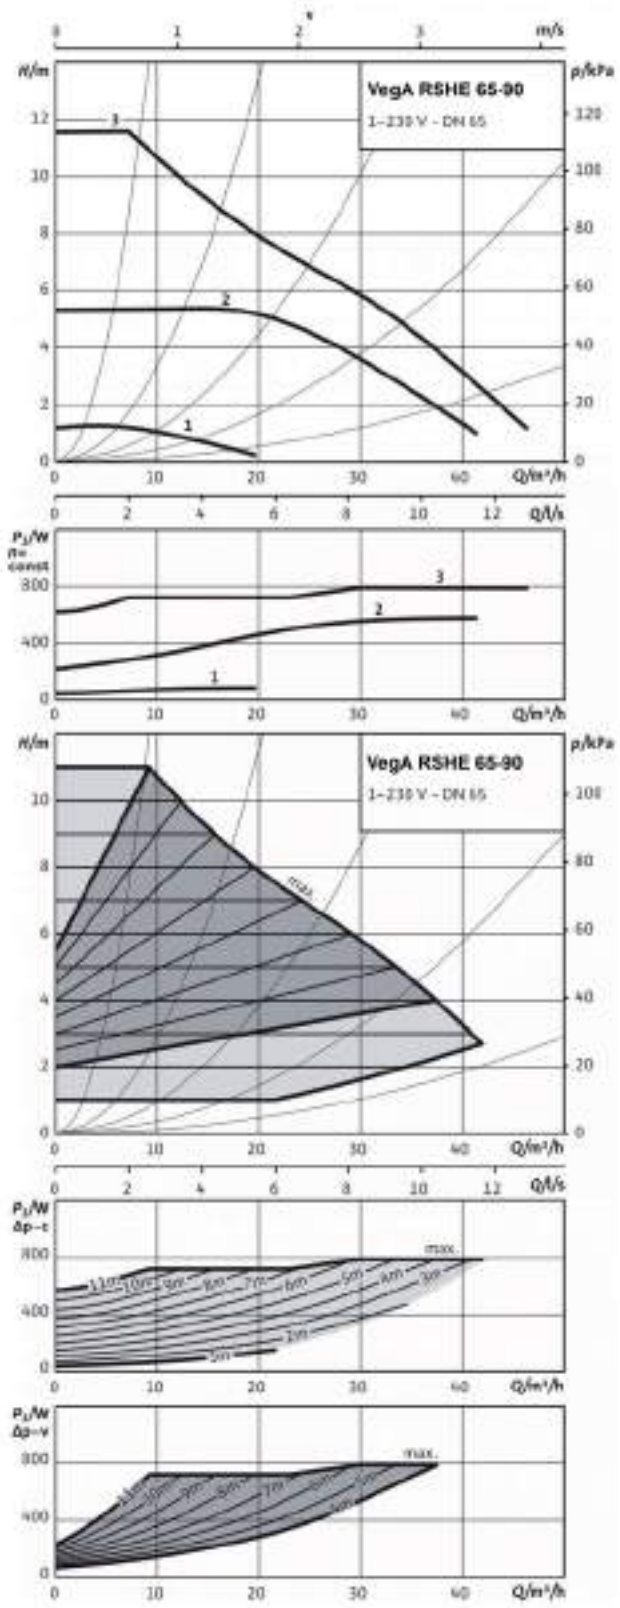

VegA RSHE 65-110 PN6/10

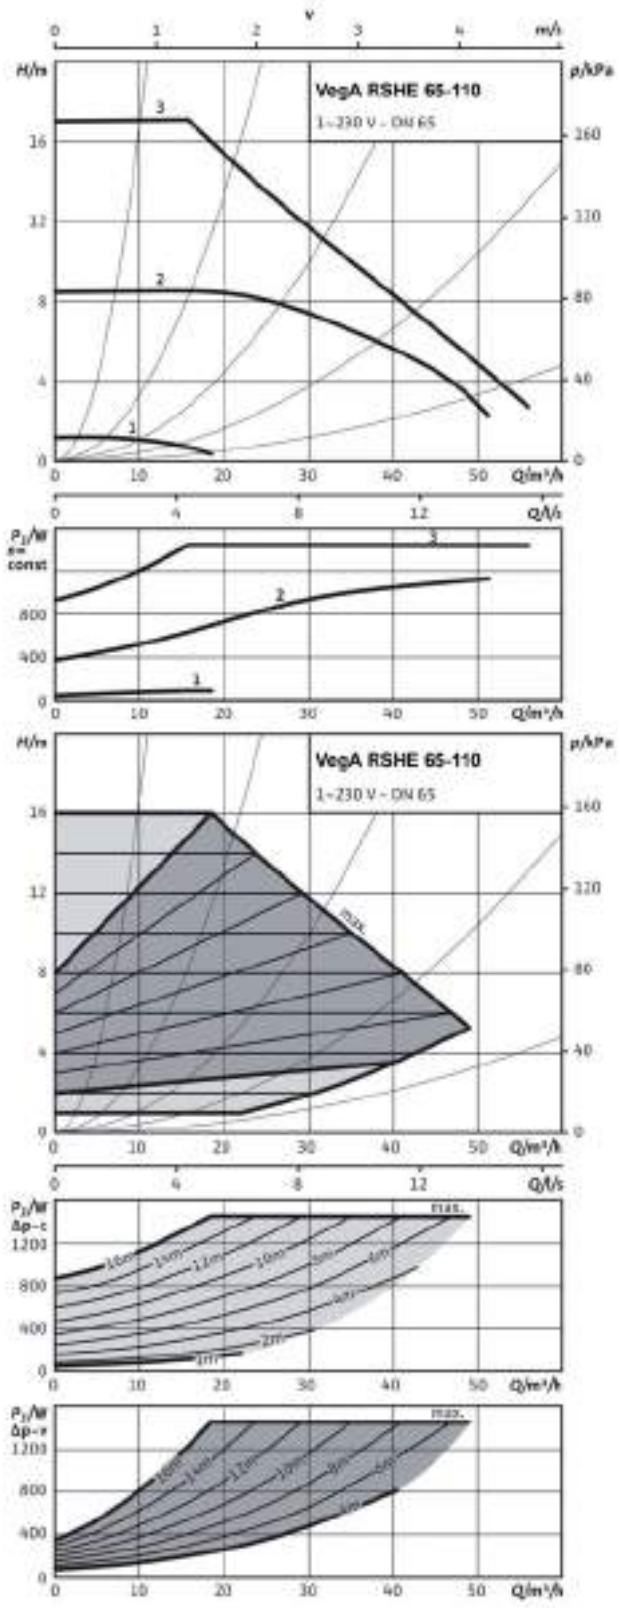


VegA RSHE 80-90 PN10

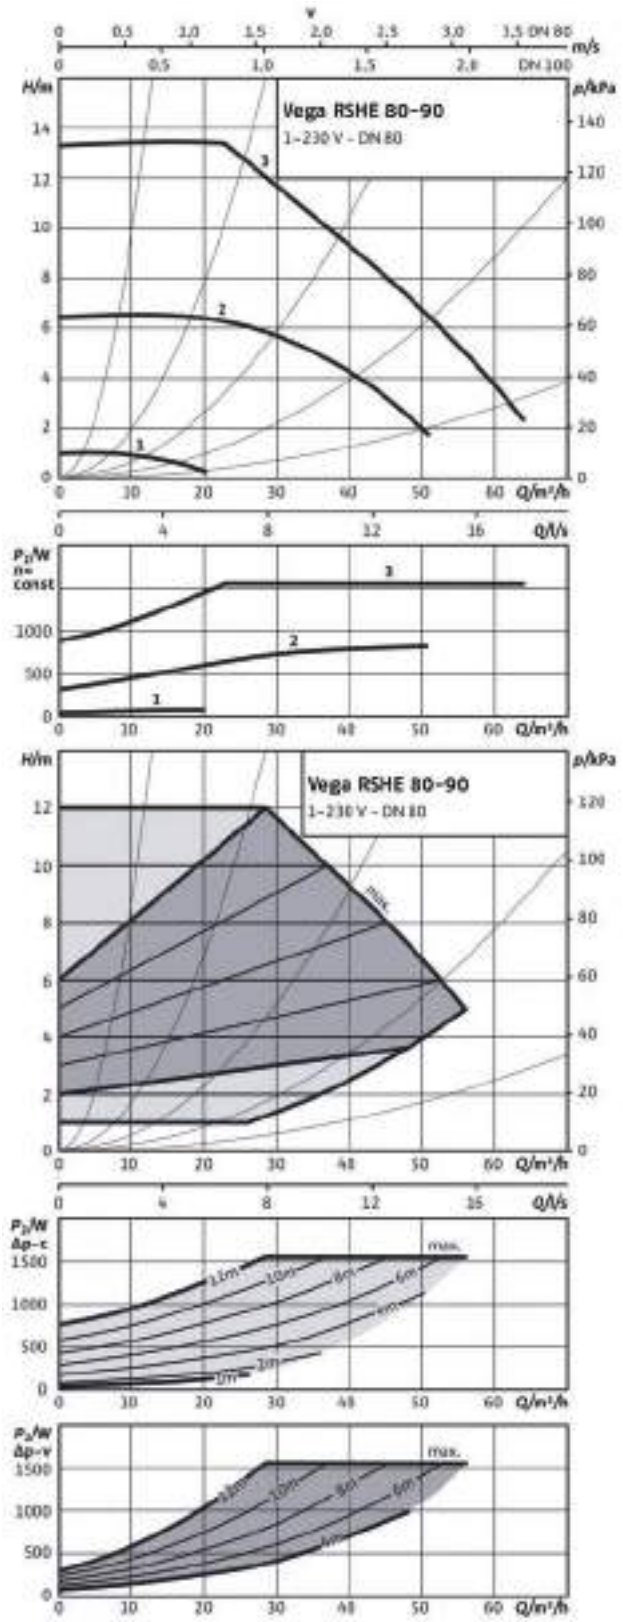

Water circulators

VegA RTHE



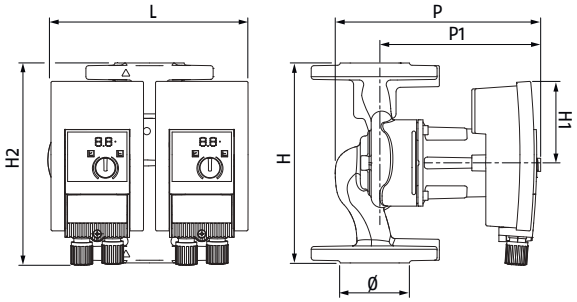

ERP

- Electronic twin pumps
- ErP ready

Description	H mm	H1 mm	H2 mm	L mm	P mm	P1 mm	Ø mm	Net weight kg
VegA RTHE 32-60 PN6/10	220	110	223	231	240	180	DN32-PN6/10	10,4
VegA RTHE 32-80 PN6/10	220	110	245	251	321	364	DN32-PN6/10	17,1
VegA RTHE 40-60 PN6/10	220	110	245	269	330	266	DN40-PN6/10	17,5
VegA RTHE 40-80 PN6/10	250	125	277	302	388	326	DN40-PN6/10	24
VegA RTHE 50-70 PN6/10	280	140	292	310	392	330	DN50-PN6/10	26,4
VegA RTHE 50-80 PN6/10	280	140	292	310	392	330	DN50-PN6/10	26
VegA RTHE 50-110 PN6/10	340	170	340	398	385	315	DN50-PN6/10	47,2
VegA RTHE 65-90 PN6/10	340	170	340	406	422	334	DN65-PN6/10	50,7
VegA RTHE 80-90 PN6	360	170	360	456	439	339	DN80-PN6	56,6
VegA RTHE 80-90 PN10	360	170	360	456	439	339	DN80-PN10	56,6

Wet rotor electronic circulators, twin type, with high-performance motor that ensure high performance and energy savings related to the electronic management system that allows to vary the operating speed of the rotor, ensuring the correct input required by the system. Possibility to select the differential pressure regulation in constant or variable mode or to have the manual selection of the three speeds.
Circulators suitable for all heating, air conditioning and closed refrigeration circuits.

Features:
- Low energy consumptions
- Silent operation
- Easy wiring thanks to the front accessibility to the terminal block
- Pump body material suitable to avoid the corrosion due to the condensate
- LED indicator to set up either the hydraulic head or to display the error codes
- Power supply: 230V, 50/60 Hz

Operating limits:
- Max operating pressure: 10 bar
- Temperature range: from 20°C up to 110°C
- Protection degree: IP X4D

TECHNICAL DATA

Description	Volume flow rate Q_{max} m³/h	Nominal pressure bar	Maximum hydraulic head H_{max} mca	Notes	Code
VegA RTHE 32-60 PN6/10	7.9	6/10	7.6		**20182783**
VegA RTHE 32-80 PN6/10	13.3	6/10	9.2	(D)	**20182784**
VegA RTHE 40-60 PN6/10	17.5	6/10	8.0		**20182785**
VegA RTHE 40-80 PN6/10	22.0	6/10	12.3		**20182786**
VegA RTHE 50-70 PN6/10	26.4	6/10	9.6		**20182787**
VegA RTHE 50-80 PN6/10	26.0	6/10	12.1		**20182788**
VegA RTHE 50-110 PN6/10	39.0	6/10	16.4	(D)	**20182789**
VegA RTHE 65-90 PN6/10	43.0	6/10	11.5		**20182790**
VegA RTHE 80-90 PN6	61.0	6	13.0	(D)	**20182791**
VegA RTHE 80-90 PN10	61.0	10	13.0	(D)	**20182792**

(D) Availability of the material at our warehouse: 20 working days after the order validation date.

ACCESSORIES

Description	Notes	Code
COUNTER FLANGE KIT		
DN32 PN 6 counter flange	(D)	**20158976**
DN40 PN 6 counter flange	(D)	**20158977**
DN50 PN 6 counter flange	(D)	**20158979**
DN65 PN 6 counter flange	(D)	**20158980**
DN80 PN 6 counter flange	(D)	**20158981**
DN80 PN 10/16 counter flange	(D)	**20158983**
INTERMEDIATE FLANGE FOR LENGTH COMPENSATION		
DN40 intermediate flange		**20158985**
DN50 intermediate flange		**20158986**
DN65 intermediate flange		**20158987**
CONNECT MODULE		
Connect module	(1)	**20182901**


(D) Availability of the material at our warehouse: 7 working days after the order validation date.
(1) Order one for each circulator.

ACCESSORIES MATCHING TABLE


Description	Code	20158976	20158977	20158979	20158980	20158981	20158983
		DN32 PN 6 counter flange	DN40 PN 6 counter flange	DN50 PN 6 counter flange	DN65 PN 6 counter flange	DN80 PN 6 counter flange	DN80 PN 10/16 counter flange
VegA RTHE 32-60 PN6/10	**20182783**	●					
VegA RTHE 32-80 PN6/10	**20182784**	●					
VegA RTHE 40-60 PN6/10	**20182785**		●				
VegA RTHE 40-80 PN6/10	**20182786**		●				
VegA RTHE 50-70 PN6/10	**20182787**			●			
VegA RTHE 50-80 PN6/10	**20182788**			●			
VegA RTHE 50-110 PN6/10	**20182789**			●			
VegA RTHE 65-90 PN6/10	**20182790**				●		
VegA RTHE 80-90 PN6	**20182791**					●	
VegA RTHE 80-90 PN10	**20182792**						●

HYDRAULIC PERFORMANCES


VegA RTHE 32-60 PN6/10

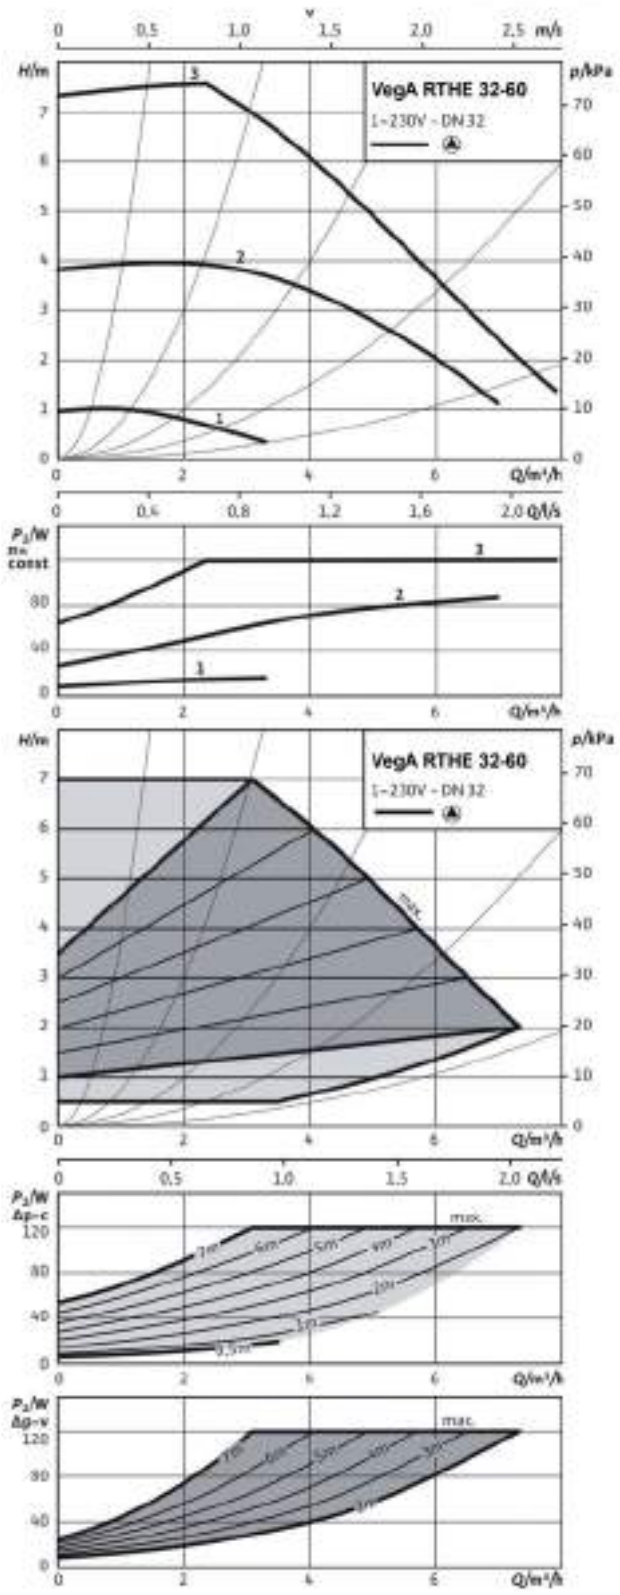


VegA RTHE 32-80 PN6/10

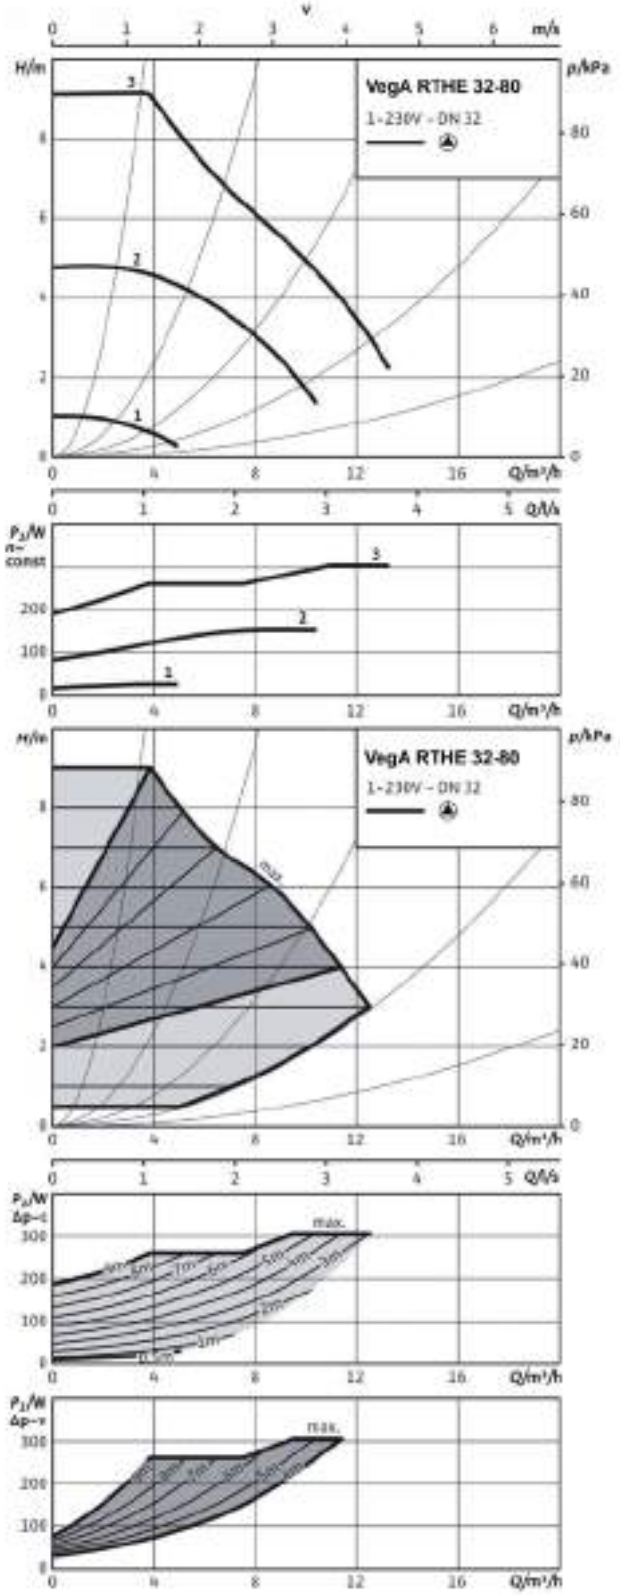


VegA RTHE 40-60 PN6/10

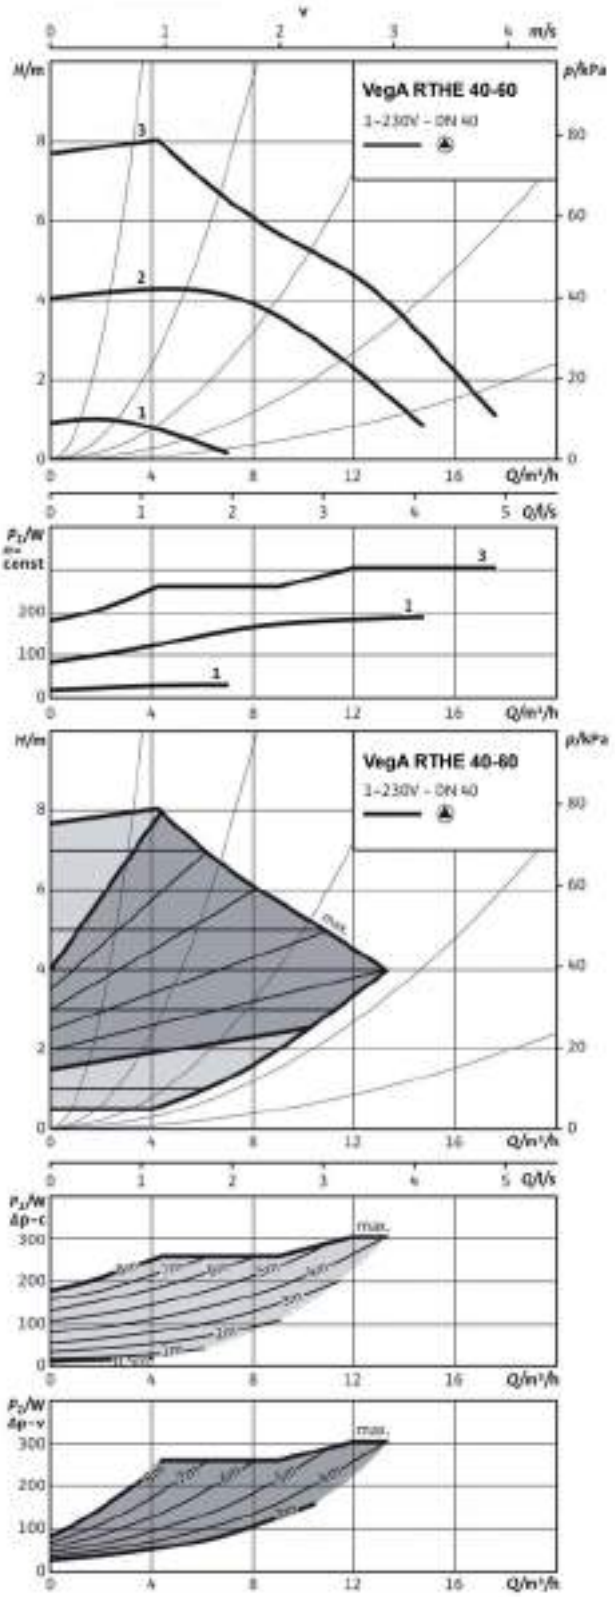


VegA RTHE 40-80 PN6/10

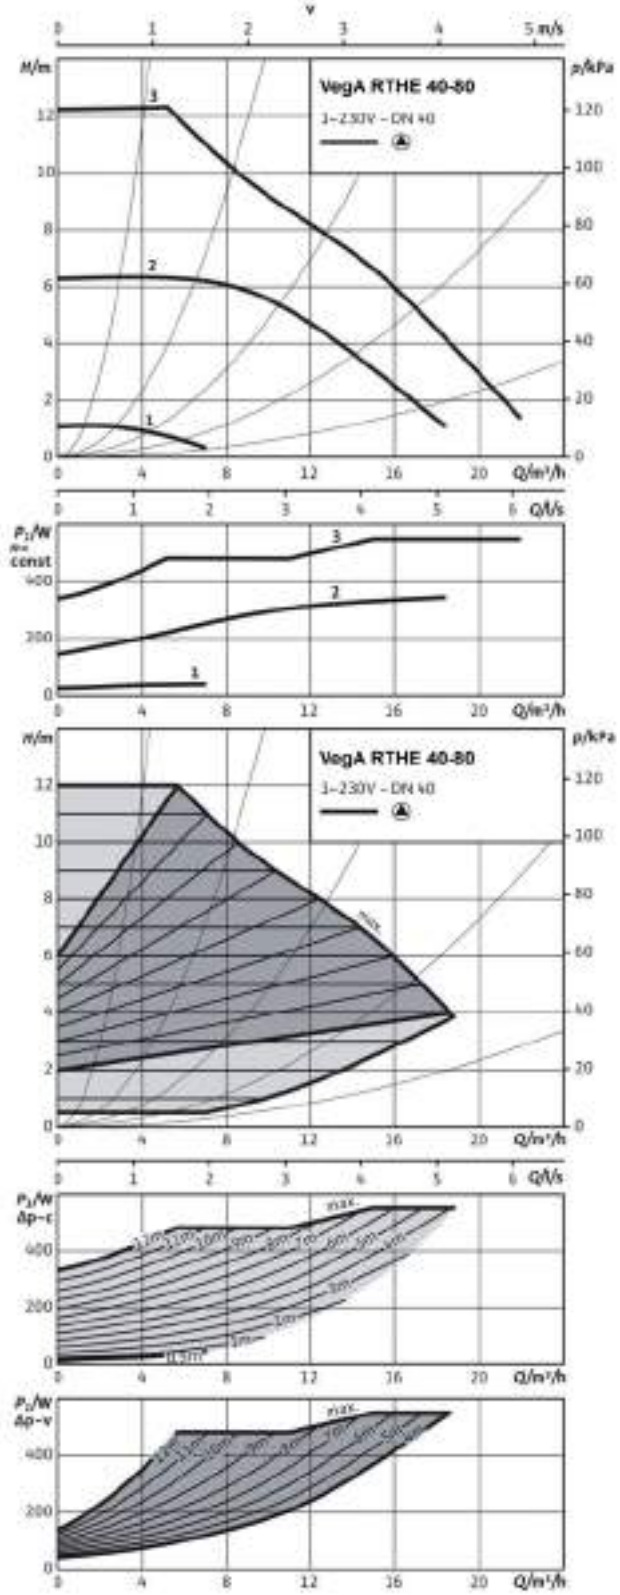


VegA RTHE 50-70 PN6/10

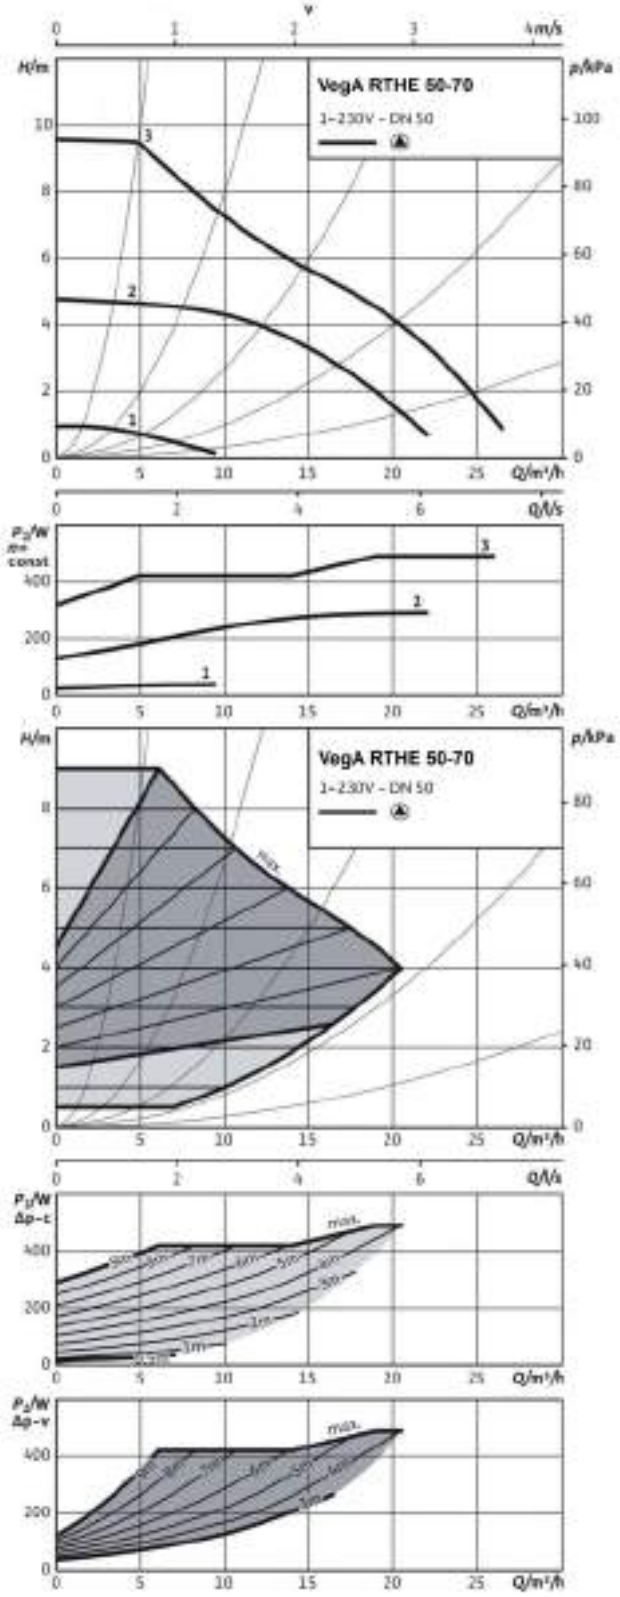


VegA RTHE 50-80 PN6/10

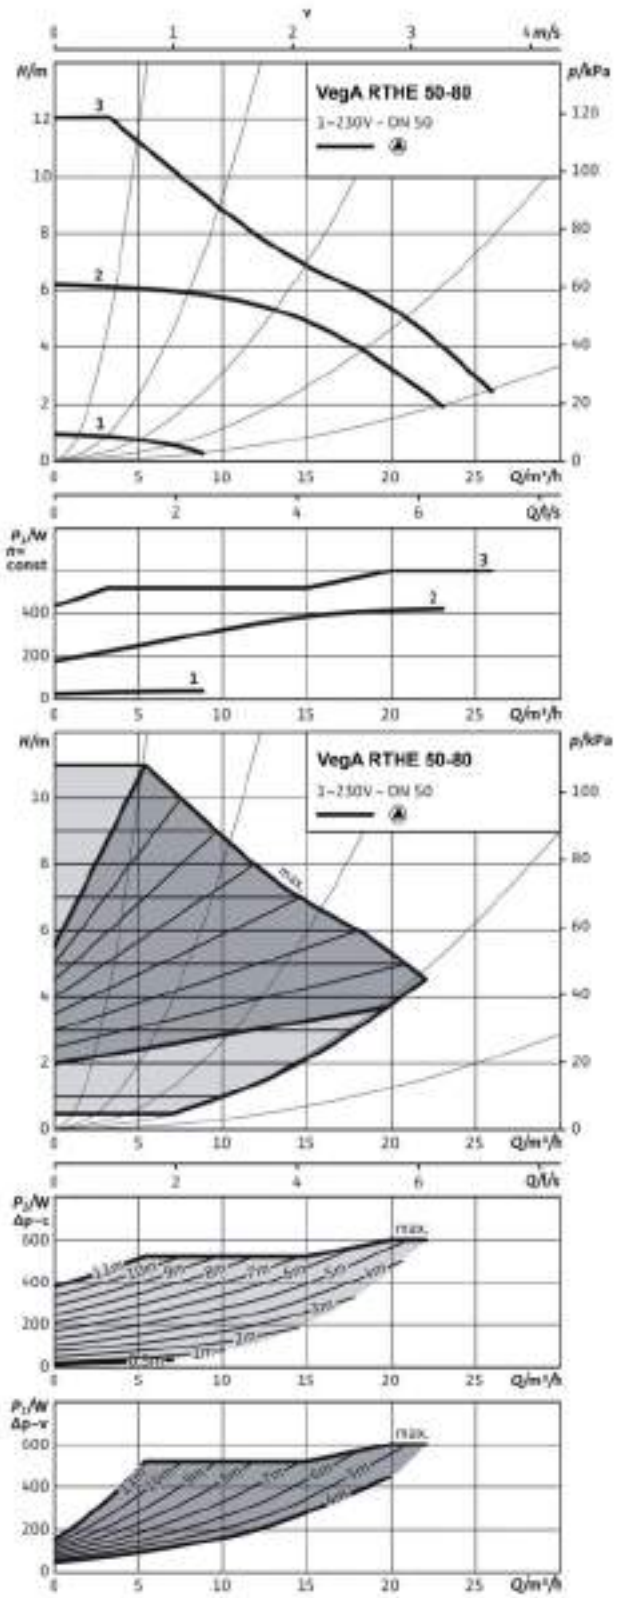


VegA RTHE 50-110 PN6/10

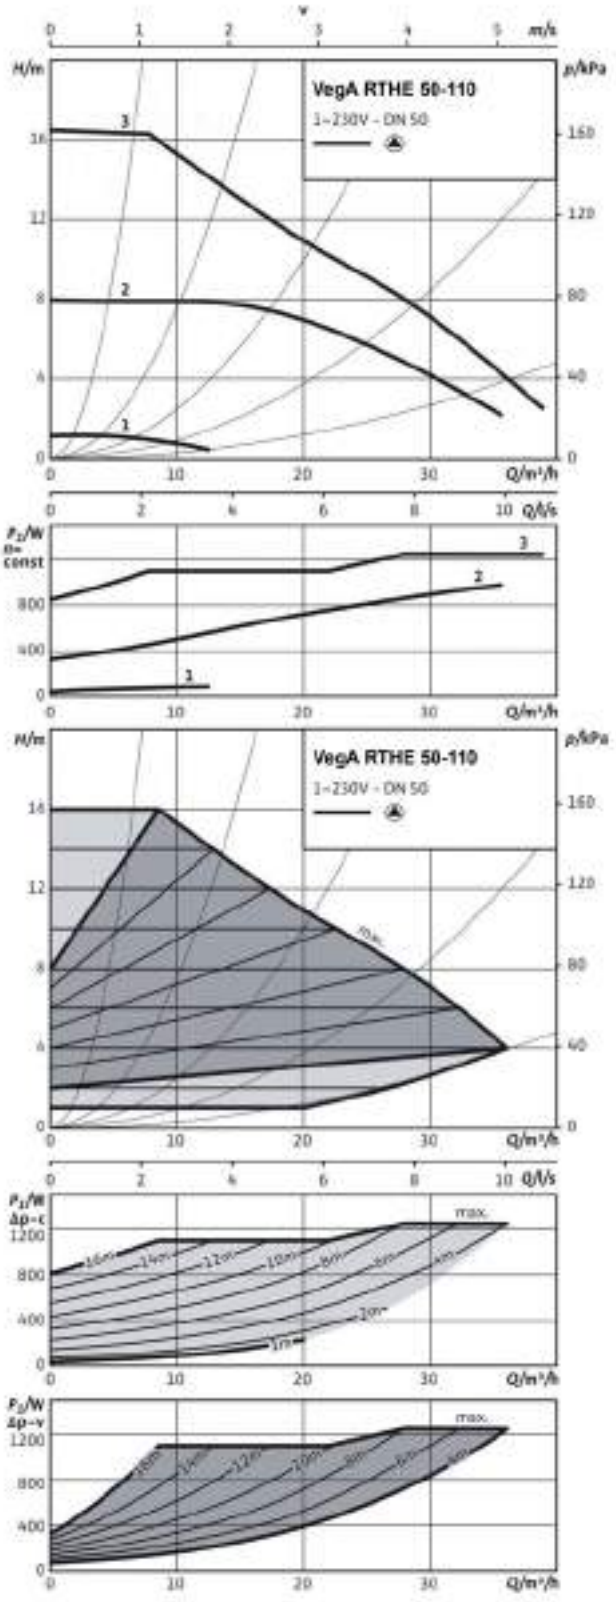

VegA RTHE 65-90 PN6/10

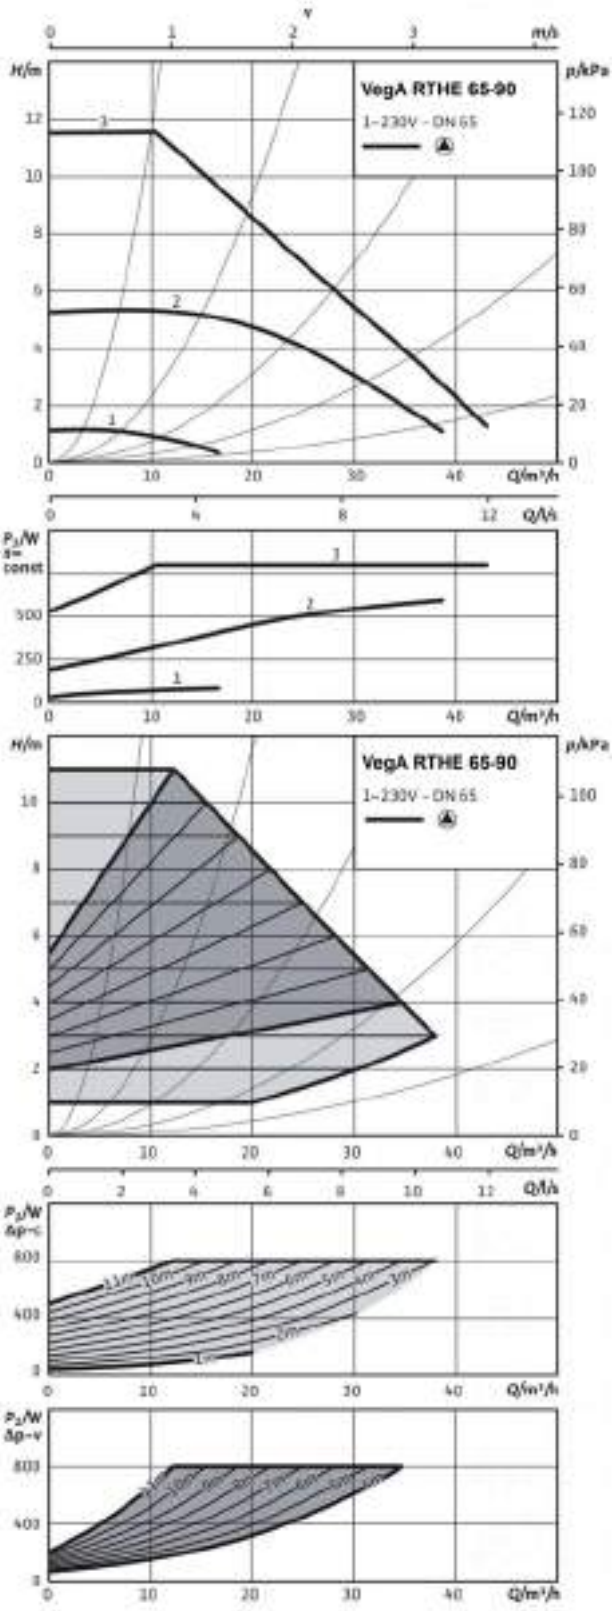

VegA RTHE 80-90 PN6
VegA RTHE 80-90 PN10

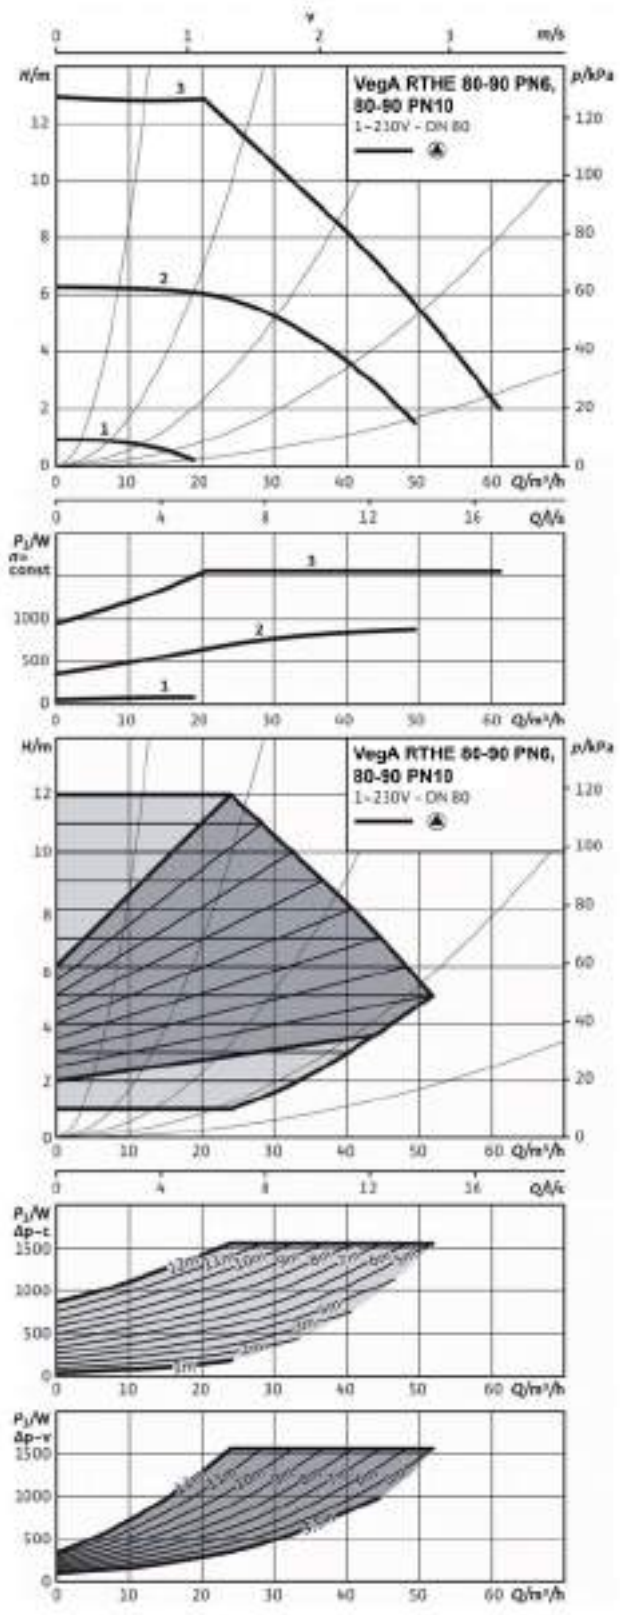



Water pumps

RSB-RSI



ERP 50%

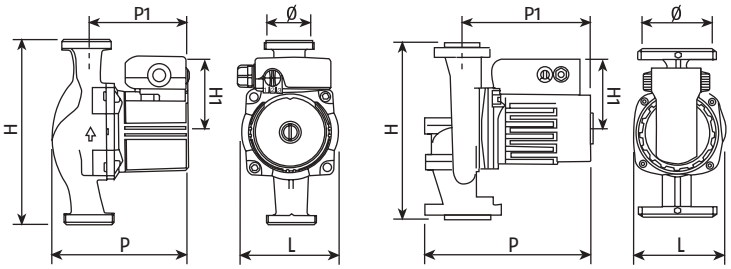

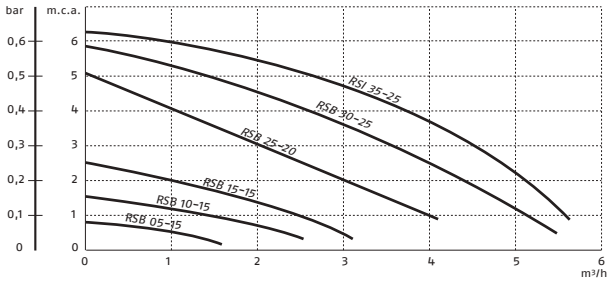

- Single pump for domestic water recirculation

Description	H mm	L mm	P mm	P1 mm	Ø mm	Weight kg
RSB 05-15	130	96	129	96	1"	2
RSB 10-15	130	96	130	96	1"	2
RSB 15-15	130	96	130	96	1"	2
RSB 25-20	158	123	132	96	1"¼	2,4
RSB 30-25	180	96	145	109	1"½	2,8
RSI 35-25	180	97	174	146	1"½	3,2

The Riello RSB-RSI single pump for domestic water recirculation have been designed and manufactured to allow the recirculation in the distribution rings of the drinking water.

Features:
- Corrosion-resistant materials
- Ceramic rotor shaft
- Graphite bearings
- 3-speed motor
- Low electrical consumption
- Sealed terminal block
- Cable glands
- Easy electrical connections thanks to the full accessibility of the terminal block Single-phase electrical supply 220V at 50Hz

Operating Limits:
- Maximum operating pressure 10 bar
- Maximum recirculation temperature 60°C
- Water pH less than 7
- Maximum water hardness 35 °F
- Electrical protection rating IP 42

TECHNICAL DATA

Description	Maximum flow rate Q m³/h	Maximum head mca	Electric variator	Notes	Code
RSB 05-15	1,5	0,8	Speed 1	(1)	**4322467**
RSB 10-15	2,5	1,6	Speed 3	(1)	**4322468**
RSB 15-15	3,2	2,5	Speed 3	(1)	**4322469**
RSB 25-20	4,2	5,2	Speed 3	(2)	**4322470**
RSB 30-25	5,5	5,8	Speed 3	(3)	**4322471**
RSI 35-25	5,7	6,5	Speed 3	(3)	**4322474**
PIPE CONNECTIONS					
BCT 15 S					**4322900**
BCT 20 S					**4322902**
BCT 25 S					**4322908**

* The circulators are supplied without fittings

Option combination
(1) Optional pairing with BCT 15 S fittings.
(2) Optional pairing with BCT 20 S fittings.
(3) Optional pairing with BCT 25 S fittings.



HOT AIR GENERATORS

GAS HOT AIR GENERATORS 481

GAS HOT AIR GENERATORS

INTERNAL

GAS HOT AIR GENERATORS



GP CONDENS

GP CONDENS 30 (28 kW-3200 m³/h)*
GP CONDENS 40 (37 kW-4400 m³/h)*
GP CONDENS 50 (48 kW-5500 m³/h)*
GP CONDENS 60 (57 kW-6500 m³/h)*
GP CONDENS 90 (89 kW-10000 m³/h)*
GP CONDENS 120 (115 kW-13000 m³/h)*

page 482


(*) Max useful power at 80-60 °C

Please verify with Sales the availability of the product in the destination Country before ordering

High efficiency indoor gas hot air generators

GP Condens



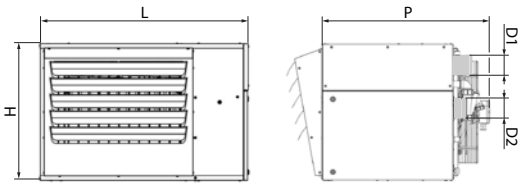

ERP

- Wall-mounted gas hot air generators, pre-mixed, high efficiency
- Up to 106% efficiency
- Axial fans

Description	H mm	L mm	P mm	D1 (*) mm	D2 (*) mm	Net weight kg
GP CONDENS 30	885	560	580	80	80	65
GP CONDENS 40	885	560	580	80	80	75
GP CONDENS 50	1225	610	650	80	80	90
GP CONDENS 60	1225	610	650	80	80	95
GP CONDENS 90	1775	710	800	100	100	205
GP CONDENS 120	1775	710	800	100	100	215

(*) Female.

GP Condens is the new wall-mounted gas hot air generator for the direct, diffusion, condensing pre-mixed, designed specifically to attain a high performance. The heat exchanger, made entirely out of stainless steel, provide the best possible performances and make inspection easy for normal cleaning and maintenance operations.
On the inside there is a multi-function electronic board that handles the burner's ignition operations, the flame monitoring and the overall safety.
The new remote control panel allows you to display and set the main operating parameters of the machine, carry out the hourly programming and manage installations in cascade up to 10 generators.

- Range composed of 6 models with an output of 10 to 116 kW.
- Condensate drain kit as standard.
- Possibility of fastening to the wall or the roof (new).
- Possibility of managing up to 10 GP Condens in cascade.
- Indoor and outdoor temperature probe (available as accessories) for a more efficient ambient temperature measurement.
- Wide range of accessories for flue gases discharge and suction.
- Ideal for the heating of industrial, commercial, sports areas etc.

TECHNICAL DATA






Description	Useful output kW		Furnace output kW		Air output m^3/h	Total efficiency (*) %		Notes	Code
	min	max	min	max	nominal	min	max		
GP CONDENS 30	10	28	9,4	29,1	3,200	106,5%	96,1%	(1)	**20139254**
GP CONDENS 40	14	37	13,3	38,5	4,400	105,1%	96,1%	(1)	**20139258**
GP CONDENS 50	19	48	18,4	49,8	5,500	103,2%	96,4%	(1)	**20139259**
GP CONDENS 60	21	57	20	59	6,500	105,1%	96,6%	(1)	**20139260**
GP CONDENS 90	35	89	33,3	90,8	10,000	105,2%	98,0%	(1)	**20139261**
GP CONDENS 120	43	115	40,6	116	13,000	106,0%	99,1%	(1)	**20139262**

(*) With reference to Net Calorific Value (Hi) with recovery of the latent vaporisation heat.
(1) GP Condens is combined with the remote control panel code 20139270. For cascade operation one panel is sufficient for up to a maximum of 10 heater units in series.
The gas heaters are set up to operate with methane gas and can be converted to LPg with the relative kit supplied.
The accessories for the flue gas exhaust and the air intake are not included in the supply and need to be ordered separately choosing from those on page 483.

ACCESSORIES

Description	Destination	Code
ASSEMBLY ACCESSORIES		
GP Condens 30-40 shelf	GP Condens 30-40	**20032159**
GP Condens 50-120 shelf	GP Condens 50-120	**20139265**
Remote room sensor	GP Condens	**20032160**
Outdoor air temperature sensor	GP Condens	**20139267**
Remote control panel	GP Condens	**20139270**
Suspended GP Condens	GP Condens	**20139273**




FLUE GAS EXHAUST/SUCTION LINE ACCESSORIES

Drawing	Description	Code
CONCENTRIC SYSTEM		
	100/100 concentric on wall	**20032161**
	Fitting Ø80/100	**20139281**
	100/100 concentric on roof	**20139288**
DOUBLE SYSTEM		
	Discharge/suction pipe Ø80 x 500 mm	**20139278**
	Terminal Ø80	**20139279**
	Terminal Ø100	**20139280**
	Bend Ø80	**20139283**
	Discharge/suction pipe Ø80 x 1000 mm	**20139285**
	Bend Ø80	**20139287**
	Roof terminal Ø80	**20139289**
	Discharge/suction pipe Ø100 x 1000 mm	**4155552**
	Discharge/suction pipe Ø100 x 500 mm	**4155554**
	Bend Ø100	**4155556**




Drawing	Description	Code
	Bend Ø100	**4155558**
	Roof terminal Ø100	**4155564**

INSTALLATION DIAGRAMS FLUE GAS EXHAUST/SUCTION



FRONT WALL PIPES

Description										
	20139278	20139279	4155554	20139280	20139281	20032161	20139278	20139279	4155554	20139280
	Flue gas discharge				Flue gas exhaust/air suction concentric		Double flue gas exhaust/air suction			
GP CONDENS 30	●	●			●	●	●	●		
GP CONDENS 40	●	●			●	●	●	●		
GP CONDENS 50	●	●			●	●	●	●		
GP CONDENS 60	●	●			●	●	●	●		
GP CONDENS 90			●	●		●			●	●
GP CONDENS 120			●	●		●			●	●

FRONT WALL PIPES

Description																								
	20139283	20139278	20139285	20139279	4155556	4155554	4155552	20139280	20139283	20139278	20139285	20139281	20032161	4155556	4155554	4155552	20139283	20139278	20139285	20139279	4155556	4155554	4155552	20139280
	Flue gas discharge								Flue gas exhaust/air suction concentric								Double flue gas exhaust/air suction							
GP CONDENS 30	●	●	●	●					●	●	●	●	●				●	●	●	●				
GP CONDENS 40	●	●	●	●					●	●	●	●	●				●	●	●	●				
GP CONDENS 50	●	●	●	●					●	●	●	●	●				●	●	●	●				
GP CONDENS 60	●	●	●	●					●	●	●	●	●				●	●	●	●				
GP CONDENS 90					●	●	●	●	●	●			●	●	●	●					●	●	●	●
GP CONDENS 120					●	●	●	●	●	●			●	●	●	●					●	●	●	●

PIPES ON ROOF

Description																			
	20139283	20139287	20139278	20139285	20139281	20139288	4155556	4155558	4155554	4155552	20139288	20139283	20139278	20139285	20139289	4155556	4155554	4155552	4155564
	Flue gas exhaust/air suction concentric											Flue gas discharge							
GP CONDENS 30	●	●	●	●	●	●						●	●	●	●				
GP CONDENS 40	●	●	●	●	●	●						●	●	●	●				
GP CONDENS 50	●	●	●	●	●	●						●	●	●	●				
GP CONDENS 60	●	●	●	●	●	●						●	●	●	●				
GP CONDENS 90							●	●	●	●	●					●	●	●	●
GP CONDENS 120							●	●	●	●	●					●	●	●	●

NOTE

NOTE

Certificate

Standard **ISO 9001:2015**

Certificate Registr. No. **01 100 1917589**

Certificate Holder: **RIELLO S.p.A**
Via Ing. Pilade Riello 7
37045 Legnago VR
Italy

Scope: Design, manufacture and service of: burners for residential heating and for commercial and industrial application; wall hung boilers and water heaters; units, floor-standing boilers and heat-ing systems; solar collectors and solar boilers.
Sales and assistance of its own brand traded products for heating; products for conditioning and cooling, system accessories; spare
Proof has been furnished by means of an audit that the requirements of ISO 9001:2015 are met.

Validity: The certificate is valid from 2022-12-11 until 2025-12-10.
Certified by other OdC from 12.11.1992 to 12.11.2019

2022-12-16

TÜV Rheinland Cert GmbH
Am Grauen Stein · 51105 Köln

IAF
DAkkS Deutsche Akkreditierungsstelle D-ZM-16031-01-00
TÜVRheinland® Precisely Right.

RIELLO

RIELLO S.p.A.
37045 Legnago (VR)
tel. +39 0442 630111
ITALY

www.riello.com

PRODUCT CATALOGUE

September 2025

Code 27024462_00

Carrier

©2025 Carrier. All rights reserved.
All trademarks and service marks referred
herein are property of their respective owners.

Riello reserves the right to change the information and specifications contained herein at any time and without notice. The contents and information provided herein are for informational purposes only and are not intended to provide legal or professional advice.
This document, therefore, cannot be considered binding on third parties.