

SPLIT-TYPE AIR CONDITIONERS

Changes for the Better

Mitsubishi
Electric
MEQ quality

Wrap Yourself in Comfort and Quiet
Eco-conscious Technologies from Japan

Air to Water Catalogue
2022

Environmental Sustainability Vision 2050

Environmental Declaration

Protect the air, land, and water with our hearts and technologies to sustain a better future for all.



Environmental
Sustainability
Vision 2050

To solve various factors that lead to environment issues, the Mitsubishi Electric Group shall unite the wishes of each and every person, and strive to create new value for a sustainable future.

Three Environmental Action Guidelines

1

Apply diverse technologies in wide-ranging business areas to solve environmental issues

2

Challenge to develop business innovations for future generations

3

Publicize and share new values and lifestyles


Key Initiatives

- Climate Change Measures
- Resource Circulation
- Live in Harmony with Nature

- Long-term Activities
- Innovation
- Nurturing Human Resources

- Understanding Needs
- Co-create and Disseminate New Values
- Live in Harmony with the Region

Heat pump technology inspires Mitsubishi Electric to design air conditioners that harmonize comfort and ecology.

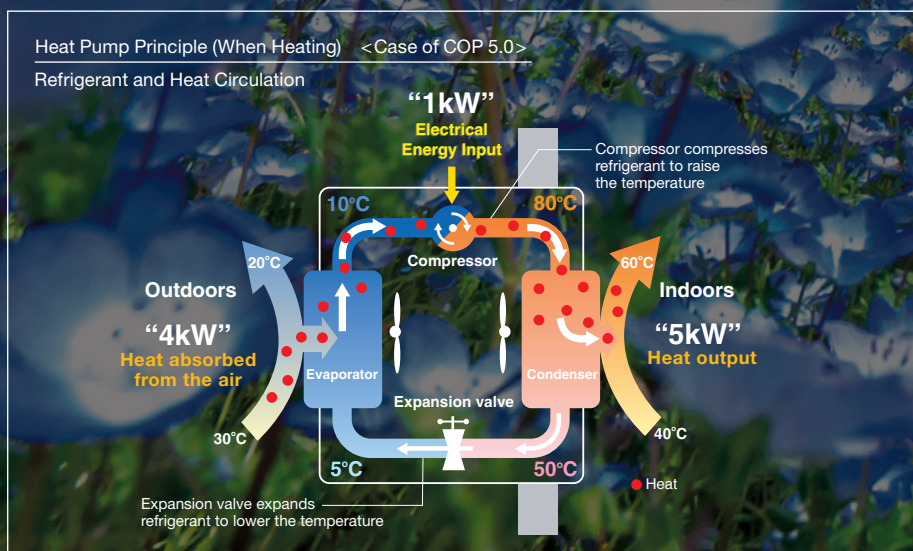


Mitsubishi Electric takes on the challenge of creating new value and contribute to a sustainable future in order to solve various environmental problems.

Preventing Global Warming

Mitsubishi Electric is actively introducing R32 refrigerant which has a global warming potential approximately 1/3 that of R410A refrigerant. Not only by shifting from R410A to R32 but by decreasing the diameter of refrigerant piping, we are also striving to reduce the amount of refrigerant usage. Through these activities, we have achieved significant reduction in CO2 equivalent amount compared to conventional models and realised minimizing the negative impact to the environment more than ever.

Reducing the amount of refrigerant usage

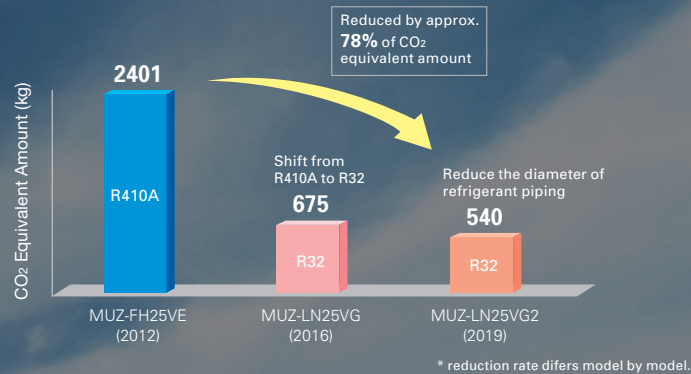

Effective use of materials (Reduce & Recycle)

1. Accelerating the downsizing technology to reduce material use while balancing energy saving performance.
2. Designing products that are easy to separate and recycle.
3. All models are designed for WEEE and RoHS (II) compliance.*

*WEEE and RoHS directive: The Waste Electrical and Electronic Equipment (WEEE) Directive is a recycling directive for this type for equipment, while the Restrictions of Hazardous Substances (RoHS) Directive is an EU directive restricting the use of ten specified substances in electronic and electrical devices. In the EU, it is no longer possible (from July 2019) to sell products containing any of the ten substances.

Balancing comfort and ecology

Mitsubishi Electric develops technologies to balance comfort and ecology, achieving greater efficiency in heat pump operation.

	Comfort	Ecology
1. Inverter	Faster start-up and more stable indoor temperature than non-inverter units.	Fewer On/Off operations than with non-inverter, saving energy.
2. 3D i-see Sensor	Since the positions of people can be detected, airflow can be set to personal taste, such as in airflow path or protected from the wind. The ability to adjust to individual preferences realizes more comfortable air conditioning.	Since the number of people in a room can be detected, energy-saving operation is adjusted or the power is turned off automatically. Efficient air conditioning with less waste is realized.
3. Flash Injection	Achieves high heating capacity even at low temperatures, plus faster start-up compared to conventional inverters.	Expands heat pump heating system to the cold regions to replace combustion heaters.
4. Dual Barrier Coating Dual Barrier Material	Prevents the indoor unit from getting dirty, delivering you clean air.	Keeping the inside of air conditioner clean leads to efficient operation and energy saving.

C

ONTENTS



LINE-UP & FEATURES 007-030

SPECIFICATION 031-043

REFRIGERANT AMOUNT 045





AIR TO WATER



SELECTION Choose the series that best matches the building layout.

Excellent ecodan's heating performance, even at low outdoor temperature!

R32

INDOOR UNIT

Hydro box, cylinder unit



OUTDOOR UNIT

Packaged type	Small capacity (Under 5kW)*	Medium capacity (6.0kW–14kW)*
		 PUZ-HWM140
	 PUZ-WM50	 PUZ-WM85/112
Split type	Small capacity (Under 5kW)*	Medium capacity (6.0kW–14kW)*
		 PUD-SHWM80/100/120/140
		 PUD-SWM80/100/120
Eco Inverter	 SUZ-SWM40/60	 SUZ-SWM80

*Rated capacity is at conditions A2W35. (according to EN14511)

R410A

INDOOR UNIT

Hydro box, cylinder unit



OUTDOOR UNIT

Split type	Medium capacity (7.5kW–14kW)*	Large capacity (≥16kW)*
	 PUHZ-SHW80/112	 PUHZ-SHW140
	 PUHZ-SHW230	 PUHZ-SW75/100
	 PUHZ-SW120	 PUHZ-SW160/200

*Rated capacity is at conditions A2W35. (according to EN14511)

Other ATW-related system

Mr.SLIM+

PUMY + ecodan

R410A



PUHZ-FRP71

R410A



PUMY-P112/125/140

New Eco-design Directive

What is the ErP Directive?


The Eco-design Directive for Energy-related Products (ErP Directive) established a framework to set mandatory standards for ErPs sold in the European Union (EU). The ErP Directive introduces new energy efficiency ratings across various product categories. It affects how products such as computers, vacuum cleaners, boilers and even windows are classified in terms of environmental performance. Labelling regulations that apply to our ATW heat pumps came into effect from September 26, 2015, and then revised from September 26, 2019.

New energy label and measurements

Under directive 2009/125/EC, ATW heat pumps of up to 70kW are required to show their heating efficiency on the energy label. The purpose of the energy label is to inform customers about the energy efficiency of a heating unit. The efficiency for space heating is ranked from A+++ to D (from September 2019). In the case of domestic hot water, it is from A+ to F (from September 2019).

Product label

This label is for individual heating units, such as an ecodan heat pump. Typically, the space heater label is used for ecodan systems with a hydro box, and the combination heater label is used for ecodan systems with a cylinder unit.

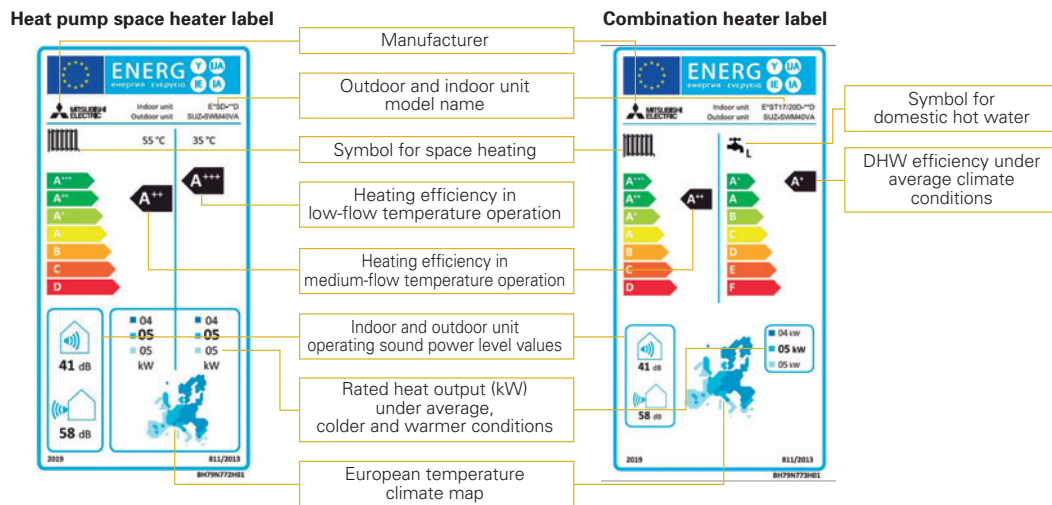

These labels are delivered with all ecodan outdoor units.


What is the package label?

A heating system can use several energy-related products, such as a controller or solar thermal system. Therefore, a label showing the efficiency of the total heating system is required. The category range is defined from A+++ to G. Creating the package label is the responsibility of the installers and distributors. A useful tool on the Mitsubishi Electric website is available to easily create the labels for ecodan products and controllers.

<http://erp.mitsubishielectric.eu/erp/options>

Package label

This label is for heating systems that use several energy-related products, such as a controller or a solar thermal system.

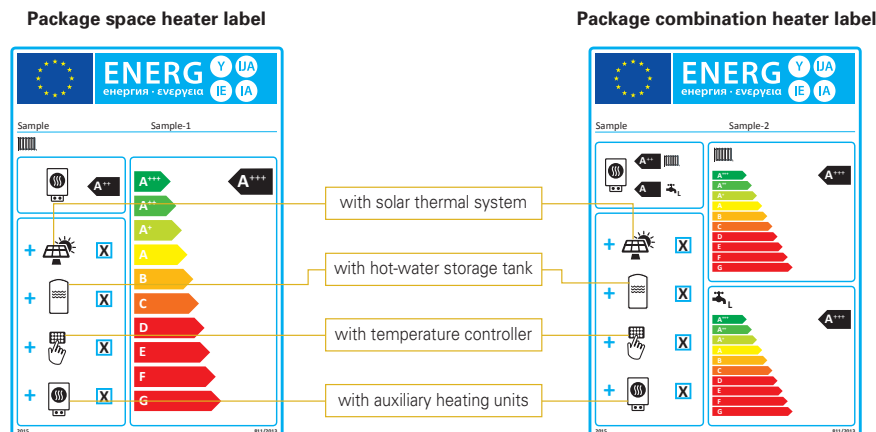

Customised package labels including ecodan heat pumps and the FTC6 controller can be created on the Mitsubishi Electric website.

New R32 Eco Inverter Line-up


Energy Efficient and Environmentally Friendly Heating

- Wide variety of product line with R32 refrigerant
- More energy efficient than conventional eco inverter models




High Performance

All models have achieved the "RANK A+++" for SCOP at low temperature.

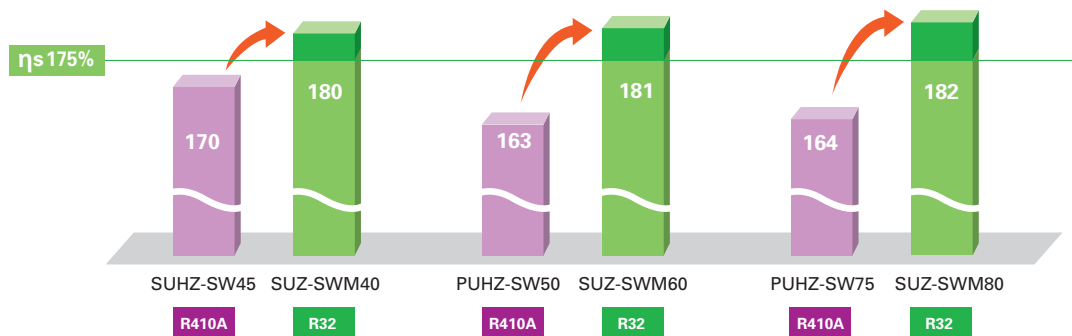

Low Noise


Compared with conventional outdoor unit, New R32 eco inverter achieved lower noise level, assuring the flexibility of installation in dense residential areas.

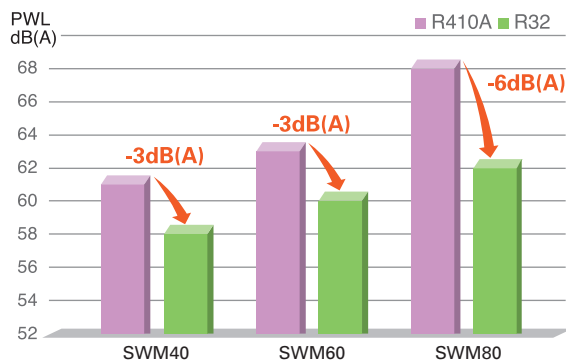

* Compared SUZ-SWM40/60/80VA with SUHZ-SW45VA/PUHZ-SW50VKA/PUHZ-SW75VHA
* Rated condition (According to EN12102)


60°C Flow Temperature

Along with its increased lower operating range the New R32 range is capable of delivering a higher flow rate of 60°C, 5°C higher than the conventional model.

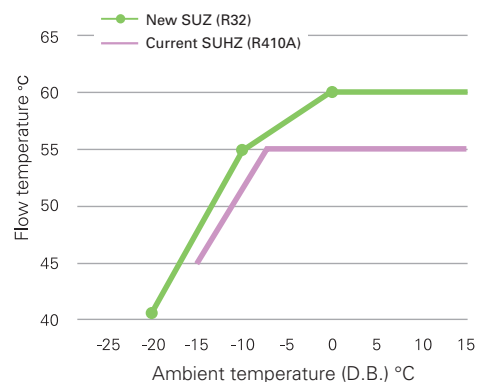


Guaranteed Operating Range Expansion

Guaranteed heating operating range is extended to -20°C.

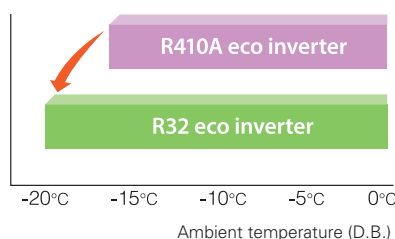

Reducing Refrigerant Amount

<R410A vs R32> CO₂ equivalent emission

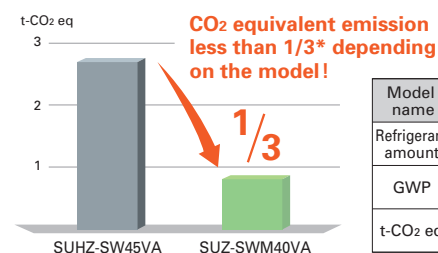

* Source: IPCC 4th Assessment Report, global warming potential (GWP) 100-year value. Comparison of 2088 (R410A) and 675 (R32).


Dedicated Heat Pump for Residence



Stylish and Compact

The Stylish Design and Compact Size Harmonises Residential Application

- Simple and elegant design by rounding left and right corners of the unit.
- Concealing the fan by matching the panel and the grille in dark colour.
- Unified shape and safety by setting the fan whole backwards and matching the grille on the same level of the front panel.
- Wider lineup with environmental-friendly R32 refrigerant.

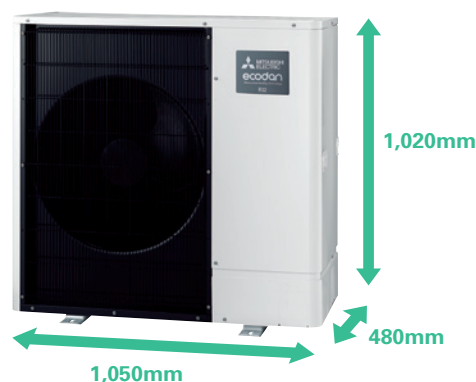


High Performance

New Compressor




- Compact
 - High performance
 - Flash injection*
- *ZUBADAN (SHWM) only

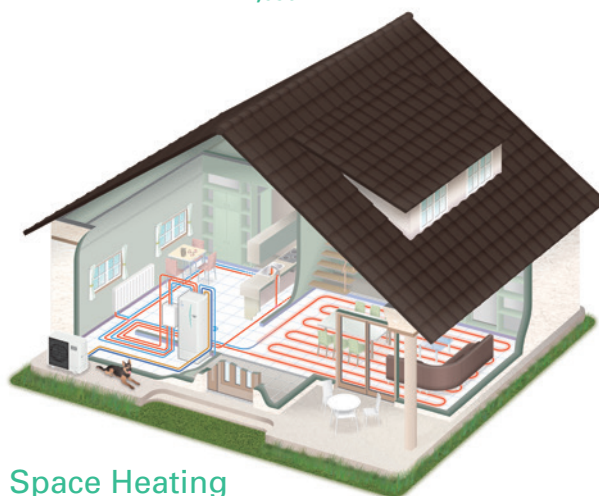

ErP Lot 1 Compliant with Highest Seasonal Space Heating Energy Efficiency Class A+++


All models have achieved the "RANK A+++" for SCOP at low temperature.

Heating

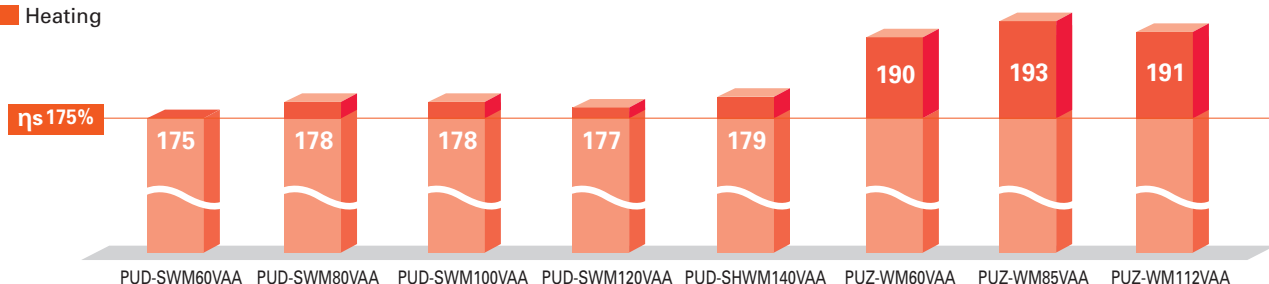


60°C Flow Temperature at Low Ambient Temperature

60°C max flow temperature can be maintained up to Ambient -7°C.
(For PUD-S(H)WM models)

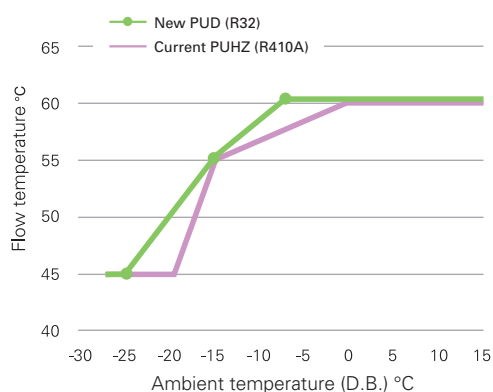

Reducing Refrigerant Amount

<R410A vs R32> CO₂ equivalent emission

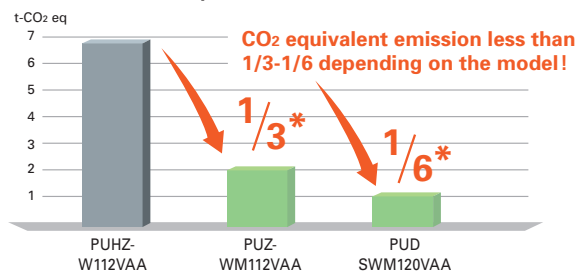

Model name	PUHZ-W112VAA	PUZ-WM112VAA	PUD-SWM120VAA
Refrigerant amount	3.3kg	3.0kg	1.6kg
GWP	2088 (R410A)	675 (R32)	675 (R32)
t-CO ₂ eq	6.890	2.025	1.080


*Source: IPCC 4th Assessment Report, global warming potential (GWP) 100-year value. Comparison of 2088(R410A) and 675 (R32).

Compact with Silence

Noise Reduction-10dB(A)

Mitsubishi Electric heat pumps are designed to give you highly efficient and eco-friendly heating with 10dB(A) less in PWL. Compared with conventional models.

* Rated condition (According to EN12102)

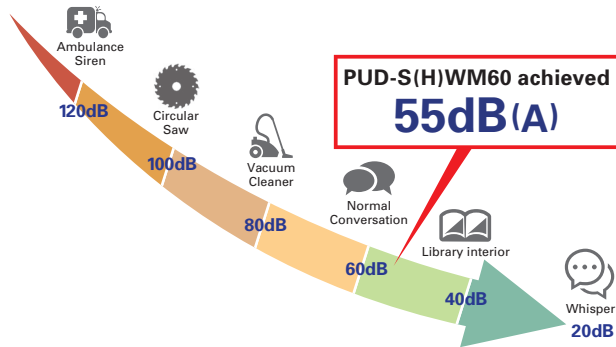

Enclosing Noise

Shutting Out Noise from Compressor

- The structure of double enclosing

Primary: enclosing a compressor (the structure is patented.)


Secondary: enclosing machine room.



Blowing Air


To Reduce Fan Noise

- Optimising fan position
- Optimising bell mouth shape
- Bigger fan diameter

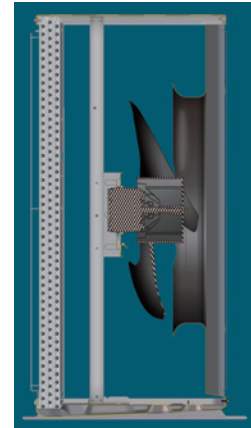

Avoiding Vibration and Resonance


- Dedicated soft rubber mount for the compressor to avoid vibration.
- Optimising piping structure to avoid vibration and resonance.

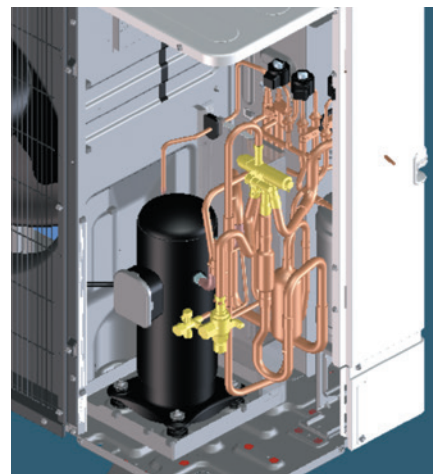

New Control for Eco-friendly Heating

Defrost Improvement


Conventional models often switch to defrost operation even when there is not much frost on outdoor units. By defrosting frost more precisely, it is possible to prevent frequent on/off for defrosting and to give you more comfort.

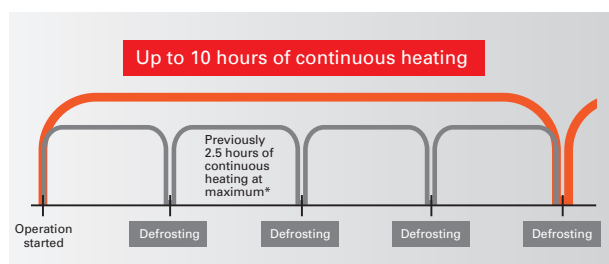

* Comparison between prior PUHZ-SHW-AA model and new PUD-S(H)WM-AA model.
Maximum number of operational hours at our Company's laboratory (external temperature -15°C).
Hours of continuous operation may differ depending on external temperature conditions.

New Compressor Frequency Control



By reducing frequency changes (from 17 to 4 times per hour), hunting is prevented. Reducing fluctuation improves efficiency and prolongs compressor life.

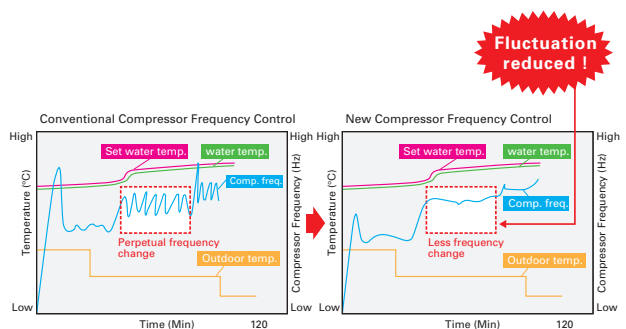

D generation Indoor Unit

All-in-one Compact Indoor Unit

- All-in-one: Key functional components are incorporated
- Compact cylinder unit: 1,400~2,050mm in height
- Compact hydro box: Only 530×360mm footprint
- Easy installation: Factory fitted pressure relief valve
- Easy service: Relevant parts are located at the front of the unit for easy maintenance
- Easy transport: Handles attached on front and back (cylinder unit)

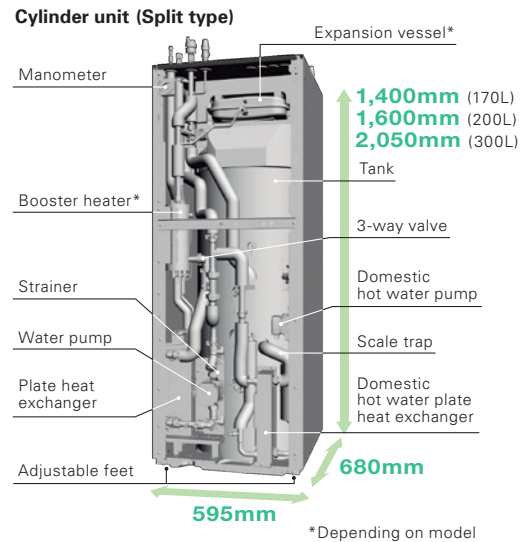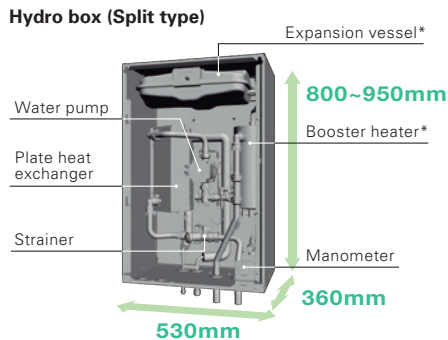

Line-up

ecodan's line-up has many types of indoor units to satisfy diverse customers' needs, requests and local regulations. It includes various capacity units, with/without booster heater, with/without an expansion vessel, etc. In addition, a reversible hydro box and a reversible cylinder unit are available.

Hydro box



Cylinder unit



Available options

- Packaged or Split type
- With/without booster heater
- With/without expansion vessel
- Cylinder unit has an integrated 170L/200L/300L stainless steel tank
- Hydro box is control ready for domestic hot water with a stand-alone tank (locally supplied)

Reversible Models

(for heating/cooling)

Perfect Comfort in Winter and Summer Time, Thanks to Our Reversible Models.

Reversible models are now available for both hydro box and cylinder units (Both for split type and cylinder unit for packaged type). The new reversible cylinder is now able to produce cold water for cooling use and can alternatively produce domestic hot water in summer time.

Reversible hydro box




Reversible cylinder unit



Easy Installation and Low Maintenance

Simple Piping Arrangement

All water piping is aligned at the rear side of the unit for easy connection and neat finish.



Easy Adjustment

Adjust bolt capable of 50mm expansion for easy installation on uneven surfaces.




Built-in Drain Pan for Reversible Cylinder Models

Reversible models now include a built-in space saving drain pan and the drain socket is positioned at the back of the unit. With use of the adjuster bolt, the outlet height can be higher than 50mm, allowing 5m drainage.




Initial Setting Wizard

In addition to language, date and time, you can set up hot water and heating/cooling operation, pump speed, flow rate range initial setting much simpler than previous models.

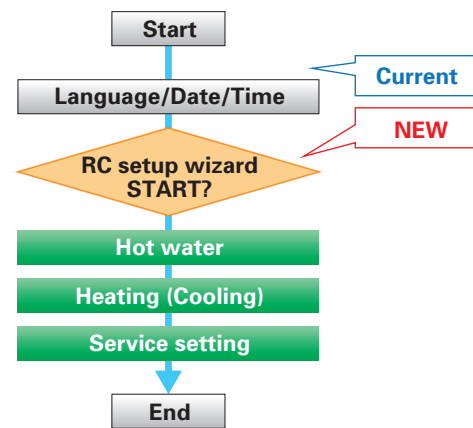

Hydro Box Piping Arrangement Improvement

Through structural innovation related to the space around the pipes, the area where the spanner can be moved has been increased, thus improving pipe work and enabling it to be completed smoothly.

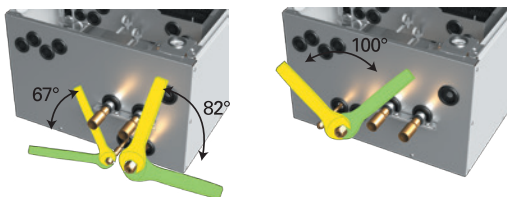

Operation Data Monitoring

Time, operation mode, flow/return/tank temperature, can be displayed on main remote controller.

Sample display of monitoring setting

26 Feb 2019 10:00					
	THW1	THW2	THW5	Flow	
10:00	☀ 41°C	38°C	54°C	20L	
9:55	☀ 38°C	38°C	54°C	20L	
9:50	☀ 48°C	48°C	54°C	20L	
9:45	☀ 60°C	56°C	54°C	15L	
9:40	☀ 59°C	55°C	52°C	15L	
i ◀ ▶ (1/5)					


Minimum Additional Water Required

In average/warmer conditions, minimum additional water is required for outdoor unit. If there is enough water amount inside water pipe, radiator, or underfloor heating no buffer tank is required.

*Refer to the indoor unit installation manual for specific outdoor unit models.

2 Zone Kit

You can select from 3 types of pump operations, 1. Fixed speed mode, 2. Fixed pressure mode, 3. Energy saving mode, depending on your preference.



- All-in-one kit: Key functional components are incorporated in 2 zone kit.
- Easy installation: G1 screw type flex-piping to avoid brazing.
- Compact size: Just to fit on the top of cylinder unit, also wall mountable.

High Performance

Improved Efficiency

With additional thermistor (THW5A), η_{wh} [%] rating is improved by more than 40% compared to previous C generation 200L models allowing 170L and 200L to achieve A⁺, the highest possible domestic hot water efficiency rank.



Excellent DHW efficiency



	170L	200L	300L
	η_{wh} [%]	η_{wh} [%]	η_{wh} [%]
Conventional	–	96~104	–
New	120~148	135~159	118~128
Load Profile	L	L	XL
DHW Rank	A ⁺	A ⁺	A/A ⁺

Thermistor Position of Cylinder

The thermistor position is now selectable allowing the unit to accommodate for different water demands in order to maximise the efficiency of the unit for any size of household or application. Using two thermistors equipped with all sizes of tanks, you can now select the DHW recharge amount from two options (Standard/Large). It helps accommodate for different water demands in order to maximise the efficiency of the unit for any size of household or application. This mode can be selected from main remote controller.



Unique Technology of ecodan


Auto Adaptation

Maximise Energy Savings While Retaining Comfort at All Times

Regarding the relation of flow temperature and unit performance, a 1°C drop in the flow temperature improves the coefficient of performance (COP) of the ATW system by 2%. This means that energy savings are dramatically affected by controlling the flow temperature in the system.

In a conventional system controller, the flow temperature is determined based on the pre-set heat curve depending on the actual outdoor temperature. However, this requires a complicated setting to achieve the optimal heat curve.

■ Heat curve setting (Example)

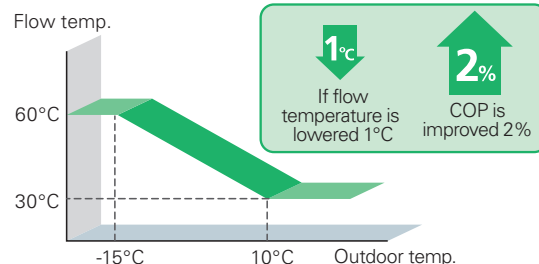

*SD logo is a trademark of SD-3C, LLC


Auto Adaptation Improvement

Mitsubishi Electric's Auto Adaptation Function Automatically Tracks Changes in the Actual Room Temperature and Outdoor Temperature and Adjusts the Flow Temperatures Accordingly.

Aiming to realise further comfort and energy savings, Mitsubishi Electric has already introduced a revolutionary new controller. Auto Adaptation function measures the room temperature and outdoor temperature, and then calculates the required heating capacity for the room. Simply stated, the flow temperature is automatically controlled according to the required heating capacity, while optimal room temperature is maintained at all times, ensuring the appropriate heating capacity and preventing energy from being wasted.

Furthermore, by estimating future changes in room temperature, the system works to prevent unnecessary increases and decreases in the flow temperature. Accordingly, Auto Adaptation maximises both comfort and energy savings without the need for complicated settings.

For Mitsubishi Electric ecodan, by introducing improved control logic, we achieved faster heating and more energy saving.

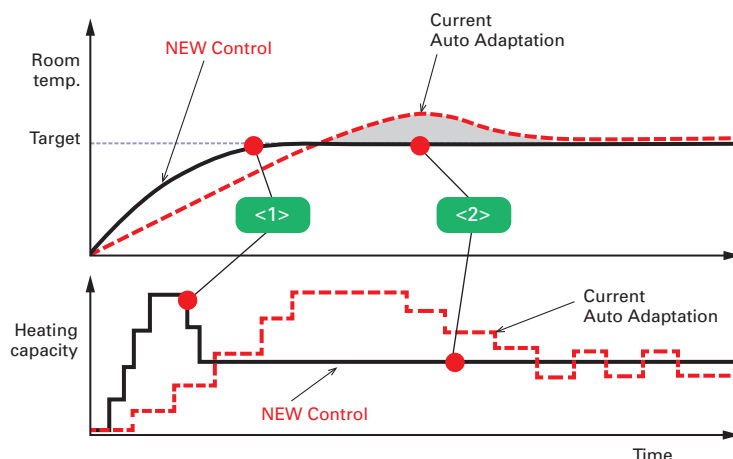


<1> Fast heating with improved accuracy in learning building heat load

<2> Energy saving by avoiding over heating and capacity fluctuation with better control response, i.e. control interval and resolution

Smart Grid Ready Function

In recent years renewable energy generation has become popular. However, this rapid growing causes the problem of supply and demand gap of electricity. The aim of "SG Ready" is to make the electricity demand response more flexible by creating a uniform interface for the smart grid integration of heat pumps. Air-to-Water units need to be able to change the operation pattern when the signal is received from the Smart Grid Controller.

New ecodan Cylinder, Hydro box and FTC have been modified to communicate with Smart Grid Controller. The communication protocol is based on "SG Ready" label regulation. (Version 1.1; gültig ab 01.01.2013)

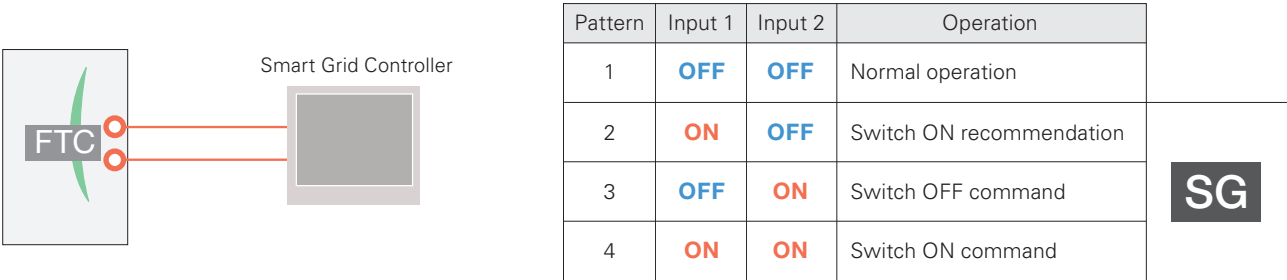

Pattern 1: Normal operation

When there is no signal from the Smart Grid Controller, DHW and Heating operate according to user settings.

Pattern 2: Switch ON recommendation

When set to the "Switch ON" recommendation, the target temperature of DHW is increased a specified amount and the heating "Thermo ON" condition range is extended.

Pattern 3: Switch OFF command

When the "Switch OFF" command is received, both DHW and Heating are turned off.


Pattern 4: Switch ON command

When the "Switch ON" command is received, the target temperature of DHW is increased to the maximum target temperature and Heating continues.

Improved Smart Grid Ready

SG ready icon on main remote controller indicates that SG ready is active and its setting can be easily operated with main remote controller. Improved SG ready function enables you to choose the target temperature in unit of 1°C. Also, when PV manager is interlocked with ecodan and ecodan receives its signal, heat is stored as much as possible while heat pump and/or electric heater running.

Heat storage in large buffer tank will be made available for zone2 as well when peak cut signal is on. As long as a mixing valve keeps its control, zone2 flow temperature is maintained.

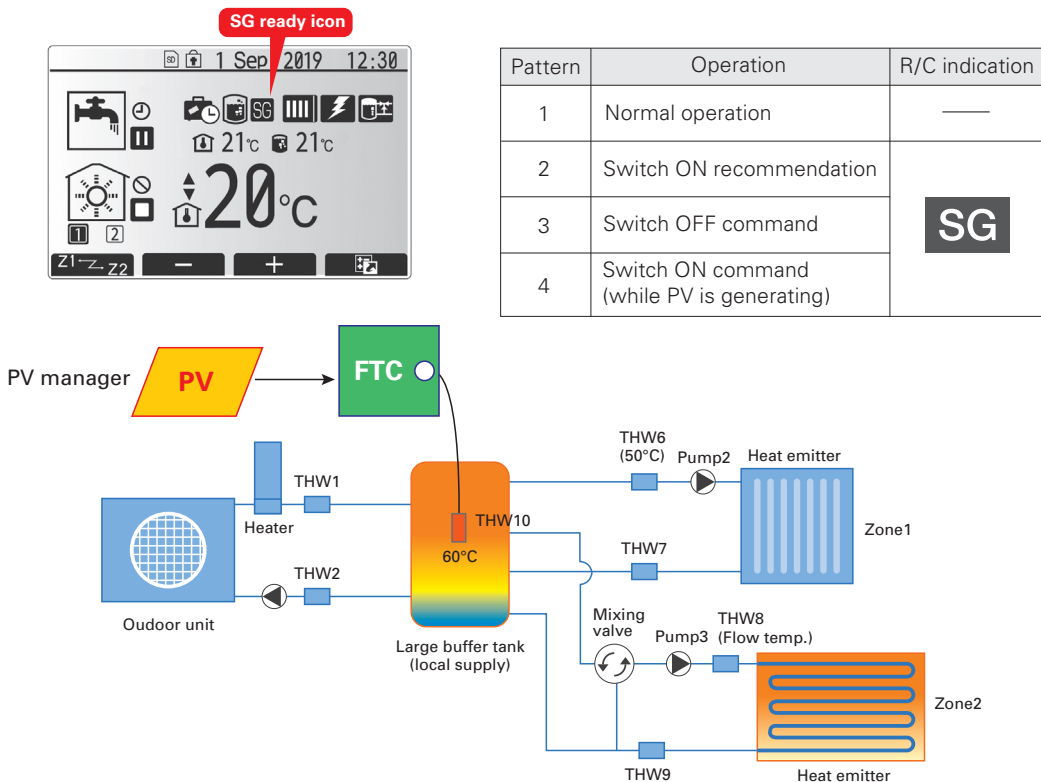



*SD logo is a trademark of SD-3C, LLC

Intelligent Hybrid Control (boiler interlock)

An Existing Boiler Can Be Used for Extra Heating Capacity in an Efficient Way


The flexibility of ecodan's intelligent control allows the system to be combined with the boiler currently in use. Additionally, this control can judge which heating source to use either ecodan or the existing boiler, based on various conditions*.

In the event of one heating unit not working due to some unforeseen problem, the other heating system can be used as a back-up, thereby preventing the heating system operation from stopping completely.

*Please see below "Heat source switchover".

Intelligent system combining a boiler with ecodan

■ Intelligent boiler interlock system

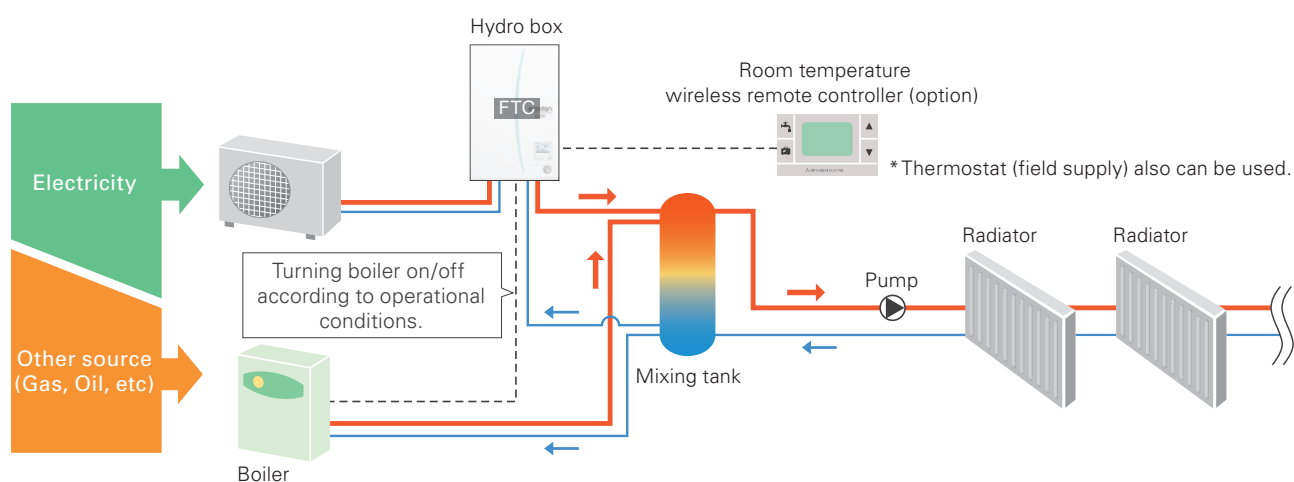

* Items such as a mixing tank, and pump are not included and need to be purchased locally.

Heat source switchover - Choose appropriate system based on needs

4 types of heat source switchover logic

- ① Switchover based on actual outdoor temperature
 - Heat source switchover occurs when the outdoor temperature drops below a pre-set temperature.
- ② Switchover based on running cost
 - Heat source switchover occurs by judging optimal operation based on running cost.
 - *Pre-registration of the energy price of electricity, and gas or oil per 1kWh is necessary.
- ③ Switchover based on CO₂ emission level
 - Heat source switchover occurs to minimise CO₂ emission.
 - *Pre-registration of CO₂ emission amount from electricity and gas or oil is necessary.
- ④ Switchover can also be activated via external input
 - For example, the peak cut signal from electric power company.



*SD logo is a trademark of SD-3C, LLC


2 Zone Control (for heating/cooling)

Improved Simultaneous Control of Two Different Zones

Using ecodan, it is possible to control two different flow temperatures, thereby managing two different heating load requirements. The system can adjust and maintain two flow temperatures when different temperatures are required for different rooms; for example, controlling a flow temperature of 40°C for the bedroom radiators and another flow temperature of 30°C for the living room floor heating.

Moreover, mixing valve control is advanced for improving zone 2 comfort by using heat storage in buffer tank. Also, new controller monitors the temperature inside buffer tank and prioritizes using the heat inside the tank to avoid frequent on/off operation when using 2 zone control.

■ Two temperature zones

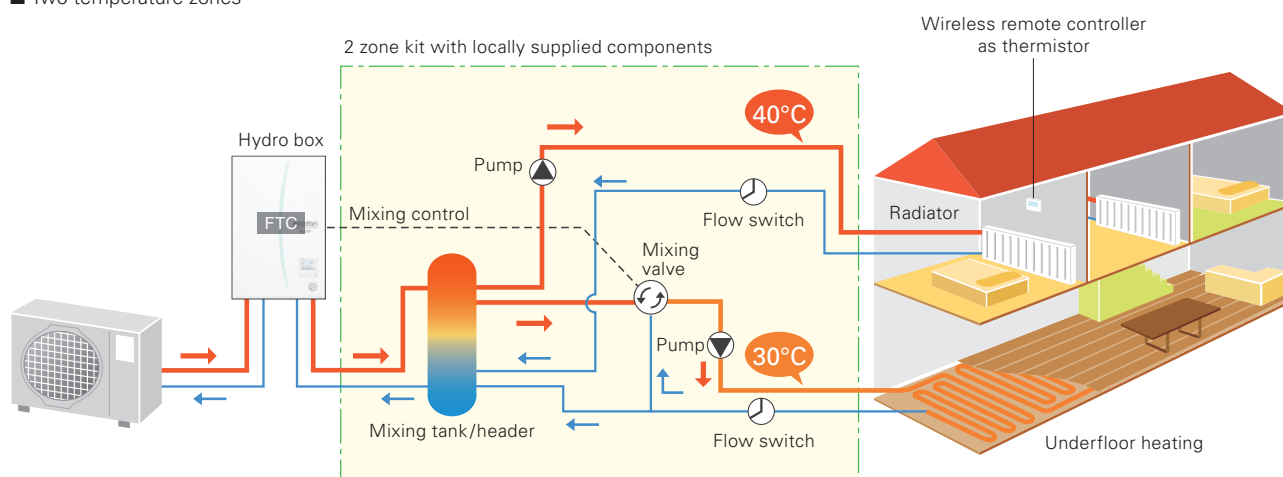

*Items such as a mixing tank, mixing valve flow switch and pumps are not included and need to be purchased locally.

Multiple Unit Control


Connect up to 6 Units – Automatic Control of Multiple Units for Bigger Capacity and Better Efficiency

A maximum of 6 units* can be configured according to the heating/cooling load of the building. The most efficient number of operating units is determined automatically based on heating/cooling load. This enables ecodan to provide optimal room temperature control, and thus superior comfort for room occupants. Also incorporated is a rotation function that enables each unit to run for an equal time period.

If one of the units malfunctions when using the Multiple Unit Control, another unit can be automatically operated for back-up, thereby preventing the system operation from stopping completely.

*Only same models (same capacity) can be used.

■ Multiple unit control

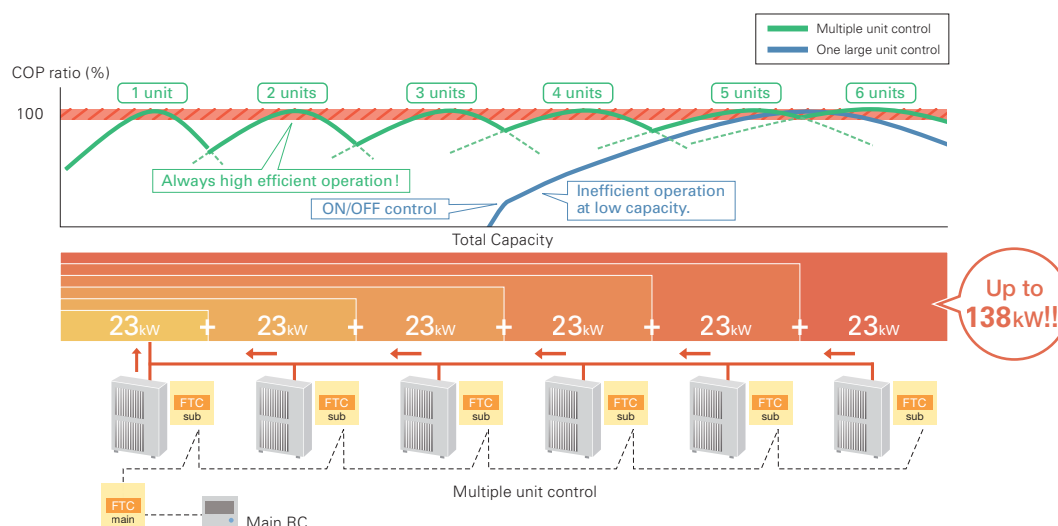

Remote Controllers


Smart User-friendly Controller with Stylish Design

Main remote controller

- Large screen and backlight for excellent visibility, even in dark environment
- Multi-language support (supports 15 languages)
- Can be removed from main unit and installed in a remote location (up to 500m)
- Quick reading of operation data (7.5 times faster than previous model)
- Wide range of convenient functions in response to user demand

Function settings

- | | |
|--|-------------------------|
| – Energy monitoring | – Floor drying mode |
| – Two-zone control (cooling and heating) | – Weekly timer |
| – Two separate schedules | – Holiday mode |
| – Summer time setting | – Legionella prevention |
| – Built-in room temperature sensors | – Error codes |
| – Hybrid control (boiler interlock) | |



Main controller



PAR-WR51R-E (Option)
Receiver



PAR-WT50R-E (Option)
Wireless remote controller

Wireless remote controller (optional)

- Built-in room temperature sensor; easy to place in the best position to detect room temperature
- Wiring work eliminated
- Simple design that is easy to operate
- Remote control from any room without needing to choose an installation location
- Backlight and big buttons that are easy to operate
- Domestic hot water boost and cancellation
- Simplified holiday mode



*SD logo is a trademark of SD-3C, LLC

Energy Monitoring

View Electricity Consumption and Heat Output on the Remote Controller

Every end user can now easily check the energy data of the ecodan heat pump.


Other features

- Daily, monthly and yearly data are stored and can be displayed using the main remote controller.
- External power meter and heat meter can be connected for accurate measurement.
- SD card is also available for storing data.


*Using pre-set values on the main remote controller, estimated energy consumption/output can be shown without external power and a heat meter.

Depending on operating condition and system configuration, there is some possibility to show different data from the reality.


*This function is available depending on the version of the outdoor unit model.



Heating capacity produced



Electric energy used





*SD logo is a trademark of SD-3C, LLC

Summer Time Setting

Easy Adjustment for Summer Time

Just switch the summer time mode 'on' using the main remote controller and the clock in the main remote controller is adjusted to summer time hours.

This function can release the end user from clock setting tasks.




Two Separate Schedules

Pre-setting Two Different Schedules for Winter and Summer Seasons

Two different schedule settings are available for use via the main remote controller.

These schedules can be pre-set and changed depending on the season. For example, from November to March, space heating and domestic hot water are used; however, during warm months such as from April to October, only domestic hot water is used.



<Example>

- | | |
|--------------------|----------------------|
| Schedule 1 | Winter time |
| Space heating | daytime |
| Domestic hot water | early morning |
| Schedule 2 | Summer time |
| Domestic hot water | any time |


Easy Commissioning

Pump for Primary Water Circuit* Speed Setting Possible Using ecodan's Main Remote Controller

Even when the system is running, pump output can be set to one of five different settings using the main remote controller.

The person commissioning the system can adjust this speed much more easily.

*Speed setting of pump for domestic hot water is not available through the main remote controller when the system is running.




Flow sensor newly incorporated

The flow sensor is key for monitoring energy output and can also be used to detect flow error as well.

– Flow rate can be checked on the main remote controller.

– Flow rate can also be shown as graphs using the SD card tool.



Run indoor unit* without outdoor unit

During installation or situations such as an outdoor unit malfunction, the indoor unit can be operated using a heater.

While using this mode, flow and tank temperature are selectable.

Fixing and maintenance of the outdoor unit can be done without stopping heating and domestic hot water operation*.

*Models with electric heater only.

*When the indoor unit operation stops, please check all settings after the outdoor unit is connected.



*SD logo is a trademark of SD-3C, LLC



SD* Card

For Easier Settings and Data Logging


The initial setting for ecodan is now simpler than ever before. The special software enables the required initial settings to be saved to an SD card using a personal computer. The system set-up is as easy as moving the SD card from the computer to the SD card slot in the indoor unit. Compared to the previous procedure of inputting settings using the main controller at the installation site, a remarkable reduction in set-up time has been achieved. Thus, it is ideal for busy installers.

*SD card function is only used at the time of installation.

Hydro box operation panel



Settings can be performed easily and the logging of operation data saved to an SD card can be confirmed via a personal computer.



Items that can be pre-set

Simply copying pre-set data to an SD card, the same settings can input into another unit using the SD card.

- Initial settings (time display, contact number, etc.)
- Heating settings
 - Auto adaptation
 - Heat curve
 - Two different temperature zones (heating and cooling)
- Interlocked boiler operation settings
- Holiday mode settings
- Schedule timer settings (two separate schedules)
- Domestic hot water settings
- Legionella prevention settings

All items that are set by the main controller can be set via a personal computer.

Data that can be stored

Operation data up to a month long can be stored on a single SD card

- Consumed electrical energy
- Delivered energy
- Flow rate
- Operation time
- Defrost time
- Actual temperature
 - Room temperature
 - Flow temperature
 - Return temperature
 - Domestic hot water temperature
 - Outdoor temperature
- Error record
- Input signal
- Etc.

ZUBADAN[®] SERIES


The ZUBADAN Series incorporates an original Flash Injection technology that improves the already high heating capacity of the system. This new member of the series line-up ensures comfortable heat pump-driven heating performance in cold regions.



* Units in photo are Japanese models.
European model specifications are different.

Improved Heating Performance

Mitsubishi Electric's unique "Flash Injection" circuit achieves remarkably high heating performance. This technology has resulted in an excellent heating capacity rating in outdoor temperatures as low as -15°C , and the guaranteed heating operation range of the heating mode has been extended to -25°C . Accordingly, the heat-pump units of the ZUBADAN Series are perfect for warming homes in the coldest of regions.

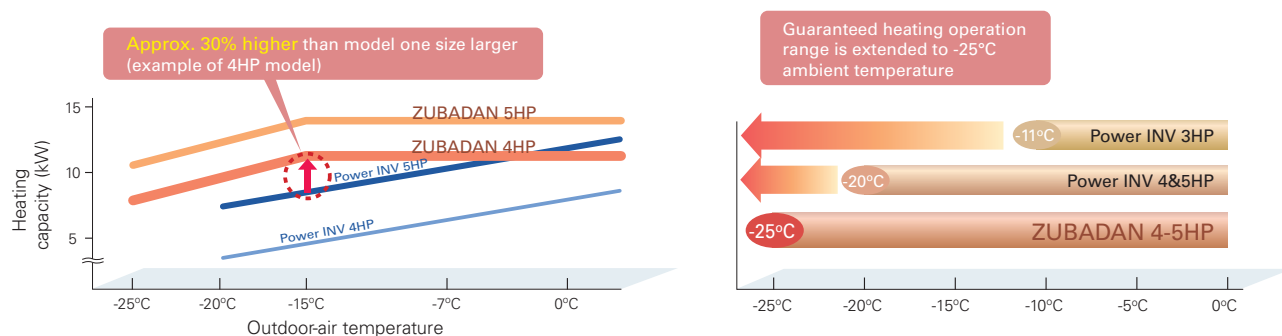


Enhanced Comfort


The Flash Injection circuit improves start-up and recover from the defrosting operation. A newly introduced defrost operation control also improves defrost frequency. These features enable the temperature to reach the set temperature more quickly, and contribute to maintaining it at the desired setting.

Quick Start-up

■ Operation at $+2^{\circ}\text{C}$ outdoor temperature

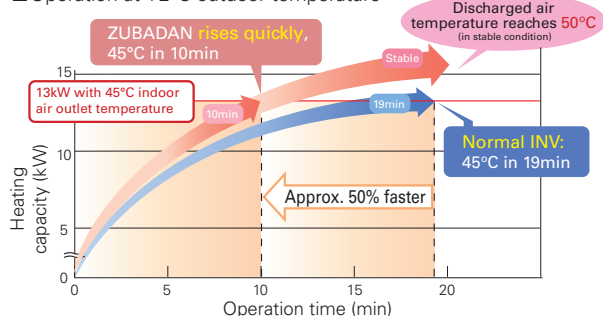


■ Operation at -20°C outdoor temperature

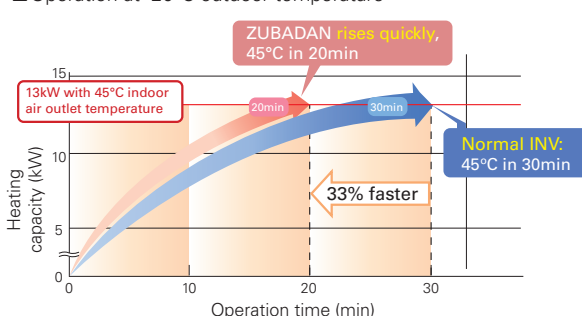


ZUBADAN Defrost Control and Faster Recovery from Defrost Operation

Field Test Results: Office building in Asahikawa, Hokkaido, Japan

■ Operation data for 25 Jan. 2005

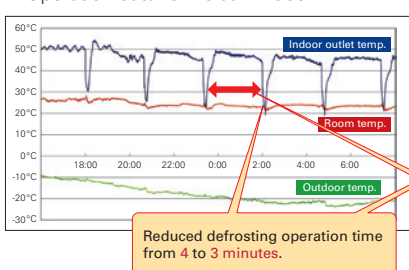

■ Operation data for 2 Dec. 2004

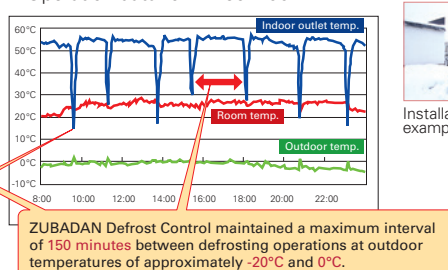



Installation example



Mitsubishi Electric's Flash Injection Technology The Key to High Heating Performance at Low Outdoor Temperatures

Flash Injection Circuit


ZUBADAN

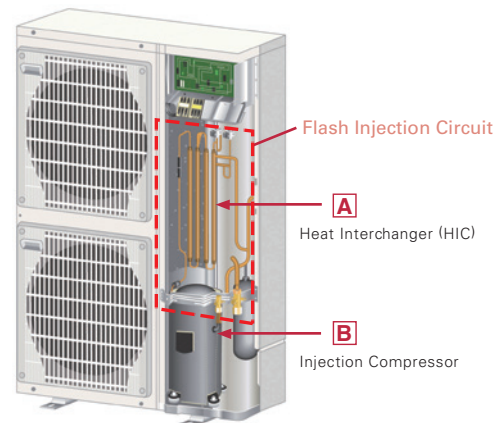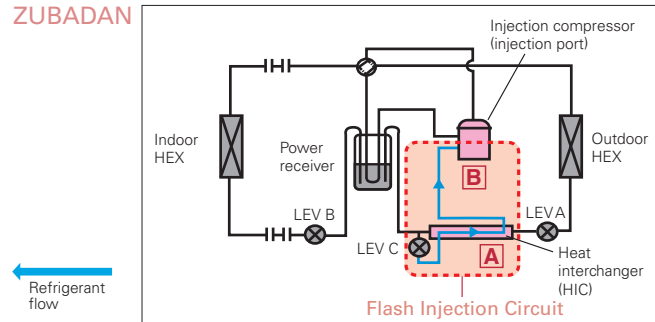

The ZUBADAN Series is equipped with Mitsubishi Electric's original Flash Injection Circuit, which is comprised of a bypass circuit and heat interchanger (HIC). The HIC transforms rerouted liquid refrigerant into a gas-liquid state to lower compression load. This process ensures excellent heating performance even when the outdoor temperature drops very low.


In traditional units, when the outdoor temperature is low, the volume of refrigerant circulating in the compressor decreases due to the drop in refrigerant pressure and the protection from overheating caused by high compression, thereby reducing heating capacity. The Flash Injection Circuit injects refrigerant to maintain the refrigerant circulation volume and compressor operation load, thereby maintaining heating capacity.

Mollier Chart Image Representing Flash Injection Circuit Operation

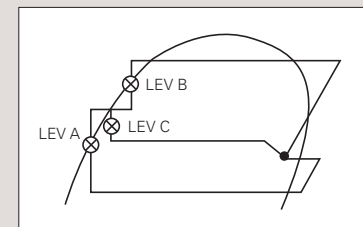


A Heat Interchanger (HIC)

HIC cross-sectional view

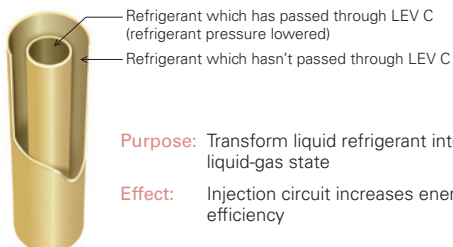

The compressor is subjected to a heavy load when compressing liquid refrigerant, and the result is lower operation efficiency. The addition of HIC supports refrigerant heat exchange at two different pressure levels. The heat-exchange process transforms the injected liquid refrigerant into a gas liquid state, thereby decreasing the load on the compressor during the compression process.

B Injection Compressor

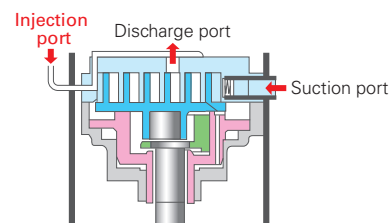

Purpose: To increase the volume of refrigerant being circulated

Effect: Improves heating capacity at low outdoor temperatures, and enables higher indoor-air outlet temperature adjustment and higher defrost operation speed

Refrigerant passes from the HIC into the compressor through the injection port. Having two refrigerant inlets makes it possible to raise the volume of refrigerant being circulated when the outdoor temperature is low and at the start of heating operation.

To ensure full capacity in cold and snowy regions...

3 Important Points to Remember When Installing the Outdoor Unit



* RAC/PAC (inc. Air to Water) /MXZ


Wind and snow can significantly reduce capacity.

Be sure to check the information below and install the outdoor unit correctly.

1 Installation Location

Be aware of the prevailing wind direction in winter and install the outdoor unit where it is as sheltered as possible.



Units are easily affected by wind and unit may not be able to run at full capacity

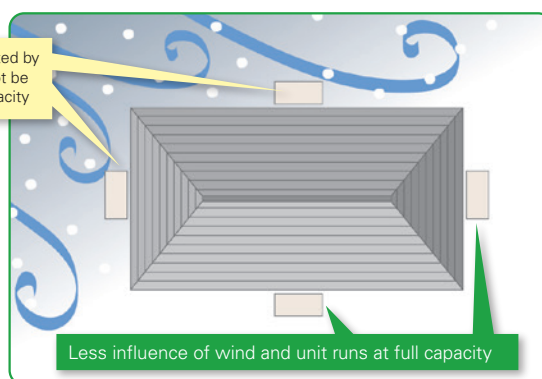

2 Measures for Drainage of Water



Case 1: Unit is installed close to passage (walkway)

Do not install the unit close to passage as drainage water from the unit may freeze and cause a slipping hazard.

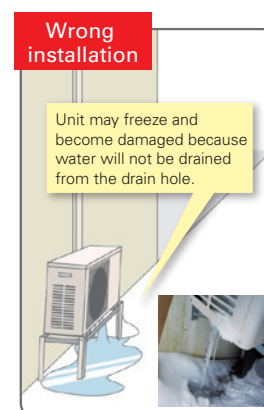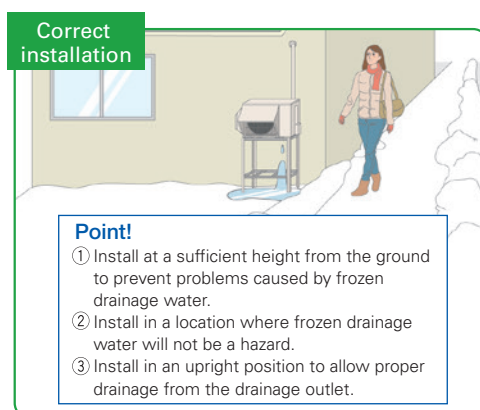

Case 2: Multiple units are installed

Do not install units on top of one another as it may cause frozen drainage water on the bottom unit.

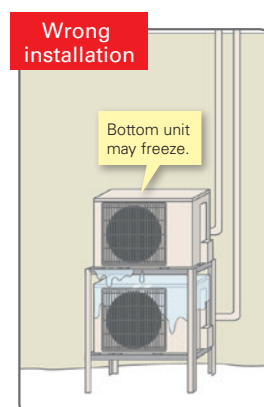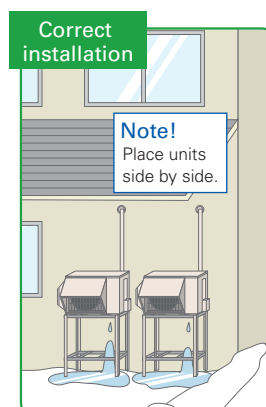


3

Measures for Snow


Unit is installed on the ground

To avoid the adverse effects of snow and frozen drainage water, install the unit on a stand to ensure a sufficient height from the ground.

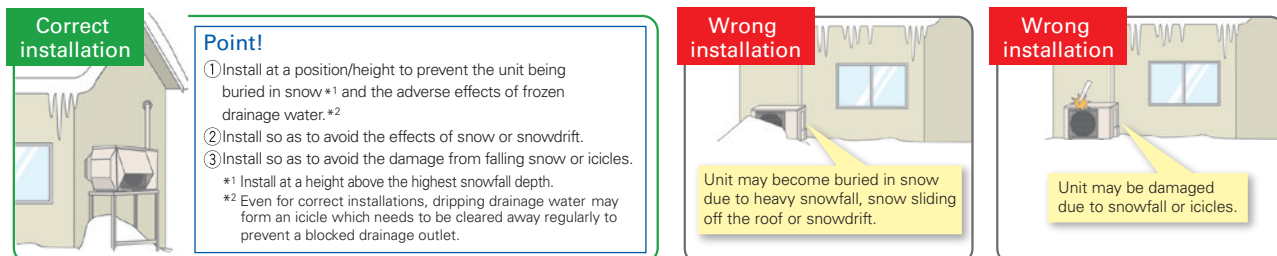


Use a stand to add sufficient height to protect the unit heat exchanger from snow and prevent icicles forming during defrost operation.

Install snow protection hood as necessary

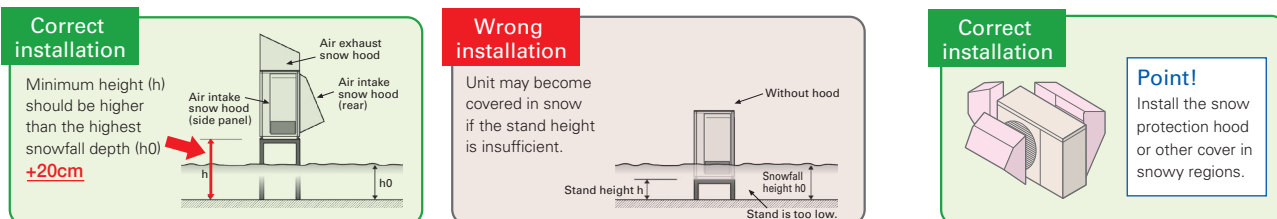

Necessity of accessories (drain socket & centralised drain pan, stand, snow protection hood, base heater)

	Snowy region	Cold region	Remarks
	Countermeasures for snow	Countermeasures for freezing	
Drain socket, Centralised drain pan	Not used	Not used	Prevents freezing
Stand	Needed	Needed	1. Install so as to prevent the unit being buried in snow (at a height greater than the highest snowfall depth). Be sure that the stand does not obstruct drainage. 2. Install so as to prevent damage to the unit due to frozen drainage water (icicles). <Correct> 
Snow protection hood	Needed *When the installation position is subject to snowfall.	—	1. Prevents heat exchanger from being covered in snow. 2. Prevents snow accumulating inside the air duct.
Base heater	—	Needed	Outdoor units equipped with a heater for cold regions are those with an "H" in the model name. For the cold-climate zone, use of a unit with a heater is strongly recommended. Even for the moderate-climate zone use of a unit with a heater is recommended for regions subject to high humidity in winter.



CAUTION

About disposal of drainage water

When the unit is installed in cold or snowy regions :

Drainage water may freeze in the drain socket/hose and prevent the fan from rotating.



Do not attach a drain socket packaged as an accessory to the unit.

* In the case that fitting a drain socket is absolutely necessary, steps must be taken so that the drainage water does not freeze.
For more information, please consult Mitsubishi Electric or one of its dealers/resellers.

Mr.SLIM+

A Smart Air Conditioning and Hot Water Supply System Conceived from Eco-conscious Ideas

Mr. SLIM+ has a heat recovery function, which uses waste heat from air conditioners to heat water. Thanks to heat recovery, the Mr. SLIM+ model can achieve a COP of 7.0*, resulting in intelligent systems with amazing efficiency.

*Conditions for air-to-air cooling: Indoor 27°C (dry bulb), 19°C (wet bulb); Outdoor 35°C (dry bulb)

1 Unit, 2 Roles – Total Comfort Year-round

Air Conditioning and Hot Water Supply Matching the Needs of Each Room

All-in-one outdoor unit (air conditioning, domestic hot water supply and hot water heating)

Mr. SLIM for Air-to-Air

Mr. SLIM+ utilises a duct system that enables the air conditioning or heating of multiple rooms, and other indoor unit type systems that it is possible to fit to various applications.

ecodan for Air-to-Water


- ✓Domestic hot water (DHW) supply
- ✓Heating for multiple rooms



Various Operations

Mr. SLIM / ATA (Air Cooling)

Cooling using ATA indoor unit

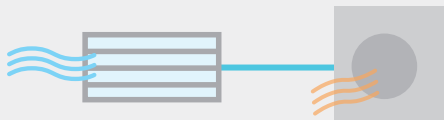


Mr. SLIM / ATA (Air Heating)

Heating using ATA indoor unit



ecodan / ATW (Hot water heating + DHW)

Heating and DHW using ATW indoor unit

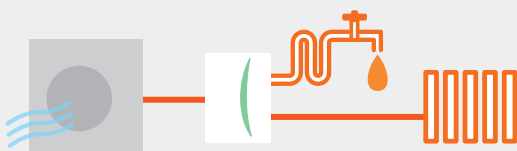

Mr. SLIM + ecodan / ATA (Air Cooling) + DHW

Heat recovery using both ATA and ATW indoor units



Specifications

Indoor unit				PLA-ZM71EA		PKA-M71KAL		PCA-M71KA		PSA-RP71KA		PEAD-M71JA		PEAD-M71JAL	
Outdoor unit				PUHZ-FRP71VHA2		PUHZ-FRP71VHA2		PUHZ-FRP71VHA2		PUHZ-FRP71VHA2		PUHZ-FRP71VHA2		PUHZ-FRP71VHA2	
Refrigerant				R410A*1											
Power supply		Outdoor (V / Phase / Hz)		230 / Single / 50											
Air-to-Air (ATA)	Cooling (ATA)	Capacity	Rated	kW	7.1	7.1	7.1	7.1	7.1	7.1					
			Min-Max	kW	3.3-8.1	3.3-8.1	3.3-8.1	3.3-8.1	3.3-8.1	3.3-8.1					
		Total input	Rated	kW	1.88	1.93	1.93	2.15	2.10	2.04					
		EER			3.77	3.67	3.67	3.30	3.38	3.48					
		Design load			kW	7.1	7.1	7.1	7.1	7.1	7.1				
		Annual electricity consumption *2			kWh/a	376	386	384	409	444	427				
		SEER *4				6.6	6.4	6.4	6.0	5.5	5.8				
			Energy-efficiency class			A++	A++	A++	A+	A	A+				
		Heating (average season)	Capacity	Rated	kW	8.0	8.0	8.0	8.0	8.0	8.0				
				Min-Max	kW	3.5-10.2	3.5-10.2	3.5-10.2	3.5-10.2	3.5-10.2	3.5-10.2				
	Total input		Rated	kW	2.11	2.29	2.29	2.42	2.11	2.11					
	COP			3.80	3.50	3.50	3.30	3.79	3.79						
	Design load			kW	4.7	4.7	4.7	4.7	4.9	4.9					
	Declared capacity		at reference design temperature	kW	4.7 (−10°C)	4.7 (−10°C)	4.7 (−10°C)	4.7 (−10°C)	4.9 (−10°C)	4.9 (−10°C)					
			at bivalent temperature	kW	4.7 (−10°C)	4.7 (−10°C)	4.7 (−10°C)	4.7 (−10°C)	4.9 (−10°C)	4.9 (−10°C)					
			at operation limit temperature	kW	3.5 (−20°C)	3.5 (−20°C)	3.5 (−20°C)	3.5 (−20°C)	3.7 (−20°C)	3.7 (−20°C)					
	Back-up heating capacity			kW	0	0	0	0	0	0					
	Annual electricity consumption *2			kWh/a	1,509	1,564	1,556	1,699	1,791	1,791					
	SCOP *4				4.3	4.2	4.2	3.8	3.8	3.8					
		Energy-efficiency class			A+	A+	A+	A	A	A					
Air-to-Water (ATW)	Nominal flow rate (for heating)			L/min	22.90										
	Heating*5	A7W35	Capacity	kW	8.00	8.00	8.00	8.00	8.00	8.00					
			Input	kW	1.98	1.98	1.98	1.98	1.98	1.98					
			COP		4.05	4.05	4.05	4.05	4.05	4.05					
		A2W35	Capacity	kW	7.50	7.50	7.50	7.50	7.50	7.50					
			Input	kW	2.67	2.67	2.67	2.67	2.67	2.67					
			COP		2.81	2.81	2.81	2.81	2.81	2.81					
	Heat recovery (ATA cooling & ATW)*6	W45	Capacity (ATA cooling + ATW)	kW	7.1+8.0	7.1+8.0	7.1+8.0	7.1+8.0	7.1+8.0	7.1+8.0					
			Input	kW	1.90	1.93	1.95	2.02	2.15	2.13					
			COP		7.95	7.82	7.74	7.48	7.02	7.09					
		W55	Capacity (ATA cooling + ATW)	kW	7.1+9.0	7.1+9.0	7.1+9.0	7.1+9.0	7.1+9.0	7.1+9.0					
			Input	kW	2.97	3.00	3.02	3.09	3.22	3.20					
			COP		5.42	5.37	5.33	5.21	5.00	5.03					
	ATW indoor unit				Cylinder unit or Hydro box (see previous page)										
Outdoor unit	Dimensions	HxWxD	mm	943-950-330 (+30)											
	Weight		kg	73	73	73	73	73	73						
	Air volume	Cooling	m³/min	50	50	50	50	50	50						
		Heating	m³/min	50	50	50	50	50	50						
	Sound pressure level (SPL)	Cooling	dB(A)	47	47	47	47	47	47						
		Heat recovery	dB(A)	47	47	47	47	47	47						
		ATA Heating	dB(A)	49	49	49	49	49	49						
		ATW Heating	dB(A)	49	49	49	49	49	49						
	Sound power level (PWL)	Cooling	dB(A)	67	67	67	67	67	67						
		Heat recovery	dB(A)	67	67	67	67	67	67						
		ATA Heating	dB(A)	68	68	68	68	68	68						
		ATW Heating	dB(A)	68	68	68	68	68	68						
	Operating current (max)			A	19.0	19.0	19.0	19.0	19.0	19.0					
	Breaker size			A	25	25	25	25	25	25					
Ext.piping	Diameter	Liquid/Gas	mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88						
	Max. length	Out-In	m	30 (for ATA) + 30 (for ATW)											
	Max. height	Out-In	m	20	20	20	20	20	20						
Guaranteed operating range (outdoor)		Cooling *3	°C	−15~+46	−15~+46	−15~+46	−15~+46	−15~+46	−15~+46						
		Heating	°C	−20~+21	−20~+21	−20~+21	−20~+21	−20~+21	−20~+21						
		ATW	°C	−20~+35	−20~+35	−20~+35	−20~+35	−20~+35	−20~+35						
		Heat recovery	°C	+7~+46	+7~+46	+7~+46	+7~+46	+7~+46	+7~+46						

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER/SCOP values are measured based on EN14825.

*5 Air-to-Water values are measured based on EN14511 (Circulation pump input is not included.).

*6 Conditions for Air-to-Air cooling: Indoor 27°C (dry bulb) /19°C (wet bulb); Outdoor 35°C (dry bulb).

PUMY+ecodan

Air-to-Air and Air-to-Water Hybrid Multi Split System

1 Unit, 2 Roles – Total Comfort Year-round

Air Conditioning and Hot Water Supply Matching the Needs of Each Room


All-in-one outdoor unit (air conditioning, domestic hot water supply and hot water heating)

PUMY for Air-to-Air


PUMY utilises various indoor units, enabling the air conditioning or heating of multiple rooms, and controls each unit individually.

ecodan for Air-to-Water


- ✓ Domestic hot water (DHW) supply
- ✓ Heating for multiple rooms

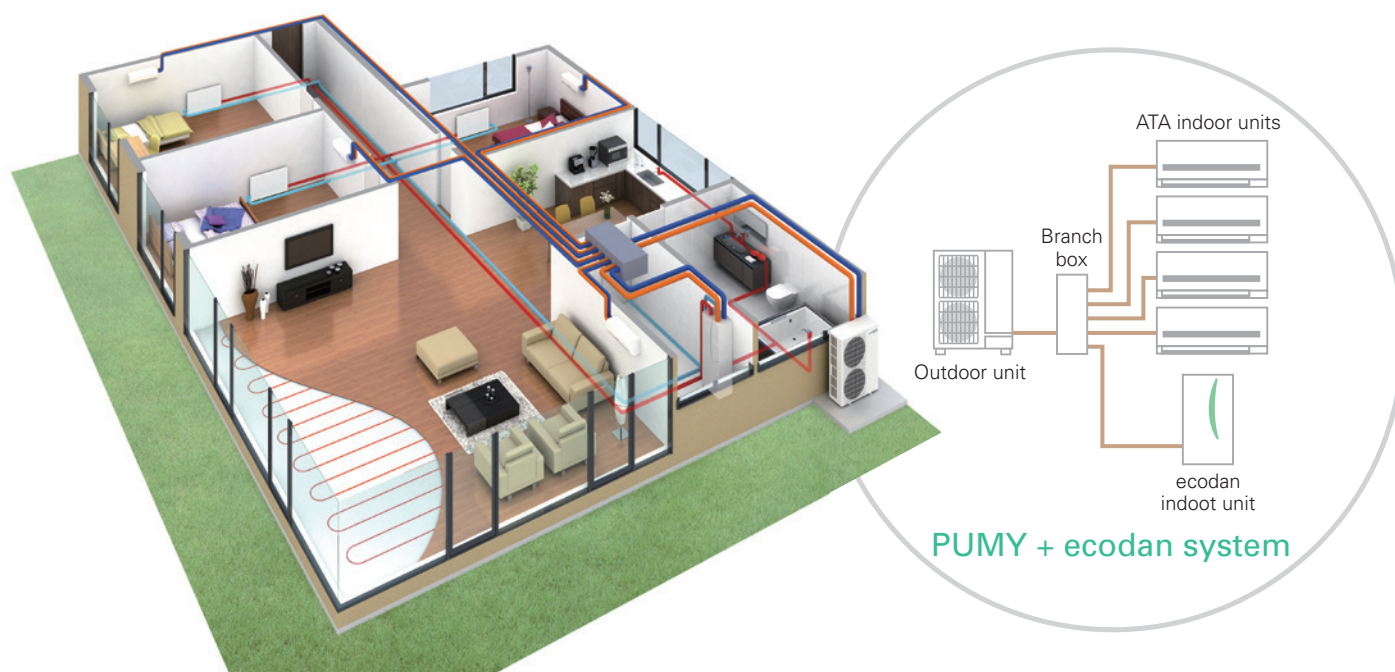

Main Operation Patterns

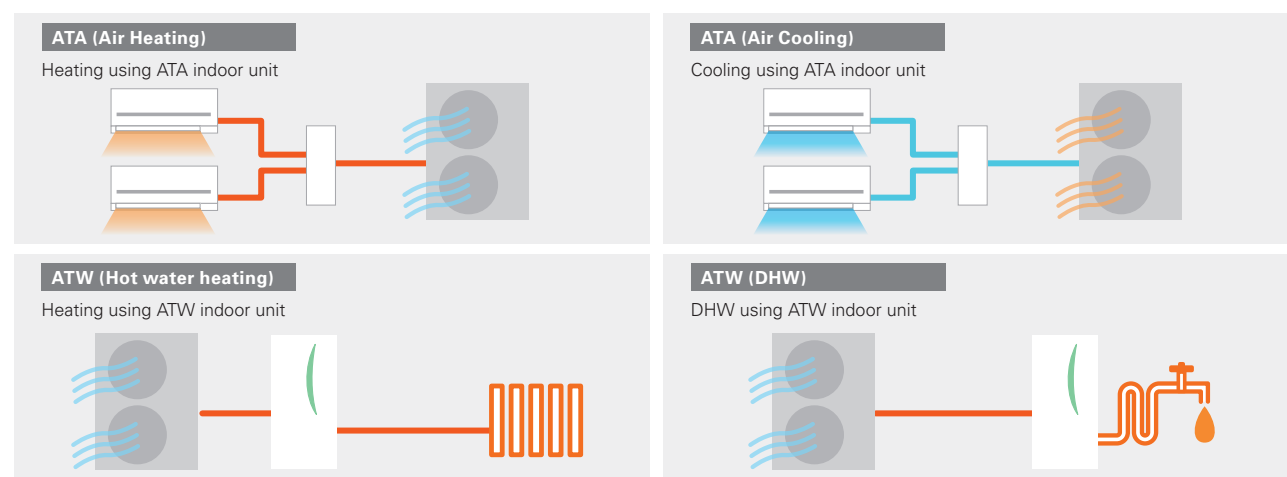

Optional Operation Patterns* (simultaneous)

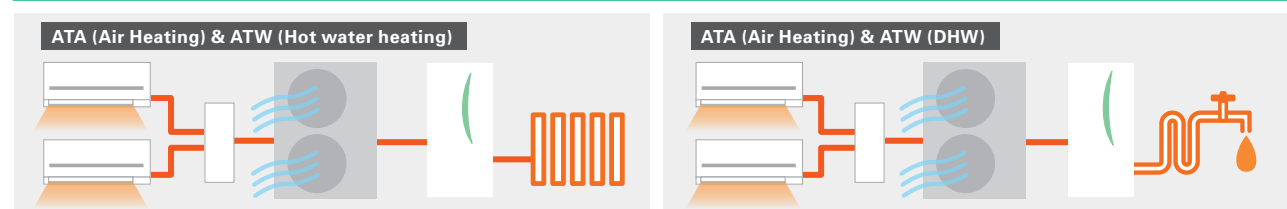


*When using optional simultaneous operation, there are some restrictions, such as connectable indoor units, operation range and DHW flow temp.


Summer 2-in-1 Operation

The diagram illustrates the usage of the system across three time periods: 6:00, 18:00, and 24:00. The diagram shows the operation of the ATA (Air Treatment Unit) and DHW (Domestic Hot Water) system. At 6:00, the ATA is in cooling mode, and the DHW is in heating mode. At 18:00, the ATA is in cooling mode, and the DHW is in heating mode. At 24:00, the ATA is in cooling mode, and the DHW is in heating mode. The diagram also shows the Tank (Domestic Hot Water Tank) and the Outdoor unit (Air Treatment Unit).

In spring and autumn, ATA heating and DHW are utilised. ATA heating can warm up each room quickly during the low temperature morning and evening. Heat pump operates to heat up water stored in the DHW tank when ATA is not operated. The hot water can be utilised for shower and washing dishes during daytime.

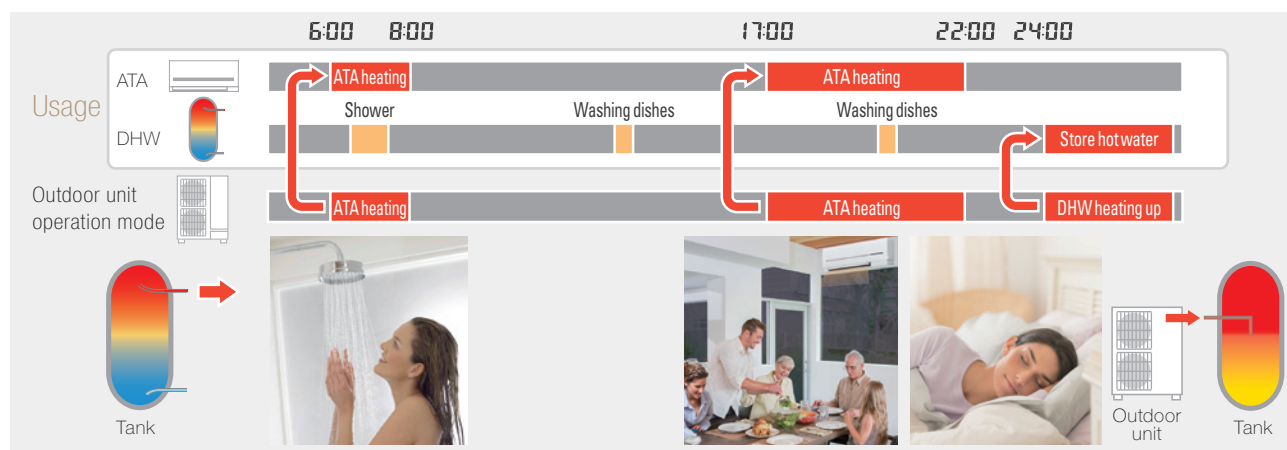

In winter ATW heating and DHW are utilised. ATW heating warms home all the day in severe cold weather. ATW heating stops temporarily only when the heat pump operates to heat up water stored in the DHW tank.

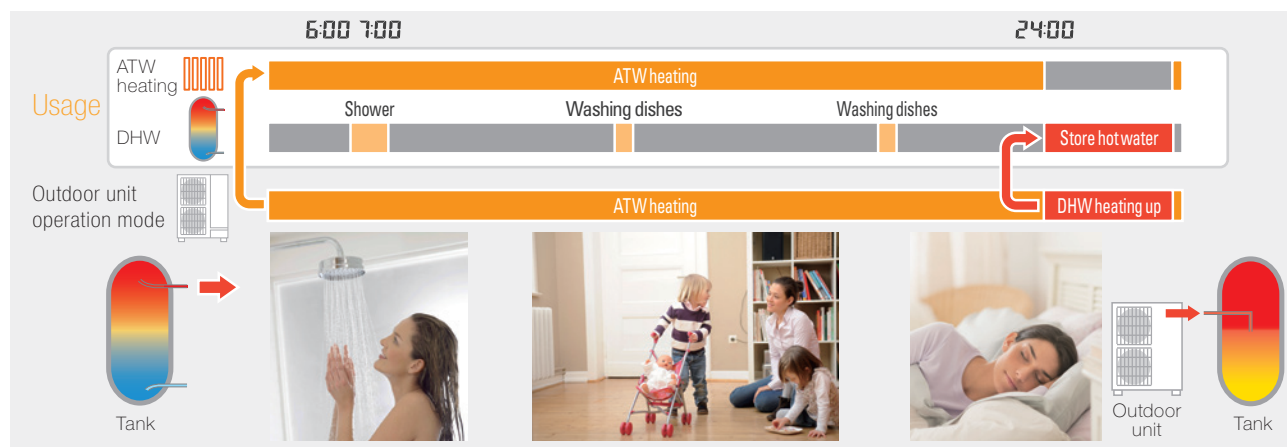

Model name				PUMY- P112VKM5(-BS)	PUMY- P125VKM5(-BS)	PUMY- P140VKM5(-BS)	PUMY- P112YKM(E)4(-BS)	PUMY- P125YKM(E)4(-BS)	PUMY- P140YKM(E)4(-BS)		
Power supply				1-phase 220 - 230 - 240V, 50Hz			3-phase 380 - 400 - 415V, 50Hz				
Air-to-Air (ATA)	Cooling (nominal)*1	Capacity	kW	12.5	14.0	15.5	12.5	14.0	15.5		
		Power input	kW	2.79	3.46	4.52	2.79	3.46	4.52		
		EER		4.48	4.05	3.43	4.48	4.05	3.43		
	Temp. range of cooling	Indoor temp.	W.B.	15 - 24°C							
		Outdoor temp.*2	D.B.	-5 - 52°C							
	Heating (nominal)*1	Capacity	kW	14.0	16.0	18.0	14.0	16.0	18.0		
		Power input	kW	3.04	3.74	4.47	3.04	3.74	4.47		
		COP		4.61	4.28	4.03	4.61	4.28	4.03		
	Temp. range of heating	Indoor temp.	W.B.	15 - 27°C							
		Outdoor temp.	D.B.	-20 - 15°C							
Air-to-Water (ATW)	Nominal flow rate (for heating)		L/min	35.8							
	Heating*3	A7W35	Capacity	kW	12.5						
			Power input	kW	3.06						
			COP		4.08						
		A2W35	Capacity	kW	10.0						
			Power input	kW	3.50						
			COP		2.86						
	Guaranteed operating range	ATW	Heating	D.B.	-20 - +21°C						
			DHW	D.B.	-20 - +35°C						
		ATA + ATW	ATA heating + DHW	D.B.	7 - +21°C						
			ATA heating + ATW heating *4	D.B.	-10 - +21°C						
	Maximum Outlet water temp.			°C	55						
Outdoor unit	Indoor unit connectable	ATA only	Total capacity		50 to 130% of outdoor unit capacity						
			Model/ Quantity	Branch box system	15-100/8	15-100/8	15-100/8	15-100/8	15-100/8	15-100/8	
				Mixed system*12	15-140*5/10	15-140*5/10*6	15-140*5/10*6	15-140*5/10	15-140*5/10*6	15-140*5/10*6	
		ATA + ATW individual operation	Total capacity		ATA : Max 130% of outdoor unit capacity + ATW (EHST20C or EHSC) *7						
			Model/Quantity (including ATW)	Branch box system	15-100/8	15-100/8	15-100/8	15-100/8	15-100/8	15-100/8	
				Mixed system*12	15-140*5/10	15-140*5/10*6	15-140*5/10*6	15-140*5/10	15-140*5/10*6	15-140*5/10*6	
		ATA + ATW simultaneous operation	Total capacity		Max 100% of outdoor unit capacity : ATA + ATW (EHST20C or EHSC) *7						
			Model/Quantity	ATA*12	15/1*8	15-25/2*9	15-42*11/3*10	15/1*8	15-25/2*9	15-42*11/3*10	
				ATW	ATW (EHST20C or EHSC) / 1						
		Sound pressure level (measured in anechoic room)			dB<A>	49 / 51	50 / 52	51 / 53	49 / 51	50 / 52	51 / 53
		Sound power level (measured in anechoic room)			dB<A>	69 / 71	70 / 72	71 / 73	69 / 71	70 / 72	71 / 73
		Refrigerant piping diameter			Liquid pipe	9.52 flare					
	Gas pipe				15.88 flare						
	Fan	Type × Quantity	Airflow rate	m³/min	Propeller fan × 2						
					110						
					1,883						
					3,884						
		Motor output	kW	0.074 + 0.074							
	Compressor	Type × Quantity		Scroll hermetic compressor × 1							
		Starting method		Inverter							
		Motor output	kW	2.9	3.5	3.9	2.9	3.5	3.9		
	External dimensions (H × W × D)			mm	1,338 × 1,050 × 330 (+40)						
	Weight			kg	122			YKM: 125 / YKMF: 136			

*1

	Indoor	Outdoor	Piping length	Level difference
Cooling	27°C DB / 19°C WB	35°C DB	7.5m	0m
Heating	20°C DB	7°C DB / 6°C WB	7.5m	0m

*2 10 to 52°C D.B.: When connecting PKFY-P15/20/25VBM, PFFY-P20/25/32VKM, PFFY-P20/25/32VLE(R)M, PEFY-P*VMA3 or M, S and P series indoor unit.

*3 In the case of ATW single connection. Input to circulation pump is not included.

*4 In the case of simultaneous operation of ATA heating and ATW heating, target flow temperature range is restricted to 45-55°C and when the ambient temp is under 7°C, the flow temp is lowered.

*5 Up to P100 when connecting via branch box.

*6 Up to 11 units when connecting via 2 branch boxes.

*7 Only one ecodan unit can be connected.

*8 Exceptionally, one MSZ-SF15VA or MSZ-AP15VF can be connected.

*9 Exceptionally, two MSZ-SF15VA or MSZ-AP15VF can be connected.

*10 Exceptionally, three MSZ-SF15VA or MSZ-AP15VF can be connected.


*11 In the case of City Multi connection, maximum is P32.

*12 PKFY and PFFY series are not connectable.

Piping specifications

Total piping length	m	150*	a+b+c+d+e+f
Farthest piping length	m	80	a+b+d or a+c+e
		85	a+f
Total piping length between outdoor unit and branch box	m	55	a+b+c
Total piping length between branch boxes and indoor units	m	95	d+e
Farthest piping length from the first joint	m	30	b or c or f
Farthest piping length after branch box	m	25	d or e
Height difference (Outdoor upside / Outdoor downside)	m	50 / 40	

*When an ecodan is connected, the maximum piping length is 150m.

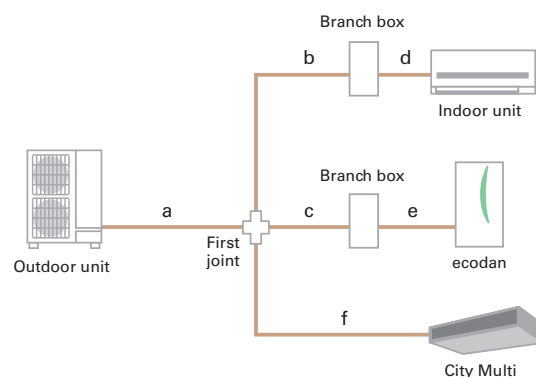

PUMY+ ecodan Compatibility Table

ATW branch box connection compatibility table

Series	Type	Model name	Compatibility	Type	Model name	Compatibility	Type	Model name	Compatibility
ATW	Cylinder unit	EHST20C-VM2/6D	●	Hydro box	EHSC-VM2/6D	●	Branch box	PAC-MK53BC	●
		EHST20C-YM9D	●		EHSC-YM9D	●		PAC-MK33BC	●

Connectable indoor unit capacity

For individual operation ATA+ATW (no simultaneous operation) ATA: Max 130% of outdoor unit capacity + ATW (EHST20C or EHSC)

Outdoor capacity 12.5kW		
ATW indoor unit (Cylinder or Hydro box) 11.2kW	Connectable ATA indoor unit total capacity: Max.16.2kW (130%)	
Outdoor capacity 14.0kW		
ATW indoor unit (Cylinder or Hydro box) 11.2kW	Connectable ATA indoor unit total capacity: Max.18.2kW (130%)	
Outdoor capacity 15.5kW		
ATW indoor unit (Cylinder or Hydro box) 11.2kW	Connectable ATA indoor unit total capacity: Max.20.2kW (130%)	

For simultaneous operation of ATA+ATW Max 100% of outdoor unit capacity: ATA + ATW (EHST20C or EHSC)

Outdoor capacity 12.5kW			
ATW indoor unit (Cylinder or Hydro box) 11.2kW	ATA capacity Max. 1.3kW	*Exceptionally, one MSZ-SF15VA or MSZ-AP15VF can be connected.	
Outdoor capacity 14.0kW			
ATW indoor unit (Cylinder or Hydro box) 11.2kW	ATA capacity Max. 2.8kW	*Exceptionally, two units of MSZ-SF15VA or MSZ-AP15VF can be connected.	
Outdoor capacity 15.5kW			
ATW indoor unit (Cylinder or Hydro box) 11.2kW	ATA capacity Max. 4.3kW	*Exceptionally, three units of MSZ-SF15VA or MSZ-AP15VF can be connected.	

Split Type Specifications

Indoor unit

<Cylinder unit (Heating only)>				Small capacity			
Model name				EHST17D-VM2D	EHST20D-VM2D	EHST20D-YM9D	EHST30D-YM9ED
Type			Heating only				
Expansion vessel				✓	✓	✓	—
Booster heater (2/6/9 kW)				✓	✓	✓	✓
Dimensions		HxWxD	mm	1400x595x680	1600x595x680		2050x595x680
Weight (empty)			kg	93	99	102	117
Control Board Power supply (Phase / V / Hz)				~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz
Heater	Booster heater	Power supply (Phase / V / Hz)		~ /N,230V, 50Hz	~ /N,230V, 50Hz	3 ~, 400V, 50Hz	3 ~, 400V, 50Hz
		Capacity	kW	2	2	3+6	3+6
		Current	A	9	9	13	13
		Breaker size	A	16	16	16	16
Domestic hot water tank	Volume / Material		L / -	170 / Stainless steel	200 / Stainless steel		300 / Stainless steel
Guranteed operating range *1	Ambient		°C	0 - 35 (≦80%RH)			
	Outdoor	Heating	°C	See outdoor unit spec table			
		Cooling	°C	—			
Target temperature range	Heating	Room temperature	°C	10 - 30			
		Flow temperature	°C	20 - 60			
	Cooling	Room temperature	°C	—			
		Flow temperature	°C	—			
DHW tank performance	Max. hot water temperature		°C	70			
	Water heater energy efficiency class			A+		A - A+	
Sound pressure level (PWL)			dB (A)	41			

*1 The indoor environment must be frost-free

*2 For the model without booster heater and immersion heater, the maximum allowable hot water temperature is 3°C lower than maximum outlet water of outdoor unit.
For the maximum outlet water of outdoor unit, refer to outdoor unit data book.

<Cylinder unit (Heating only)>				Medium capacity				
Model name				EHST20C-VM2D	EHST20C-VM6D	EHST20C-YM9D	EHST30C-VM6ED	EHST30C-YM9ED
Type				Heating only				
Expansion vessel				✓	✓	✓	—	—
Booster heater (2/6/9kW)				✓	✓	✓	✓	✓
Dimensions		HxWxD	mm	1600x595x680			2050x595x680	
Weight (empty)			kg	110	110	112	122	124
Control Board Power supply (Phase / V / Hz)				~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz
Heater	Booster heater	Power supply (Phase / V / Hz)		~ /N,230V, 50Hz	~ /N,230V, 50Hz	3 ~, 400V, 50Hz	~ /N,230V, 50Hz	3 ~, 400V, 50Hz
		Capacity	kW	2	2+4	3+6	2+4	3+6
		Current	A	9	26	13	26	13
		Breaker size	A	16	32	16	32	16
Domestic hot water tank	Volume / Material		L / -	200 / Stainless steel			300 / Stainless steel	
Guranteed operating range *1	Ambient		°C	0 - 35 (≦80%RH)				
	Outdoor	Heating	°C	See outdoor unit spec table				
		Cooling	°C	—				
Target temperature range	Heating	Room temperature	°C	10 - 30				
		Flow temperature	°C	20 - 60				
	Cooling	Room temperature	°C	—				
		Flow temperature	°C	—				
DHW tank performance	Max. hot water temperature		°C	70				
	Water heater energy efficiency class			A+			A	
Sound pressure level (PWL)			dB (A)	40				

*1 The indoor environment must be frost-free

*2 For the model without booster heater and immersion heater, the maximum allowable hot water temperature is 3°C lower than maximum outlet water of outdoor unit.
For the maximum outlet water of outdoor unit, refer to outdoor unit data book.

<Hydro box (Heating only)>			Small capacity		Medium capacity			Large capacity	
Model name			EHSD-VM2D	EHSD-YM9D	EHSC-VM2D	EHSC-VM6D	EHSC-YM9D	EHSE-YM9ED	
Type			Heating only						
Expansion vessel			✓	✓	✓	✓	✓	—	
Booster heater (2/6/9 kW)			✓	✓	✓	✓	✓	✓	
Dimensions		HxWxD	mm	800x530x360					950x600x360
Weight (empty)		kg	43	44	47	48	48	63	
Control Board Power supply (Phase / V / Hz)			~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	
Heater	Booster heater	Power supply (V / Phase / Hz)		~ /N,230V, 50Hz	3 ~ 400V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	3 ~ 400V, 50Hz	3 ~ 400V, 50Hz
		Capacity	kW	2	3+6	2	2+4	3+6	3+6
		Current	A	9	13	9	26	13	13
		Breaker size	A	16	16	16	32	16	16
Guranteed operating range *1	Ambient		L / -	0 - 35 (≤80%RH)					
	Outdoor	Heating	°C	See outdoor unit spec table					
		Cooling	°C	—					
Target temperature range	Heating	Room temperature	°C	10 - 30					
		Flow temperature	°C	20 - 60					
	Cooling	Room temperature	°C	—					
		Flow temperature	°C	—					
Sound pressure level (PWL)			dB (A)	41		40		45	

*1 The indoor environment must be frost-free.

Split Type Specifications

Indoor unit

<Cylinder unit (Reversible)>				Small capacity		
Model name				ERST17D-VM2D	ERST20D-VM2D	ERST30D-VM2ED
Type				Heating and Cooling		
Expansion vessel				✓	✓	
Booster heater (2/6/9kW)				✓	✓	✓
Dimensions		HxWxD	mm	1400x595x680	1600x595x680	2050x595x680
Weight (empty)			kg	94	100	115
Control Board Power supply (Phase / V / Hz)				~/N, 230V, 50Hz	~/N, 230V, 50Hz	~/N, 230V, 50Hz
Heater	Booster heater	Power supply (V / Phase / Hz)		~/N, 230V, 50Hz	~/N, 230V, 50Hz	~/N, 230V, 50Hz
		Capacity	kW	2	2	2
		Current	A	9	9	9
		Breaker size	A	16	16	16
Domestic hot water tank	Volume / Material		L / -	170 / Stainless steel	200 / Stainless steel	300 / Stainless steel
Guaranteed operating range *1	Ambient		°C	0 - 35 (≦ 80%RH)		
	Outdoor	Heating	°C	See outdoor unit spec table		
		Cooling	°C	See outdoor unit spec table *2		
Target temperature range	Heating	Room temperature	°C	10 - 30		
		Flow temperature	°C	20 - 60		
	Cooling	Room temperature	°C	-		
		Flow temperature	°C	5 - 25		
DHW tank performance	Max. hot water temperature		°C	70		
	Water heater energy efficiency class			A ⁺		A - A ⁺
Sound pressure level (PWL)			dB (A)	41		

*1 The indoor environment must be frost-free.

*2 During cooling operation at low outdoor temperature (10°C or lower), frozen water may cause damage on plate heat exchanger.

<Cylinder unit (Reversible)>				Medium capacity	
Model name				ERST20C-VM2D	ERST30C-VM2ED
Type			Heating and Cooling		
Expansion vessel			✓		
Booster heater (2/6/9kW)			✓		
Dimensions		HxWxD	mm	1600x595x680	2050x595x680
Weight (empty)			kg	110	122
Control Board Power supply (Phase / V / Hz)				~/N, 230V, 50Hz	~/N, 230V, 50Hz
Heater	Booster heater	Power supply (V / Phase / Hz)		~/N, 230V, 50Hz	~/N, 230V, 50Hz
		Capacity	kW	2	2
		Current	A	9	9
		Breaker size	A	16	16
Domestic hot water tank	Volume / Material		L / -	200 / Stainless steel	300 / Stainless steel
Guaranteed operating range *1	Ambient		°C	0 - 35 (≦80%RH)	
	Outdoor	Heating	°C	See outdoor unit spec table	
		Cooling	°C	See outdoor unit spec table *2	
Target temperature range	Heating	Room temperature	°C	10 - 30	
		Flow temperature	°C	20 - 60	
	Cooling	Room temperature	°C	-	
		Flow temperature	°C	5 - 25	
DHW tank performance	Max. hot water temperature		°C	70	
	Water heater energy efficiency class			A ⁺	A
Sound pressure level (PWL)			dB (A)	40	

*1 The indoor environment must be frost-free.

*2 During cooling operation at low outdoor temperature (10°C or lower), frozen water may cause damage on plate heat exchanger.

<Hydro box (Reversible)>				Small capacity	Medium capacity	Large capacity	
Model name				ERSD-VM2D	ERSC-VM2D	ERSE-MED	ERSE-YM9ED
				Heating and Cooling			
Type							
Expansion vessel				✓	✓	-	-
Booster heater (2/6/9kW)				✓	✓	-	✓
Dimensions	HxWxD		mm	800x530x360		950x600x360	
Weight (empty)			kg	44	48	62	64
Control Board Power supply (Phase / V / Hz)				~N, 230V, 50Hz	~N, 230V, 50Hz	~N, 230V, 50Hz	~N, 230V, 50Hz
Heater	Booster heater	Power supply (V / Phase / Hz)		~N, 230V, 50Hz	~N, 230V, 50Hz	-	3~、400V, 50Hz
		Capacity	kW	2	2	-	3+6
		Current	A	9	9	-	13
		Breaker size	A	16	16	-	16
Guaranteed operating range *1	Ambient		°C	0 - 35 (≤80%RH)			
	Outdoor	Heating	°C	See outdoor unit spec table			
		Cooling	°C	See outdoor unit spec table *2			
Target temperature range	Heating	Room temperature	°C	10 - 30			
		Flow temperature	°C	20 - 60			
	Cooling	Room temperature	°C	-			
		Flow temperature	°C	5 - 25			
Sound pressure level (PWL)			dB (A)	41	40	45	

*1 The indoor environment must be frost-free.

*2 If you use our system in cooling mode at the low ambient temperature (10°C or below), there are some risks of plate heat exchanger breaking by frozen water.

Split Type Specifications

Outdoor unit

Outdoor unit				Eco Inverter		
Model name				SUZ-SWM40VA	SUZ-SWM60VA	SUZ-SWM80VA
Refrigerant				R32*1		
Dimensions		HxWxD	mm	880×840×330	880×840×330	880×840×330
Weight			kg	54	54	54
Power supply (V / Phase / Hz)				230 / 1-ph / 50	230 / 1-ph / 50	230 / 1-ph / 50
Heating	A7W35*2	Nominal	kW	4.0	6.0	7.5
		COP		5.20	4.86	4.70
	A2W35*2	Nominal	kW	4.0	5.0	6.5
		COP		3.90	3.33	3.40
		Average climate water outlet 35°C*3		Class	A+++	A+++
Average climate water outlet 55°C*3		ηs		180	181	182
		Class		A++	A++	A++
DHW 200L(L) Load Profile (Average climate)*4		ηs		129	130	131
		Class		A+	A+	A+
		ηwh		159	148	148
Max outlet water temperature (°C)				60	60	60
Cooling	A35W7*2	Nominal	kW	4.5	5.0	5.4
		EER		3.29	3.03	3.00
	A35W18*2	Nominal	kW	5.6	6.0	6.3
		EER		4.97	4.88	4.80
PWL (Heating)*5			dB(A)	58	60	62
Max operating current			A	13.9	13.9	13.9
Breaker size			A	16	16	16
Piping	Diameter	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	6.35 / 12.7
	Length	Out-In	m	5-30	5-30	5-30
	Height	Out-In	m	Max 30	Max 30	Max 30
Guaranteed Operating Range	Heating		°C	-20°C~24°C	-20°C~24°C	-20°C~24°C
	DHW		°C	-20°C~35°C	-20°C~35°C	-20°C~35°C
	Cooling		°C	10°C~46°C	10°C~46°C	10°C~46°C

Outdoor unit

Outdoor unit				Power Inverter, Heating only			ZUBADAN, Heating only			
Model name				PUD-SWM80V/YAA	PUD-SWM100V/YAA	PUD-SWM120V/YAA	PUD-SHWM80V/YAA	PUD-SHWM100V/YAA	PUD-SHWM120V/YAA	PUD-SHWM140V/YAA
Refrigerant				R32*1						
Dimensions		HxWxD	mm	1020x1050x480	1020x1050x480	1020x1050x480	1020x1050x480	1020x1050x480	1020x1050x480	1020x1050x480
Weight			kg	101/114	105/118	105/118	102/115	108/121	108/121	110/122
Power supply (V / Phase / Hz)				VAA: 230 / 1-ph / 50, YAA: 400 / 3-ph / 50						
Heating	A7W35*2	Nominal	kW	6.0	8.0	10.0	6.0	8.0	10.0	12.0
		COP		4.76	5.00	4.70	5.03	5.00	4.80	4.70
	A2W35*2	Nominal	kW	8.0	10.0	12.0	8.0	10.0	12.0	14.0
		COP		3.55	3.30	3.24	3.75	3.45	3.30	3.05
Average climate water outlet 35°C*3		Class		A+++	A+++	A+++	A+++	A+++	A+++	A+++
		ηs		178/176	178/177	177/176	181/179	180/178	179/177	179/177
Average climate water outlet 55°C*3		Class		A++	A++	A++	A++	A++	A++	A++
		ηs		131/130	131/130	129/128	135/134	136/135	135/134	134/134
DHW 200L(L)/300L(XL) Load Profile (Average climate)*4		Class		A+ / A	A+ / A	A+ / A	A+ / A	A+ / A	A+ / A	A+ / A
		ηwh		148/121	148/121	148/121	148/121	148/121	148/121	145/121
Max outlet water temperature (°C)				60	60	60	60	60	60	60
PWL (Heating)*5			dB(A)	56	59	60	56	59	60	62
Max operating current			A	22/8	26/10	28/12	22/8	26/10	28/12	35/12
Breaker size			A	25/16	30/16	32/16	25/16	30/16	32/16	40/16
Piping	Diameter	Liquid/Gas	mm	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7
	Length	Out-In	m	2 - 30	2 - 30	2 - 30	2 - 30	2 - 30	2 - 30	2 - 25
	Height	Out-In	m	Max. 30	Max. 30	Max. 30	Max. 30	Max. 30	Max. 30	Max. 25
Guaranteed Operating Range	Heating		°C	-25°C~24°C	-25°C~24°C	-25°C~24°C	-28°C~24°C	-28°C~24°C	-28°C~24°C	-28°C~24°C
	DHW		°C	-25°C~35°C	-25°C~35°C	-25°C~35°C	-28°C~35°C	-28°C~35°C	-28°C~35°C	-28°C~35°C

*1 Refrigerant leakage contribute to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Air-to-Water values are measured based on EN14511 (Circulation pump input is not included.).

*3 ηs values are measured based on EN14825. *4 ηwh values are measured based on EN16147. *5 Sound power levels are measured based on EN12102.

Split type

Small capacity (Under 5kW)*

Medium capacity (8.0kW~14kW)*



PUD-SHWM80/100/120/140



PUD-SWM80/100/120

Eco Inverter



SUZ-SWM40/60



SUZ-SWM80

*Rated capacity is at conditions A2W35. (according to EN14511)

Split Type Specifications

Outdoor unit

Outdoor unit				Power Inverter				
Model name				PUHZ-SW75V/YAA(-BS)	PUHZ-SW100V/YAA(-BS)	PUHZ-SW120V/YHA(-BS)	PUHZ-SW160YKA(-BS)	PUHZ-SW200YKA(-BS)
Refrigerant				R410A*1				
Dimensions		HxWxD	mm	1020x1050x480	1020x1050x480	1350x950x330	1338x1050x330	1338x1050x330
Weight		kg		92/104	114/126	118/130	136	136
Power supply (V / Phase / Hz)				VAA, VHA: 230 / 1-ph / 50, YAA, YHA, YKA: 400 / 3-ph / 50				
Heating	A7W35*2	Nominal	kW	8.0	11.2	16.0	22.0	25.0
		COP		4.40	4.46	4.10	4.20	4.00
	A2W35*2	Nominal	kW	7.5	10.0	12.0	16.0	20.0
		COP		3.40	3.32	3.24	3.11	2.80
Average climate water outlet 35°C*3		Class		A++	A++	A++	A++	A++
		ηs		162/160	167/165	162/162	161	163
Average climate water outlet 55°C*3		Class		A++	A++	A++	A++	A++
		ηs		129/128	130/129	125/125	125	127
DHW 200L(L)/300L(XL) Load Profile (Average climate)*4		Class		A+ / A	A+ / A	A+ / A	–	–
		ηwh		145/120	145/120	138/118	–	–
Max outlet water temperature (°C)				60	60	60	–	–
Cooling	A35W7*2	Nominal	kW	7.1	10.0	12.5	16.0	20.0
		EER		2.70	2.83	2.32	2.76	2.25
	A35W18*2	Nominal	kW	7.1	10.0	14.0	18.0	22.0
		EER		4.43	4.47	4.08	4.56	4.1
PWL (Heating)*5			dB(A)	58	60	72	78	78
Max operating current			A	22.0/11.5	28.0/12.0	29.5/13.0	19.0	21.0
Breaker size			A	25/16	32/16	32/16	25	32
Piping	Diameter	Liquid/Gas	mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/25.4	12.7/25.4
	Length	Out-In	m	40	75	75	80	80
	Height	Out-In	m	10	10	30	30	30
Guaranteed Operating Range	Heating		°C	–20°C–21°C	–20°C–21°C	–20°C–21°C	–20°C–21°C	–20°C–21°C
	DHW		°C	–20°C–35°C	–20°C–35°C	–20°C–35°C	–20°C–35°C	–20°C–35°C
	Cooling		°C	–15°C–46°C	–15°C–46°C	–15°C–46°C	–15°C–46°C	–15°C–46°C

				ZUBADAN			
Model name				PUHZ-SHW80V/YAA(-BS)	PUHZ-SHW112V/YAA	PUHZ-SHW140YHA	PUHZ-SHW230YKA2
Refrigerant				R410A*1			
Dimensions		HxWxD	mm	1020x1050x480	1020x1050x480	1350x950x330	1338x1050x330
Weight		kg		116/128	116/128	134	143
Power supply (V / Phase / Hz)				VAA, VHA: 230 / 1-ph / 50, YAA, YHA, YKA: 400 / 3-ph / 50			
Heating	A7W35*2	Nominal	kW	8.0	11.2	14.0	23.0
		COP		4.65	4.40	4.22	3.65
	A2W35*2	Nominal	kW	8.0	11.2	14.0	23.0
		COP		3.55	3.22	2.96	2.37
Average climate water outlet 35°C*3		Class		A++	A++	A++	A++
		ηs		169/167	171/169	163	164
Average climate water outlet 55°C*3		Class		A++	A++	A++	A++
		ηs		133/132	135/135	127	127
DHW 200L(L)/300L(XL) Load Profile (Average climate)*4		Class		A+ / A	A+ / A	A+ / A	–
		ηwh		145/120	145/120	138/118	–
Max outlet water temperature (°C)				60	60	60	60
Cooling	A35W7*2	Nominal	kW	7.1	10.0	12.5	20.0
		EER		3.31	2.83	2.17	2.22
	A35W18*2	Nominal	kW	7.1	10	12.5	20.0
		EER		4.52	4.74	4.26	3.55
PWL (Heating)*5			dB(A)	59	60	70	75
Max operating current			A	22/13	28/13	13	20
Breaker size			A	25/16	32/16	16	25
Piping	Diameter	Liquid/Gas	mm	9.52/15.88	9.52/15.88	9.52/15.88	12.7/25.4
	Length	Out-In	m	75	75	75	80
	Height	Out-In	m	30	30	30	30
Guaranteed Operating Range	Heating		°C	–28°C–21°C	–28°C–21°C	–28°C–21°C	–25°C–21°C
	DHW		°C	–28°C–35°C	–28°C–35°C	–28°C–35°C	–25°C–35°C
	Cooling		°C	–15°C–46°C	–15°C–46°C	–15°C–46°C	–15°C–46°C

*1 Refrigerant leakage contribute to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Air-to-Water values are measured based on EN14511 (Circulation pump input is not included.).

*3 ηs values are measured based on EN14825. *4 ηwh values are measured based on EN16147. *5 Sound power levels are measured based on EN12102.

R410A	Split type	Medium capacity (7.5kW–14kW)		Large capacity (≥16kW)	
			PUHZ-SHW80/112AA		PUHZ-SHW140
			PUHZ-SHW230		
			PUHZ-SW75/100AA		PUHZ-SW120
			PUHZ-SW160/200		

Packaged Type Specifications

<Cylinder unit (Reversible)>

Model name			ERPT17X-VM2D	ERPT20X-VM2D	ERPT30X-VM2ED		
	Type		Heating and cooling				
	Immersion heater		—	—	—		
	Expansion vessel		✓	✓	—		
	Booster heater		✓	✓	✓		
Dimensions		H×W×D	mm	1400×595×680	1600×595×680	2050×595×680	
Weight (empty)			kg	86	94	107	
Control board power supply (Phase / V / Hz)			~N, 230V, 50Hz				
Heater	Booster heater	Power supply (Phase / V / Hz)	~N, 230V, 50Hz		~N, 230V, 50Hz		
		Capacity	kW	2	2	2	
		Current	A	9	9	9	
		Breaker size	A	16	16	16	
	Immersion heater*2	Power supply (Phase / V / Hz)	—		—		
		Capacity	kW	—		—	
		Current	A	—		—	
		Breaker size	A	—		—	
Domestic hot water tank	Volume / Material		L / —	170 / Stainless steel	200 / Stainless steel	300 / Stainless steel	
Guaranteed operating range*1	Ambient	°C		0 - 35 (≤80%RH)			
	Outdoor	Heating	°C		See outdoor unit spec table		
		Cooling	°C		See outdoor unit spec table*4		
Target temperature range	Heating	Room temperature	°C		10~30		
		Flow temperature	°C		20~60		
	Cooling	Room temperature	°C		—		
		Flow temperature	°C		5~25		
DHW tank performance	Max. hot water temperature		°C		70		
	Water heater emergy efficiency class				A+		A
Sound pressure level (PWL)			dB (A)		40		

*1 The indoor environment must be frost-free.

*2 Do not fit immersion heaters without thermal cut-out. Use only Mitsubishi Electric service parts as a direct replacement.

*3 For the model without booster heater and immersion heater, the maximum allowable hot water temperature is 3°C lower than maximum outlet water of outdoor unit.

For the maximum outlet water of outdoor unit, refer to outdoor unit data book.

*4 During cooling operation at low outdoor temperature (10°C or lower), frozen water may cause damage on plate heat exchanger.



Packaged Type Specifications

<Hydro box (Reversible)>

NEW

Model name		ERPX-VM2D	
Type		Heating and cooling	
Immersion heater		-	
Expansion vessel		✓	
Booster heater		✓	
Dimensions	HxWxD	mm	800x530x360
Weight (empty)		kg	33
Control board power supply (Phase / V / Hz)			~N, 230V, 50Hz
Heater	Booster heater	Power supply (Phase / V / Hz)	~N, 230V, 50Hz
		Capacity	kW
		Current	A
		Breaker size	A
Guaranteed operating range*1	Ambient		°C 0-35 (≤80%RH)
	Outdoor	Heating	°C See outdoor unit spec table
		Cooling	°C See outdoor unit spec table *2
	Target temperature range	Heating	Room temperature
Flow temperature			°C 20-60
Cooling		Room temperature	°C -
		Flow temperature	°C -
Sound pressure level (PWL)		dB (A)	40

*1 The indoor environment must be frost-free.

*2 If you use our system in cooling mode at the low ambient temperature (10°C or below), there are some risks of plate heat exchanger breaking by frozen water.

Packaged type

Small capacity (Under 5kW)*

Medium capacity (6.0kW~14kW)*



PUZ-HWM140

*Rated capacity is at conditions A2W35. (according to EN14511)

Packaged type

Small capacity (Under 5kW)*

Medium capacity (8.0kW~11.2kW)*



PUZ-WM50



PUHZ-WM85/112

*Rated capacity is at conditions A2W35. (according to EN14511)

Outdoor unit

NEW

Model name			PUZ- WM50VHA	PUZ- WM85V/YAA	PUZ- WM112V/YAA	PUZ- HWM140V/YHA	
Refrigerant			R32*1				
Dimensions		HxWxD	mm	943x950x330	1020x1050x480	1020x1050x480	1350x1020x330
Weight			kg	71	98/111	119/132	132/143
Power supply (V / Phase / Hz)			VHA +VAA: 230 / 1-ph / 50, YHA +YAA: 400 / 3-ph / 50				
Heating	A7W35*2	Nominal	kW	5.0	8.5	11.2	14.0
		COP		5.00	4.80	4.70	4.46
	A2W35*2	Nominal	kW	5.0	8.5	11.2	14.0
		COP		3.70	3.51	3.44	3.15
Average climate water outlet 35°C*3		Class	A+++	A+++	A+++	A+++	
		ηs	183	193/190	191/189	176/175	
Average climate water outlet 55°C*3		Class	A++	A++	A++	A++	
		ηs	129	139/138	134/133	132/131	
DHW 200L(L) Load Profile (Average climate)*4		Class	A+	A+	A+	A+	
		ηwh	135	145	148	130	
Max outlet water temperature (°C)			60	60	60	60	
Cooling	A35W7*2	Nominal	kW	4.5	7.5	10.0	11.9
		EER		3.40	3.15	3.30	3.00
	A35W18*2	Nominal	kW	4.5	7.5	10.0	11.1
		EER		5.00	4.90	4.90	4.10
PWL (Heating)*5		dB(A)	61	58	60	67	
Max operating current			A	13.0	22.0/11.5	28.0/13.0	35.0/13.0
Breaker size			A	16	25/16	32/16	40/16
Piping	Diameter	Liquid/Gas	mm	-	-	-	-
	Length	Out-In	m	-	-	-	-
	Height	Out-In	m	-	-	-	-
Guaranteed Operating Range	Heating		°C	-20°C~21°C	-20°C~21°C	-25°C~21°C	-28°C~21°C
	DHW		°C	-20°C~35°C	-20°C~35°C	-25°C~35°C	-28°C~35°C
	Cooling		°C	10°C~46°C	10°C~46°C	10°C~46°C	10°C~46°C

*1 Refrigerant leakage contribute to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Air-to-Water values are measured based on EN14511 (Circulation pump input is not included).

*3 ηs values are measured based on EN14825.

*4 ηwh values are measured based on EN16147.

*5 Sound power levels are measured based on EN12102.

Optional Parts

Split type

<Indoor unit>

Parts name	Model name	Cylinder	Hydrobox	Remarks
Wireless remote controller	PAR-WT50R-E	✓	✓	
Wireless receiver	PAR-WR51R-E	✓	✓	
Thermistors	PAC-SE41TS-E	✓	✓	For room temp.
	PAC-TH011-E	✓	✓	For buffer and zone (flow and return temp.)
	PAC-TH011TK2-E	-	✓	For tank temp. (5m)
	PAC-TH012HT-E	✓	✓	For boiler and buffer (5m)
Immersion heater	PAC-IH01V2-E	✓	-	1Ph 1kW
	PAC-IH03V2-E	✓	-	1Ph 3kW
Wi-Fi interface	MAC-567IF-E	✓	✓	
2 Zone kit	PAC-TZ02-E	✓	✓	

<Outdoor unit>

Parts name	Model name	R32 (Eco Inverter)			R32 Heating only (Power Inverter)			R32 Heating only (ZUBADAN)			
		SUZ-SWM40VA	SUZ-SWM60VA	SUZ-SWM80VA	PUD-SWM80VYAA	PUD-SWM100VYAA	PUD-SWM120VYAA	PUD-SHWM80VYAA	PUD-SHWM100VYAA	PUD-SHWM120VYAA	PUD-SHWM140VYAA
Connector for drain hose heater signal output	PAC-SE60RA-E	-	-	-	✓	✓	✓	✓	✓	✓	✓
Air discharge guide	MAC-886SG-E	✓	✓	✓	-	-	-	-	-	-	-
	PAC-SG59SG-E	-	-	-	-	-	-	-	-	-	-
Air protection guide	PAC-SH96SG-E*1	-	-	-	✓*1	✓*1	✓*1	✓*1	✓*1	✓*1	✓*1
	PAC-SH63AG-E	-	-	-	-	-	-	-	-	-	-
Attachment	PAC-SH95AG-E*1	-	-	-	✓*1	✓*1	✓*1	✓*1	✓*1	✓*1	✓*1
	PAC-SJ82AT-E	-	-	-	✓	✓	✓	✓	✓	✓	✓
Drain socket*2	PAC-SG61DS-E	-	-	-	✓	✓	✓	✓	✓	✓	✓
Centralized drain pan*2	PAC-SG64DP-E	-	-	-	-	-	-	-	-	-	-
	PAC-SH97DP-E	-	-	-	-	-	-	-	-	-	-
	PAC-SJ83DP-E	-	-	-	✓	✓	✓	✓	✓	✓	✓
Base heater	MAC-642BH-U1	✓	✓	✓	-	-	-	-	-	-	-
Control/Service tool	PAC-SK52ST	-	-	-	✓	✓	✓	✓	✓	✓	✓

*1 Attachment (PAC-SJ82AT-E) is necessary for the Air guide

*2 Cannot be used for cold climate.

Parts name	Model name	R410A (Power Inverter)						R410A (ZUBADAN)			
		PUHZ-SW75VYAA	PUHZ-SW100VYAA	PUHZ-SW120VYAA	PUHZ-SW160YKA	PUHZ-SW200YKA	PUHZ-SHW80VYAA	PUHZ-SHW112VYAA	PUHZ-SHW140YHA	PUHZ-SHW230YKX2	
Connector for drain hose heater signal output	PAC-SE60RA-E	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Air discharge guide	MAC-886SG-E	-	-	-	-	-	-	-	-	-	
	PAC-SG59SG-E	-	-	✓	-	-	-	-	✓	-	
Air protection guide	PAC-SH96SG-E	✓	✓	✓	✓	✓	✓	✓	-	✓	
	PAC-SH63AG-E	-	-	✓	-	-	-	-	✓	-	
Attachment	PAC-SH95AG-E	✓	✓	-	✓	✓	✓	✓	-	✓	
	PAC-SJ82AT-E	✓	✓	-	-	-	✓	✓	-	✓	
Drain socket*2	PAC-SG61DS-E	✓	✓	✓	✓	✓	✓	✓	-	-	
Centralized drain pan*2	PAC-SG64DP-E	-	-	✓	-	-	-	-	-	-	
	PAC-SH97DP-E	-	-	-	✓	✓	-	-	-	-	
	PAC-SJ83DP-E	✓	✓	-	-	-	✓	✓	-	-	
Base heater	MAC-642BH-U1	-	-	-	-	-	-	-	-	-	
Control/Service tool	PAC-SK52ST	✓	✓	✓	✓	✓	✓	✓	✓	✓	

*1 Attachment (PAC-SJ82AT-E) is necessary for the Air guide

*2 Cannot be used for cold climate.

Interface/Flow Temperature Controller

Split type

Parts name	Model name	Description
Capacity step control interface	PAC-IF011B-E	1 PC board w/ Case
Flow temperature controller	PAC-IF032B-E	1 PC board w/ Case
	PAC-IF033B-E	1 PC board w/ Case
	PAC-IF033PCB-E	10 PC board w/o case
System Controllers	PAC-IF071B-E	1 PC board w/ Case
Pressure sensor	PAC-PS01-E	For SUZ-SWM40/60/80VA
Flow sensor	PAC-FS01-E	
Thermistor	PAC-TH011-E	

Optional Parts

Packaged type

<Indoor unit>

Parts name	Model name	Cylinder	Hydrobox	Remarks
Wireless remote controller	PAR-WT50R-E	✓	✓	
Wireless receiver	PAR-WR51R-E	✓	✓	
Thermistors	PAC-SE41TS-E	✓	✓	For room temp.
	PAC-TH011-E	✓	✓	For buffer and zone (flow and return temp.)
	PAC-TH011TK2-E	-	✓	For tank temp. (5m)
	PAC-TH012HT-E	✓	✓	For boiler and buffer (5m)
Immersion heater	PAC-IH01V2-E	✓ (Except EHPT20X-MHEDW)	-	1Ph 1kW
	PAC-IH03V2-E	✓ (Except EHPT20X-MHEDW)	-	1Ph 3kW
Wi-Fi interface	MAC-5671F-E	✓	✓	
2 Zone kit	PAC-TZ02-E	✓	✓	

<Outdoor unit>

Parts name	Model name	R32 (Power Inverter)			
		PUZ-WM50VHA	PUZ-WM85V/YAA	PUZ-WM112V/YAA	PUZ-HWM140V/YHA
Connector for drain hose heater signal output	PAC-SE60RA-E	✓	✓	✓	✓
Air discharge guide	PAC-SG59SG-E	✓	-	-	✓
	PAC-SH96SG-E	-	✓*	✓*	-
Air protection guide	PAC-SH63AG-E	✓	-	-	✓
	PAC-SH95AG-E	-	✓*	✓*	-
Attachement	PAC-SJ82AT-E	-	✓	✓	-
Drain socket	PAC-SG61DS-E	✓	✓	✓	-
Centralized drain pan	PAC-SG64DP-E	✓	-	-	-
	PAC-SJ83DP-E	-	✓	✓	-

*Attachment (PAC-SJ82AT-E) is necessary for the Air Guide.

Interface/Flow Temperature Controller

Packaged type

Parts name	Model name	Description
Flow temperature controller	PAC-IF033B-E	1 PC board w/ Case
	PAC-IF033PCB-E	10 PC board w/o case
System Controllers	PAC-IF072B-E	
Flow sensor	PAC-FS01-E	
Thermistor	PAC-TH011-E	



D Generation

Combination Table

Split Indoor/outdoor unit

Split indoor/outdoor unit combination		R32										R410A								ATA/ATW Hybrid system				
		Power inverter					ZUBADAN					Power inverter				ZUBADAN				Mr. SLIM+	PUMY			
		SUZ-SWM40VA	SUZ-SWM60VA	SUZ-SWM80VA	PUD-SWM80V/YAA	PUD-SWM100V/YAA	PUD-SWM120V/YAA	PUD-SHWM80V/YAA	PUD-SHWM100V/YAA	PUD-SHWM120V/YAA	PUD-SHWM140V/YAA	PUHZ-SW75V/YAA	PUHZ-SW100V/YAA	PUHZ-SW120V/YHA	PUHZ-SW160YKA	PUHZ-SW200YKA	PUHZ-SHW80V/YAA	PUHZ-SHW112V/YAA	PUHZ-SHW140VHA	PUHZ-SHW230YKA2	PUHZ-FRP71VHA2	PUMY-P112V/YKMEI/4	PUMY-P125V/YKMEI/4	PUMY-P140V/YKMEI/4
Heating only Cylinder	EHST17D-VM2D	●	●	●	●			●				●												
	EHST20D-VM2D	●	●	●	●	●	●	●	●	●	●													
	EHST20D-YM9D	●	●	●	●	●	●	●	●	●	●													
	EHST30D-YM9ED	●	●	●	●	●	●	●	●	●	●													
	EHST20C-VM2D												●	●			●	●	●		●	●	●	●
	EHST20C-VM6D												●	●			●	●	●		●	●	●	●
	EHST20C-YM9D												●	●			●	●	●		●	●	●	●
	EHST30C-VM6ED												●	●			●	●	●					
EHST30C-YM9ED												●	●			●	●	●						
Reversible Cylinder	ERST17D-VM2D	●	●	●	●			●				●												
	ERST20D-VM2D	●	●	●	●	●	●	●	●	●	●													
	ERST30D-VM2ED	●	●	●	●	●	●	●	●	●	●													
	ERST20C-VM2D												●	●			●	●	●					
ERST30C-VM2ED												●	●			●	●	●						
Heating only Hydro box	EHSD-VM2D	●	●	●	●	●	●	●	●	●	●													
	EHSD-YM9D	●	●	●	●	●	●	●	●	●	●													
	EHSC-VM2D												●	●			●	●	●		●			
	EHSC-VM6D												●	●			●	●	●		●	●	●	●
	EHSC-YM9D												●	●			●	●	●		●	●	●	●
	EHSE-YM9ED													●	●				●					
Reversible Hydro box	ERSD-VM2D	●	●	●	●	●	●	●	●	●	●													
	ERSC-VM2D												●	●			●	●	●					
	ERSE-MED													●	●				●					
	ERSE-YM9ED													●	●				●					

Packaged indoor/outdoor unit

Packaged indoor/outdoor unit combination		R32			
		Power inverter		ZUBADAN	
		PUZ-WM50VHA	PUZ-WM85V/YAA	PUZ-WM112V/YAA	PUZ-HWM140V/YHA
Reversible Cylinder	ERPT17X-VM2D	●	●		
	ERPT20X-VM2D	●	●	●	●
	ERPT30X-VM2ED		●	●	●
Reversible Hydro box	ERPX-VM2D	●	●	●	●

MELCloud (Wi-Fi Interface) for ecodan

MELCloud for Fast, Easy Remote Control and Monitoring of Your ecodan

MELCloud is a new Cloud-based solution for controlling ecodan either locally or remotely by computer, tablet or smartphone via the Internet. Setting up and remotely operating your ecodan heating system via MELCloud is simple and straight forward. All you need is wireless computer connectivity in your home or the building where the ecodan is installed and an Internet connection on your mobile or fixed terminal. To set up the system, the router and the ecodan WiFi interface must be paired, and this is done simply and quickly using the WPS button found on all mainstream routers.

You can control and check ecodan via MELCloud from virtually anywhere an Internet connection is available. That means, thanks to MELCloud, you can use ecodan much more easily and conveniently.



Key Control and Monitoring Features

- 1 Turn system on/off**
- 2 See status of each of your heating zones & adjust set points**
- 3 See the status of your hot water cylinder & boost remotely**
- 4 Live weather feed from ecodan location**
 - Holiday mode - Set system parameters while away
 - Schedule timer - Set 7 day weekly schedule
 - Frost protection - Set system to run at minimum temperature
 - Error status
- 5 Check energy usage report*** *Additional metering hardware is required.



All A++ or Above!!

Outdoor unit	Indoor unit	For medium-temperature application										For low-temperature application									
		Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions kW	Seasonal space heating energy efficiency under average climate conditions %	Water heating energy efficiency under average climate conditions %	Rated heat output under warmer climate condition kW	Seasonal space heating energy efficiency under warmer climate condition %	Warmer heating energy efficiency under warmer climate conditions %	Sound power level LWA indoor dB	Sound power level LWA outdoor dB	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions kW	Seasonal space heating energy efficiency under average climate conditions %	Water heating energy efficiency under average climate conditions %	Rated heat output under warmer climate condition kW	Seasonal space heating energy efficiency under warmer climate condition %	Warmer heating energy efficiency under warmer climate conditions %	Sound power level LWA indoor dB	Sound power level LWA outdoor dB
SUZ-SWM40VA	EHST17D-***D	A++	A+	4.6	129	148	4.6	155	167	41	58	A+++	A+	5.1	180	148	5.1	216	167	41	58
	ERST17D-***D	A++	A+	4.6	132	148	4.6	160	167	41	58	A+++	A+	5.1	187	148	5.1	225	167	41	58
	EHST20D-***D	A++	A+	4.6	129	159	4.6	155	173	41	58	A+++	A+	5.1	180	159	5.1	216	173	41	58
	ERST20D-***D	A++	A+	4.6	132	159	4.6	160	173	41	58	A+++	A+	5.1	187	159	5.1	225	173	41	58
	EHST30D-***D	A++	A+	4.6	129	128	4.6	155	149	41	58	A+++	A+	5.1	180	128	5.1	216	149	41	58
	ERST30D-***D	A++	A+	4.6	132	128	4.6	160	149	41	58	A+++	A+	5.1	187	128	5.1	225	149	41	58
	EHSD-***D	A++	-	4.6	129	-	4.6	155	-	41	58	A+++	-	5.1	180	-	5.1	216	-	41	58
	ERSD-***D	A++	-	4.6	132	-	4.6	160	-	41	58	A+++	-	5.1	187	-	5.1	225	-	41	58
SUZ-SWM60VA	EHST17D-***D	A++	A+	6.0	130	144	6.0	138	167	41	60	A+++	A+	6.6	181	144	6.6	192	167	41	60
	ERST17D-***D	A++	A+	6.0	133	144	6.0	142	167	41	60	A+++	A+	6.6	187	144	6.6	198	167	41	60
	EHST20D-***D	A++	A+	6.0	130	148	6.0	138	173	41	60	A+++	A+	6.6	181	148	6.6	192	173	41	60
	ERST20D-***D	A++	A+	6.0	133	148	6.0	142	173	41	60	A+++	A+	6.6	187	148	6.6	198	173	41	60
	EHST30D-***D	A++	A+	6.0	130	128	6.0	138	164	41	60	A+++	A+	6.6	181	128	6.6	192	164	41	60
	ERST30D-***D	A++	A+	6.0	133	128	6.0	142	164	41	60	A+++	A+	6.6	187	128	6.6	198	164	41	60
	EHSD-***D	A++	-	6.0	130	-	6.0	138	-	41	60	A+++	-	6.6	181	-	6.6	192	-	41	60
	ERSD-***D	A++	-	6.0	133	-	6.0	142	-	41	60	A+++	-	6.6	187	-	6.6	198	-	41	60
SUZ-SWM80VA	EHST17D-***D	A++	A+	7.1	131	144	7.1	135	167	41	62	A+++	A+	7.1	182	144	7.1	186	167	41	62
	ERST17D-***D	A++	A+	7.1	133	144	7.1	138	167	41	62	A+++	A+	7.1	187	144	7.1	191	167	41	62
	EHST20D-***D	A++	A+	7.1	131	148	7.1	135	173	41	62	A+++	A+	7.1	182	148	7.1	186	173	41	62
	ERST20D-***D	A++	A+	7.1	133	148	7.1	138	173	41	62	A+++	A+	7.1	187	148	7.1	191	173	41	62
	EHST30D-***D	A++	A+	7.1	131	128	7.1	135	164	41	62	A+++	A+	7.1	182	128	7.1	186	164	41	62
	ERST30D-***D	A++	A+	7.1	133	128	7.1	138	164	41	62	A+++	A+	7.1	187	128	7.1	191	164	41	62
	EHSD-***D	A++	-	7.1	131	-	7.1	135	-	41	62	A+++	-	7.1	182	-	7.1	186	-	41	62
	ERSD-***D	A++	-	7.1	133	-	7.1	138	-	41	62	A+++	-	7.1	187	-	7.1	191	-	41	62
PUD-SWM80V/YAA(-BS)	E*ST17D-***D	A++	A+	8.0	131/130	136	8.0	161/159	154	41	56	A+++	A+	8.0	178/176	136	8.0	218/215	154	41	56
	E*ST20D-***D	A++	A+	8.0	131/130	148	8.0	161/159	162	41	56	A+++	A+	8.0	178/176	148	8.0	218/215	162	41	56
	E*ST30D-***D	A++	A	8.0	131/130	121	8.0	161/159	145	41	56	A+++	A	8.0	178/176	121	8.0	218/215	145	41	56
	E*SD-***D	A++	-	8.0	131/130	-	8.0	161/159	-	41	56	A+++	-	8.0	178/176	-	8.0	218/215	-	41	56
PUD-SWM100V/YAA(-BS)	E*ST20D-***D	A++	A+	10.0	131/130	148	10.0	152/151	162	41	59	A+++	A+	10.0	178/177	148	10.0	221/218	162	41	59
	E*ST30D-***D	A++	A	10.0	131/130	121	10.0	152/151	145	41	59	A+++	A	10.0	178/177	121	10.0	221/218	145	41	59
	E*SD-***D	A++	-	10.0	131/130	-	10.0	152/151	-	41	59	A+++	-	10.0	178/177	-	10.0	221/218	-	41	59
PUD-SWM120V/YAA(-BS)	E*ST20D-***D	A++	A+	12.0	129/128	148	12.0	150/149	162	41	60	A+++	A+	12.0	177/176	148	12.0	217/215	162	41	60
	E*ST30D-***D	A++	A	12.0	129/128	121	12.0	150/149	145	41	60	A+++	A	12.0	177/176	121	12.0	217/215	145	41	60
	E*SD-***D	A++	-	12.0	129/128	-	12.0	150/149	-	41	60	A+++	-	12.0	177/176	-	12.0	217/215	-	41	60
PUD-SHWM80V/YAA(-BS)	E*ST17D-***D	A++	A+	8.0	135/134	136	8.0	166/164	154	41	56	A+++	A+	8.0	181/179	136	8.0	225/222	154	41	56
	E*ST20D-***D	A++	A+	8.0	135/134	148	8.0	166/164	162	41	56	A+++	A+	8.0	181/179	148	8.0	225/222	162	41	56
	E*ST30D-***D	A++	A	8.0	135/134	121	8.0	166/164	145	41	56	A+++	A	8.0	181/179	121	8.0	225/222	145	41	56
	E*SD-***D	A++	-	8.0	135/134	-	8.0	166/164	-	41	56	A+++	-	8.0	181/179	-	8.0	225/222	-	41	56

Note: E**T17/20*-***D use "Load profile L"
E**T30*-***D use "Load profile XL"

Outdoor unit	Indoor unit	For medium-temperature application										For low-temperature application									
		Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Rated heat output under warmer climate condition	Seasonal space heating energy efficiency under warmer climate condition	Warmer heating energy efficiency under warmer climate conditions	Sound power level LWA indoor	Sound power level LWA outdoor	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Rated heat output under warmer climate condition	Seasonal space heating energy efficiency under warmer climate condition	Warmer heating energy efficiency under warmer climate conditions	Sound power level LWA indoor	Sound power level LWA outdoor
				kW	%	%	kW	%	%	dB	dB			kW	%	%	kW	%	%	dB	dB
PUD-SHWM100V/YAA(-BS)	E*ST20D-***D	A++	A+	10.0	136/135	148	10.0	163/161	162	41	59	A+++	A+	10.0	180/178	148	10.0	235/232	162	41	59
	E*ST30D-***D	A++	A	10.0	136/135	121	10.0	163/161	145	41	59	A+++	A	10.0	180/178	121	10.0	235/232	145	41	59
	E*SD-***D	A++	-	10.0	136/135	-	10.0	163/161	-	41	59	A+++	-	10.0	180/178	-	10.0	235/232	-	41	59
PUD-SHWM120V/YAA(-BS)	E*ST20D-***D	A++	A+	12.0	135/134	148	12.0	159/158	162	41	60	A+++	A+	12.0	179/177	148	12.0	231/229	162	41	60
	E*ST30D-***D	A++	A	12.0	135/134	121	12.0	159/158	145	41	60	A+++	A	12.0	179/177	121	12.0	231/229	145	41	60
	E*SD-***D	A++	-	12.0	135/134	-	12.0	159/158	-	41	60	A+++	-	12.0	179/177	-	12.0	231/229	-	41	60
PUD-SHWM140V/YAA(-BS)	E*ST20D-***D	A++	A+	14.0	134/134	145	14.0	161/139	161	41	62	A+++	A+	14.0	179/177	145	14.0	224/223	161	41	62
	E*ST30D-***D	A++	A	14.0	134/134	121	14.0	161/139	139	41	62	A+++	A	14.0	179/177	121	14.0	224/223	139	41	62
	E*SD-***D	A++	-	14.0	134/134	-	14.0	161/139	-	41	62	A+++	-	14.0	179/177	-	14.0	224/223	-	41	62
PUHZ-SW75V/YAA(-BS)	EHST17D-***D	A++	A+	7.1	129/128	136	7.1	155/153	141	41	58	A++	A+	7.2	162/160	136	7.1	219/215	141	41	58
	ERST17D-***D	A++	A+	7.1	132/132	136	7.1	158	141	41	58	A++	A+	7.2	166/165	136	7.1	226/225	141	41	58
	EHST20D-***D	A++	A+	7.1	129/128	145	7.1	155/153	161	41	58	A++	A+	7.2	162/160	145	7.1	219/215	161	41	58
	ERST20D-***D	A++	A+	7.1	132/132	145	7.1	158	161	41	58	A++	A+	7.2	166/165	145	7.1	226/225	161	41	58
	EHST30D-***D	A++	A	7.1	129/128	120	7.1	155/153	127	41	58	A++	A	7.2	162/160	120	7.1	219/215	127	41	58
	ERST30D-***D	A++	A	7.1	132/132	120	7.1	158	127	41	58	A++	A	7.2	166/165	120	7.1	226/225	127	41	58
	EHSD-***D	A++	-	7.1	129/128	-	7.1	155/153	-	41	58	A++	-	7.2	162/160	-	7.1	219/215	-	41	58
	ERSD-***D	A++	-	7.1	132/132	-	7.1	158	-	41	58	A++	-	7.2	166/165	-	7.1	226/225	-	41	58
PUHZ-SW100V/YAA(-BS)	EHST20C-***D	A++	A+	10.0	130/129	145	10.0	180/178	161	40	60	A++	A+	10.6	167/165	145	10.6	255/251	161	40	60
	ERST20C-***D	A++	A+	10.0	132/132	145	10.0	183	161	40	60	A++	A+	10.6	170/169	145	10.6	261/260	161	40	60
	EHST30C-***D	A++	A	10.0	130/129	120	10.0	180/178	127	40	60	A++	A	10.6	167/165	120	10.6	255/251	127	40	60
	ERST30C-***D	A++	A	10.0	132/132	120	10.0	183	127	40	60	A++	A	10.6	170/169	120	10.6	261/260	127	40	60
	EHSC-***D	A++	-	10.0	130/129	-	10.0	180/178	-	40	60	A++	-	10.6	167/165	-	10.6	255/251	-	40	60
	ERSC-***D	A++	-	10.0	132/132	-	10.0	183	-	40	60	A++	-	10.6	170/169	-	10.6	261/260	-	40	60
PUHZ-SW120V/YAA(-BS)	EHST20C-***D	A++	A+	12.1	125/125	138	12.1	157	160	40	72	A++	A+	12.9	162/162	138	12.9	222	160	40	72
	ERST20C-***D	A++	A+	12.1	127/127	138	12.1	159	160	40	72	A++	A+	12.9	164/164	138	12.9	226	160	40	72
	EHST30C-***D	A++	A	12.1	125/125	118	12.1	157	126	40	72	A++	A	12.9	162/162	118	12.9	222	126	40	72
	ERST30C-***D	A++	A	12.1	127/127	118	12.1	159	126	40	72	A++	A	12.9	164/164	118	12.9	226	126	40	72
	EHSC-***D	A++	-	12.1	125/125	-	12.1	157	-	40	72	A++	-	12.9	162/162	-	12.9	222	-	40	72
	ERSC-***D	A++	-	12.1	127/127	-	12.1	159	-	40	72	A++	-	12.9	164/164	-	12.9	226	-	40	72
PUHZ-SW160YKA(-BS)	EHSE-***D	A++	-	13.5	125	-	13.5	151	-	45	78	A++	-	15.3	151	-	15.3	212	-	45	78
	ERSE-***D	A++	-	13.5	126	-	13.5	152	-	45	78	A++	-	15.3	152	-	15.3	215	-	45	78
PUHZ-SW200YKA(-BS)	EHSE-***D	A++	-	15.5	127	-	15.5	147	-	45	78	A++	-	17.3	147	-	17.3	209	-	45	78
	ERSE-***D	A++	-	15.5	129	-	15.5	148	-	45	78	A++	-	17.3	148	-	17.3	211	-	45	78
PUHZ-SHW80V/YAA(-BS)	EHST20C-***D	A++	A+	9.0	133/132	145	9.0	157/155	161	40	59	A++	A+	9.6	169/167	145	9.6	217/213	161	40	59
	ERST20C-***D	A++	A+	9.0	135/134	145	9.0	160/159	161	40	59	A++	A+	9.6	172/172	145	9.6	222/221	161	40	59
	EHST30C-***D	A++	A	9.0	133/132	120	9.0	157/155	127	40	59	A++	A	9.6	169/167	120	9.6	217/213	127	40	59
	ERST30C-***D	A++	A	9.0	135/134	120	9.0	160/159	127	40	59	A++	A	9.6	172/172	120	9.6	222/221	127	40	59
	EHSC-***D	A++	-	9.0	133/132	-	9.0	157/155	-	40	59	A++	-	9.6	169/167	-	9.6	217/213	-	40	59
	ERSC-***D	A++	-	9.0	135/134	-	9.0	160/159	-	40	59	A++	-	9.6	172/172	-	9.6	222/221	-	40	59
PUHZ-SHW112V/YAA(-BS)	EHST20C-***D	A++	A+	12.7	135/135	145	11.0	158/157	161	40	60	A++	A+	13.9	171/169	145	11.0	219/216	161	40	60
	ERST20C-***D	A++	A+	12.7	137/137	145	11.0	161	161	40	60	A++	A+	13.9	173/173	145	11.0	223	161	40	60
	EHST30C-***D	A++	A	12.7	135/135	120	11.0	158/157	127	40	60	A++	A	13.9	171/169	120	11.0	219/216	127	40	60
	ERST30C-***D	A++	A	12.7	137/137	120	11.0	161	127	40	60	A++	A	13.9	173/173	120	11.0	223	127	40	60
	EHSC-***D	A++	-	12.7	135/135	-	11.0	158/157	-	40	60	A++	-	13.9	171/169	-	11.0	219/216	-	40	60
	ERSC-***D	A++	-	12.7	137/137	-	11.0	161	-	40	60	A++	-	13.9	173/173	-	11.0	223	-	40	60

All A++ or Above!!

Outdoor unit	Indoor unit	For medium-temperature application										For low-temperature application																									
		Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions		Seasonal space heating energy efficiency under average climate conditions		Water heating energy efficiency under average climate conditions		Rated heat output under warmer climate condition		Seasonal space heating energy efficiency under warmer climate condition		Warmer heating energy efficiency under warmer climate conditions		Sound power level LWA indoor		Sound power level LWA outdoor		Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions		Seasonal space heating energy efficiency under average climate conditions		Water heating energy efficiency under average climate conditions		Rated heat output under warmer climate condition		Seasonal space heating energy efficiency under warmer climate condition		Warmer heating energy efficiency under warmer climate conditions		Sound power level LWA indoor		Sound power level LWA outdoor	
				kW	%	%	kW	%	%	kW	%	%	kW	%	%	kW	%	%	kW			%	%	kW	%	%	kW	%	%	kW	%	%	kW	%	%	kW	%
PUHZ-SHW140YHA	EHST20C-***D	A++	A+	15.8	127	138	14.0	153	160	40	70	A++	A+	17.0	163	138	15.5	209	160	40	70																
	ERST20C-***D	A++	A+	15.8	128	138	14.0	154	160	40	70	A++	A+	17.0	165	138	15.5	211	160	40	70																
	EHST30C-***D	A++	A	15.8	127	118	14.0	153	126	40	70	A++	A	17.0	163	118	15.5	209	126	40	70																
	ERST30C-***D	A++	A	15.8	128	118	14.0	154	126	40	70	A++	A	17.0	165	118	15.5	211	126	40	70																
	EHSC-***D	A++	–	15.8	127	–	14.0	153	–	40	70	A++	–	17.0	163	–	15.5	209	–	40	70																
	ERSC-***D	A++	–	15.8	128	–	14.0	154	–	40	70	A++	–	17.0	165	–	15.5	211	–	40	70																
PUHZ-SHW230YKA2	EHSE-***D	A++	–	23.0	127	–	22.8	149	–	45	75	A++	–	25.0	164	–	23.0	199	–	45	75																
	ERSE-***D	A++	–	23.0	128	–	22.8	150	–	45	75	A++	–	25.0	165	–	23.0	202	–	45	75																
PUZ-WM50VHA(-BS)	EHPT17X-***D(W)	A++	A+	5.0	129	120	5.0	157	135	40	61	A+++	A+	5.0	183	120	5.0	226	135	40	61																
	ERPT17X-***D(W)	A++	A+	5.0	133	120	5.0	162	135	40	61	A+++	A+	5.0	190	120	5.0	237	135	40	61																
	EHPT20X-***D(W)	A++	A+	5.0	129	135	5.0	157	154	40	61	A+++	A+	5.0	183	135	5.0	226	154	40	61																
	ERPT20X-***D(W)	A++	A+	5.0	133	135	5.0	162	154	40	61	A+++	A+	5.0	190	135	5.0	237	154	40	61																
	EHPX-***D	A++	–	5.0	129	–	5.0	157	–	40	61	A+++	–	5.0	183	–	5.0	226	–	40	61																
	ERPX-***D	A++	–	5.0	133	–	5.0	162	–	40	61	A+++	–	5.0	190	–	5.0	237	–	40	61																
PUZ-WM85V/YAA(-BS)	EHPT17X-***D(W)	A++	A+	8.5	139/138	120	8.5	156/155	135	40	58	A+++	A+	8.5	193/190	120	8.5	227/224	135	40	58																
	ERPT17X-***D(W)	A++	A+	8.5	141/141	120	8.5	159	135	40	58	A+++	A+	8.5	197/197	120	8.5	234	135	40	58																
	EHPT20X-***D(W)	A++	A+	8.5	139/138	145	8.5	156/155	161	40	58	A+++	A+	8.5	193/190	145	8.5	227/224	161	40	58																
	ERPT20X-***D(W)	A++	A+	8.5	141/141	145	8.5	159	161	40	58	A+++	A+	8.5	197/197	145	8.5	234	161	40	58																
	EHPT30X-***D(W)	A++	A	8.5	139/138	120	8.5	156/155	135	40	58	A+++	A	8.5	193/190	120	8.5	227/224	135	40	58																
	ERPT30X-***D(W)	A++	A	8.5	141/141	120	8.5	159	135	40	58	A+++	A	8.5	197/197	120	8.5	234	135	40	58																
	EHPX-***D	A++	–	8.5	139/138	–	8.5	156/155	–	40	58	A+++	–	8.5	193/190	–	8.5	227/224	–	40	58																
	ERPX-***D	A++	–	8.5	141/141	–	8.5	159	–	40	58	A+++	–	8.5	197/197	–	8.5	234	–	40	58																
PUZ-WM112V/YAA(-BS)	EHPT20X-***D(W)	A++	A+	10.0	134/133	148	10.0	152/150	161	40	60	A+++	A+	10.0	191/189	148	10.0	215/213	161	40	60																
	ERPT20X-***D(W)	A++	A+	10.0	136/136	148	10.0	154	161	40	60	A+++	A+	10.0	195/195	148	10.0	220	161	40	60																
	EHPT30X-***D(W)	A++	A	10.0	134/133	120	10.0	152/150	135	40	60	A+++	A	10.0	191/189	120	10.0	215/213	135	40	60																
	ERPT30X-***D(W)	A++	A	10.0	136/136	120	10.0	154	135	40	60	A+++	A	10.0	195/195	120	10.0	220	135	40	60																
	EHPX-***D	A++	–	10.0	134/133	–	10.0	152/150	–	40	60	A+++	–	10.0	191/189	–	10.0	215/213	–	40	60																
	ERPX-***D	A++	–	10.0	136/136	–	10.0	154	–	40	60	A+++	–	10.0	195/195	–	10.0	220	–	40	60																
PUZ-HWM140V/YHA(-BS)	EHPT20X-***D(W)	A++	A+	14.0	132/131	130	14.0	160/159	152	40	67	A+++	A+	14.0	176/175	130	14.0	227/225	152	40	67																
	ERPT20X-***D(W)	A++	A+	14.0	133/133	130	14.0	162	152	40	67	A+++	A+	14.0	178/177	130	14.0	232/231	152	40	67																
	EHPT30X-***D(W)	A++	A	14.0	132/131	118	14.0	160/159	125	40	67	A+++	A	14.0	176/175	118	14.0	227/225	125	40	67																
	ERPT30X-***D(W)	A++	A	14.0	133/133	118	14.0	162	125	40	67	A+++	A	14.0	178/177	118	14.0	232/231	125	40	67																
	EHPX-***D	A++	–	14.0	132/131	–	14.0	160/159	–	40	67	A+++	–	14.0	176/175	–	14.0	227/225	–	40	67																
	ERPX-***D	A++	–	14.0	133/133	–	14.0	162	–	40	67	A+++	–	14.0	178/177	–	14.0	232/231	–	40	67																
PUHZ-FRP71VHA2	EHST20C-***D	A+	A+	7.5	121	138	7.5	150	156	40	68	A++	A+	7.5	163	138	7.5	226	156	40	68																
	EHSC-***D	A+	–	7.5	121	–	7.5	150	–	40	68	A++	–	7.5	163	–	7.5	226	–	40	68																
PUMY-P112VKM5/YKM(E)4(-BS)	EHST20C-***D	A+	A	11.2	121/121	106	10.0	139	119	40	69	A++	A	11.2	168/168	106	11.2	207	119	40	69																
	EHSC-***D	A+	–	11.2	121/121	–	10.0	139	–	40	69	A++	–	11.2	168/168	–	11.2	207	–	40	69																
PUMY-P125VKM5/YKM(E)4(-BS)	EHST20C-***D	A+	A	11.2	121/121	106	10.0	139	119	40	69	A++	A	11.2	168/168	106	11.2	207	119	40	69																
	EHSC-***D	A+	–	11.2	121/121	–	10.0	139	–	40	69	A++	–	11.2	168/168	–	11.2	207	–	40	69																
PUMY-P140VKM5/YKM(E)4(-BS)	EHST20C-***D	A+	A	11.2	121/121	106	10.0	139	119	40	69	A++	A	11.2	168/168	106	11.2	207	119	40	69																
	EHSC-***D	A+	–	11.2	121/121	–	10.0	139	–	40	69	A++	–	11.2	168/168	–	11.2	207	–	40	69																



Refrigerant Amount

M/S/P/Multi/Zubadan/ATW

	Model Name	Refrigerant		Pre-charged quantity		Max. added quantity	
			GWP	Weight [kg]	CO ₂ equivalent [t]	Weight [kg]	CO ₂ equivalent [t]
PUMY	PUMY-SP112VKM(-BS)	R40A	2088	3.5	7.31	9.0	18.79
	PUMY-SP112YKM(-BS)	R410A	2088	3.5	7.31	9.0	18.79
	PUMY-SP125VKM(-BS)	R410A	2088	3.5	7.31	9.0	18.79
	PUMY-SP125YKM(-BS)	R410A	2088	3.5	7.31	9.0	18.79
	PUMY-SP140VKM(-BS)	R410A	2088	3.5	7.31	9.0	18.79
	PUMY-P112VKM5(-BS)	R410A	2088	4.8	10.02	13.8	28.81
	PUMY-P125VKM5(-BS)	R410A	2088	4.8	10.02	13.8	28.81
	PUMY-P140VKM5(-BS)	R410A	2088	4.8	10.02	13.8	28.81
	PUMY-P112YKM(E)4(-BS)	R410A	2088	4.8	10.02	13.8	28.81
	PUMY-P125YKM(E)4(-BS)	R410A	2088	4.8	10.02	13.8	28.81
	PUMY-P140YKM(E)4(-BS)	R410A	2088	4.8	10.02	13.8	28.81
ATW Packaged	PUZ-WM50VHA	R32	675	2.0	1.35	–	–
	PUZ-WM85V/YAA	R32	675	2.2	1.49	–	–
	PUZ-WM112V/YAA	R32	675	3.0	2.03	–	–
	PUZ-HWM140V/YHA	R32	675	3.3	2.2275	–	–
ATW Split	SUZ-SWM40VA	R32	675	1.2	0.81	0.4	0.27
	SUZ-SWM60VA	R32	675	1.2	0.81	0.4	0.27
	SUZ-SWM80VA	R32	675	1.2	0.81	0.4	0.27
	PUD-SWM80V/YAA	R32	675	1.3	0.8775	0.3	0.20
	PUD-SWM100V/YAA	R32	675	1.6	1.08	0.23	0.16
	PUD-SWM120V/YAA	R32	675	1.6	1.08	0.23	0.16
	PUD-SHWM80V/YAA	R32	675	1.4	0.945	0.3	0.20
	PUD-SHWM100V/YAA	R32	675	1.7	1.1475	0.13	0.09
	PUD-SHWM120V/YAA	R32	675	1.7	1.1475	0.13	0.09
	PUD-SHWM140V/YAA	R32	675	1.7	1.1475	0.13	0.09
	PUHZ-SW75V/YAA	R410A	2088	3.0	6.27	1.8	3.76
	PUHZ-SW100V/YAA	R410A	2088	4.2	8.77	1.6	3.76
	PUHZ-SW120V/YHA	R410A	2088	4.6	9.61	2.9	6.06
	PUHZ-SW160YKA	R410A	2088	7.1	14.83	4.0	8.36
	PUHZ-SW200YKA	R410A	2088	7.7	16.08	5.2	8.36
	PUHZ-SHW80V/YAA	R410A	2088	4.6	9.61	1.4	2.93
	PUHZ-SHW112V/YAA	R410A	2088	4.6	9.61	1.4	2.93
	PUHZ-SHW140YHA	R410A	2088	5.5	11.49	2.4	5.02
	PUHZ-SHW230YKA2	R410A	2088	7.1	14.83	8.4	17.54
Mr. Slim+	PUHZ-FRP71VHA2	R410A	2088	3.8	7.94	1.8	3.76



 NOTICE

- Do not install indoor units in areas (e.g. mobile phone base stations) where the emission of VOCs such as phthalate compounds and formaldehyde is known to be high as this may result in a chemical reaction.
- Our air-conditioning equipments and heat pumps contain a fluorinated greenhouse gas, R410A (GWP: 2088) or R32 (GWP: 675). *These GWP values are based on Regulation (EU) No.517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP: 1975), R32 (GWP: 550)
- When installing or relocating or servicing our air-conditioning equipment, use only the specified refrigerant (R410A or R32) to charge the refrigerant lines.
Do not mix it with any other refrigerant and do not allow air to remain in the lines.
If air is mixed with the refrigerant, then it can be the cause of abnormal high pressure in the refrigerant lines, and may result in an explosion and other hazards.
The use of any refrigerant other than that specified for the system will cause mechanical failure, system malfunction or unit breakdown. In the worst case, this could lead to a serious impediment to securing product safety.

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BUILDING, 2-7-3 MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
<http://Global.MitsubishiElectric.com/>

Full Product Catalogue - Heating 2022 (Air to water)
E-2203260(17360)



E-2203260